


SUZUKI Remote Keyless Entry Instruction Manual

This is the remote control transmitter named RKE. It was paired with a receiver to control the vehicle door lock and unlock, the transmitter power is less than 10mw with a coin battery, the operating frequency is 433.92MHz, and it was governed by the radio regulation rules.

1、block diagram

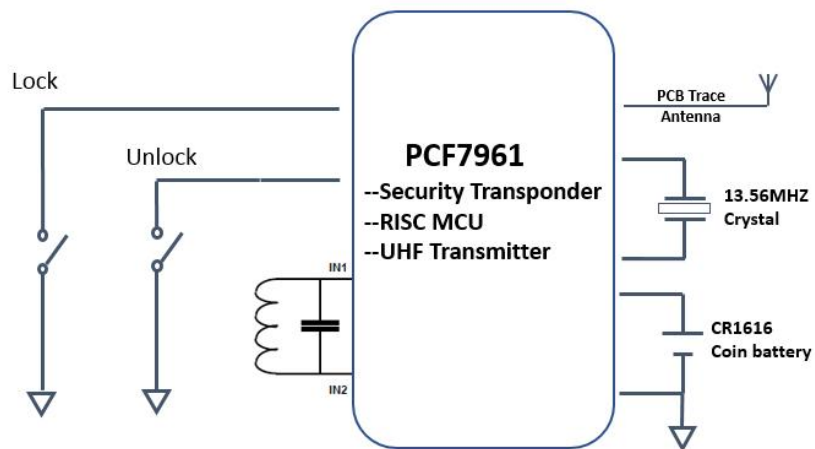

2、key Instruction





Press Lock button, the Lock command is sent out

Press Unlock button, the Unlock command is sent out.

3. Battery replacement

When the remote control distance is much short, the battery CR1616 inside the transmitter should be changed to a new one.

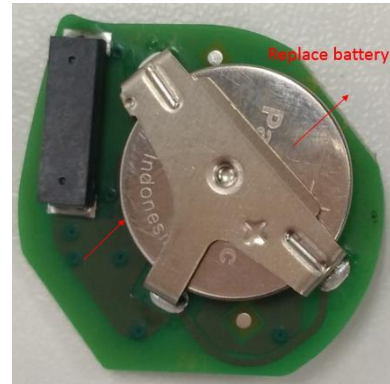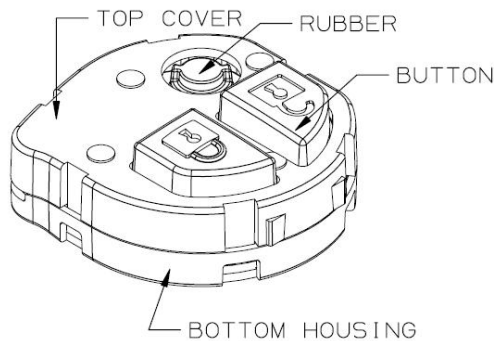

operating instruction:

separate the Bottom and top housing, take the PCBA out, follow the arrow remove the battery and put it back with a new one, and put the battery polarity correctly!

Caution

This device complies with Part 15 of the FCC. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.