

## Create Schedule for Home Inclusion Zone

1. Click on the In Charger Rule (see below).

**SMART View** by ProTech

What's New About SMART@View Contact Us Logout  
Welcome: Jason Abernethy Options

Home View Tools Help

**OFFENDER** Offender - Dave Offender [222870]

Quick Search:  
ID1:   
Last Name:   
First Name:   
**Search**

Recent Offenders...  
**Advanced Search**  
**Enroll Offender**

**CONTACT**  
Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Contacts...  
**Advanced Search**  
**Enroll Contact**

**Offender General Information** **Offender Functions**

**Customer:** Pro Tech Training  
**Level of Supervision:** Active XT  
**Assigned Officer:** [John Officer](#)  
**Enrollment Date:** 02/14/2011 9:50 AM  
**Custom ID1:**  
**Custom ID2:**  
**Name:** Dave Offender  
**Address:** [1838 Gunn Hwy](#)  
**City, State Zip code:** [Odessa, FL 33556-3524](#)  
**Phone Number:**  
**Mobile Number:**  
**Offender Type:** Other/Unspecified  
**Comments:**  
**Time Zone:** (GMT -05:00) Eastern Time (DST Applies)

**Assigned Hardware Information** **Hardware Functions**

**XT:** 35007660 (Activate Pending, XT1000, GSM-E, Phone #: (500) 336-9549)  
**Bracelet:** 100246 (BTR 3000B)  
**SMART Base:** 50400016 (Activate Pending, SBU 2000)

**Rule Information** **Rule Functions**

Name	Type	Distance	Grace Period	Has Actions	Status
In Charger	Hardware	N/A	00:00:00	No	Pending Active
Bracelet Gone	Hardware	N/A	00:00:00	No	Pending Active
Bracelet Battery	Hardware	N/A	00:00:00	No	Pending Active
Bracelet Strap	Hardware	N/A	00:00:00	No	Pending Active
XT Motion No GPS	Hardware	N/A	00:10:00	No	Pending Active
XT Tamper	Hardware	N/A	00:00:00	No	Pending Active
XT Battery	Hardware	N/A	00:30:00	No	Pending Active

## Create Schedule for Home Inclusion Zone, Cont.

2. Move your mouse cursor over the Rule Functions dropdown menu and left click Edit.

**SMART View** by PROTECH

What's New About SMART@View Contact Us Logout  
Welcome: Jason Abernethy Options

Home View Tools Help

**OFFENDER** Offender - Dave Offender [222870]

Quick Search:  
ID1:   
Last Name:   
First Name:   
**Search**

Recent Offenders...  
**Advanced Search**  
**Enroll Offender**

**CONTACT**  
Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Contacts...  
**Advanced Search**  
**Enroll Contact**

**General Rule Information**

**Rule Name:** In Charger  
**Caller ID:** disabled  
**Grace Period:** 00:00:00 (hh:mm:ss)  
**Offender Notification:** Yes - In Charger Violation - Place in SMART Base/Charger

**Rule Functions**  
Edit  
Print

**Notification Contacts**  
- No Notification Contacts Defined -

**Permanent Rule Schedule**

	12am	1:00	2:00	3:00	4:00	5:00	6:00	7:00	8:00	9:00	10:00	11:00	12pm	1:00	2:00	3:00	4:00	5:00	6:00	7:00	8:00	9:00	10:00	11:00
<b>Monday</b>	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
<b>Tuesday</b>	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
<b>Wednesday</b>	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
<b>Thursday</b>	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
<b>Friday</b>	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
<b>Saturday</b>	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
<b>Sunday</b>	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█



## Create Schedule for Home Inclusion Zone, Cont.

- Each block represents a 30 minute increment of time. Left-click and drag the cursor along the blocks during the times that the offender is required to be home. As you move the cursor, the blocks will turn **blue**. The white blocks that remain equal the times that the offender is allowed to be out of the home (see below).
- Click the **Save** button.

**Permanent Rule Schedule**

12am	1:00	2:00	3:00	4:00	5:00	6:00	7:00	8:00	9:00	10:00	11:00	12pm	1:00	2:00	3:00	4:00	5:00	6:00	7:00	8:00	9:00	10:00	11:00
Visual representation of the schedule grid with blue and white blocks																							

Starts on Mon at 12:00 AM, Ends on Mon at 08:00 AM

Starts on Mon at 08:00 PM, Ends on Tue at 08:00 AM

Starts on Tue at 08:00 PM, Ends on Wed at 08:00 AM

Starts on Wed at 08:00 PM, Ends on Thu at 08:00 AM

Starts on Thu at 08:00 PM, Ends on Fri at 08:00 AM

Starts on Fri at 08:00 PM, Ends on Sat at 08:00 AM

**Temporary Rule Schedules**

**Schedules:**

2/14/2011

February 2011

Mo	Tu	We	Th	Fr	Sa	Su
	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28						

12am	1:00	2:00	3:00	4:00	5:00	6:00	7:00	8:00	9:00	10:00	11:00	12pm	1:00	2:00	3:00	4:00	5:00	6:00	7:00	8:00	9:00	10:00	11:00
Visual representation of the temporary schedule grid																							

## Create Exclusion Zone

You can create an Exclusion Rule to ensure that the offender is not entering areas which are forbidden – such as schools, playgrounds, and victims’ residences.

1. Move your cursor over the Rule Functions menu (see below).
2. Left click Add Zone.

**SMART View**  
by PROTECH

What's New About SMART@View Contact Us Logout  
Welcome: Jason Abernethy Options

Home View Tools Help

**OFFENDER** Offender - Dave Offender [222870]

Quick Search:  
ID1:   
Last Name:   
First Name:   
**Search**

Recent Offenders...  
**Advanced Search**  
**Enroll Offender**

**CONTACT**  
Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Contacts...  
**Advanced Search**  
**Enroll Contact**

Okay (XT Activate Pending)

Go To:  **View GPS Points** **Send Msg** **Download Points**

**Offender General Information** **Offender Functions**

**Customer:** Pro Tech Training  
**Level of Supervision:** Active XT  
**Assigned Officer:** [John Officer](#)  
**Enrollment Date:** 02/14/2011 9:50 AM  
**Custom ID1:**  
**Custom ID2:**  
**Name:** Dave Offender  
**Address:** [1838 Gunn Hwy](#)  
**City, State Zip code:** [Odessa, FL 33556-3524](#)  
**Phone Number:**  
**Mobile Number:**  
**Offender Type:** Other/Unspecified  
**Comments:**  
**Time Zone:** (GMT -05:00) Eastern Time (DST Applies)

**Assigned Hardware Information** **Hardware Functions**

**XT:** 35007660 (Activate Pending, XT1000, GSM-E, Phone #: (500) 336-9549)  
**Bracelet:** 100246 (BTR 3000B)  
**SMART Base:** 50400016 (Activate Pending, SBU 2000)

**Rule Information** **Rule Functions**

Name	Type	Distance	Grace Period	Has Act	
In Charger	Hardware	N/A	00:00:00	Yes	
Bracelet Gone	Hardware	N/A	00:00:00	No	
Bracelet Battery	Hardware	N/A	00:00:00	No	Pending Active
Bracelet Strap	Hardware	N/A	00:00:00	No	Pending Active
XT Motion No GPS	Hardware	N/A	00:10:00	No	Pending Active

**Rule Functions**  
Add Zone  
Replicate Actions  
Reset Rules

## Create Exclusion Zone, Cont.

3. Choose a Zone Shape.
4. Choose Exclusion as the Zone Type.
5. Click the **Continue** button.

**SMART View**  
by ProTech

What's New About SMART@View Contact Us Logout  
Welcome: Jason Abernethy Options

Home View Tools Help

**OFFENDER** Edit Offender - Dave Offender [222870]

Quick Search:  
ID1:   
Last Name:   
First Name:   
  
Recent Offenders...  
[Advanced Search](#)  
[Enroll Offender](#)

**CONTACT**

Quick Search:  
Last Name:   
First Name:   
  
Recent Contacts...  
[Advanced Search](#)  
[Enroll Contact](#)

Okay (XT Activate Pending)

**General Rule Information**

Zone Shape:  Standard  Free Form  
Zone Type:  Inclusion  Exclusion

Copyright © 2008-2011 - Pro Tech Monitoring, Inc. - v1.3.0.0

## Create Exclusion Zone Cont.

6. Enter the Rule Name (school, playground, etc.).
7. Enter the address information and the zone size. The default is 600 ft.
8. Select *Yes* or *No* if you want to notify the offender upon violation.
9. If you selected *Yes* to notify the offender upon violation, type the message you want displayed on the XT screen in the **Offender Message** field.
10. Choose the appropriate Contact from the Notification Contact drop down list. The contact's default notification method will appear selected.
11. Click the **Add** button.
12. Click the **Map** button.

**SMART View**  
by PROTECH

What's New About SMART@View Contact Us Logout  
Welcome: Jason Abernethy Options

Home View Tools Help

**OFFENDER** Edit Offender - Dave Offender [222870]

Quick Search:  
ID1:   
Last Name:   
First Name:   
Search

Recent Offenders...  
Advanced Search  
Enroll Offender

**CONTACT**

Quick Search:  
Last Name:   
First Name:   
Search

Recent Contacts...  
Advanced Search  
Enroll Contact

**General Rule Information**

Zone Shape:  Standard  Free Form  
Zone Type:  Inclusion  Exclusion

Rule Name:   
Address:   
Address 2:   
City:   
State:   
Zip code:   
Zone Size:   Feet  Miles  
Coordinates: N/A   
Grace Period:   
Notify Offender If Violated:  Yes  No  
Offender Message:

**Notification Contacts**


Name	Page	Fax	EMail	Txt Msg	Update Status
Officer, John	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Update Pending <input type="button" value="Delete"/>

Contact Name:

**Permanent Rule Schedule**

## Create Exclusion Zone, Cont.

13. Ensure that the address and zone size is correct.
14. If you want to resize or move the zone, click the **Move/Resize** button.
15. If you move or resize the zone, click the **Finish Move/Resize** button.
16. Click the **Submit** button.

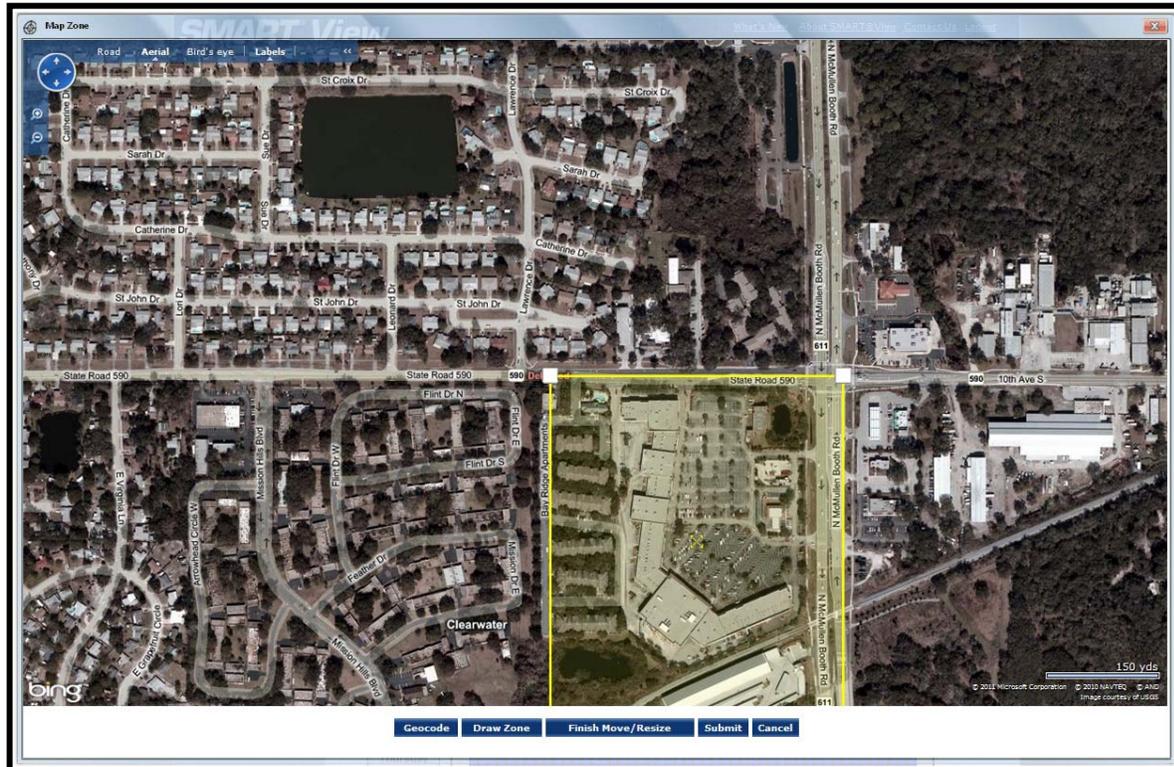

# Activating the SMART<sup>®</sup> XT with SMART<sup>®</sup> Base



## Connecting the SMART<sup>®</sup> Base



### **STEP 1:**

Plug A/C adapter into a wall outlet.



### **STEP 2:**

Plug A/C adapter into the back of the SMART<sup>®</sup> Base where 12VDC is located. The green power light will light up on the front of the unit.



### **STEP 3:**

**If offender has a phone line:**

**A:** Remove phone line from telephone and plug into the back of the SMART<sup>®</sup> Base marked **PHONE**.

**B:** Take extra phone cord and plug one end back into the telephone and the other end into the SMART<sup>®</sup> Base marked **LINE**.

# Activating the SMART<sup>®</sup> XT with SMART<sup>®</sup> Base



## Connecting the SMART<sup>®</sup> Base, cont.



### **STEP 4:**

#### **If activating at office:**

**A:** Remove phone line from facsimile machine.

**B:** Plug facsimile phone line into the SMART<sup>®</sup> Base.

### **SMART<sup>®</sup> Base - Violation Status Lights:**

**Power:** The SMART<sup>®</sup> Base has lost power.

**Line:** The phone line has been disconnected.


**Curfew:** The XT is not in the SMART<sup>®</sup> Base when the schedule is in effect.

**Message:** The offender needs to contact the officer.

# Activating the SMART<sup>®</sup> XT with SMART<sup>®</sup> Base




## Activating the SMART<sup>®</sup> XT

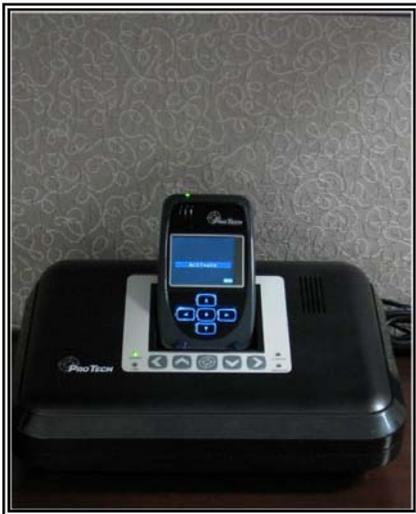

### Step 1:


Place the XT into the SMART<sup>®</sup> Base. Ensure the SMART<sup>®</sup> Base is connected to the A/C power cord.

Note: Ensure the hardware has been assigned and saved to the offender's profile.

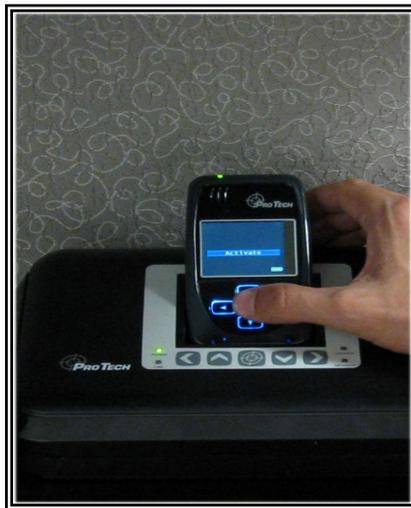

### Step 2:

Press the **Activate** button (center button).

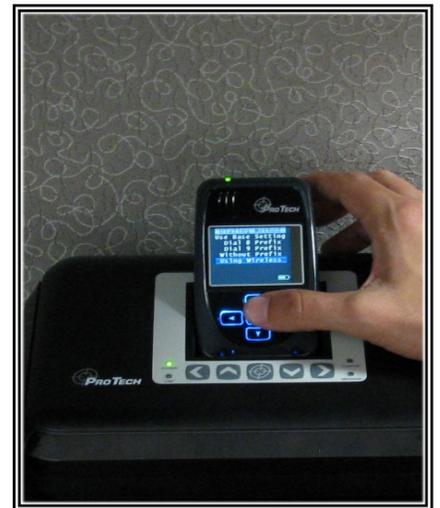

### Step 3:

Press the **Scroll** button (bottom button) to select "Using Wireless" to activate using the cellular network.


If activating via the SMART<sup>®</sup> Base, select which prefix (if any) the SMART<sup>®</sup> Base must dial to complete a call.

*Refer to Connecting the SMART Base STEP 3 for additional instructions.*

# Activating the SMART<sup>®</sup> XT with SMART<sup>®</sup> Base



## Activating the SMART<sup>®</sup> XT, cont.

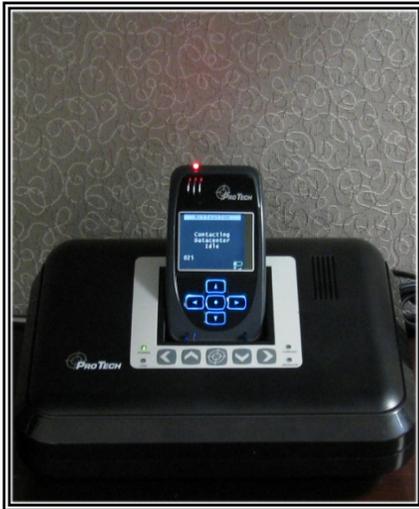

### **Step 4:**

Press the Activation button to begin dialing. The XT will begin to contact the Pro Tech Data Center. "Contacting Data Center" will be displayed on the screen.

Once contact is complete, the XT will begin to search for the bracelet. "Searching for Bracelet" will be displayed on the screen.

Note: Both sides of the strap must be connected to the bracelet and it, the bracelet, must be in range of the XT.

Once the XT recognizes the bracelet, it will display "Waiting for GPS." Remove the XT from the SMART<sup>®</sup> Base.

### **Step 5:**

Walk the XT outside, holding it upright in an area with a clear view of the sky.

Once GPS has been acquired, the XT will beep and display the message "Activation Successful." Click on the **Activation** button to acknowledge.

After the **Activation** button has been clicked, the XT will display the offender's name, date and time.

# Activating the SMART<sup>®</sup> XT without SMART<sup>®</sup> Base cont.



## Activating the SMART<sup>®</sup> XT



### Step 1:

Plug A/C adapter into a wall outlet.



### Step 2:

Plug A/C adapter into the back of the SMART<sup>®</sup> XT where 12VDC is located. The red power light will light up on the front of the unit.



### Step 3:

Press the **Activate** button (center button).

# Activating the SMART<sup>®</sup> XT without SMART<sup>®</sup> Base cont.




## Activating the SMART<sup>®</sup> XT cont.



### Step 4:

Press the **Scroll** button (bottom button) to select "Using Wireless" to activate using the cellular network.

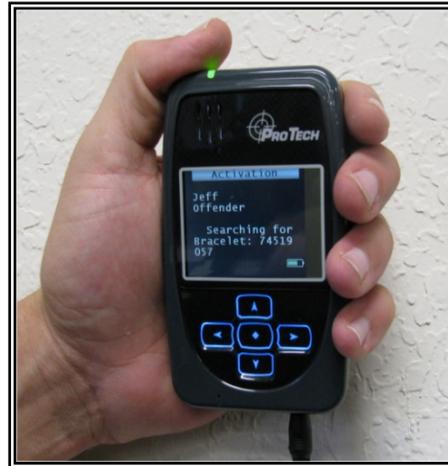

### Step 5:

Press the Activation button (center button) to begin dialing. The XT will begin to contact the Pro Tech data center. "Contacting Data Center" will be displayed on the screen. Once contact is complete, the XT will begin to search for the bracelet. "Searching for Bracelet" will be displayed on the screen.

Note: Both sides of the strap must be connected to the bracelet and it, the bracelet, must be in range of the XT. Once the XT recognizes the bracelet, it will display "Waiting for GPS."



### Step 6:

Walk the XT outside, holding it upright in an area with a clear view of the sky.

Once GPS has been acquired, the XT will beep and display the message "Activation Successful." Click on the **Activation** button to acknowledge.

After the **Activation** button has been clicked, the XT will display the offender's name, date and time.