

LIGHT SCHEDULE			
SYM	DESCRIPTION	LAMP	REMARKS
A	JUNO TRACK	N/A	1 CIRCUIT BASIC TRACK
B	JUNO V690NH	1/60PAR/FL	TRACK HEAD WITH FLOOD LAMP
C	JUNO V690NH	1/75PAR35/CAP/WSP	TRACK HEAD WITH SPOT LAMP
D	N/A	N/A	N/A
E	N/A	N/A	N/A
F	AMERLUX MURRO TF9020 W/ ADAPTOR MURRO70E/65/JA	MHCT01U/M/3K	PERMETER WALLWASH TRACK FIXTURE, WHITE FINISH
G	LIGHTOLIER 0242HU-120/2TT-ADV-CUL-2038CLM	PLT42A/335/4P Philips	FLUORESCENT DOWNLIGHT
H	N/A	N/A	N/A
I	BY WOOD FIXTURE MFG.	2/F32T8/TL/BS	DOUBLE TUBE 48" FLUOR. STRIP
J	NAE1L45TT80U 5M 1LT T8 8'	2/F32T8/TL/BS	DOUBLE TUBE 96" FLUOR. STRIP
K	NAE1L45TU 5M 1LT T8 4'	1/F32T8/TL/BS	SINGLE TUBE 48" FLUOR. STRIP
L	MERCURY 54E-340-BIAX-4-ELB-UNI	PHILIPS 2/PLL40W/835	2X2 FLUOR. TROFFER IV/ 3" DEEP CELL PARABOLIC LENSE
M	METALUX 2EP36X-3325361-2TT-EB01	3/F32T8/TL/BS	2X4 FLUOR. TROFFER IV/ 3" DEEP CELL PARABOLIC LENSE
N	PROGRESS P-3524	1/72W/CAP	SURFACE MOUNTED CEILING FIXTURE
O	PROGRESS P5645-16	1/72W/CAP	OUTSIDE LIGHT WITH UNBREAKABLE REFLECTOR
P	METALUX 2EP36X-3325361-UNI-OS-QTP3X32T8N/15-EM	3/F32T8/TL/BS	2X4 FLUOR. TROFFER IV/ 3" DEEP CELL PARABOLIC LENSE IV/ EMERGENCY BALLAST
Q	NABP-FLD-R*	LED	EXIT SIGNS IV SELF CONTAINED BATT PACK
R	TBD / JEM TABLE	N/A	PENDANT MOUNT DECORATIVE LIGHT
S	HL-90-DL	LAMPS INCLUDED	2 HEAD SELF CONTAINED EMERG LT
T	1 HEAD SELF CONTAINED EMERG LT	LAMPS INCLUDED	1 HEAD SELF CONTAINED EMERG LT
U	1 HEAD SELF CONTAINED EMERG LT (EXTERIOR)	LAMPS INCLUDED	1 HEAD SELF CONTAINED EMERG LT
V	NAE1L45TU 5M 1LT T8 4'	1/F32T8/TL/BS	SINGLE TUBE 48" FLUOR. STRIP EMERGENCY BALLAST
W	NAE1L45TT80U 5M 1LT T8 8'	2/F32T8/TL/BS	DOUBLE TUBE 96" FLUOR. STRIP - EMERGENCY BALLAST
X	N/A	N/A	N/A
Y	N/A	N/A	N/A
Z	N/A	N/A	N/A
AA	TBD	TBD	FITTING ROOM PENDANT LIGHT
BB	TBD	TBD	FITTING ROOM PENDANT LIGHT
CC	TBD	TBD	FITTING ROOM PENDANT LIGHT
DD	TBD	TBD	FITTING ROOM PENDANT LIGHT

FIXTURE TYPES *F, G, J, K, M, V, W ARE DUAL VOLTAGE (120 OR 277)


NOTES:
 THESE DRAWINGS ARE DIAGRAMMATIC - REFER TO ARCHITECTURAL DRAWINGS FOR EXACT DIMENSIONS, BRANCH CIRCUITING CONNECTION #12 AWG PER PHASE AND NEUTRAL (WHERE REQUIRED) AND 20 AMPERE CIRCUIT BREAKER, UNLESS OTHERWISE NOTED. PROVIDE QUANTITY AND SIZE SWITCH CONDUCTORS AS REQUIRED TO MAKE SYSTEM FULLY OPERATIONAL.

IT IS THE TENANT ELECTRICAL CONTRACTORS RESPONSIBILITY TO FIELD VERIFY ALL EXISTING CONDITIONS AND TO PROVIDE ANY ADDITIONAL MATERIALS ETC. AS REQUIRED TO COMPLY WITH ALL CRITERIA AND ELECTRICAL SPECS AND DRAWINGS AT NO ADDITIONAL COST TO MAURICES.

THE CONTRACTOR TO NOTIFY MAURICES' CONSTRUCTION DEPARTMENT ON ANY CONFLICTS WITH LIGHTING PLACE WITH ANY OTHER ITEMS SUCH AS DUCTS, SPRINKLER SYSTEM, DIFFUSERS, ETC..

NOTE:
 E.C. SHALL PROVIDE AND INSTALL A FIRST ALERT SMOKE DETECTOR, BATTERY OPERATED OR APPROVED EQUAL.

LIGHT FIXTURE RESPONSIBILITY NOTE:	
ANY LIGHT FIXTURE DESIGNATION FOLLOWED BY "LL", INDICATES FIXTURE IS SUPPLIED AND INSTALLED BY THE LANDLORD. ALL OTHER LIGHT FIXTURES ARE SUPPLIED BY MAURICES AND INSTALLED BY MAURICES E.C.	
EXAMPLE:	
	FIXTURE SUPPLIED BY MAURICES AND INSTALLED BY MAURICES E.C.
	FIXTURE SUPPLIED BY LANDLORD AND INSTALLED BY LANDLORD

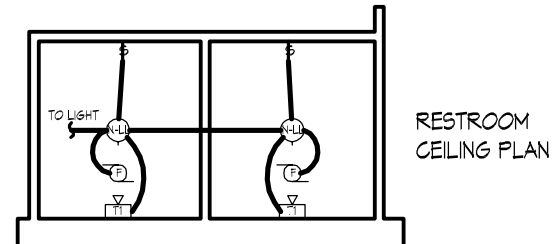

NOT FOR CONSTRUCTION