

# **Attenti Two-Piece GPS Offender Tracking System (XT - Voice) User Manual**

**January 16, 2018**



Copyright ©2018 Attenti. All rights reserved.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Attenti.

The information in this document is subject to change without notice. The software mentioned in this document is furnished under license and may only be used or copied in accordance with the terms of such license. Contact software manufacturers directly for terms of software licenses for any software mentioned in this document not originating from Attenti.

All brand or product names are the trademarks or registered trademarks of their respective holders.

## **Table of Contents**

Overview .....	3
2 Piece (XT) Details.....	4
2 Piece (XT) Features.....	6
Bracelet Details .....	7
Base Unit 2000 Details .....	8
Enrollment .....	9
Enroll a Contact .....	10
Contact Information Page .....	13
Enroll an Offender .....	14
Supervision Level.....	15
Offender Enrollment .....	16
Map Offender’s Address .....	18
Offender General Information Page .....	19
Create Schedule for Home Inclusion Zone .....	20
Create Exclusion Zone.....	24
Attaching the Bracelet .....	28
Activating the 2 Piece (XT) with Base Unit 2000.....	31
Unassigning Hardware .....	35
Removing the Bracelet.....	39
Accessing the Officer Menu .....	41
Accessing the Offender Menu .....	42
Voice Features.....	43
Appendix .....	54

## **Overview**

Attenti's Two-Piece GPS Offender Tracking System (XT) utilizes GPS satellites to establish an offender's location and uses cellular networks to transmit the location data to Attenti. The 2 Piece (XT) transmits all GPS data wirelessly at the agency's contract specific call-in intervals.

The 2 Piece (XT) consists of four components: The Ankle Bracelet, the 2 Piece (XT), the Base Unit 2000, and the EM Manager (Smart View) software.

### **Bracelet**

- Serves as an electronic tether to the 2 Piece (XT).

### **2 Piece (XT)**

- The 2 Piece (XT) receives transmitted information from GPS Satellites and Attenti's ankle bracelet, and then uses its modem to transmit the data to Attenti by using the cellular network. The device weighs approximately 6 ounces (the same weight as a smart phone).

### **Base Unit 2000**

- A stationary device used to recharge the 2 Piece (XT) and transmits all information via a landline, if available.

### **EM Manager (Smart View)**

- The tracking and monitoring software that can be installed on almost any computer with Internet access. EM Manager (Smart View) provides access to maps, offender information, and reports.



## **2 Piece (XT) Details**

**Storing GPS Points:** The storage of GPS points is based on an offender's mobility. The 2 Piece (XT) will record and store GPS points based on the offender's amount of activity. The 2 Piece (XT) will store an offender's location, GPS point, when it is in motion (moving) every minute. If the 2 Piece (XT) is left in the same place for 10 consecutive minutes without any motion, the 2 Piece (XT) will go to "Rest" and display the last known GPS location, point, at the top of every hour instead of every minute. If the offender causes a Zone violation, the 2 Piece (XT) will display a point every 15 seconds.

**At Rest:** If the 2 Piece (XT) is left in the same place for 10 consecutive minutes without any motion, the 2 Piece (XT) will go to "Rest" and display the last known GPS location, point, at the top of every hour instead of every minute. This feature is designed to conserve the battery life. While the 2 Piece (XT) is at rest, it will still be communicating with the bracelet, ensuring that the offender is in range of the 2 Piece (XT).

**Communication:** The 2 Piece (XT) has a SIM card, which is similar to the data transmitter/receiver found in most cellular phones. The 2 Piece (XT) uses the SIM card to transmit and download the GPS points and alarms it has recorded to Attenti's servers. The call-in intervals are determined by the agency's contract specifications. Examples may be hourly, every six hours, or immediately upon alarm.

Active Mode:

- The standard 2 Piece (XT) call-in interval is once every hour while in compliance.
- The 2 Piece (XT) will call Attenti as soon as a violation occurs.

Passive Mode:

- The standard 2 Piece (XT) call-in interval is once every six hours.
- The 2 Piece (XT) will not call Attenti when a violation occurs. The officer will only be made aware of violations when they view the GPS maps or the Daily Event Summary Report (DESR) that is emailed to them.
- Violations will also be displayed in Case Management and on the Offender Monitor.

## **2 Piece (XT) Details, Cont.**

**Activation:** When the 2 Piece (XT) has a clear view of the sky, activation will take less than five minutes.

**Download Points:** The 2 Piece (XT) can download all GPS points in less than 3 minutes if strong cellular coverage is available.

**Battery Life:** The device should be given a full charge (4.2 volts) to supply a full day of battery life. It takes approximately 3 hours to acquire approximately 24 hours of battery life. The daily life of the battery is dependent upon the call-in interval of the device, how often it goes to rest, and how many alarms are created. The battery must be charged each day in order to continue to track your offender's locations.

**Note:** Battery tests are conducted using specific Attenti devices in controlled testing environments. Actual performance and results may be affected by cellular network, location, signal strength, feature configuration, usage, and many other factors. Battery life and charge cycles vary by use and settings.

**Vibrate feature:** Officers can choose to enable the vibration mode to alert the offender of alarms and/or messages. The vibration will continue periodically until the offender has acknowledged the alarm and/or message.

**LCD Display:** The 2 Piece (XT) has a color LCD screen that displays the offender name, date, time, battery level, alarm information, and messages.

**LED Light:** The LED light is used to notify the offender that there is a message and/or an alarm that needs to be acknowledged. It will flash red until the message and/or alarm has been acknowledged.


**Speaker:** Officers can choose to enable the speaker feature to alert the offender of alarms and/or messages that need to be acknowledged.

**Automatic Redial:** If the 2 Piece (XT) is unable to communicate with Attenti because of poor cellular coverage, it will continue to try to call and download its information until it is successful.

**Carrying Pouch Accessory:** In order to maintain compliance to RF exposure requirements for body worn use, the 2 Piece (XT) must be carried in the belt clip pouch to provide a separation from the body.



## 2 Piece (XT) Features

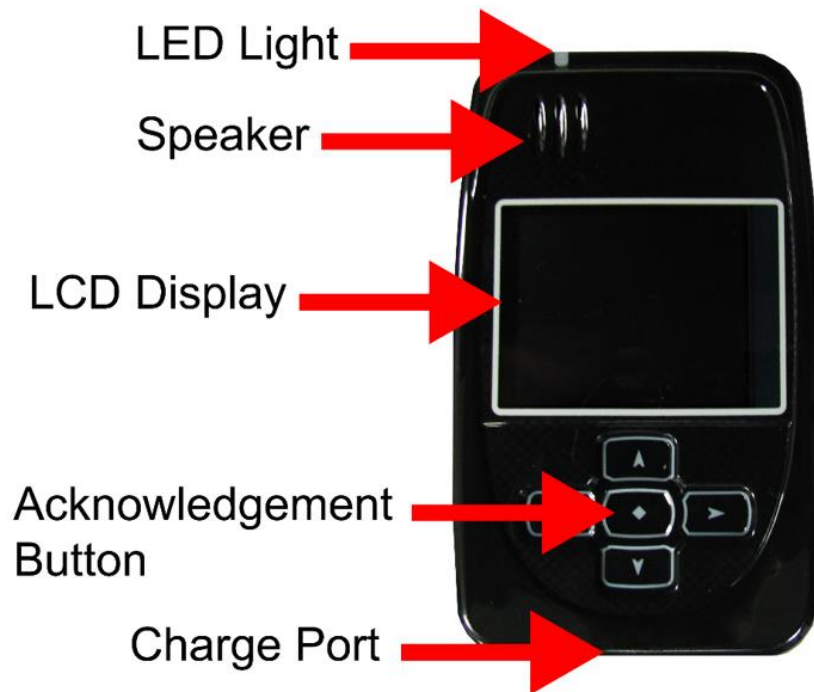



## **Bracelet Details**

### **Electronic Tether**

The bracelet serves as an electronic tether to the 2 Piece (XT). The bracelet communicates with the 2 Piece (XT) and Base Unit 2000 via Radio Frequency.

### **Waterproof**

The bracelet is waterproof (per IP68 standard) down to 66 feet.

### **Battery Life**

The bracelet battery is designed to last approximately 9-12 months\* while in use and has a 3 year shelf life.

**\*Depending on vibrations, number of violations, etc.**

### **Rubber Straps**

The bracelet comes with a rubber strap that contains a fiber optic cable designed to prevent tampering. The strap is safe for use in prolonged skin contact applications.

### **Tamper Detection**

If an offender interrupts the infrared light, located inside of the fiber optic cable, inside of the bracelet strap, an alarm will occur.

### **Vibration**

The bracelet will vibrate three times consecutively if it has been out of range of the 2 Piece (XT) for four consecutive minutes. This indicates that the offender has one minute to move closer to the 2 Piece (XT) before a Bracelet Gone violation is generated.

**Note: The bracelet will not vibrate again to inform the offender that he has cleared the violation.**



## **Base Unit 2000 Details**

**Charger:** The Base Unit 2000 acts as a charger for the 2 Piece (XT). It takes approximately 3 hours to fully charge the XT. The charge will last approximately a full day (24 hours).

**Back-up Battery:** If the Base Unit 2000 loses power, it will utilize its back-up battery feature. With a full charge, the back-up battery will last approximately 48 hours.

**Communication:** If the offender has a phone line, it is recommended that an analog phone line be plugged into the device. A digital phone line can be used, but the features must be removed. Every six hours, the Base Unit 2000 will transmit the 2 Piece (XT) data to Attenti.

**Note: When the 2 Piece (XT) is docked or undocked from the Base Unit 2000, the Base Unit 2000 will transmit the most recent data to Attenti.**

**Caller ID Feature:** The Base Unit 2000 notifies the assigned officer if an offender's Base Unit 2000 makes a call from a telephone number that differs from the offender's home number.



## Enrollment

### EM Manager (Smart View) Log In

To access the secure website, go to <https://smartview.ptm.com>. You will be required to enter a user ID and password. When using EM Manager (Smart View) for the first time, you will create your own password. Enter your User ID (often your three initials and last four digits of your social security number), the temporary password that was emailed to you, and click OK. The next screen will tell you that your password has expired. Create your password, (**the password you select must contain at least 8 characters**), and click OK. You will now be logged into EM Manager (Smart View).

**Note: If you forget your password, click the *Forgot your Password* link. A new temporary password will be emailed to you. To create your new password, follow the instructions contained within the email.**



The image shows a screenshot of the 3M Electronic Monitoring EM Manager login interface. At the top left is the 3M logo. Below it, the text reads "3M Electronic Monitoring" and "EM Manager". On the right side, there is a "Secure Login" button with a lock icon. The main area contains two input fields: "User ID:" and "Password:". Below these fields is a dark blue "Login" button. At the bottom center, there is a blue link that says "Forgot Password?". The background of the login form is a light blue grid pattern.

## Enroll a Contact

The *Enroll Contact* link is located on the left side of the Home page (see below). It is here that you will enter the officer's information (name, address, phone number, etc.), report types, and default notification settings.

1. Click the *Enroll Contact* link on the left side of the Home page.
2. You will be redirected to the Enroll Contact page (see below). Enter all Contact information.
3. Click **Save**.

**3M** About EM Manager | Contact Us | Logout Tom Officer

**EM Manager (Smart View)** [What's New](#) [Options](#)

Home View Tools Help

**OFFENDER**  
Enroll Offender

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Offenders...

**Advanced Search**

**CONTACT**  
Enroll Contact

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Contacts...

**Advanced Search**

**Home Page**

Welcome to EM Manager (Smart View)  
Your Client Enrollment and Monitoring Web Service.

**Getting Started**

**Quick Search** – using the section on the left.

- Offender
- Contacts

**View** – located in the above menu

- Offender Monitors
- Case Management Tools
- View All Offenders' home addresses, home rules, and last positions
- View My Offenders' last positions


**Tools** – located in the above menu

- Offender Tracking (Offender Trax)
- Point Tracking (Point Trax)
- Crime Tracking (Crime Trax)
- Reports (Smart Reports)

Need assistance? [Contact Us](#). We'll be glad to help.

Copyright © 2008-2016 - 3M Electronic Monitoring - v2.10.14.0

# Enroll a Contact, Cont.


About EM Manager | Contact Us | Logout Tom Officer

EM Manager (Smart View)
What's New Options

Home View Tools Help

**OFFENDER**

**Enroll Offender**

Quick Search:

Last Name:

First Name:

Recent Offenders...

**Advanced Search**

**CONTACT**

**Enroll Contact**

Quick Search:

Last Name:

First Name:

Recent Contacts...

**Advanced Search**

**Enroll New Contact**

\* Customer:

**Demographic Data**

My Contact Record:  (Associate this contact record with current user)

Custom ID1:

Custom ID2:

\* Last Name:

\* First Name:

\* Address:

Address 2:

\* City:

\* State:

\* Zip code:

Phone Number:  Ext:

Mobile Number:

Fax Number:

Pager Number:

Notification Email Address:

Notification Email Format:

Notification Text Msg Address:

Notification Text Msg Format:

Contact Type:

\* Time Zone:

- Daylight Saving Applies

**Report Options**

Reporting Email Address:

	<u>Daily Event Summary Report</u>	<u>Case Management Activity Report</u>
Receive Active Report:	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Receive Passive Report:	<input type="checkbox"/>	<input type="checkbox"/>
Receive Hybrid Report:	<input type="checkbox"/>	<input type="checkbox"/>
Receive RF Report:	<input type="checkbox"/>	<input type="checkbox"/>
Receive Alcohol Report:	<input type="checkbox"/>	<input type="checkbox"/>

**Default Notification Options**

Pager Notification:

Fax Notification:

Email Notification:

Text Msg Notification:

Copyright © 2008-2016 - 3M Electronic Monitoring - v2.10.14.0

## **Enroll a Contact, Cont.**

### **Demographic Data**

1. Enter the Contact's information.
  - All fields with red asterisks (\*) are required fields.

### **Report Options**

2. Enter an email address where the selected reports will be sent.
3. Choose Daily Event Summary Report and/or Case Management Activity Report.

### **Default Notification Options**

4. Select the type of Notification you would like to be your default method. The notification method is dependent upon the information that you enter into the Notification Email or Text Message fields.
  - Pager
  - Fax
  - E-mail
  - Text Message

### **Finish Enrollment**

5. When you have completed the form, click **Save**.

## Contact Information Page

When you click **Save**, you will be taken to the Contact Information page (see below). Here, you can edit the contact information, as well as disable the contact.

1. To edit the contact information, move your mouse cursor over the Contact Functions dropdown menu and left click Edit.
2. To disable the contact, move your mouse cursor over the Contact Functions dropdown menu and left click Disable Contact.

**3M** EM Manager (Smart View) About EM Manager | Contact Us | Logout Tom Officer

Home View Tools Help What's New Options

### OFFENDER

**Enroll Offender**

Quick Search:  
 Last Name:   
 First Name:   
  
 Recent Offenders...   
[Advanced Search](#)

---

### CONTACT

**Enroll Contact**

Quick Search:  
 Last Name:   
 First Name:   
  
 Recent Contacts...   
[Advanced Search](#)

---

## Contact - Tom Officer

Go To:


Contact General Information	Contact Functions
<b>Contact's User Record:</b> Tom Officer <b>Customer:</b> 3M EM Training <b>Custom ID1:</b> <b>Custom ID2:</b> <b>Name:</b> Tom Officer <b>Address:</b> 8100 Sheldon Road <b>City, State Zip code:</b> Tampa, FL 33615 <b>Phone Number:</b> (813) 555-4778 ext 1234 <b>Mobile Number:</b> (813) 555-3669 <b>Fax Number:</b> (813) 555-2323 <b>Pager Number:</b> <b>Email Address:</b> <a href="mailto:tomofficer@statedoc.com">tomofficer@statedoc.com</a> (Standard format) <b>Text Msg Address:</b> <a href="mailto:8135553669@att.txt.net">8135553669@att.txt.net</a> (Brief format) <b>Contact Type:</b> - Not Set - <b>Time Zone:</b> (GMT -05:00) Eastern Time (DST Applies)	
<b>Report Options</b> <b>Reporting Email Address:</b> <a href="mailto:tomofficer@statedoc.com">tomofficer@statedoc.com</a>	
	<input type="checkbox"/> <a href="#">Daily Event Summary Report</a> <input type="checkbox"/> <a href="#">Case Management Activity Report</a>
<b>Receive Active Report:</b>	<input checked="" type="checkbox"/>
<b>Receive Passive Report:</b>	<input type="checkbox"/>
<b>Receive Hybrid:</b>	<input type="checkbox"/>
<b>Receive RF Report:</b>	<input type="checkbox"/>
<b>Receive Alcohol Report:</b>	<input type="checkbox"/>
<b>Default Notification Options</b> <b>Pager Notification:</b> <input type="checkbox"/> <b>Fax Notification:</b> <input type="checkbox"/> <b>Email Notification:</b> <input checked="" type="checkbox"/> <b>Text Msg Notification:</b> <input checked="" type="checkbox"/>	

Copyright © 2008-2016 - 3M Electronic Monitoring - v2.10.14.0

## Enroll an Offender

The *Enroll Offender* link is located on the left side of the Home page (see below).

1. Click the *Enroll Offender* link.

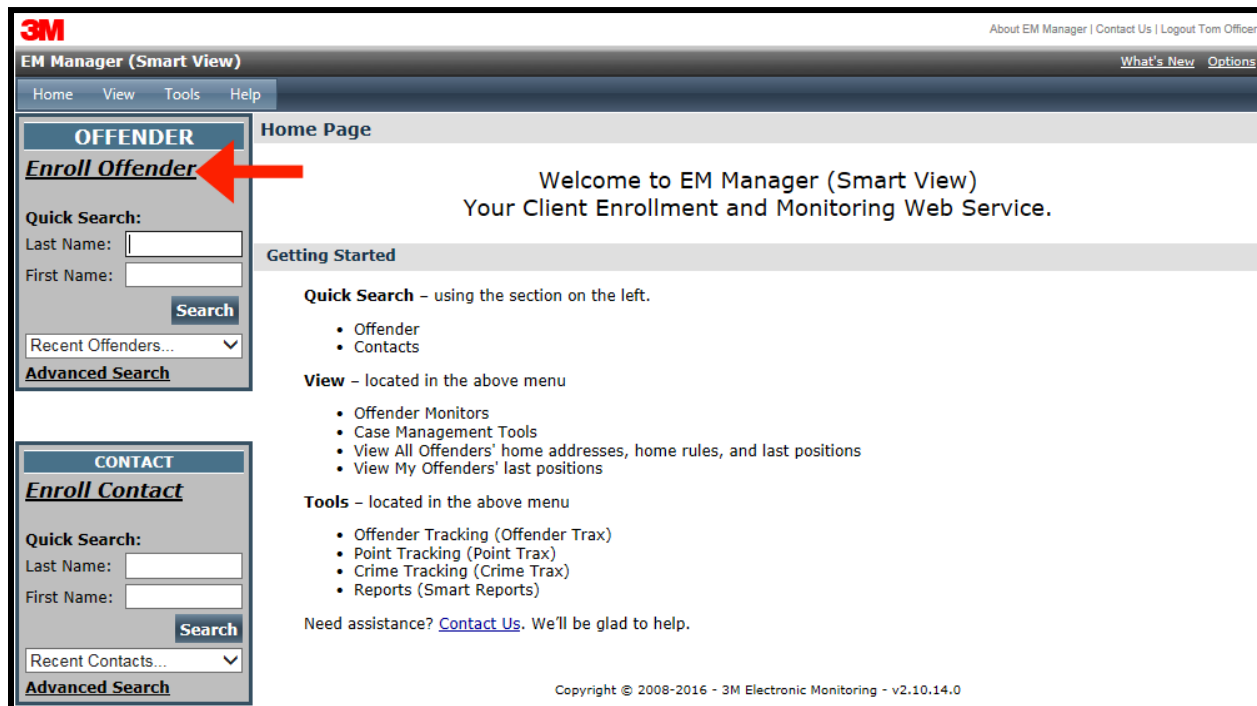

**3M** About EM Manager | Contact Us | Logout Tom Officer

EM Manager (Smart View) What's New Options

Home View Tools Help

**OFFENDER**

[Enroll Offender](#)

Quick Search:  
Last Name:   
First Name:   
  
Recent Offenders...  
[Advanced Search](#)

**CONTACT**

[Enroll Contact](#)

Quick Search:  
Last Name:   
First Name:   
  
Recent Contacts...  
[Advanced Search](#)

Home Page

Welcome to EM Manager (Smart View)  
Your Client Enrollment and Monitoring Web Service.

Getting Started

**Quick Search** – using the section on the left.

- Offender
- Contacts

**View** – located in the above menu

- Offender Monitors
- Case Management Tools
- View All Offenders' home addresses, home rules, and last positions
- View My Offenders' last positions

**Tools** – located in the above menu

- Offender Tracking (Offender Trax)
- Point Tracking (Point Trax)
- Crime Tracking (Crime Trax)
- Reports (Smart Reports)

Need assistance? [Contact Us](#). We'll be glad to help.


Copyright © 2008-2016 - 3M Electronic Monitoring - v2.10.14.0



## Supervision Level

Clicking on the *Enroll Offender* link will redirect you to the Level of Supervision page (see below).

1. Click on the Level of Supervision drop down menu.
2. Select your Level of Supervision (see below).
3. Click the **Continue** button.

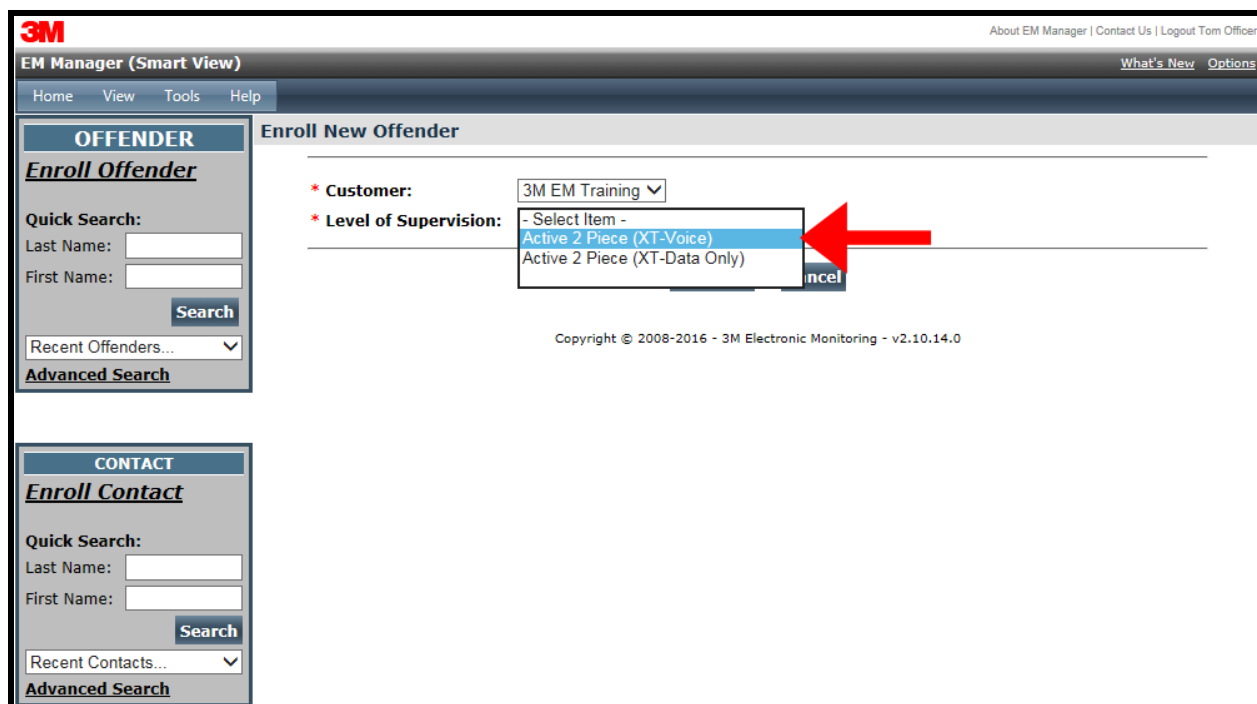

**3M** EM Manager (Smart View) About EM Manager | Contact Us | Logout Tom Officer

Home View Tools Help What's New Options

### OFFENDER

**Enroll Offender**

Quick Search:  
Last Name:   
First Name:   
  
Recent Offenders...   
[Advanced Search](#)

### CONTACT

**Enroll Contact**

Quick Search:  
Last Name:   
First Name:   
  
Recent Contacts...   
[Advanced Search](#)

### Enroll New Offender

\* Customer: 3M EM Training

\* Level of Supervision:   
Active 2 Piece (XT-Voice)   
Active 2 Piece (XT-Data Only)

Copyright © 2008-2016 - 3M Electronic Monitoring - v2.10.14.0

# Offender Enrollment

After selecting the Level of Supervision, you will be redirected to the Enroll Offender page (see below). It is here that you will select an Assigned Officer, enter the Offender's Information, select the Notification Contact and Method, Assign Hardware, and select the Basic Rule Setup.

**EM Manager (Smart View)** About EM Manager | Contact Us | Logout Tom Officer

Home View Tools Help What's New Options

---

**OFFENDER**

Enroll Offender

Quick Search:

Last Name:

First Name:

**Search**

Recent Offenders...

**Advanced Search**

**Enroll New Offender**

\* Customer: 3M EM Training

\* Level of Supervision: Active 2 Piece (XT-Voice)

**Demographic Data**

Assigned Officer: Officer, Tom

Custom ID1:

Custom ID2:

\* Last Name: Offender

\* First Name: Steve

\* Date of Birth: 7/25/1980

\* Address: 1838 Gunn Hwy

Address 2:

\* City: Odessa

\* State: Florida

\* Zip code: 33556-\_\_

County: Pasco County

Coordinates (lat,lon): (28.185146,-82.591506)

Mobile Number: (813) 555-1212

Home/Secondary Number: (813) 555-3434

Email: steveoffender@statedoc.

Offender Type: Other/Unspecified

Comments:

\* Time Zone: (GMT -05:00) Eastern Time

- Daylight Saving Applies

Picture: \\hqfp02\share\users\jabe.

**Hardware Assignment**

Assign 2 Piece (XT): 3976 (XT CDMA V4, CDMA-V, voice)

Assign Bracelet: 159652 (BTR 3000B)

Assign Base Unit: 50403383 (Base Unit 2000 Landline)

**Basic Rule Setup**

Home Zone:  - Create default Home Zone from home address

Home Zone Shape:  Standard  Circle

Zone Template:  - Apply Zone Templates

- None Selected -

**Notification Contacts**

Contact Name	Pager	Fax	Email	Txt Msg	
Officer, Tom <input type="button" value="v"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="Add"/>

Contact Name	Page	Fax	Email	Txt Msg	
Officer, Tom	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="Delete"/>

Copyright © 2008-2016 - 3M Electronic Monitoring - v2.10.14.0

## **Offender Enrollment, Cont.**

### **Demographic Data**

1. Enter the Offender's Information.
  - All fields with red asterisks (\*) are required fields
2. Click the **Map** button to geo-code the offender's address. This is required if you are creating a Home Inclusion Zone for the offender.
3. Enter the offender's home number, if available.
4. Select the Offender Type.
5. Select the Time Zone.

### **Hardware Assignment**

6. Locate the serial number on the device(s).
7. Click on the drop down menu and select that serial number for the device.

### **Basic Rule Setup**


8. Click the box next to Create Default Home Zone from Home Address. For information on how to edit the schedule for the Home Rule, refer to page 19.
9. Choose the appropriate Contact from the Notification Contact drop down list. The selected Contact will be notified for **all** rules.
10. Click the **Add** button.
11. Select the type of Notification (if you haven't chosen your Default Notification Method on your Contact record)
  - Pager
  - Fax
  - E-mail
  - Text Message

### **Finish Enrollment**

12. When you have completed entering the information, click **Save**.


## Map Offender's Address

Clicking the **Map** button on the Offender Enrollment screen will generate a map that displays a pushpin at the offender's residence. Ensure that the pushpin location is correct and click the **Submit** button. It is also possible to edit the location by clicking the **Edit Pushpin** button.

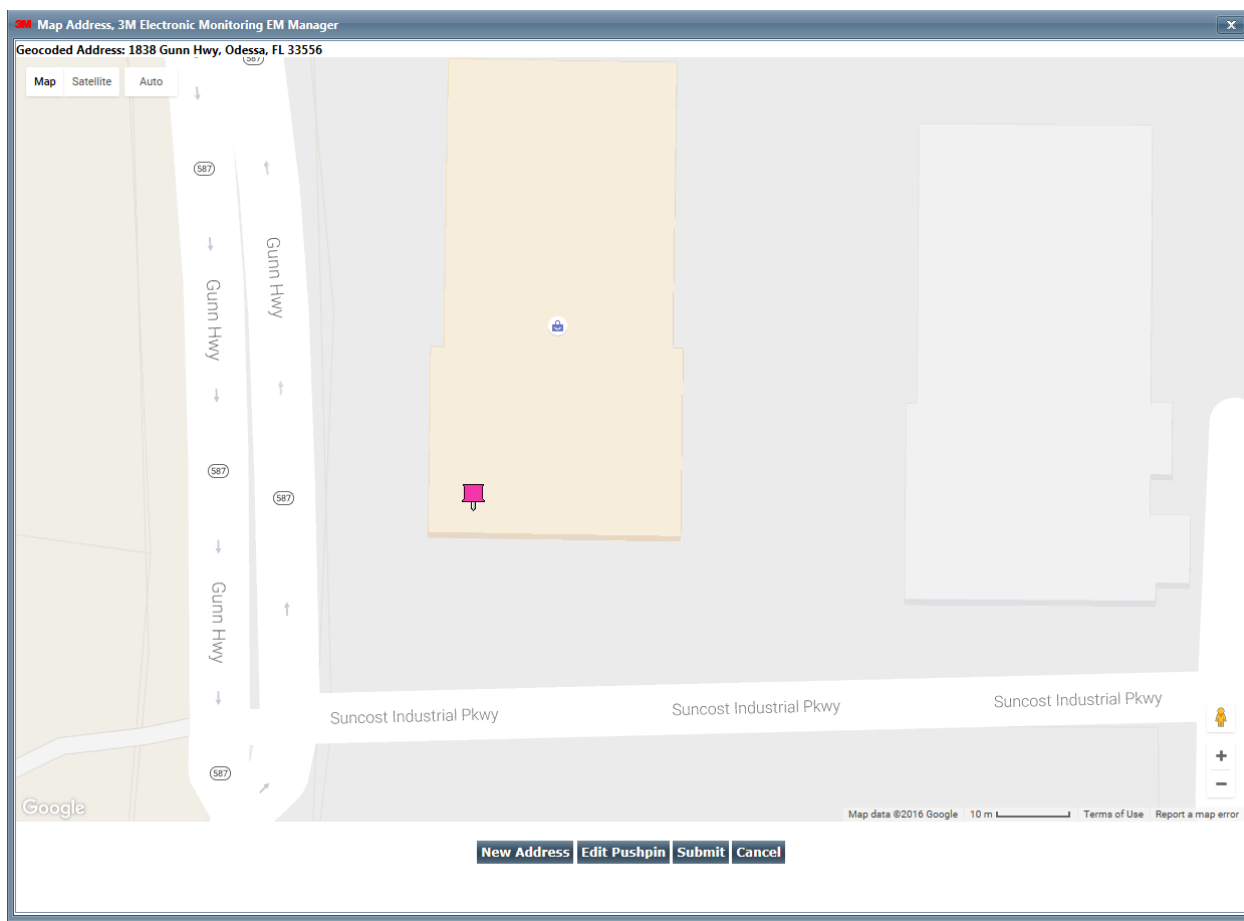

## Offender General Information Page

When Enrollment has been completed, you will be redirected to the Offender General Information page (see below). Here, you can Edit Offender Information, Disable the Offender, View GPS Points, Unassign Hardware, Edit Rules, Send Messages, and Download Points.


About EM Manager | Contact Us | Logout Tom Officer

EM Manager (Smart View)
What's New Options

Home View Tools Help

**OFFENDER**

[Enroll Offender](#)

Quick Search:

Last Name:

First Name:

Recent Offenders...

[Advanced Search](#)

**CONTACT**

[Enroll Contact](#)

Quick Search:

Last Name:

First Name:

Recent Contacts...

[Advanced Search](#)

**Offender - Steve Offender**

**Okay (2 Piece (XT) Activate Pending)**

● **Device Last Charged:** Never  
**Battery Status:** N/A

Go To:

Offender General Information
▼ Offender Functions

**Name:** Steve Offender

**Customer:** 3M EM Training

**Level of Supervision:** Active 2 Piece (XT-Voice)

**Assigned Officer:** [Tom Officer](#)

**Enrollment Date:** 10/05/2016 10:27 AM

**Custom ID1:**

**Custom ID2:**

**Address:** [1838 Gunn Hwy](#)

**City, State Zip code:** [Odessa, FL 33556](#)

**County:** [Pasco County](#)

**Mobile Number:** (813) 555-1212

**Home/Secondary Number:** (813) 555-3434

**Email:** [steveoffender@statedoc.com](mailto:steveoffender@statedoc.com)

**Offender Type:** Other/Unspecified

**Comments:**

**Time Zone:** (GMT -05:00) Eastern Time (DST Applies)

Assigned Hardware Information
▼ Hardware Functions

**2 Piece (XT):** 35453976 (Activate Pending, XT CDMA V4, CDMA-V, Voice #: (763) 248-0164)

**Bracelet:** 159652 (BTR 3000B)


**Base Unit:** 50403383 (Activate Pending, Base Unit 2000 Landline)

Rule Information
▼ Rule Functions

Name	Type	Distance	Grace Period	Has Actions	Status
Home	Inclusion (Home)	600 ft	00:00:00	Yes	Pending Active
In Charger	Hardware	N/A	00:00:00	Yes	Pending Active
Bracelet Battery	Hardware	N/A	N/A	Yes	Pending Active
Bracelet Gone	Hardware	N/A	00:00:00	Yes	Pending Active
Bracelet Strap	Hardware	N/A	N/A	Yes	Pending Active
2 Piece (XT) Battery	Hardware	N/A	00:30:00	Yes	Pending Active
2 Piece (XT) Motion No GPS	Hardware	N/A	00:10:00	Yes	Pending Active
2 Piece (XT) Tamper	Hardware	N/A	N/A	Yes	Pending Active

**Offender Functions**

Picture
Map



[See larger image](#)

## Create Schedule for Home Inclusion Zone

1. Click on the Home Rule (see below).

**3M** About EM Manager | Contact Us | Logout Tom Officer

**EM Manager (Smart View)** What's New Options

Home View Tools Help

**OFFENDER**  
*Enroll Offender*

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Offenders...  
**Advanced Search**

---

**CONTACT**  
*Enroll Contact*

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Contacts...  
**Advanced Search**

**Offender - Steve Offender**

Okay (2 Piece (XT) Activate Pending)  
 Device Last Charged: Never  
 Battery Status: N/A

Go To:  **Base Point History** **View GPS Points** **Event History** **Download Points** **Send Msg**


---

**Offender General Information**

**Name:** Steve Offender  
**Customer:** 3M EM Training  
**Level of Supervision:** Active 2 Piece (XT-Voice)  
**Assigned Officer:** [Tom Officer](#)  
**Enrollment Date:** 10/05/2016 10:27 AM  
**Custom ID1:**  
**Custom ID2:**  
**Address:** [1838 Gunn Hwy](#)  
**City, State Zip code:** [Odessa, FL 33556](#)  
**County:** [Pasco County](#)  
**Mobile Number:** (813) 555-1212  
**Home/Secondary Number:** (813) 555-3434  
**Email:** [steveoffender@statedoc.com](mailto:steveoffender@statedoc.com)  
**Offender Type:** Other/Unspecified  
**Comments:**  
**Time Zone:** (GMT -05:00) Eastern Time (DST Applies)

**Offender Functions**

Picture  Map

  
[See larger image](#)

---

**Assigned Hardware Information**

**2 Piece (XT):** 35453976 (Activate Pending, XT CDMA V4, CDMA-V, Voice #: (763) 248-0164)  
**Bracelet:** 159652 (BTR 3000B)  
**Base Unit:** 50403383 (Activate Pending, Base Unit 2000 Landline)

**Hardware Functions**

---

**Rule Information**

Name	Type	Distance	Grace Period	Has Actions	Status
Home	Inclusion (Home)	600 ft	00:00:00	Yes	Pending Active
In Charger	Hardware	N/A	00:00:00	Yes	Pending Active
Bracelet Battery	Hardware	N/A	N/A	Yes	Pending Active
Bracelet Gone	Hardware	N/A	00:00:00	Yes	Pending Active
Bracelet Strap	Hardware	N/A	N/A	Yes	Pending Active
2 Piece (XT) Battery	Hardware	N/A	00:30:00	Yes	Pending Active
2 Piece (XT) Motion No GPS	Hardware	N/A	00:10:00	Yes	Pending Active
2 Piece (XT) Tamper	Hardware	N/A	N/A	Yes	Pending Active

**Rule Functions**

## Create Schedule for Home Inclusion Zone, Cont.

2. Move your mouse cursor over the Rule Functions dropdown menu and left click Edit.

The screenshot shows the EM Manager (Smart View) interface for an offender named Steve Offender. The page is divided into several sections:

- OFFENDER Section:** Includes 'Enroll Offender', 'Quick Search' (Last Name, First Name), 'Recent Offenders...', and 'Advanced Search'.
- CONTACT Section:** Includes 'Enroll Contact', 'Quick Search' (Last Name, First Name), 'Recent Contacts...', and 'Advanced Search'.
- Offender - Steve Offender Details:**
  - Status: Okay (2 Piece (XT) Activate Pending)
  - Device Last Charged: Never
  - Battery Status: N/A
  - Go To: Select ...
  - Buttons: Base Point History, View GPS Points, Event History, Download Points, Send Msg
- General Rule Information:**
  - Zone Type: Inclusion (Home)
  - Zone Shape: Standard Zone
  - Rule Name: Home
  - Address: 1838 Gunn Hwy
  - City, State Zip code: Odessa, FL 33556
  - Zone Size: 600 feet
  - Coordinates: 28.185146 , -82.591506 (with Map button)
  - Display Border Only: No
  - Grace Period: 00:00:00 (hh:mm:ss)
  - Offender Notification: Yes - Home
- Notification Contacts:**
  - Notify On Clear: No
  - Table with columns: Contact, Rcv Page, Rcv Fax, Rcv Email, Rcv Txt Msg
  - Row: Officer, Tom (Rcv Email is checked)
- Permanent Rule Schedule:**
  - Schedule Synced: No
  - Grid showing days of the week (Monday to Sunday) and time slots (12am to 11:00).

A red arrow points to the 'Edit' option in the 'Rule Functions' dropdown menu.

## Create Schedule for Home Inclusion Zone, cont.

- You will be redirected to the Edit Rule page. Scroll down to the Permanent Rule Schedule.

**3M** EM Manager (Smart View) About EM Manager | Contact Us | Logout Tom Officer

Home View Tools Help What's New Options

**OFFENDER**

Enroll Offender

Quick Search:

Last Name:

First Name:

Recent Offenders...

Advanced Search

---

**CONTACT**

Enroll Contact

Quick Search:

Last Name:

First Name:

Recent Contacts...

Advanced Search

**Offender - Steve Offender**

Okay (2 Piece (XT) Activate Pending)

Device Last Charged: Never

Battery Status: N/A

---

**General Rule Information**

Zone Type:  Inclusion  Exclusion

Zone Shape:  Standard  Circle  Free Form

---

Inclusion Zone Type:

Rule Name:

Address:

Address 2:

City:

State:

Zip code:

Copy Address From:  Home  Work  School

Zone Size:   Feet  Miles

Coordinates:

Display Border Only:  Yes  No

Grace Period:

Notify Offender If Violated:  Yes  No

Offender Message:

---

**Notification Contacts**

Notify Contact on Clear:  Yes  No

Name	Page	Fax	Email	Txt Msg	Update Status
Officer, Tom	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="Delete"/>

Pager
  Fax
  Email
  Txt Msg

---

**Permanent Rule Schedule**

Schedule Synced:  Yes  No

All	12am	1:00	2:00	3:00	4:00	5:00	6:00	7:00	8:00	9:00	10:00	11:00	12pm	1:00	2:00	3:00	4:00	5:00	6:00	7:00	8:00	9:00	10:00	11:00
-----	------	------	------	------	------	------	------	------	------	------	-------	-------	------	------	------	------	------	------	------	------	------	------	-------	-------



## Create Schedule for Home Inclusion Zone, Cont.

- Each block represents a 30 minute increment of time. Left-click and drag the cursor along the blocks during the times that the offender is required to be home. As you move the cursor, the blocks will turn blue. The white blocks that remain equal the times that the offender is allowed to be out of the home (see below).
- Click the **Save** button.

**Permanent Rule Schedule**
Copy From ...

Schedule Synced:  Yes  No

All	12am	1:00	2:00	3:00	4:00	5:00	6:00	7:00	8:00	9:00	10:00	11:00	12pm	1:00	2:00	3:00	4:00	5:00	6:00	7:00	8:00	9:00	10:00	11:00
Monday																								
Tuesday																								
Wednesday																								
Thursday																								
Friday																								
Saturday																								
Sunday																								

**Notes:**

Starts Monday 12:00 AM, Ends Monday 8:00 AM  
 Starts Monday 7:00 PM, Ends Tuesday 8:00 AM  
 Starts Tuesday 7:00 PM, Ends Wednesday 8:00 AM  
 Starts Wednesday 7:00 PM, Ends Thursday 8:00 AM  
 Starts Thursday 7:00 PM, Ends Friday 8:00 AM  
 Starts Friday 7:00 PM, Ends Saturday 8:00 AM

## Create Exclusion Zone

You can create an Exclusion Rule to ensure that the offender is not entering areas which are forbidden – such as schools, playgrounds, and victims’ residences.

1. Move your cursor over the Rule Functions menu (see below).
2. Left click Add Zone.

**3M** EM Manager (Smart View) About EM Manager | Contact Us | Logout Tom Officer

Home View Tools Help What's New Options

**OFFENDER** Offender - Steve Offender

Enroll Offender

Quick Search:  
Last Name:   
First Name:   
  
Recent Offenders...

**CONTACT**

Enroll Contact

Quick Search:  
Last Name:   
First Name:   
  
Recent Contacts...

**Offender - Steve Offender**

Okay (2 Piece (XT) Activate Pending)

Device Last Charged: Never  
Battery Status: N/A

Go To:

**Offender General Information**

**Name:** Steve Offender  
**Customer:** 3M EM Training  
**Level of Supervision:** Active 2 Piece (XT-Voice)  
**Assigned Officer:** [Tom Officer](#)  
**Enrollment Date:** 10/05/2016 10:27 AM  
**Custom ID1:**  
**Custom ID2:**  
**Address:** [1838 Gunn Hwy](#)  
**City, State Zip code:** [Odessa, FL 33556](#)  
**County:** [Pasco County](#)  
**Mobile Number:** (813) 555-1212  
**Home/Secondary Number:** (813) 555-3434  
**Email:** [steveoffender@statedoc.com](mailto:steveoffender@statedoc.com)  
**Offender Type:** Other/Unspecified  
**Comments:**  
**Time Zone:** (GMT -05:00) Eastern Time (DST Applies)

**Assigned Hardware Information**

**2 Piece (XT):** 35453976 (Activate Pending, XT CDMA V4, CDMA-V, Voice #: (763) 248-0164)  
**Bracelet:** 159652 (BTR 3000B)  
**Base Unit:** 50403383 (Activate Pending, Base Unit 2000 Landline)

**Rule Information**

Name	Type	Distance	Grace Period	...	...
Home	Inclusion (Home)	600 ft	00:00:00	Y	
In Charger	Hardware	N/A	00:00:00	Y	
Bracelet Battery	Hardware	N/A	N/A	Yes	Pending Active
Bracelet Gone	Hardware	N/A	00:00:00	Yes	Pending Active
Bracelet Strap	Hardware	N/A	N/A	Yes	Pending Active
2 Piece (XT) Battery	Hardware	N/A	00:30:00	Yes	Pending Active
2 Piece (XT) Motion No GPS	Hardware	N/A	00:10:00	Yes	Pending Active
2 Piece (XT) Tamper	Hardware	N/A	N/A	Yes	Pending Active

**Rule Functions**

- Add Zone
- Apply Zone Templates
- Replicate Actions

## Create Exclusion Zone, Cont.

3. Choose a Zone Shape.
4. Choose Exclusion as the Zone Type.
5. Click the **Continue** button.

**3M** About EM Manager | Contact Us | Logout Tom Officer

EM Manager (Smart View) What's New Options

Home View Tools Help

**OFFENDER** Offender - Steve Offender

**Enroll Offender**

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Offenders...   
**Advanced Search**

Okay (2 Piece (XT) Activate Pending)  
● Device Last Charged: Never  
Battery Status: N/A

**General Rule Information**

Zone Template:  **Select** **Reset**

Zone Type:  Inclusion  Exclusion

Zone Shape:  Standard  Circle  Free Form

**Continue** **Cancel**

Copyright © 2008-2016 - 3M Electronic Monitoring - v2.10.14.0

**CONTACT**

**Enroll Contact**

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Contacts...   
**Advanced Search**

## Create Exclusion Zone, Cont.

6. Enter the Rule Name (school, playground, etc.).
7. Enter the address information and the zone size. The default is 600 ft.
8. Select *Yes* or *No* if you want to notify the offender upon violation.
9. If you selected *Yes* to notify the offender upon violation, type the message you want displayed on the 2 Piece (XT) screen in the **Offender Message** field.
10. Choose the appropriate Contact from the Notification Contact drop down list. The contact's default notification method will appear selected.
11. Click the **Add** button.
12. Click the **Map** button.

**3M** EM Manager (Smart View) About EM Manager | Contact Us | Logout Tom Officer

Home View Tools Help

**OFFENDER** Offender - Steve Offender

Enroll Offender

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Offenders...  
**Advanced Search**

**CONTACT**

Enroll Contact

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Contacts...  
**Advanced Search**

Okay (2 Piece (XT) Activate Pending)  
 Device Last Charged: Never  
 Battery Status: N/A

**General Rule Information**

Zone Type:  Inclusion  Exclusion

Zone Shape:  Standard  Circle  Free Form

Rule Name:

Address:

Address 2:

City:

State:

Zip code:

Zone Size:   Feet  Miles

Coordinates: (28.022590, -82.711469) **Map**

Display Border Only:  Yes  No

Grace Period:

Notify Offender If Violated:  Yes  No

Offender Message:

**Notification Contacts**

Notify Contact on Clear:  Yes  No

- No Notification Contacts Defined -

Contact Name	Pager	Fax	Email	Txt Msg
- Select Item -	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


**Add**

**Permanent Rule Schedule** **Copy From ...**

	12am	1:00	2:00	3:00	4:00	5:00	6:00	7:00	8:00	9:00	10:00	11:00	12pm	1:00	2:00	3:00	4:00	5:00	6:00	7:00	8:00	9:00	10:00	11:00	
All																									
Monday																									
Tuesday																									
Wednesday																									
Thursday																									
Friday																									

## Create Exclusion Zone, Cont.

13. Ensure that the address and zone size is correct.
14. If you want to resize or move the zone, click the **Move/Resize** button.
15. If you move or resize the zone, click the **Finish Move/Resize** button.
16. Click the **Submit** button.

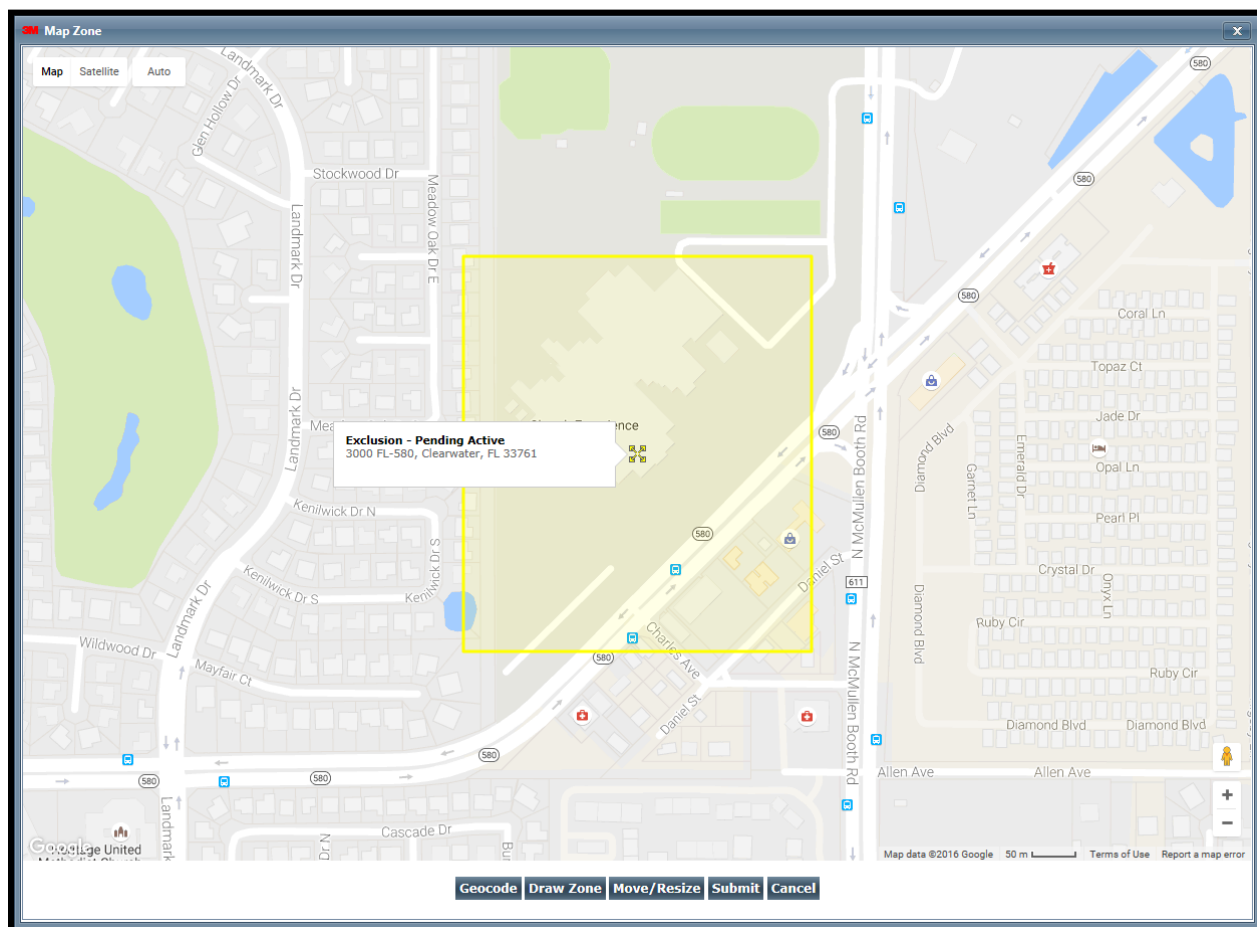

## Attaching the Bracelet



### Step 1:

Push tamper plugs into the back of the brackets of the Bracelet. **Be sure to insert the left side first.** After the left side has been secured, press the right side of the tamper plug down.

### Step 2:

Place the pin tray on a flat surface (such as a desk) and push one end of the strap into the pin tray until it is level with the “lip” of the pin tray. **Ensure that there is no gap between the end of the strap and the edge of the pin tray.**

## **Attaching the Bracelet, Cont.**



### **Step 3:**

Insert strap with attached pin tray into one side of the Bracelet until it snaps in place.



### **Step 4:**

Place the Bracelet on the offender's leg, just above the ankle bone.



### **Step 5:**

Wrap the strap around the offender's leg and measure to the line shown above so that it allows approximately  $\frac{1}{4}$  inch of space between the offender's leg and the strap to ensure comfort.

## Attaching the Bracelet, Cont.



### **Step 6:**

Using the strap cutters, cut the strap according to the measurement taken in step six. **Wipe off any fiber optic cable residue left on the strap after cutting has been completed.**



### **Step 7:**

Place remaining pin tray on a flat surface and insert measured end of the underneath side (the bottom) of the strap into the pin tray.



### **Step 8:**

Place the Bracelet on the offender's leg just above the ankle bone and insert the strap with attached pin tray into the bracket until it snaps in place. Once in place, gently pull on strap to ensure that device is secured around offender's ankle.



## Connecting the Base Unit 2000



### Step 1:

Plug A/C adapter into a wall outlet.



### Step 2:

Plug A/C adapter into the back of the Base Unit 2000 where 12VDC is located. The green power light will light up on the front of the unit.



### Step 3:

**If offender has a phone line:**

**A:** Disconnect telephone line from the wall jack and plug into the back of the Base Unit 2000 marked PHONE. This will connect the telephone to the Base Unit 2000.

**B:** Take provided phone cord and plug one end into the wall jack and the other end into Base Unit 2000 marked LINE.

## **Connecting the Base Unit 2000, Cont.**



### **Step 4:**

#### **If activating at office:**

**A:** Remove phone line from facsimile machine.

**B:** Plug facsimile phone line into the Base Unit 2000.

### **Base Unit 2000- Violation Status Lights:**


**Power:** The Base Unit 2000 has lost power.

**Line:** The phone line has been disconnected.

**Curfew:** The 2 Piece (XT) is not in the Base Unit 2000 when the schedule is in effect.

**Message:** N/A

## Activating the 2 Piece (XT)

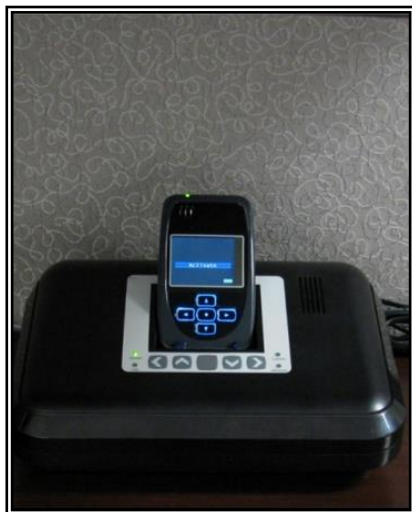

### Step 1:

Place the 2 Piece (XT) into the Base Unit 2000 or attach it to the 2 Piece (XT) wall charger. Ensure the Base Unit 2000 is connected to the A/C power cord.

Note: Ensure the hardware has been assigned and saved to the offender's profile.



### Step 2:

Press the **Activate** button (center button).




### Step 3:

Press the **Scroll** button (bottom button) to select "Using Wireless" to activate using the cellular network. Press the center button to accept your choice and to begin dialing.

If activating via the Base Unit 2000, select which prefix (if any) the Base Unit 2000 must dial to complete a call. Press the center button to accept your choice and to begin dialing.

## Activating the 2 Piece (XT), Cont.

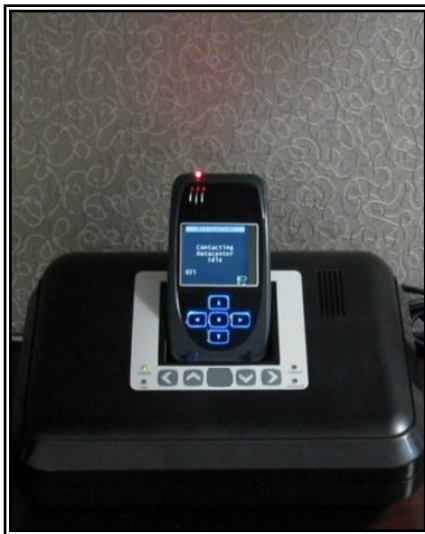

### Step 4:

The 2 Piece (XT) will begin to contact the Attenti Data Center. "Contacting Data Center" will be displayed on the screen.

Once contact is complete, the 2 Piece (XT) will begin to search for the bracelet. "Searching for Bracelet" will be displayed on the screen.

Note: Both sides of the strap must be connected to the bracelet and it, the bracelet, must be in range of the 2 Piece (XT).

Once the XT recognizes the bracelet, it will display "Waiting for GPS" on the screen. Remove the 2 Piece (XT) from the Base Unit 2000.

### Step 5:

Walk the 2 Piece (XT) outside, holding it upright in an area with a clear view of the sky.

Once GPS has been acquired, the 2 Piece (XT) will beep and display the message "Activation Successful." Click the center button to acknowledge.

After the center button has been clicked, the 2 Piece (XT) will display the offender's name, date and time.

# Unassigning Hardware

1. Move your mouse cursor over the Hardware Functions dropdown menu and left click Unassign.

**3M** EM Manager (Smart View) About EM Manager | Contact Us | Logout Tom Officer

Home View Tools Help What's New Options

**OFFENDER**  
Enroll Offender

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Offenders...  
**Advanced Search**

---

**CONTACT**  
Enroll Contact

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Contacts...  
**Advanced Search**

**Offender - Steve Offender**

**Violation - Bracelet Gone (In Base Unit)**  
● **Device Last Charged:** 10/05/16 1:47:42 PM - 0:00 hrs  
**Battery Status:** 63%

Go To: Select ... **Base Point History** **View GPS Points** **Event History** **Download Points** **Send Msg**

---

**Offender General Information** ▼ **Offender Functions**

**Name:** Steve Offender  
**Customer:** 3M EM Training  
**Level of Supervision:** Active 2 Piece (XT-Voice)  
**Assigned Officer:** [Tom Officer](#)  
**Enrollment Date:** 10/05/2016 10:27 AM  
**Custom ID1:**  
**Custom ID2:**  
**Address:** [1838 Gunn Hwy](#)  
**City, State Zip code:** [Odessa, FL 33556](#)  
**County:** [Pasco County](#)  
**Mobile Number:** (813) 555-1212  
**Home/Secondary Number:** (813) 555-3434  
**Email:** steveoffender@statedoc.com  
**Offender Type:** Other/Unspecified  
**Comments:**  
**Time Zone:** (GMT -05:00) Eastern Time (DST Applies)

**Assigned Hardware Information**

**2 Piece (XT):** 35453976 (XT CDMA V4, CDMA-V, Voic  
**Bracelet:** 159652 (BTR 3000B)  
**Base Unit:** 50403383 (Base Unit 2000 Landline)

▼ **Hardware Functions**

- ✖ Unassign
- Send Message
- Download Points

▼ **Rule Functions**

**Rule Information**

Name	Type	Distance	Grace Period	Has Actions	Status
Elementary School	Exclusion	600 ft	00:00:00	No	Active
Home	Inclusion (Home)	600 ft	00:00:00	Yes	Active
In Charger	Hardware	N/A	00:00:00	Yes	Active
Bracelet Battery	Hardware	N/A	N/A	Yes	Active
Bracelet Gone	Hardware	N/A	00:00:00	Yes	Active
Bracelet Strap	Hardware	N/A	N/A	Yes	Active

## Unassigning Hardware, Cont.

2. Click the checkbox next to the 2 Piece (XT), Bracelet, and Base Unit 2000. (see below).
3. Click on the drop-down menu and select a reason for unassignment. This is required.

The screenshot displays the 3M EM Manager (Smart View) interface. The main content area is titled 'Offender - Steve Offender'. It shows a violation: 'Violation - Bracelet Gone (In Base Unit)' with a red dot icon. Below this, it states 'Device Last Charged: 10/05/16 1:47:42 PM - 0:00 hrs' and 'Battery Status: 63%'. The 'Unassign Offender Hardware' section is active, showing 'Unassign 2 Piece (XT):' with a checked checkbox and the device ID '- 35453976 (XT CDMA V4, CDMA-V, Voice #: (763) 248-0164)'. The 'Unassignment Reason:' dropdown menu is open, displaying a list of reasons: 'Offender Removed From System', 'Failed To Activate', 'GPS Problem', 'Battery Problem', 'Hardware Failure', 'External Damage', 'Switched to Active', 'Arrest / Violation', 'Program Completion', 'Switched to Passive', 'Medical', 'Other', and 'Absconded'. A red arrow points to the dropdown menu. The 'Unassignment Reason' field is marked as required with a red exclamation point and the text '! Required'. The interface also includes search filters for 'OFFENDER' and 'CONTACT' on the left side.


## Unassigning Hardware, Cont.

4. Click the **Save** button. A popup will generate with a warning that the unassignment is immediate.
5. Click **OK**.

The screenshot displays the 3M EM Manager (Smart View) interface. The main content area shows the offender profile for "Steve Offender" with a violation "Bracelet Gone (In Base Unit)". The "Unassign Offender Hardware" section is active, showing options to unassign a 2-piece XT (checked) and a bracelet (checked). A warning dialog box is overlaid on the interface, containing the text: "WARNING: Hardware Unassignment Is Immediate! Click OK to continue." The dialog has "OK" and "Cancel" buttons. The interface also includes search filters for offenders and contacts, and a navigation menu at the top.

## Unassigning Hardware, Cont.

- You will be returned to the Offender Information page, where the hardware will be pending unassignment. The device is now required to call Attenti and transmit its final data. The hardware will only be unassigned once this final call has occurred.


About EM Manager | Contact Us | Logout Tom Offender

**EM Manager (Smart View)**
What's New Options

Home View Tools Help

OFFENDER

Enroll Offender

Quick Search:

Last Name:

First Name:

Recent Offenders...

Advanced Search

CONTACT

Enroll Contact

Quick Search:

Last Name:

First Name:

Recent Contacts...

Advanced Search

Offender - Steve Offender

Violation - Bracelet Gone (2 Piece (XT) Unassign Pending, In Base Unit)

● Device Last Charged: 10/05/16 1:47:42 PM - 0:00 hrs

Battery Status: 63%

Go To:

Offender General Information

Offender Functions

Name: **Steve Offender**

Customer: 3M EM Training

Level of Supervision: Active 2 Piece (XT-Voice)

Assigned Officer: [Tom Officer](#)

Enrollment Date: 10/05/2016 10:27 AM

Custom ID1:

Custom ID2:

Address: [1838 Gunn Hwy](#)

City, State Zip code: [Odessa, FL 33556](#)

County: [Pasco County](#)

Mobile Number: (813) 555-1212

Home/Secondary Number: (813) 555-3434

Email: steveoffender@statedoc.com

Offender Type: Other/Unspecified

Comments:

Time Zone: (GMT -05:00) Eastern Time (DST Applies)

Assigned Hardware Information

Hardware Functions

2 Piece (XT): 35453976 (Unassign Pending, XT CDMA V4, CDMA-V, Voice #: (763) 248-0164)


Bracelet: - unassigned -

Base Unit: 50403383 (Unassign Pending, Base Unit 2000 Landline)

Rule Information

Rule Functions

Name	Type	Distance	Grace Period	Has Actions	Status
Elementary School	Exclusion	600 ft	00:00:00	No	Active
Home	Inclusion (Home)	600 ft	00:00:00	Yes	Active
In Charger	Hardware	N/A	00:00:00	Yes	Pending Active
Bracelet Battery	Hardware	N/A	N/A	Yes	Active
Bracelet Gone	Hardware	N/A	00:00:00	Yes	Active
Bracelet Strap	Hardware	N/A	N/A	Yes	Active
2 Piece (XT) Battery	Hardware	N/A	00:30:00	Yes	Active
2 Piece (XT) Motion No GPS	Hardware	N/A	00:10:00	Yes	Active

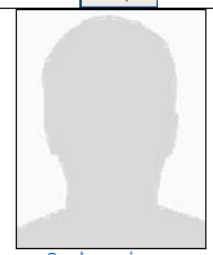

[See larger image](#)



## Removing the Bracelet



### Step 1:

Cut the strap by using the strap cutters and remove the Bracelet from the offender's leg.



### Step 2:


Using a Attenti flathead screwdriver, push on the tamper plugs to break them.



### Step 3:

Use the screwdriver to remove the tamper plugs from the brackets.

## **Removing the Bracelet, Cont.**

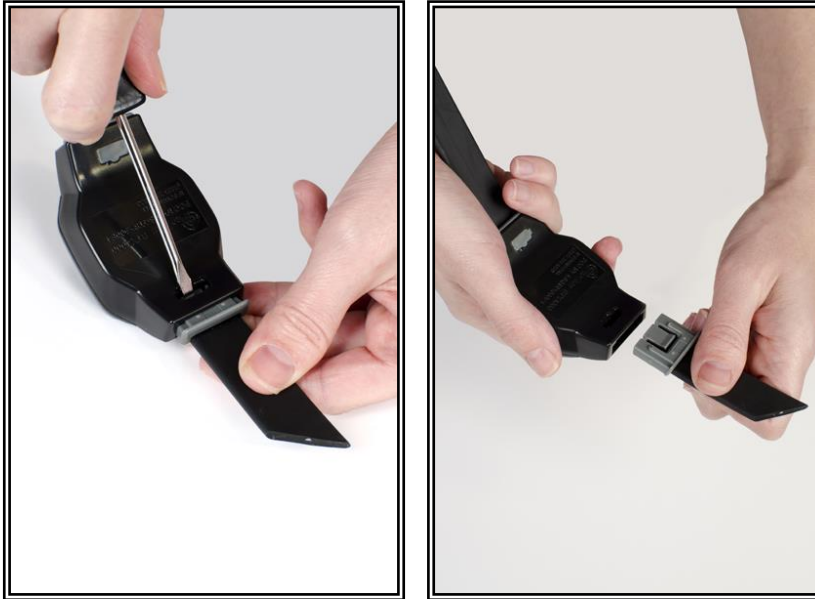

### **Step 4:**

While keeping the latch depressed, pull the strap with the attached pin trays out of each bracket.  
Discard the tamper plugs and straps.

**Note: Do NOT reuse the tamper plugs.**

**Note: Do NOT remove tamper plugs from the brackets of the Bracelet unless there is a strap with an attached pin tray inside the bracket.**

## Accessing the Officer Menu

To access the Officer Menu from a 2 Piece (XT), follow the button sequence below:

**BUTTON SEQUENCE: 2, 2, 1, 1, 2, 1, 2, 2, 3**

**Messages:** Displays messages sent to the device.

**Vibrate/Beep:** Changes 2 Piece (XT) alert mode.

**ID Numbers:** Displays ID numbers of assigned hardware.

**Alarm Set:** Accesses alarm clock function.

**Call List:** Displays the phone numbers that the 2 Piece (XT) can dial. They are programmed by the officer in the EM Manager (Smart View) software.

**Icon Glossary:** Displays the icons that appear when the 2 Piece (XT) is in violation.

**Phone # Prefix:** Changes dialing prefix for Base Unit 2000 calls.

**Beep Volume:** Changes volume of alert tone.

**Time Format:** Changes the way the time is displayed.

**Firmware Ver.:** Displays current version of software in 2 Piece (XT).

**Bracelet Test:** Displays the receipt of the signal from the bracelet.

**Set Brac S/N:** Allows you to temporarily assign a bracelet to an unassigned 2 Piece (XT).

**Modem Info:** Allows you to force the device to call Attenti immediately.

**Assigned SBs:** Shows you the Base Unit 2000 that is assigned to the offender.

**Satellite Bar:** Displays the receipt of GPS signals from the GPS satellites.



## Accessing the Offender Menu

The offender will be allowed to access a menu within the 2 Piece (XT) that will allow them to view and/or edit options. To access the Offender Menu, press button 3, which is also the acknowledgement button.



**Messages:** Displays messages sent to the device.

**Vibrate/Beep:** Changes 2 Piece (XT) alert mode.

**ID Numbers:** Displays ID numbers of assigned hardware.

**Alarm Set:** Accesses alarm clock function.

**Call List:** Displays the officer-defined phone numbers that the offender is allowed to dial using the 2 Piece (XT).

**Icon Glossary:** Displays the icons that will appear with each alarm, if the offender is selected to be notified of the alarm.

## Voice Features

The 2 Piece (XT) voice feature provides officers with the ability to call or send a message with a phone number link to an offender's 2 Piece (XT) at any time from any phone. Officers will also have the ability to send a message to the 2 Piece (XT) that contains a link to the officer's phone number that the offender can click on to call the officer. The Officers have the option of creating a list of phone numbers (Call List) that the offender may call at any time. The offender will also have the ability to call 911 in case of an emergency.

## Send Message

To send a message, press the **Send Msg** button (see below).

The screenshot displays the EM Manager (Smart View) interface for an offender named Steve Offender. The interface includes a navigation bar with 'Home', 'View', 'Tools', and 'Help'. The main content area shows offender details, including a violation 'Bracelet Gone (In Base Unit)', device last charged information, and battery status. A navigation bar below the violation information contains buttons for 'Go To', 'Base Point History', 'View GPS Points', 'Event History', 'Down', and 'Send Msg'. A red arrow points to the 'Send Msg' button. The offender's general information is displayed, including name, customer, level of supervision, assigned officer, enrollment date, custom IDs, address, city, state, zip code, county, mobile number, home/secondary number, email, offender type, and comments. The assigned hardware information is also shown, including 2 Piece (XT), bracelet, and base unit details. The rule information is presented in a table with columns for Name, Type, Distance, Grace Period, Has Actions, and Status.

**EM Manager (Smart View)** About EM Manager | Contact Us | Logout Tom Officer  
What's New Options

Home View Tools Help

**OFFENDER**  
Enroll Offender

Quick Search:  
Last Name:   
First Name:   
  
Recent Offenders...

**CONTACT**  
Enroll Contact

Quick Search:  
Last Name:   
First Name:   
  
Recent Contacts...

**Offender - Steve Offender**

**Violation - Bracelet Gone (In Base Unit)**  
 ● Device Last Charged: 10/05/16 1:47:42 PM - 0:00 hrs  
 Battery Status: 63%

Go To:

**Offender General Information**

**Name:** Steve Offender  
**Customer:** 3M EM Training  
**Level of Supervision:** Active 2 Piece (XT-Voice)  
**Assigned Officer:** Tom Officer  
**Enrollment Date:** 10/05/2016 10:27 AM  
**Custom ID1:**  
**Custom ID2:**  
**Address:** [1838 Gunn Hwy](#)  
**City, State Zip code:** [Odessa, FL 33556](#)  
**County:** [Pasco County](#)  
**Mobile Number:** (813) 555-1212  
**Home/Secondary Number:** (813) 555-3434  
**Email:** steveoffender@statedoc.com  
**Offender Type:** Other/Unspecified  
**Comments:**  
**Time Zone:** (GMT -05:00) Eastern Time (DST Applies)

**Assigned Hardware Information**

**2 Piece (XT):** 35453976 (XT CDMA V4, CDMA-V, Voice #: (763) 248-0164)  
**Bracelet:** 159652 (BTR 3000B)  
**Base Unit:** 50403383 (Activate Pending, Base Unit 2000 Landline)

**Rule Information**

Name	Type	Distance	Grace Period	Has Actions	Status
Elementary School	Exclusion	600 ft	00:00:00	No	Active
Home	Inclusion (Home)	600 ft	00:00:00	Yes	Active
In Charger	Hardware	N/A	00:00:00	Yes	Active
Bracelet Battery	Hardware	N/A	N/A	Yes	Active
Bracelet Gone	Hardware	N/A	00:00:00	Yes	Active
Bracelet Strap	Hardware	N/A	N/A	Yes	Active
2 Piece (XT) Battery	Hardware	N/A	00:30:00	Yes	Active
2 Piece (XT) Motion No GPS	Hardware	N/A	00:10:00	Yes	Active

## Voice Features, Cont.

### Send Predefined Message

The officer has the option to send a predefined message to the offender's 2 Piece (XT).

1. Left click on the Predefined List dropdown menu.
2. Select a message.
3. When a predefined message is chosen, the text will appear in the "Send Message" text box below the Predefined List dropdown menu.

**Note: The Send Message text box must contain characters in order for the message to be sent.**

The screenshot displays the EM Manager (Smart View) interface. The main window shows the offender's profile for Steve Offender, with a violation of 'Bracelet Gone (In Base Unit)' and a battery status of 63%. A 'Send Device Message' dialog box is open, allowing the user to select a predefined message from a dropdown menu. The message text box is currently empty. The background shows the offender's profile and a table of locations.

Name	Type	Distance	Grace Period	Has Actions	Status
Elementary School	Exclusion	600 ft	00:00:00	No	Active
Home	Inclusion (Home)	600 ft	00:00:00	Yes	Active
In Charger	Hardware	N/A	00:00:00	Yes	Active
Bracelet Battery	Hardware	N/A	N/A	Yes	Active
Bracelet Gone	Hardware	N/A	00:00:00	Yes	Active
Bracelet Strap	Hardware	N/A	N/A	Yes	Active
2 Piece (XT) Battery	Hardware	N/A	00:30:00	Yes	Active
2 Piece (XT) Motion No GPS	Hardware	N/A	00:10:00	Yes	Active

## Voice Features, cont.

### Send Custom Message

1. Enter a custom message in the Send Message Text box.
2. Left click **Send Message**.

The screenshot shows the 3M EM Manager (Smart View) interface. The main window displays information for an offender named Steve Offender, including a violation 'Bracelet Gone (In Base Unit)', device last charged time, and battery status (63%). A 'Send Device Message' dialog box is open, allowing the user to send a custom message to the offender's device. The dialog box contains the following fields:

- Device Display:** Move closer to your XT.
- Predefined List:** - Select Message -
- Send Message:** Move closer to your XT.
- Response 1:** - none -
- Response 2:** - none -
- Response 3:** - none -
- Response 4:** - none -
- Display Message:**  As soon as possible,  Schedule date/time: 10/5/2016 2:03 PM

At the bottom of the dialog box are 'Send Message' and 'Cancel' buttons. Below the dialog box is a table of offender locations and device status:

Name	Type	Distance	Grace Period	Has Actions	Status
Elementary School	Exclusion	600 ft	00:00:00	No	Active
Home	Inclusion (Home)	600 ft	00:00:00	Yes	Active
In Charger	Hardware	N/A	00:00:00	Yes	Active
Bracelet Battery	Hardware	N/A	N/A	Yes	Active
Bracelet Gone	Hardware	N/A	00:00:00	Yes	Active
Bracelet Strap	Hardware	N/A	N/A	Yes	Active
2 Piece (XT) Battery	Hardware	N/A	00:30:00	Yes	Active
2 Piece (XT) Motion No GPS	Hardware	N/A	00:10:00	Yes	Active

## **Voice Features, Cont.**

### **Send Message with Phone Number**

3. Enter a custom message in the Send Message Text box.
4. Left click the Response 1 dropdown menu and select "Phone Number."
5. Enter the phone number, including the area code.
6. Left click **Send Message**.

**Note: The officer MUST type a phone number in the Phone # text box.**

**Note: Do NOT type a phone number in the Send Message text box.**



**3M** EM Manager (Smart View) About EM Manager | Contact Us | Logout Tom Officer

Home View Tools Help What's New Options

---

**OFFENDER**

Enroll Offender

Quick Search:

Last Name:

First Name:

Recent Offenders...

Advanced Search

---

**CONTACT**

Enroll Contact

Quick Search:

Last Name:

First Name:

Recent Contacts...

Advanced Search

**Offender - Steve Offender**

Violation - Bracelet Gone (In Base Unit)

● Device Last Charged: 10/05/16 1:47:42 PM - 0:00 hrs

Battery Status: 63%

Go To: Select ... **Base Point History** **View GPS Points** **Event History** **Download Points** **Send Msg**

**Send Device Message**

Device Display: Call PO at:

Predefined List: - Select Message -

Send Message: Call PO at:

Response 1: Phone Number Phone #: (813) 555-56

Response 2: - none -

Response 3: - none -

Response 4: - none -

Display Message:  As soon as possible  
 Schedule date/time: 10/5/2016 2:03 PM

**Send Message** **Cancel**

Name	Type	Distance	Grace Period	Has Actions	Status
Elementary School	Exclusion	600 ft	00:00:00	No	Active
Home	Inclusion (Home)	600 ft	00:00:00	Yes	Active
In Charger	Hardware	N/A	00:00:00	Yes	Active
Bracelet Battery	Hardware	N/A	N/A	Yes	Active
Bracelet Gone	Hardware	N/A	00:00:00	Yes	Active
Bracelet Strap	Hardware	N/A	N/A	Yes	Active
2 Piece (XT) Battery	Hardware	N/A	00:30:00	Yes	Active
2 Piece (XT) Motion No GPS	Hardware	N/A	00:10:00	Yes	Active

## Voice Features, Cont.

### Send Message with Phone Number Description

If officers want to keep a phone number private, they can send a message with the phone number's description instead of the phone number (Officer's Cell, Officer's Work, etc.). When the offender receives the message, the message will contain only the clickable description of the phone number.

1. Enter a custom message in the Send Message Text box.
2. Left click the Response dropdown menu and select "Phone # w/Description."
3. Enter the phone number, including the area code.
4. Enter a description into the "Desc:" text box (for example: Officer's Work).
5. Left click **Send Message**.

**Note: The officer MUST type a phone number in the Phone # text box.**

**Note: Do NOT type a phone number in the Send Message text box.**

**3M** EM Manager (Smart View) About EM Manager | Contact Us | Logout Tom Officer

Home View Tools Help What's New Options

---

**OFFENDER**

Enroll Offender

Quick Search:

Last Name:

First Name:

Recent Offenders...

Advanced Search

---

**CONTACT**

Enroll Contact

Quick Search:

Last Name:

First Name:

Recent Contacts...

Advanced Search

**Offender - Steve Offender**

Violation - Bracelet Gone (In Base Unit)

Device Last Charged: 10/05/16 1:47:42 PM - 0:00 hrs

Battery Status: 63%

Go To: Select ... Base Point History View GPS Points Event History Download Points Send Msg

**Send Device Message**

Device Display: Call PO at:

Predefined List: - Select Message -

Send Message: Call PO at:

Response 1: Phone # w/Description Phone #: (813) 555-56 Desc: Officer Cell

Response 2: - none -

Response 3: - none -

Response 4: - none -

Display Message:  As soon as possible  
 Schedule date/time: 10/5/2016 2:03 PM


Send Message Cancel

Name	Type	Distance	Grace Period	Has Actions	Status
Elementary School	Exclusion	600 ft	00:00:00	No	Active
Home	Inclusion (Home)	600 ft	00:00:00	Yes	Active
In Charger	Hardware	N/A	00:00:00	Yes	Active
Bracelet Battery	Hardware	N/A	N/A	Yes	Active
Bracelet Gone	Hardware	N/A	00:00:00	Yes	Active
Bracelet Strap	Hardware	N/A	N/A	Yes	Active
2 Piece (XT) Battery	Hardware	N/A	00:30:00	Yes	Active
2 Piece (XT) Motion No GPS	Hardware	N/A	00:10:00	Yes	Active


## Voice Features, Cont.

### Offender Response


When a message is sent to the 2 Piece (XT), the offender must press the acknowledgement button. If a phone number or phone number description is contained within the message, the offender will have the option to dial the phone number listed in the message.

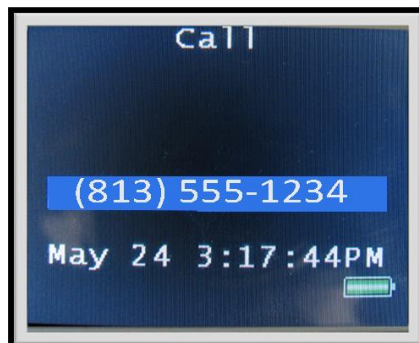

When the acknowledgement button is pressed, the Dial Now menu will appear and the offender must select "Yes" or "No". If the offender selects "No", the link will be available for the offender to call the number for 24 hours in the Offender Menu.

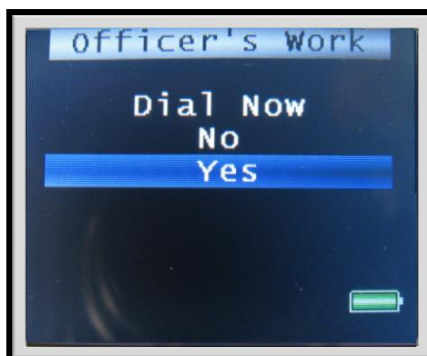

If the offender selects "Yes", the 2 Piece (XT) will automatically dial the number. The offender can also choose to adjust the speaker volume and/or hang up.

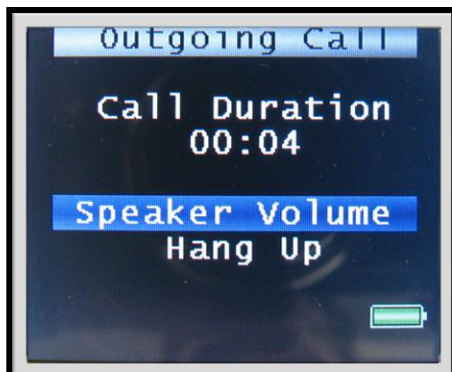

## Create Call List

Officers have the option of creating a list of phone numbers that the offender may call at any time (for example – Officer’s Work). In case of emergency, 911 is automatically included in the Call List.

1. Left click the Go To dropdown menu.
2. Left click Device Parameters.

**EM Manager (Smart View)** About EM Manager | Contact Us | Logout Tom Officer

Home View Tools Help

**OFFENDER** Offender - Steve Offender

**Enroll Offender**

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Offenders...  
**Advanced Search**

**CONTACT** **Enroll Contact**

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Contacts...  
**Advanced Search**

**Violation - Bracelet Gone (In Base Unit)**  
**Device Last Charged:** 10/05/16 1:47:42 PM - 0:00 hrs  
**Battery Status:** 63%

Go To: **Select ...** **Base Point History** **View GPS Points** **Event History** **Download Points** **Send Msg**

Select ...  
**Hardware**  
 Base Point History  
 Device Message History  
 Device Parameters  
 Event History  
 Offender Case Management  
 View GPS Points  
**Offender**  
 Education  
 Employment  
 Notes  
 Personal  
 Rules  
 Sentencing  
 Secondary Number

**Offender Functions**

Picture Map

**Assigned Hardware Information** **Hardware Functions**

**2 Piece (XT):** 35453976 (XT CDMA V4, CDMA-V, Voice #: (763) 248-0164)  
**Bracelet:** 159652 (BTR 3000B)  
**Base Unit:** 50403383 (Base Unit 2000 Landline)

**Rule Information** **Rule Functions**

Name	Type	Distance	Grace Period	Has Actions	Status
Elementary School	Exclusion	600 ft	00:00:00	No	Active
Home	Inclusion (Home)	600 ft	00:00:00	Yes	Active
In Charger	Hardware	N/A	00:00:00	Yes	Active
Bracelet Battery	Hardware	N/A	N/A	Yes	Active
Bracelet Gone	Hardware	N/A	00:00:00	Yes	Active
Bracelet Strap	Hardware	N/A	N/A	Yes	Active
2 Piece (XT) Battery	Hardware	N/A	00:30:00	Yes	Active
2 Piece (XT) Motion No GPS	Hardware	N/A	00:10:00	Yes	Active

## Create Call List, Cont.

3. Left click **Edit**.

**3M** About EM Manager | Contact Us | Logout Tom Officer

**EM Manager (Smart View)** What's New Options

Home View Tools Help

**OFFENDER** **Offender - Steve Offender**

**Enroll Offender**

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Offenders...  
**Advanced Search**

**CONTACT**

**Enroll Contact**

Quick Search:  
Last Name:   
First Name:   
**Search**

Recent Contacts...  
**Advanced Search**

**Violation - Bracelet Gone (In Base Unit)**

● **Device Last Charged:** 10/05/16 1:47:42 PM - 0:00 hrs  
**Battery Status:** 63%

Go To:  **Base Point History** **View GPS Points** **Event History** **Download Points** **Send Msg**

**View Device Parameters** **Edit**

**2 Piece (XT) Settings**

**Call List Numbers:** 911

**Base Unit Settings**

**Force Piezo Silent:** No  
**Phone Line Annoyance:** Yes  
**Officer/No Phone Device:** No  
**Dial Prefix on LandLine:** 9

Copyright © 2008-2016 - 3M Electronic Monitoring - v2.10.14.0

## Create Call List, Cont.

4. Enter a Description (for instance: Officer's Work) and phone number, including area code, in the provided boxes.
5. Click **Save**. The offender will now have the ability to call this number at any time by accessing the Offender Menu and selecting Call List.

**3M** EM Manager (Smart View) About EM Manager | Contact Us | Logout Tom Officer

Home View Tools Help What's New Options

---

**OFFENDER**

Enroll Offender

Quick Search:

Last Name:

First Name:

**Search**

Recent Offenders...

**Advanced Search**

---

**CONTACT**

Enroll Contact

Quick Search:

Last Name:

First Name:

**Search**

Recent Contacts...

**Advanced Search**

**Offender - Steve Offender**

Violation - Bracelet Gone (In Base Unit)

● Device Last Charged: 10/05/16 1:47:42 PM - 0:00 hrs

Battery Status: 6%

---

**Device Parameters**

2 Piece (XT) Settings

Call List Numbers:	Description	Number	Extension
	<input type="text" value="Officer Work"/>	<input type="text" value="(813) 555-4567"/>	<input type="text" value="1234"/>
	<input type="text" value="Officer Cell"/>	<input type="text" value="(813) 555-7890"/>	<input type="text"/>
	<input type="text"/>	<input type="text" value="( ) - -"/>	<input type="text"/>
	<input type="text"/>	<input type="text" value="( ) - -"/>	<input type="text"/>
	<input type="text"/>	<input type="text" value="( ) - -"/>	<input type="text"/>
		<input type="text" value="911"/>	

---

**Base Unit Settings**

Force Piezo Silent:

Phone Line Annoyance:

Officer/No Phone Device:

Dial Prefix on LandLine:  Prefix:

---

**Save** **Cancel**

Copyright © 2008-2016 - 3M Electronic Monitoring - v2.10.14.0

## Voice Features, Cont.

### Call XT

The officer can dial the 2 Piece (XT) at any time from any phone by dialing the 2 Piece (XT) phone number. This phone number is listed on the General Offender Information page under the Assigned Hardware Information (see below).

**3M**
About EM Manager | Contact Us | Logout Tom Officer

EM Manager (Smart View)
What's New Options

**OFFENDER**

Enroll Offender

Quick Search:

Last Name:

First Name:

**Search**

Recent Offenders... ▼

**Advanced Search**

**CONTACT**

Enroll Contact

Quick Search:

Last Name:

First Name:

**Search**

Recent Contacts... ▼

**Advanced Search**

Offender - Steve Offender
▼ Offender Functions

**Violation - Bracelet Gone (In Base Unit)**

● **Device Last Charged:** 10/05/16 1:47:42 PM - 0:00 hrs

**Battery Status:** 63%

Go To: Select ... Base Point History View GPS Points Event History Download Points Send Msg

**Offender General Information**

**Name:** Steve Offender

**Customer:** 3M EM Training

**Level of Supervision:** Active 2 Piece (XT-Voice)

**Assigned Officer:** [Tom Officer](#)

**Enrollment Date:** 10/05/2016 10:27 AM

**Custom ID1:**

**Custom ID2:**

**Address:** [1838 Gunn Hwy](#)

**City, State Zip code:** [Odessa, FL 33556](#)

**County:** [Pasco County](#)

**Mobile Number:** (813) 555-1212

**Home/Secondary Number:** (813) 555-3434

**Email:** steveoffender@statedoc.com

**Offender Type:** Other/Unspecified

**Comments:**

**Time Zone:** (GMT -05:00) Eastern Time (DST Applies)

Picture Map

See larger image

**Assigned Hardware Information**

**2 Piece (XT):** 35453976 (XT CDMA V4, CDMA-V, Voice #: (763) 248-0164) ←

**Bracelet:** 159652 (BTR 3000B)

**Base Unit:** 50403383 (Base Unit 2000 Landline)

▼ **Hardware Functions**

**Rule Information**

Name	Type	Distance	Grace Period	Has Actions	Status
Elementary School	Exclusion	600 ft	00:00:00	No	Active
Home	Inclusion (Home)	600 ft	00:00:00	Yes	Active
In Charger	Hardware	N/A	00:00:00	Yes	Active
Bracelet Battery	Hardware	N/A	N/A	Yes	Active
Bracelet Gone	Hardware	N/A	00:00:00	Yes	Active
Bracelet Strap	Hardware	N/A	N/A	Yes	Active
2 Piece (XT) Battery	Hardware	N/A	00:30:00	Yes	Active
2 Piece (XT) Motion No GPS	Hardware	N/A	00:10:00	Yes	Active

▼ **Rule Functions**





## Voice Features, Cont.

### Notifications

The officer can receive text or email notifications on their phone.

**Note: Email notifications will display a link to the offender's XT number and allow the officer to call the device.**

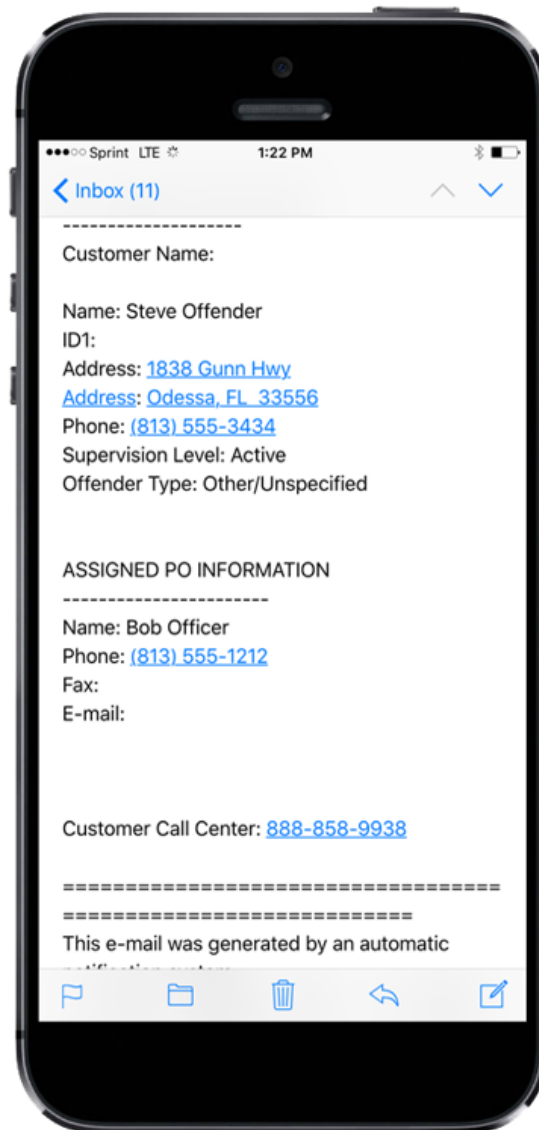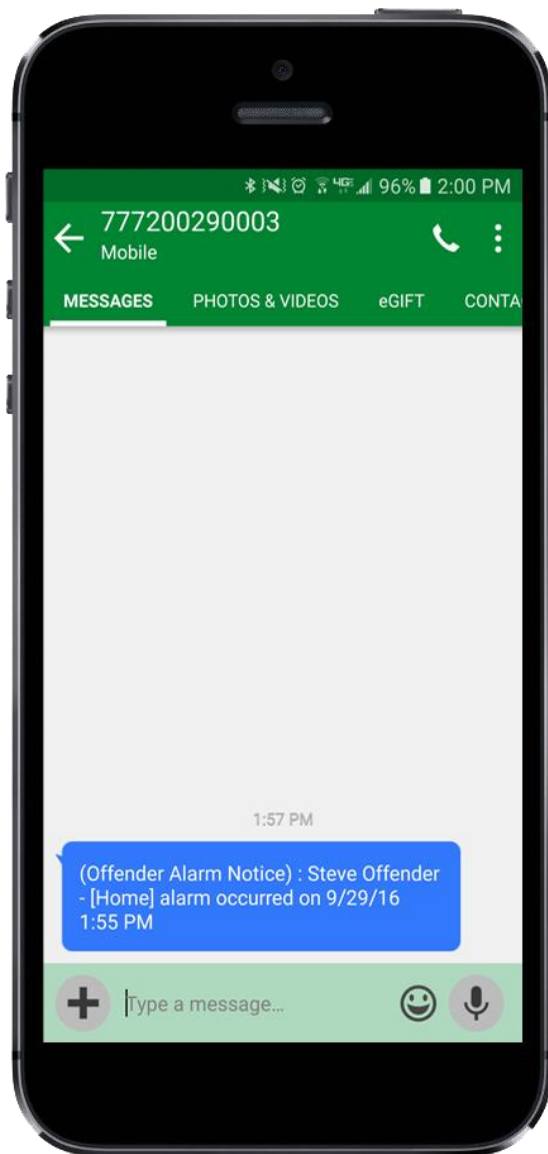

## **Appendix**

### **Rule Definitions**

#### **Bracelet Battery:**

- The Bracelet battery is getting low; the bracelet must be replaced within seven days.

#### **Bracelet Gone:**

- Occurs when the offender is out of range of the 2 Piece (XT). Therefore the location of the offender is unknown.
- If the “Notify Offender” box is checked in EM Manager (Smart View), the offender will receive the automatic message “Bracelet Gone- Stay Closer to the 2 Piece (XT).”
- Attenti adds a 5 minute buffer period to all Bracelet Gone violations.

**This is not a Grace Period. During this time, the offender is not notified of the Bracelet Gone. Only after five minutes have passed will the Bracelet Gone Rule go into violation. If you add a Grace, it will apply after five minute buffer has passed. For example, if a one minute grace is set, the bracelet will have to be out of range for 6 minutes before notifications are sent out.**

#### **Bracelet Strap:**

- The bracelet strap has been compromised or removed from the bracelet.

#### **In Charger:**

- The 2 Piece (XT) is NOT in the assigned Base Unit 2000 or attached to the wall charger when the In Charger schedule is in effect.

## **Appendix**

### **Rule Definitions, Cont.**

#### **Motion No GPS:**

- Occurs when the 2 Piece (XT) has accumulated excessive motion in a 60-minute period without receiving a signal from the GPS satellites.
- If the “Notify Offender” box is checked in EM Manager (Smart View) the offender is sent the automatic message “GPS Warning-Go Outside”. The offender has 10 minutes (grace period) from this point to clear the Motion No GPS warning message before it becomes a violation and notifications are sent out.
- When GPS is reacquired, the offender is notified with the automatic message “GPS Warning Cleared”.

#### **Phone Number Caller ID:**

- Signals the offender may have moved the Base Unit 2000 to a new phone line or home.
- The number cannot be “private” or “unlisted.”

#### **Base Unit 2000 A/C Power:**

- The Base Unit 2000 has lost A/C power and is running on the battery back-up.

#### **Base Unit 2000 Battery:**

- The Base Unit 2000 has been running on the back-up battery and is about to lose power. With a full charge, the back-up battery will last approximately 48 hours. While running on the back-up battery, the Base Unit 2000 will not charge the 2 Piece (XT). If the 2 Piece (XT) is in the Base Unit 2000, and the Base Unit 2000 can call in, the 2 Piece (XT) will still be able to successfully download its information.

#### **Base Unit 2000 Phone Line Disconnect:**

- The phone line has been removed from the Base Unit 2000. You will not get this alert until the phone line has been re-connected because the Base Unit 2000 requires a phone line to report violations.

#### **Base Unit 2000 Tamper:**

- The Base Unit 2000 has been compromised and/or tampered with.

## **Appendix**

### **Rule Definitions, Cont.**

#### **Base Unit 2000 Unable to Connect:**

- The Base Unit 2000 has not called Attenti in 6.5 hours.

#### **2 Piece (XT) Battery:**

- The 2 Piece (XT) battery is low and needs to be charged. The offender receives the automatic message “Battery Low-Place in Charger”.

#### **2 Piece (XT) Tamper:**

- The 2 Piece (XT) has been compromised and/or tampered with.

#### **2 Piece (XT) Unable to Connect:**

- The 2 Piece (XT) has a defined call-in interval that is determined by the contract. If the 2 Piece (XT) is unable to call Attenti at its defined call-in interval, a default 90 minute grace period will go into effect. If the default 90 minute grace period expires and the 2 Piece (XT) has still not called Attenti, the database will create this alarm. This is normally due to poor cellular coverage in the area. The offender is not notified of the Unable to Connect alarm. Once the 2 Piece (XT) is able to use the cellular network to call in, it will report any violations that occurred during this time and download all tracking data.

#### **Zone:**

- The offender has violated a Zone set up by the supervising officer or agency. This could be an Exclusion (forbidden area) Zone or an Inclusion (required area) Zone.

## Appendix

### XT Status Icons

When an offender generates a violation, the 2 Piece (XT) will display the violation information, along with an icon. The icons are as follows:



**Exclusion Zone**



**Inclusion Zone**



**Motion No GPS**



**In Charger**



**Bracelet Gone**

## **Appendix**

### **Safety and Precautions**

#### **Important safety instructions**

Please read and follow the safety instructions listed below:

- Carry the 2 Piece (XT) in the provided belt clip pouch
- Use only a clean, soft, dry cloth to clean the 2 Piece (XT) and Base Unit 2000
- Do not spill or place any liquid on or in proximity of the 2 Piece (XT) or Base Unit 2000
- Do not connect the A/C Power to the 2 Piece (XT) or Base Unit 2000 while in or near any water
- Place the Base Unit 2000 on a solid surface. Do not place the Base Unit 2000 on an unstable surface, stand or table
- Do not place the 2 Piece (XT) or Base Unit 2000 on any vibration prone-surface

## **FCC Statement**

Attenti's Two-Piece GPS Offender Tracking System (XT) has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This device is to be used solely by law enforcement agencies for tracking purposes and must be professionally installed.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the U.S. Federal Communications Commission (FCC) rules and is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### **Bracelet Transmitter**

The radiation output power of the bracelet transmitter falls below the FCC radio frequency exposure limits.

**Exposure to Radio Frequency (RF) Energy:**

This monitor contains radio transmitters and has been designed, manufactured and tested to meet the Federal Communications Commission (FCC) guidelines for RF exposure and Specific Absorption Rate when used in ankle worn configuration with a Attenti bracelet designated for this product. The use of accessories not approved by Attenti Company may cause your device to malfunction or in the case of unapproved electrical accessories may cause the device to exceed RF energy exposure guidelines.

Additional information about RF safety can be found on the FCC website at <http://www.fcc.gov/oet/rfsafety>.

Modifications to this device shall not be made without the written consent of Attenti Company. Unauthorized modifications may void the authority granted under Federal Communication Rules permitting the operation of this device.