



Using Avaya Vantage™ and Avaya Vantage™ Basic

Release 2.0
Issue 1
June 2018

1 © 2017-2018, Avaya Inc.

2 All Rights Reserved.

3 **Note**

4 Using a cell, mobile, or GSM phone, or a two-way radio in close
5 proximity to an Avaya IP telephone might cause interference.

6 **Documentation disclaimer**

7 "Documentation" means information published in varying mediums
8 which may include product information, operating instructions and
9 performance specifications that are generally made available to users
10 of products. Documentation does not include marketing materials.
11 Avaya shall not be responsible for any modifications, additions, or
12 deletions to the original published version of Documentation unless
13 such modifications, additions, or deletions were performed by or on
14 the express behalf of Avaya. End User agrees to indemnify and hold
15 harmless Avaya, Avaya's agents, servants and employees against all
16 claims, lawsuits, demands and judgments arising out of, or in
17 connection with, subsequent modifications, additions or deletions to
18 this documentation, to the extent made by End User.

19 **Link disclaimer**

20 Avaya is not responsible for the contents or reliability of any linked
21 websites referenced within this site or Documentation provided by
22 Avaya. Avaya is not responsible for the accuracy of any information,
23 statement or content provided on these sites and does not
24 necessarily endorse the products, services, or information described
25 or offered within them. Avaya does not guarantee that these links will
26 work all the time and has no control over the availability of the linked
27 pages.

28 **Warranty**

29 Avaya provides a limited warranty on Avaya hardware and software.
30 Refer to your sales agreement to establish the terms of the limited
31 warranty. In addition, Avaya's standard warranty language, as well as
32 information regarding support for this product while under warranty is
33 available to Avaya customers and other parties through the Avaya
34 Support website: [https://support.avaya.com/helpcenter/
35 getGenericDetails?detailId=C20091120112456651010](https://support.avaya.com/helpcenter/getGenericDetails?detailId=C20091120112456651010) under the link
36 "Warranty & Product Lifecycle" or such successor site as designated
37 by Avaya. Please note that if You acquired the product(s) from an
38 authorized Avaya Channel Partner outside of the United States and
39 Canada, the warranty is provided to You by said Avaya Channel
40 Partner and not by Avaya.

41 "Hosted Service" means an Avaya hosted service subscription that
42 You acquire from either Avaya or an authorized Avaya Channel
43 Partner (as applicable) and which is described further in Hosted SAS
44 or other service description documentation regarding the applicable
45 hosted service. If You purchase a Hosted Service subscription, the
46 foregoing limited warranty may not apply but You may be entitled to
47 support services in connection with the Hosted Service as described
48 further in your service description documents for the applicable
49 Hosted Service. Contact Avaya or Avaya Channel Partner (as
50 applicable) for more information.

51 **Hosted Service**

52 THE FOLLOWING APPLIES ONLY IF YOU PURCHASE AN AVAYA
53 HOSTED SERVICE SUBSCRIPTION FROM AVAYA OR AN AVAYA
54 CHANNEL PARTNER (AS APPLICABLE), THE TERMS OF USE
55 FOR HOSTED SERVICES ARE AVAILABLE ON THE AVAYA
56 WEBSITE, [HTTPS://SUPPORT.AVAYA.COM/LICENSEINFO](https://support.avaya.com/LICENSEINFO) UNDER
57 THE LINK "Avaya Terms of Use for Hosted Services" OR SUCH
58 SUCCESSOR SITE AS DESIGNATED BY AVAYA, AND ARE
59 APPLICABLE TO ANYONE WHO ACCESSES OR USES THE HOSTED
60 HOSTED SERVICE. BY ACCESSING OR USING THE HOSTED
61 SERVICE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON
62 BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE
63 DOING SO (HEREINAFTER REFERRED TO INTERCHANGEABLY
64 AS "YOU" AND "END USER"), AGREE TO THE TERMS OF USE. IF
65 YOU ARE ACCEPTING THE TERMS OF USE ON BEHALF A
66 COMPANY OR OTHER LEGAL ENTITY, YOU REPRESENT THAT
67 YOU HAVE THE AUTHORITY TO BIND SUCH ENTITY TO THESE
68 TERMS OF USE. IF YOU DO NOT HAVE SUCH AUTHORITY, OR IF
69 YOU DO NOT WISH TO ACCEPT THESE TERMS OF USE, YOU
70 MUST NOT ACCESS OR USE THE HOSTED SERVICE OR
71 AUTHORIZE ANYONE TO ACCESS OR USE THE HOSTED
72 SERVICE.

73 **Licenses**

74 THE SOFTWARE LICENSE TERMS AVAILABLE ON THE AVAYA
75 WEBSITE, [HTTPS://SUPPORT.AVAYA.COM/LICENSEINFO](https://support.avaya.com/LICENSEINFO),
76 UNDER THE LINK "AVAYA SOFTWARE LICENSE TERMS (Avaya
77 Products)" OR SUCH SUCCESSOR SITE AS DESIGNATED BY
78 AVAYA, ARE APPLICABLE TO ANYONE WHO DOWNLOADS,
79 USES AND/OR INSTALLS AVAYA SOFTWARE, PURCHASED
80 FROM AVAYA INC., ANY AVAYA AFFILIATE, OR AN AVAYA
81 CHANNEL PARTNER (AS APPLICABLE) UNDER A COMMERCIAL
82 AGREEMENT WITH AVAYA OR AN AVAYA CHANNEL PARTNER.
83 UNLESS OTHERWISE AGREED TO BY AVAYA IN WRITING,
84 AVAYA DOES NOT EXTEND THIS LICENSE IF THE SOFTWARE
85 WAS OBTAINED FROM ANYONE OTHER THAN AVAYA, AN AVAYA
86 AFFILIATE OR AN AVAYA CHANNEL PARTNER; AVAYA
87 RESERVES THE RIGHT TO TAKE LEGAL ACTION AGAINST YOU
88 AND ANYONE ELSE USING OR SELLING THE SOFTWARE
89 WITHOUT A LICENSE. BY INSTALLING, DOWNLOADING OR
90 USING THE SOFTWARE, OR AUTHORIZING OTHERS TO DO SO,
91 YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM
92 YOU ARE INSTALLING, DOWNLOADING OR USING THE
93 SOFTWARE (HEREINAFTER REFERRED TO
94 INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO
95 THESE TERMS AND CONDITIONS AND CREATE A BINDING
96 CONTRACT BETWEEN YOU AND AVAYA INC. OR THE
97 APPLICABLE AVAYA AFFILIATE ("AVAYA").

98 Avaya grants You a license within the scope of the license types
99 described below, with the exception of Heritage Nortel Software, for
100 which the scope of the license is detailed below. Where the order
101 documentation does not expressly identify a license type, the
102 applicable license will be a Designated System License as set forth
103 below in the Designated System(s) License (DS) section as
104 applicable. The applicable number of licenses and units of capacity
105 for which the license is granted will be one (1), unless a different
106 number of licenses or units of capacity is specified in the
107 documentation or other materials available to You. "Software" means
108 computer programs in object code, provided by Avaya or an Avaya
109 Channel Partner, whether as stand-alone products, pre-installed on
110 hardware products, and any upgrades, updates, patches, bug fixes,
111 or modified versions thereto. "Designated Processor" means a single
112 stand-alone computing device. "Server" means a set of Designated
113 Processors that hosts (physically or virtually) a software application
114 to be accessed by multiple users. "Instance" means a single copy of
115 the Software executing at a particular time: (i) on one physical
116 machine; or (ii) on one deployed software virtual machine ("VM") or
117 similar deployment.

118 **License types**

119 Designated System(s) License (DS). End User may install and use
120 each copy or an Instance of the Software only: 1) on a number of
121 Designated Processors up to the number indicated in the order; or 2)
122 up to the number of Instances of the Software as indicated in the
123 order, Documentation, or as authorized by Avaya in writing. Avaya
124 may require the Designated Processor(s) to be identified in the order
125 by type, serial number, feature key, Instance, location or other
126 specific designation, or to be provided by End User to Avaya through
127 electronic means established by Avaya specifically for this purpose.

128 Shrinkwrap License (SR). You may install and use the Software in
129 accordance with the terms and conditions of the applicable license
130 agreements, such as "shrinkwrap" or "clickthrough" license
131 accompanying or applicable to the Software ("Shrinkwrap License").

132 **Heritage Nortel Software**

133 "Heritage Nortel Software" means the software that was acquired by
134 Avaya as part of its purchase of the Nortel Enterprise Solutions
135 Business in December 2009. The Heritage Nortel Software is the
136 software contained within the list of Heritage Nortel Products located
137 at <https://support.avaya.com/LicenseInfo> under the link "Heritage
138 Nortel Products" or such successor site as designated by Avaya. For
139 Heritage Nortel Software, Avaya grants Customer a license to use
140 Heritage Nortel Software provided hereunder solely to the extent of
141 the authorized activation or authorized usage level, solely for the
142 purpose specified in the Documentation, and solely as embedded in,
143 for execution on, or for communication with Avaya equipment.
144 Charges for Heritage Nortel Software may be based on extent of
145 activation or use authorized as specified in an order or invoice.

1 Copyright

2 Except where expressly stated otherwise, no use should be made of
3 materials on this site, the Documentation, Software, Hosted Service,
4 or hardware provided by Avaya. All content on this site, the
5 documentation, Hosted Service, and the product provided by Avaya
6 including the selection, arrangement and design of the content is
7 owned either by Avaya or its licensors and is protected by copyright
8 and other intellectual property laws including the sui generis rights
9 relating to the protection of databases. You may not modify, copy,
10 reproduce, republish, upload, post, transmit or distribute in any way
11 any content, in whole or in part, including any code and software
12 unless expressly authorized by Avaya. Unauthorized reproduction,
13 transmission, dissemination, storage, and or use without the express
14 written consent of Avaya can be a criminal, as well as a civil offense
15 under the applicable law.

16 Virtualization

17 The following applies if the product is deployed on a virtual machine.
18 Each product has its own ordering code and license types. Note,
19 unless otherwise stated, that each Instance of a product must be
20 separately licensed and ordered. For example, if the end user
21 customer or Avaya Channel Partner would like to install two
22 Instances of the same type of products, then two products of that
23 type must be ordered.

24 Third Party Components

25 "Third Party Components" mean certain software programs or
26 portions thereof included in the Software or Hosted Service may
27 contain software (including open source software) distributed under
28 third party agreements ("Third Party Components"), which contain
29 terms regarding the rights to use certain portions of the Software
30 ("Third Party Terms"). As required, information regarding distributed
31 Linux OS source code (for those products that have distributed Linux
32 OS source code) and identifying the copyright holders of the Third
33 Party Components and the Third Party Terms that apply is available
34 in the products, Documentation or on Avaya's website at: [https://
35 support.avaya.com/Copyright](https://support.avaya.com/Copyright) or such successor site as designated
36 by Avaya. The open source software license terms provided as Third
37 Party Terms are consistent with the license rights granted in these
38 Software License Terms, and may contain additional rights benefiting
39 You, such as modification and distribution of the open source
40 software. The Third Party Terms shall take precedence over these
41 Software License Terms, solely with respect to the applicable Third
42 Party Components to the extent that these Software License Terms
43 impose greater restrictions on You than the applicable Third Party
44 Terms.

45 The following applies only if the H.264 (AVC) codec is distributed with
46 the product. THIS PRODUCT IS LICENSED UNDER THE AVC
47 PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A
48 CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE
49 REMUNERATION TO (i) ENCODE VIDEO IN COMPLIANCE WITH
50 THE AVC STANDARD ("AVC VIDEO") AND/OR (ii) DECODE AVC
51 VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A
52 PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO
53 PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS
54 GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE.
55 ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA,
56 L.L.C. SEE [HTTP://WWW.MPEGLA.COM](http://www.mpegla.com).

57 Service Provider

58 THE FOLLOWING APPLIES TO AVAYA CHANNEL PARTNER'S
59 HOSTING OF AVAYA PRODUCTS OR SERVICES. THE PRODUCT
60 OR HOSTED SERVICE MAY USE THIRD PARTY COMPONENTS
61 SUBJECT TO THIRD PARTY TERMS AND REQUIRE A SERVICE
62 PROVIDER TO BE INDEPENDENTLY LICENSED DIRECTLY FROM
63 THE THIRD PARTY SUPPLIER. AN AVAYA CHANNEL PARTNER'S
64 HOSTING OF AVAYA PRODUCTS MUST BE AUTHORIZED IN
65 WRITING BY AVAYA AND IF THOSE HOSTED PRODUCTS USE
66 OR EMBED CERTAIN THIRD PARTY SOFTWARE, INCLUDING
67 BUT NOT LIMITED TO MICROSOFT SOFTWARE OR CODECS,
68 THE AVAYA CHANNEL PARTNER IS REQUIRED TO
69 INDEPENDENTLY OBTAIN ANY APPLICABLE LICENSE
70 AGREEMENTS, AT THE AVAYA CHANNEL PARTNER'S EXPENSE,
71 DIRECTLY FROM THE APPLICABLE THIRD PARTY SUPPLIER.

72 WITH RESPECT TO CODECS, IF THE AVAYA CHANNEL
73 PARTNER IS HOSTING ANY PRODUCTS THAT USE OR EMBED
74 THE G.729 CODEC, H.264 CODEC, OR H.265 CODEC, THE

75 AVAYA CHANNEL PARTNER ACKNOWLEDGES AND AGREES
76 THE AVAYA CHANNEL PARTNER IS RESPONSIBLE FOR ANY
77 AND ALL RELATED FEES AND/OR ROYALTIES. THE G.729
78 CODEC IS LICENSED BY SIPRO LAB TELECOM INC. SEE
79 WWW.SIPRO.COM/CONTACT.HTML. THE H.264 (AVC) CODEC IS
80 LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR
81 THE PERSONAL USE OF A CONSUMER OR OTHER USES IN
82 WHICH IT DOES NOT RECEIVE REMUNERATION TO: (I) ENCODE
83 VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC
84 VIDEO") AND/OR (II) DECODE AVC VIDEO THAT WAS ENCODED
85 BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR
86 WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO
87 PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE
88 IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION
89 FOR H.264 (AVC) AND H.265 (HEVC) CODECS MAY BE
90 OBTAINED FROM MPEG LA, L.L.C. SEE [HTTP://
91 WWW.MPEGLA.COM](http://WWW.MPEGLA.COM).

92 Compliance with Laws

93 You acknowledge and agree that it is Your responsibility for
94 complying with any applicable laws and regulations, including, but not
95 limited to laws and regulations related to call recording, data privacy,
96 intellectual property, trade secret, fraud, and music performance
97 rights, in the country or territory where the Avaya product is used.

98 Preventing Toll Fraud

99 "Toll Fraud" is the unauthorized use of your telecommunications
100 system by an unauthorized party (for example, a person who is not a
101 corporate employee, agent, subcontractor, or is not working on your
102 company's behalf). Be aware that there can be a risk of Toll Fraud
103 associated with your system and that, if Toll Fraud occurs, it can
104 result in substantial additional charges for your telecommunications
105 services.

106 Avaya Toll Fraud intervention

107 If you suspect that You are being victimized by Toll Fraud and You
108 need technical assistance or support, call Technical Service Center
109 Toll Fraud Intervention Hotline at +1-800-643-2353 for the United
110 States and Canada. For additional support telephone numbers, see
111 the Avaya Support website: <https://support.avaya.com> or such
112 successor site as designated by Avaya.

113 Security Vulnerabilities

114 Information about Avaya's security support policies can be found in
115 the Security Policies and Support section of [https://
116 support.avaya.com/security](https://support.avaya.com/security).

117 Suspected Avaya product security vulnerabilities are handled per the
118 Avaya Product Security Support Flow ([https://
119 support.avaya.com/css/P8/documents/100161515](https://support.avaya.com/css/P8/documents/100161515)).

120 Downloading Documentation

121 For the most current versions of Documentation, see the Avaya
122 Support website: <https://support.avaya.com>, or such successor site
123 as designated by Avaya.

124 Contact Avaya Support

125 See the Avaya Support website: <https://support.avaya.com> for
126 product or Hosted Service notices and articles, or to report a problem
127 with your Avaya product or Hosted Service. For a list of support
128 telephone numbers and contact addresses, go to the Avaya Support
129 website: <https://support.avaya.com> (or such successor site as
130 designated by Avaya), scroll to the bottom of the page, and select
131 Contact Avaya Support.

132 Regulatory Statements

133 Australia Statements

134 Handset Magnets Statement:

Danger:

135 The handset receiver contains magnetic devices that can
136 attract small metallic objects. Care should be taken to avoid
137 personal injury.

138 Industry Canada (IC) Statements

75 RSS Standards Statement

1 This device complies with Industry Canada licence-exempt RSS
2 standard(s). Operation is subject to the following two conditions:

- 3 1. This device may not cause interference, and
- 4 2. This device must accept any interference, including
5 interference that may cause undesired operation of the
6 device.

7 Le présent appareil est conforme aux CNR d'Industrie Canada
8 applicables aux appareils radio exempts de licence. L'exploitation est
9 autorisée aux deux conditions suivantes:

- 10 1. L'appareil ne doit pas produire de brouillage, et
- 11 2. L'utilisateur de l'appareil doit accepter tout brouillage
12 radioélectrique subi, même si le brouillage est susceptible
13 d'en compromettre le fonctionnement.

14 Radio Transmitter Statement

15 Under Industry Canada regulations, this radio transmitter may only
16 operate using an antenna of a type and maximum (or lesser) gain
17 approved for the transmitter by Industry Canada. To reduce potential
18 radio interference to other users, the antenna type and its gain
19 should be so chosen that the equivalent isotropically radiated power
20 (EIRP) is not more than that necessary for successful
21 communication.

22 Conformément à la réglementation d'Industrie Canada, le présent
23 émetteur radio peut fonctionner avec une antenne d'un type et d'un
24 gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie
25 Canada. Dans le but de réduire les risques de brouillage
26 radioélectrique à l'intention des autres utilisateurs, il faut choisir le
27 type d'antenne et son gain de sorte que la puissance isotrope
28 rayonnée équivalente ne dépasse pas l'intensité nécessaire à
29 l'établissement d'une communication satisfaisante.

30 This Class B digital apparatus complies with Canadian ICES-003.

31 Cet appareil numérique de la classe B est conforme à la norme
32 NMB-003 du Canada.

33 Radiation Exposure Statement

34 This equipment complies with FCC & IC RSS102 radiation exposure
35 limits set forth for an uncontrolled environment. This equipment
36 should be installed and operated with minimum distance 20cm
37 between the radiator & your body. This transmitter must not be co-
38 located or operating in conjunction with any other antenna or
39 transmitter.

40 Cet équipement est conforme aux limites d'exposition aux
41 rayonnements ISED établies pour un environnement non contrôlé.
42 Cet équipement doit être installé et utilisé avec un minimum de 20
43 cm de distance entre la source de rayonnement et votre corps.

44 Japan Statements

45 Class B Statement

46 This is a Class B product based on the standard of the VCCI Council.
47 If this is used near a radio or television receiver in a domestic
48 environment, it may cause radio interference. Install and use the
49 equipment according to the instruction manual.

この装置は、クラスB情報技術装置です。この装置は、家庭環境で使用
することを目的としています。この装置がラジオやテレビジョン受信機に
近接して使用されると、受信障害を引き起こすことがあります。

50 取扱説明書に従って正しい取り扱いをして下さい。 VCCI-B

51 Denan Power Cord Statement

Danger:

52 Please be careful of the following while installing the
53 equipment:

- 54 • Please only use the connecting cables, power cord, and
55 AC adapters shipped with the equipment or specified by
56 Avaya to be used with the equipment. If you use any
57 other equipment, it may cause failures, malfunctioning,
58 or fire.
- 59 • Power cords shipped with this equipment must not be
60 used with any other equipment. In case the above

61 guidelines are not followed, it may lead to death or
62 severe injury.



63
64 本製品を安全にご使用頂くため、以下のことにご注意ください。

- 65 • 接続ケーブル、電源コード、ACアダプタなどの部品は、必ず
66 製品に同梱されており添付品または指定品をご使用くだ
67 さい。添付品指定品以外の部品をご使用になると故障や動作
68 不良、火災の原因となることがあります。
- 69 • 同梱されており添付の電源コードを他の機器には使用し
70 ないでください。上記注意事項を守らないと、死亡や大怪我
71 など人身事故の原因となることがあります。

72 México Statement

73 The operation of this equipment is subject to the following two
74 conditions:

- 75 1. It is possible that this equipment or device may not cause
76 harmful interference, and
- 77 2. This equipment or device must accept any interference,
78 including interference that may cause undesired operation.

79 La operación de este equipo está sujeta a las siguientes dos
80 condiciones:

- 81 1. Es posible que este equipo o dispositivo no cause
82 interferencia perjudicial y
- 83 2. Este equipo o dispositivo debe aceptar cualquier
84 interferencia, incluyendo la que pueda causar su operación
85 no deseada.

86 Power over Ethernet (PoE) Statement

87 This equipment must be connected to PoE networks without routing
88 to the outside plant.

89 U.S. Federal Communications Commission (FCC) Statements

90 Compliance Statement

91 The changes or modifications not expressly approved by the party
92 responsible for compliance could void the user's authority to operate
93 the equipment.

94 To comply with the FCC RF exposure compliance requirements, this
95 device and its antenna must not be co-located or operating to
96 conjunction with any other antenna or transmitter.

97 This device complies with part 15 of the FCC Rules. Operation is
98 subject to the following two conditions:

- 99 1. This device may not cause harmful interference, and
- 100 2. This device must accept any interference received,
101 including interferences that may cause undesired
102 operation.

103 This equipment has been tested and found to comply with the limits
104 for a Class B digital device, pursuant to Part 15 of the FCC Rules.
105 These limits are designated to provide reasonable protection against
106 harmful interferences in a residential installation. This equipment
107 generates, uses and can radiate radio frequency energy and, if not
108 installed and used in accordance with the instructions, may cause
109 harmful interference to radio communications. However, there is no
110 guarantee that interference will not occur in a particular installation. If
111 this equipment does cause harmful interferences to radio or
112 television reception, which can be determined by turning the
113 equipment off and on, the user is encouraged to try to correct the
114 interference by one or more of the following measures:

- 103 • Reorient or relocate the receiving antenna.
- 104 • Increase the separation between the equipment and receiver.
- 105 • Connect the equipment into an outlet on a circuit different from
106 that to which the receiver is connected.
- 107 • Consult the dealer or an experienced radio/TV technician for
108 help.

1 *Radiation Exposure Statement*

2 This equipment complies with FCC radiation exposure limits set forth
3 for an uncontrolled environment . This equipment should be installed
4 and operated with minimum distance of 8 in or 20 cm between the
5 radiator and your body. This transmitter must not be co-located or
6 operating in conjunction with any other antenna or transmitter.

7 **EU Countries**

8 This device when installed complies with the essential requirements
9 and other relevant provisions of the EMC Directive 2014/30/EU,
10 Safety LV Directive 2014/35/EU, and Radio Equipment Directive
11 2014/53/EU. A copy of the Declaration may be obtained from [http://](http://support.avaya.com)
12 support.avaya.com or Avaya Inc., 4655 Great America Parkway,
13 Santa Clara, CA 95054–1233 USA.

14 WiFi and BT transmitter

- 15 • Frequencies for 2412-2472 MHz, transmit power: 19.84 dBm
- 16 • Frequencies for 5180-5240 MHz, transmit power: 22.5 dBm

17 **General Safety Warning**

- 18 • Use only the Avaya approved Limited Power Source power
19 supplies specified for this product.
- 20 • Ensure that you:
 - 21 - Do not operate the device near water.
 - 22 - Do not use the device during a lightning storm.
 - 23 - Do not report a gas leak while in the vicinity of the leak.
 - 24 - For Accessory Power Supply - Use Only Limited Power
25 Supply Delta Electronics Inc. model:ADP-30HR B , output:
26 48Vdc, 0.66A.

27 **Trademarks**

28 The trademarks, logos and service marks (“Marks”) displayed in this
29 site, the Documentation, Hosted Service(s), and product(s) provided
30 by Avaya are the registered or unregistered Marks of Avaya, its
31 affiliates, its licensors, its suppliers, or other third parties. Users are
32 not permitted to use such Marks without prior written consent from
33 Avaya or such third party which may own the Mark. Nothing
34 contained in this site, the Documentation, Hosted Service(s) and
35 product(s) should be construed as granting, by implication, estoppel,
36 or otherwise, any license or right in and to the Marks without the
37 express written permission of Avaya or the applicable third party.

38 Avaya is a registered trademark of Avaya Inc.

39 All non-Avaya trademarks are the property of their respective owners.

40 Linux[®] is the registered trademark of Linus Torvalds in the U.S. and
41 other countries.

42 Android, Google and Google Play are trademarks of Google Inc.

Contents

Chapter 1: Introduction	8
Purpose.....	8
Change history.....	8
Chapter 2: Avaya Vantage™ overview	9
Supported features.....	10
Wireless handset features.....	11
Third party applications.....	13
New in this release.....	13
Chapter 3: Getting started with Avaya Vantage™	14
Installing applications.....	14
Logging in to and out of Avaya Vantage™.....	15
Locking and unlocking Avaya Vantage™.....	15
Avaya Smart Lock.....	16
Enabling Avaya Smart Lock.....	17
Removing or changing the trusted device.....	18
Locking the device manually when Smart Lock is enabled.....	19
Connecting a wireless handset.....	19
Turning the wireless handset on and off.....	20
Chapter 4: Navigation	22
Physical device layout.....	22
Layout of Avaya Vantage™ K165 and K175.....	22
Layout of Avaya Vantage™ K155.....	24
Connectors and controls.....	25
Wireless handset layout.....	28
Avaya Vantage Basic screen navigation.....	28
Dial pad screen.....	28
Contacts screen.....	30
Call screen.....	32
Chapter 5: Call management operations	35
Making audio or video calls.....	35
Making an emergency call.....	35
Making an audio or video call using the dial pad.....	36
Making an audio or video call using contacts.....	36
Making an audio or video call from your Favorites list.....	36
Making an audio or video call using call history.....	37
Making a second call.....	37
Redialing a number.....	38
Managing calls.....	38
Answering or declining an incoming call.....	38

- Entering digits during a call..... 39
- Muting or unmuting a call..... 39
- Placing a call on hold and resuming the call..... 40
- Toggling between calls..... 40
- Transferring a call..... 40
- Working with video functionality..... 41
- Selecting an active audio device..... 41
- Ending a call..... 42
- Viewing call history..... 42
 - Deleting all call information..... 43
- Working with conference calls..... 43
 - Starting a conference call..... 43
 - Merging calls to create a conference call..... 43
- Chapter 6: Contact management operations..... 45**
 - Adding a contact..... 45
 - Editing a contact..... 46
 - Deleting a contact..... 46
 - Searching for a contact..... 47
 - IP Office contact search options..... 47
 - Setting contact display options..... 47
 - Setting a contact as a favorite..... 48
 - Synchronizing contacts and call history over Bluetooth..... 48
 - Filtering contacts..... 49
- Chapter 7: Customization..... 51**
 - Modifying the ring tone..... 51
 - Disabling video using the privacy shutter..... 51
 - Changing the wallpaper..... 52
- Chapter 8: Resources..... 53**
 - Documentation..... 53
 - Finding documents on the Avaya Support website..... 53
 - Viewing Avaya Mentor videos..... 54
 - Support..... 54
 - Using the Avaya InSite Knowledge Base..... 54

Chapter 1: Introduction

Purpose

This document is intended for end users and describes how to use the Avaya Vantage™ Basic application on an Avaya Vantage™ device. This document also describes setup tasks performed by end users.

Separate documentation is available for SDK developer applications. This document does not provide information about SDK applications.

Change history

The following table describes the major changes made in this document:

Issue	Date	Summary of changes
Release 2.0, Issue 1	June 2018	<ul style="list-style-type: none">• Added information about the K155 device throughout the document.• Updated Supported features on page 10.• Updated New in this release on page 13.• Added IP Office login information in Logging in to and out of Avaya Vantage on page 15.• Updated the “Navigation” chapter.• Minor rephrasing throughout the document.• Added Editing a contact on page 46.• Added Editing a contact on page 46.• Updated Filtering contacts on page 49.

Chapter 2: Avaya Vantage™ overview

Avaya Vantage™ is an Android™ device that provides telephony and conferencing functionality. Avaya Vantage™ combines the advantages of a customizable unified communications solution and a fully functional Android device. Use the Avaya Breeze™ Client Software Development Kit (CSDK) and custom applications to integrate communications in business processes on your Avaya Vantage™ device.

According to your business needs, you can choose from the following Avaya Vantage™ device variants:

- Avaya Vantage™ K175: Standard device with an 8-inch screen and an integrated camera for full access to video calls and conferences. You can cover the camera by using a mechanical camera shutter.
- Avaya Vantage™ K165: Standard device with an 8-inch screen that does not include an integrated camera. You can still receive video from other users.
- Avaya Vantage™ K155: Device with a small 5-inch screen. The device also includes a dial pad and an integrated camera.

Avaya Vantage™ supports the following communication applications:

- Avaya Vantage™ Basic
- Avaya Equinox®
- Avaya Vantage™ Open

This document is focused on Avaya Vantage™ Basic usage. For more information about using other applications, see the following documents:

- For more information about using Avaya Equinox® clients, see *Using Avaya Equinox® for Android, iOS, Mac, and Windows*.

Some features and services are not supported when an Avaya Equinox® client is deployed on Avaya Vantage™. These feature discrepancies are described in the Avaya Equinox® clients documentation.

- For more information about using Avaya Vantage™ Open, see *Using Avaya Vantage™ Open*.

* Note:

- IP Office Release 11.0 only supports Avaya Vantage™ Basic. IP Office Release 11.0 does not support other clients, such as Avaya Equinox®, on Avaya Vantage™.

- 1 • In Release 2.0, the Avaya Vantage™ K155 device only supports Avaya Vantage™ Basic. It
- 2 does not support Avaya Equinox® or Avaya Vantage™ Open.

3 Supported features

Avaya Vantage™ Basic feature	Supported with Avaya Aura®	Supported with IP Office
Make and receive audio calls	Yes	Yes
Caller ID and call information	Yes	Yes
Multiple line support	Yes	Yes ¹
Feature Access Codes (FACs) ²	Yes	Yes
Mute calls	Yes	Yes
Hold calls	Yes	Yes
Transfer calls	Yes	Yes
Forward calls	Yes, through FACs	Yes, through FACs or short codes
Toggle calls	Yes	Yes
Conferencing	Yes	Yes
Missed calls indication	Yes	Yes
Do Not Disturb mode	No	No
Message Waiting Indication (MWI)	Yes	Yes
Video calls	Yes	Yes
Emergency calls	Yes	Yes ³
Off Hook dialing	Yes	Yes
Call logs	Yes	Yes ⁴
Avaya Aura® Device Services contact services	Yes	No
PPM contacts	Yes	No
Local contacts, including Google™ and Microsoft Exchange contacts	Yes	Yes

Table continues...

¹ For multiple line support to work on IP Office, you must enable the Call Waiting On feature for the user account. Otherwise the connection is treated as a single line.

² Avaya Vantage™ Basic does not have any UI representation for the FAC status. For example, if EC500 is enabled in the Avaya Aura® environment, then the UI of Avaya Vantage™ Basic does not indicate that EC500 is enabled.

³ In the IP Office environment, you can make an emergency call only when you are logged in to Avaya Vantage™. You cannot make an emergency call from the Login screen. You can make an emergency call from the Lock screen if the Lock mode is enabled and an administrator has configured emergency numbers in the 46xxspecial.txt file.

⁴ Call logs in IP Office are local to the device.

Avaya Vantage™ Basic feature	Supported with Avaya Aura®	Supported with IP Office
Favorites	Yes	Yes Only local contacts can be added to the Favorites list
Presence	No	No
Instant Messaging	No	No

! **Important:**

- 1 IP Office Release 11.0 only supports Avaya Vantage™ Basic. Other applications, such as
- 2 Avaya Equinox® on Avaya Vantage™, are not supported.

Wireless handset features

A wired or wireless handset can optionally be used with Avaya Vantage™. The following section describes the wireless handset features.

Range

The handset uses Bluetooth technology. As a Class 2 device, the handset nominal range is 10 meters. In practical use this range might vary depending on the environment. If the handset was out of range, the connection is reestablished automatically when the handset is back in range. When the handset is not in range for more than 22 minutes, it turns off to prevent battery discharge. If the handset was turned off, the connection is reestablished automatically when the handset is turned on and back in range.

Battery service life

If used carefully, the expected service life of the battery is several years. Although the battery capacity is diminished over time, in general it does not affect normal handset use.

Battery talk time

When fully charged, the new battery provides approximately 12 hours of talk time. You might need to charge the battery before the first use to achieve the full talk time. To prevent damage to the battery, the protection system does not allow the battery to discharge below a certain point. Avaya Vantage™ displays the battery charge level on the Notifications panel.

Battery standby time

When fully charged, the new battery provides approximately 60 hours of standby time. When the handset is not in range or Avaya Vantage™ is turned off for approximately 22 minutes, the handset is turned off automatically to save battery. To turn on the handset again, press the **Power** button for approximately 2 seconds. The handset is not turned on automatically even if it is returned to the cradle.

Battery charging

The handset supports a contactless charging system. To charge the handset, place it in its cradle. If the battery charge is low, the handset will notify you with warning tones. When you hear the warning tones, return the handset to its cradle to charge the battery.

1 The handset uses a Lithium-Ion battery with the battery management and protection system. The
 2 protection system allows to prevent the following situations:

- 3 • Overcharging.
- 4 • Over-discharging.
- 5 • Charging if the ambient temperature is higher than 40 °C (102 °F).

6 **Battery recharge time**

7 The battery fully recharges in less than 3 hours. You do not need to fully discharge the battery
 8 before charging.

9 **Battery disposal**

10 At the end of the service life, remove the battery and deliver it to a battery recycling depot. Do not
 11 dispose of the battery in the normal waste stream.

12 **Wireless handset LED indicator**

13 The blue LED indicator shows the current state of the handset and is also used to indicate user
 14 actions.

Wireless handset state	LED indication	Notes
Wireless handset is in the Pairing mode.	LED flashes every 0.5 seconds.	Wireless handset exits the Pairing mode in 150 seconds.
Pairing completed successfully.	LED flashes 10 times at 0.1 seconds rate.	None
Wireless handset is used in a call	LED flashes 3 times every 3 seconds	None
Wireless handset is turned on and is connected to its base (Connected mode).	LED flashes 2 times every 5 seconds.	None
Wireless handset is trying to establish connection to its base (Linkback mode).	LED flashes every 0.5 seconds.	None
Wireless handset is out of range and is not trying to establish connection to its base (Standby mode).	LED flashes every 5 seconds.	Wireless handset is turned off after 22 minutes.
Incoming call.	LED flashes 3 times every 7 seconds.	None
Mute.	LED is on and flashes 3 times every 4 seconds.	None
Wireless handset has been turned on.	LED flashes 4 times.	None
Wireless handset has been turned off.	LED flashes 3 times.	None

1 **Third party applications**

- 2 You can install third party applications on Google Play™. The system administrator determines the
3 list of applications that you are allowed to install.

4 **New in this release**

- 5 Avaya Vantage™ Release 2.0 introduces the K155 device. This device includes a 5-inch screen
6 and a key pad. Currently, only Avaya Vantage™ Basic is supported on the K155 device.

Chapter 3: Getting started with Avaya Vantage™

This chapter describes general startup tasks, such as logging in or out, locking your Avaya Vantage™ device, and enabling the Avaya Smart Lock feature. To enable the Avaya Smart Lock feature, you must first log in to your device manually.

Installing applications

About this task

You can install applications from Google Play.


* Note:

- You can use this procedure to install Avaya Vantage™ Basic, Avaya Equinox®, or Avaya Vantage™ Open if these applications were not pre-installed by your administrator.
- Your installation policy might prevent you from installing certain applications.

Before you begin

- Ensure that you have a Google account to access Google Play.
- Work with your administrator to obtain permission to install applications on your Avaya Vantage™ device.

Procedure

- On your device open Google Play.
- In the **Search** bar, enter the appropriate search term and then tap .
For example, to find Avaya Vantage™ Basic, enter `Avaya Vantage Basic`.
- From the displayed search results, open the application page.
- Install the application.
- (Optional)** If you want to set the installed telephony application as your primary telephony application, contact your administrator.

Some Avaya applications, such as Avaya Vantage™ Basic or Avaya Equinox®, require additional setup performed by your administrator. Contact your administrator to see if the installed application requires additional setup.

1 Logging in to and out of Avaya Vantage™

2 About this task

3 Use this procedure to log in to the Avaya Vantage™ device manually. You can log in to the device
4 by using either SIP or Avaya Aura® Device Services credentials.

5 After the first login, you can activate the Avaya Smart Lock feature. The Avaya Vantage™ device
6 then automatically logs you in when you are within the range of the device while carrying a trusted
7 device.

* Note:

- 8 This procedure is only applicable to Avaya Vantage™ Basic and Avaya Equinox®, but not to
9 other telephony applications, such as Avaya Vantage™ Open.

10 Procedure

- To log in, do the following:

11 1. In **Username**, enter your SIP or Avaya Aura® Device Services user name.

12 **In an IP Office environment, you must enter your SIP extension number.**

13 2. In **Password**, enter your **user password**.

14 3. Tap **Login**.

15 If you are using Avaya Aura® Device Services credentials, you might also need to enter
16 your SIP credentials.

17 4. **(Optional)** At the first login, accept the software license agreement.

18 Avaya Vantage™ displays the Home screen or the main screen of the active telephony
19 application depending on the settings configured by your system administrator.

- To log out, do one of the following:

20 - Swipe down to open the notification area, and tap **Logout** (☒).

21 - On the Home screen, tap **Logout** (●).

22 - In **Settings** > **System**, tap **Logout**.

23 Related links

24 [Enabling Avaya Smart Lock](#) on page 17

27 Locking and unlocking Avaya Vantage™

28 About this task

29 Use this procedure to lock and unlock the Avaya Vantage™ device manually. You can lock the
30 device for security and privacy reasons. Locking your phone does not log you out, so you can
31 continue to receive calls.


1 You can activate the Screen Lock feature so that the device is locked automatically after a period
2 of inactivity. **With IP Office deployments, this feature is disabled by default.**

3 You can also activate the Avaya Smart Lock feature. The Avaya Vantage™ device then
4 automatically unlocks when you are within the range of the device while carrying a trusted
5 Bluetooth device. When the trusted device goes out of range, the Avaya Vantage™ device is
6 locked automatically.

*** Note:**

7 This procedure is only applicable to Avaya Vantage™ Basic and Avaya Equinox®, but not for
8 other telephony applications, such as Avaya Vantage™ Open.

Procedure

- To lock the device, do one of the following:
 - Swipe down to open the notification area, and tap **Lock** (🔒).
 - On the Home screen, tap **Lock** (🔒).
- To unlock the device, do the following:
 1. On the locked screen, swipe up to open the login prompt.
 2. In the **Enter Password** field, enter your SIP or Avaya Aura® Device Services password.
 - If login is performed using SIP credentials, enter the SIP password.
 - If login is performed using Avaya Aura® Device Services credentials, enter the Avaya Aura® Device Services password.
 3. Tap .

When the device is unlocked successfully, Avaya Vantage™ displays the Home screen or the main screen of the active telephony application depending on the settings configured by your system administrator.

Related links

[Enabling Avaya Smart Lock](#) on page 17

Avaya Smart Lock

When Avaya Smart Lock is enabled, the Avaya Vantage™ device can automatically get unlocked and log you in without the need to enter your account credentials. The automatic login or unlock happens based on the proximity of the device to a trusted Bluetooth device. When the trusted device goes out of range, the Avaya Vantage™ device is locked automatically, and if configured, you are automatically logged out of the device.

You can have your phone stay unlocked whenever it is connected to a trusted device.

Bluetooth device as the trusted device

You can choose any Bluetooth device, such as Bluetooth headsets, watches, or Bluetooth-enabled Android smart phones, as the trusted device. However, you cannot select the Avaya Vantage™ wireless Bluetooth handset as the trusted device. When choosing your trusted device, avoid using a device that is always with your Avaya Vantage™ device. For example, if you always have a Bluetooth keyboard and mouse with Avaya Vantage™, do not use this as your trusted device.

Note that only one device can be set as the trusted device.

Bluetooth connectivity range

The Bluetooth connectivity range can vary based on factors, such as your device model, the Bluetooth device, and the current environment. Bluetooth connectivity of the Avaya Vantage™ device can be up to 10 meters.

Avaya Smart Lock vs. Google Smart Lock

- Avaya Smart Lock can automatically log you in or out of the Avaya Vantage™ device. Google Smart Lock does not support this capability.
- Google Smart Lock does not support an Android smart phone as the trusted device.

Enabling Avaya Smart Lock

About this task

Use this procedure to enable the Avaya Smart Lock feature. You can set your Avaya Vantage™ device to automatically unlock in certain circumstances, so you do not need to manually unlock the device with your PIN or password.

Before you begin

- On the Avaya Vantage™ device, turn on Bluetooth.
- Pair a Bluetooth device to use as your trusted device.

Procedure

To enable the Avaya Smart Lock feature, do the following:

1. Open the **Settings** menu.
2. Tap **Security > Trust agents**.
3. Turn on **Avaya Smart Lock** and tap **Back** (←).

By default, Google Smart Lock is enabled on Avaya Vantage™. Since you can enable only one trust agent at a time, Google Smart Lock is disabled automatically when you enable Avaya Smart Lock.

To set up automatic unlock options and add the trusted device, do the following:

4. Tap **Security > Avaya Smart Lock**.

Avaya Smart Lock or **Google Smart Lock** are available only when the Screen lock feature is enabled.

- 1 5. Enter the password that you use to log in and unlock Avaya Vantage™.
- 2 6. In the **Avaya Smart Lock** menu, select one of the following lock options:
 - 3 • **Unlock/Lock:** When the trusted device is within range, the Avaya Vantage™ device
 - 4 unlocks automatically. When the trusted device goes out of range, the Avaya Vantage™
 - 5 device is locked automatically.
 - 6 • **Login and Unlock/Logout:** When the trusted device is within the range, the Avaya
 - 7 Vantage™ device unlocks, and if required, logs you in automatically. When the trusted
 - 8 device goes out of range, the Avaya Vantage™ device is locked and you are
 - 9 automatically logged out of the device.
- 10 After a logout, another user can log in to the device. When a new user logs in, all
- 11 previous user data is wiped.

12 7. Tap **Trust Device**.

- 13 8. On the list of paired and connected devices, tap the device that you want to select as the
- 14 trusted device.

15 On the Lock screen, you see the **Lock** (🔒) icon with a pulsing circle at the bottom. The 🔒

16 icon indicates that the device is unlocked. When the trusted device is within range, the

17 device remains unlocked until you manually lock it.

18 To access the device Home screen from the Lock screen, do the following:

- 19 9. Swipe up the 🔒 icon.

20 You see the 🔒 icon only when Smart Lock is set up and the trusted device is within range.

22 Removing or changing the trusted device

23 Procedure

- 24 1. Open the **Settings** menu.
- 25 2. Tap **Security > Avaya Smart Lock**.
- 26 3. Enter the password that you use to log in and unlock Avaya Vantage™.
- 27 4. Tap **Trust Device**.
- 28 5. On the list of paired and connected devices, do one of the following:
 - 29 • To select a new device as the trusted device, tap the device name.
 - 30 • To remove the trusted device, tap **None**.

2 Locking the device manually when Smart Lock is enabled

3 About this task

4 Use this procedure to manually lock your Avaya Vantage™ device when Avaya Smart Lock is set
5 up and the trusted device is within range.

6 When the trusted device is within range, tapping **Lock** (🔒) from the Home screen or from the
7 notification area does not lock the device. The device displays the Lock screen with the **Lock** (🔒)
8 icon.

9 Procedure

10 On the Lock screen, tap the **Lock** (🔒) icon.

11 The device stays locked until you manually unlock it with your account password.

12 Connecting a wireless handset

13 About this task

14 Use this procedure to connect or pair a wireless handset with your Avaya Vantage™ device. You
15 cannot use the wired handset after you connect the wireless handset. You can connect only one
16 wireless handset at a time.

17 You need administrative privilege to remove the pairing with the wireless handset.

18 Before you begin

- 19 • Charge the handset battery by placing the handset in the cradle.
- 20 • Turn off the wireless handset.

21 Procedure

- 22 1. Lift the wireless handset from the cradle, and press and hold the top **Power** button for at
23 least 10 seconds to enter the pairing mode.



1

2

To indicate that the handset is in the pairing mode, the handset LED starts flashing.

3

2. On the Home screen, tap **Applications**.

4

3. Tap **Settings**.

5

4. Tap **Bluetooth**.

6

5. Turn Bluetooth on.

7

6. In the list of available devices, tap the entry that matches the ID on the handset label.

8

When pairing is successful, Avaya Vantage™ displays the wireless handset in the list of paired devices as connected.

9

10 **Result**

11 You can now use your wireless handset for calls as long as the handset is turned on. When the
12 handset is turned off, you cannot use it for calls, but it is still paired with Avaya Vantage™. When
13 you turn on the handset the next time, you do not need to repeat the pairing procedure.

14

15 **Turning the wireless handset on and off**

16 **About this task**

17 Your system administrator might connect an optional wireless handset to your Avaya Vantage™. To
18 use the handset, you must turn it on.

1 When the handset is turned on, the handset LED flashes every 5 seconds. When the handset is
2 not being used on a call and is not in its cradle, it automatically turns off in 60 seconds.

3 **Procedure**

4 To turn the wireless handset on or off, press the **Power** button for approximately 3 seconds.

5 - When the handset turns on, the handset LED flashes 4 times.

6 - When the handset turns off, the handset LED flashes 3 times.

Chapter 4: Navigation

Physical device layout

You can choose from the following Avaya Vantage™ device variants:

- Avaya Vantage™ K175: Standard device with an 8-inch screen and an integrated camera for full access to video calls and conferences. You can cover the camera by using a mechanical camera shutter.
- Avaya Vantage™ K165: Standard device with an 8-inch screen that does not include an integrated camera. You can still receive video from other users.
- Avaya Vantage™ K155: Device with a small 5-inch screen. The device also includes a dial pad and an integrated camera.

Layout of Avaya Vantage™ K165 and K175

The standard Avaya Vantage™ device resembles a tablet in the portrait orientation. The only difference in the layout of the Avaya Vantage™ K165 and K175 variants is that K175 comes with an integrated camera and a mechanical camera shutter.




1

Layout of Avaya Vantage™ K155



Dial pad and functional keys

The Avaya Vantage™ K155 device includes a physical dial pad and functional keys.

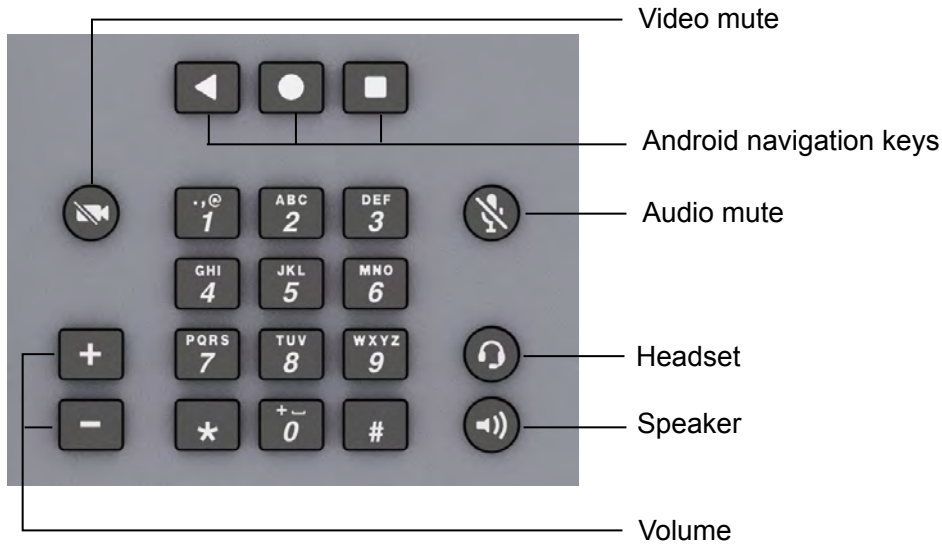

1

2

Connectors and controls

3

The following images show the options available on the Avaya Vantage™ device.

4

Rear panel


5

The rear panel contains a power adapter connector, an RJ9 headset port, and dual Ethernet ports with an internal Ethernet switch.

6

7

Power adapter connector

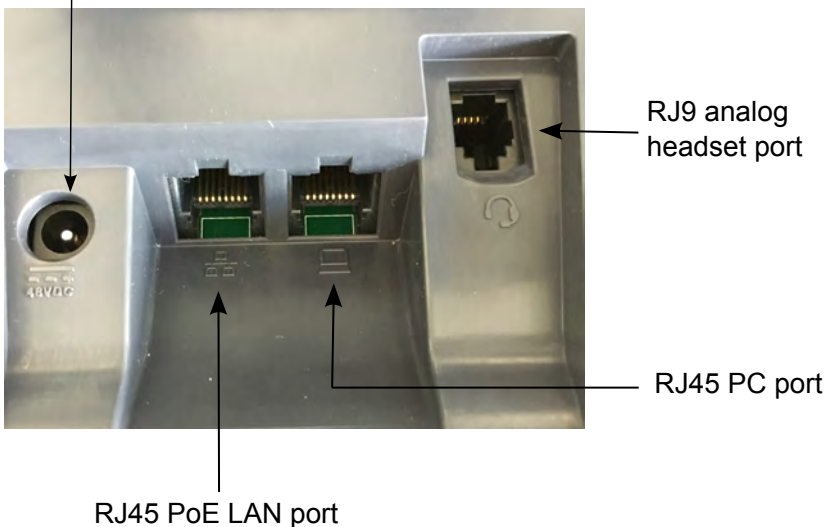

8

*** Note:**

- 1 Avaya Vantage™ K165 and K175 devices from Release 1.0 only have a single Ethernet port.
- 2 Devices with hardware version 5 and later support dual Ethernet ports.
- 3 The K155 device has dual Ethernet ports.


4 **K155 devices have an additional wireless module slot at the top-right side of the rear panel. The**
5 **wireless module provides Wi-Fi and Bluetooth connectivity.**



Slot for wireless module

Right side panel

8 On Avaya Vantage™ K165 and K175, the right side panel contains a 3.5 mm audio jack socket and
9 a USB Type-C port.

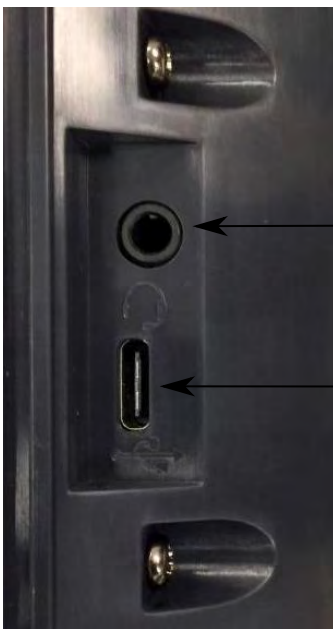


3.5 mm stereo headset jack
with microphone support

USB Type-C
port

10

- 1 On Avaya Vantage™ K155, the right side panel contains a 3.5 mm audio jack socket and a USB
- 2 Type-A port.

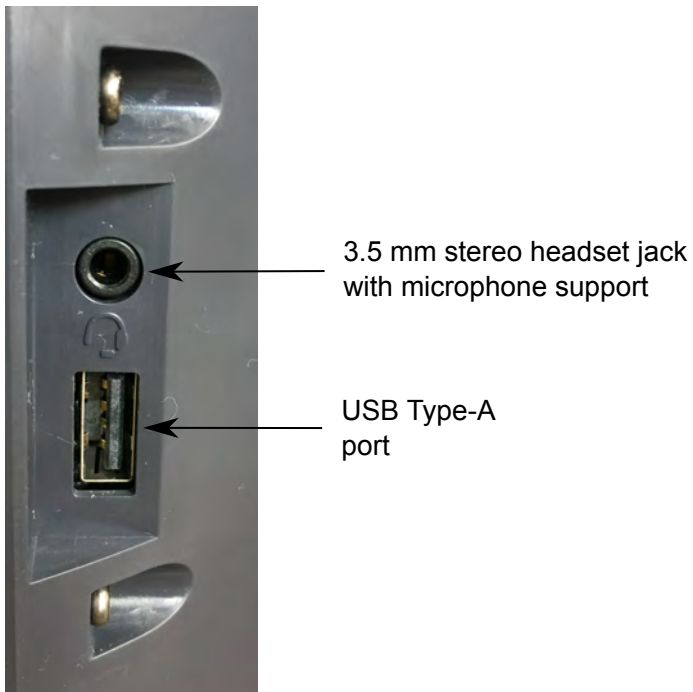


3

4 **Left side panel**

4


- 5 On all device variants, the left side panel contains a cordless or corded handset cradle connector.

5

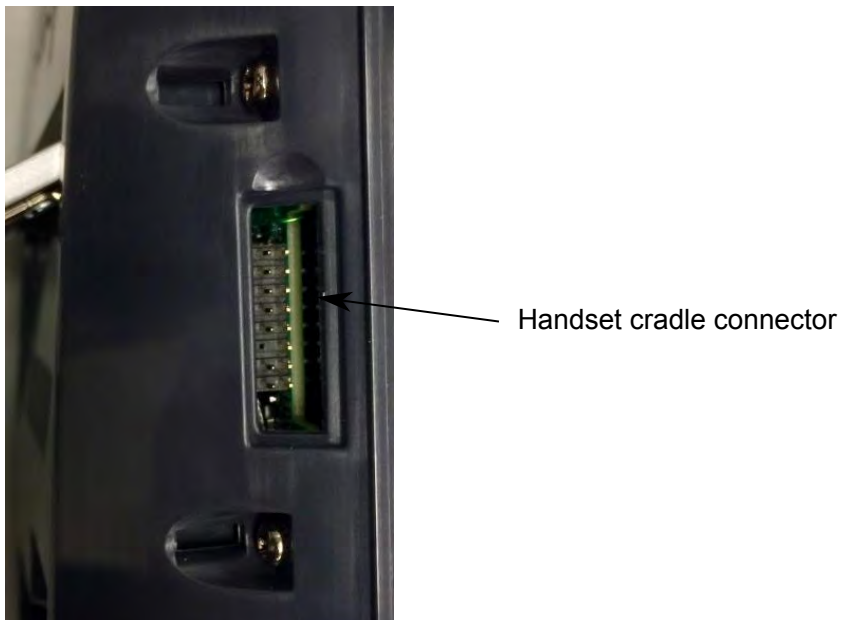

6

1 Wireless handset layout

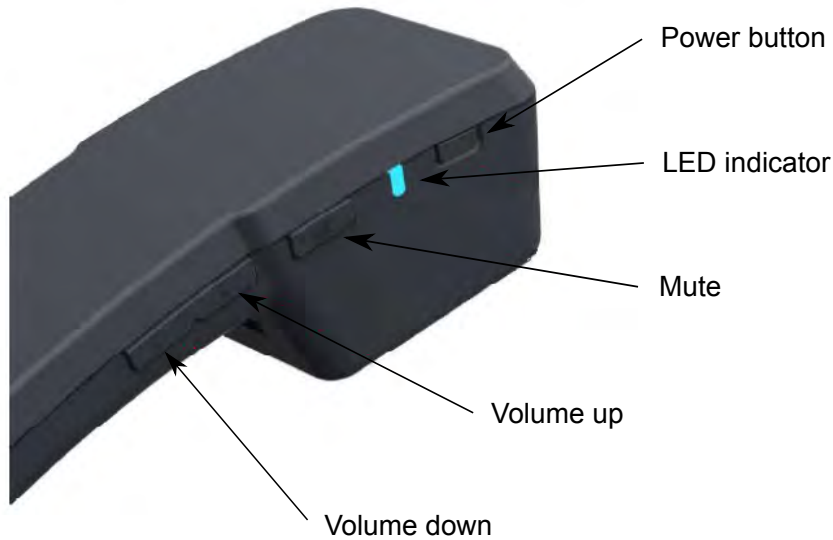

2


3 Avaya Vantage Basic screen navigation

4

5 Dial pad screen


6 The following sections show the Avaya Vantage™ Basic Dial pad screen.

1 K165 or K175 device

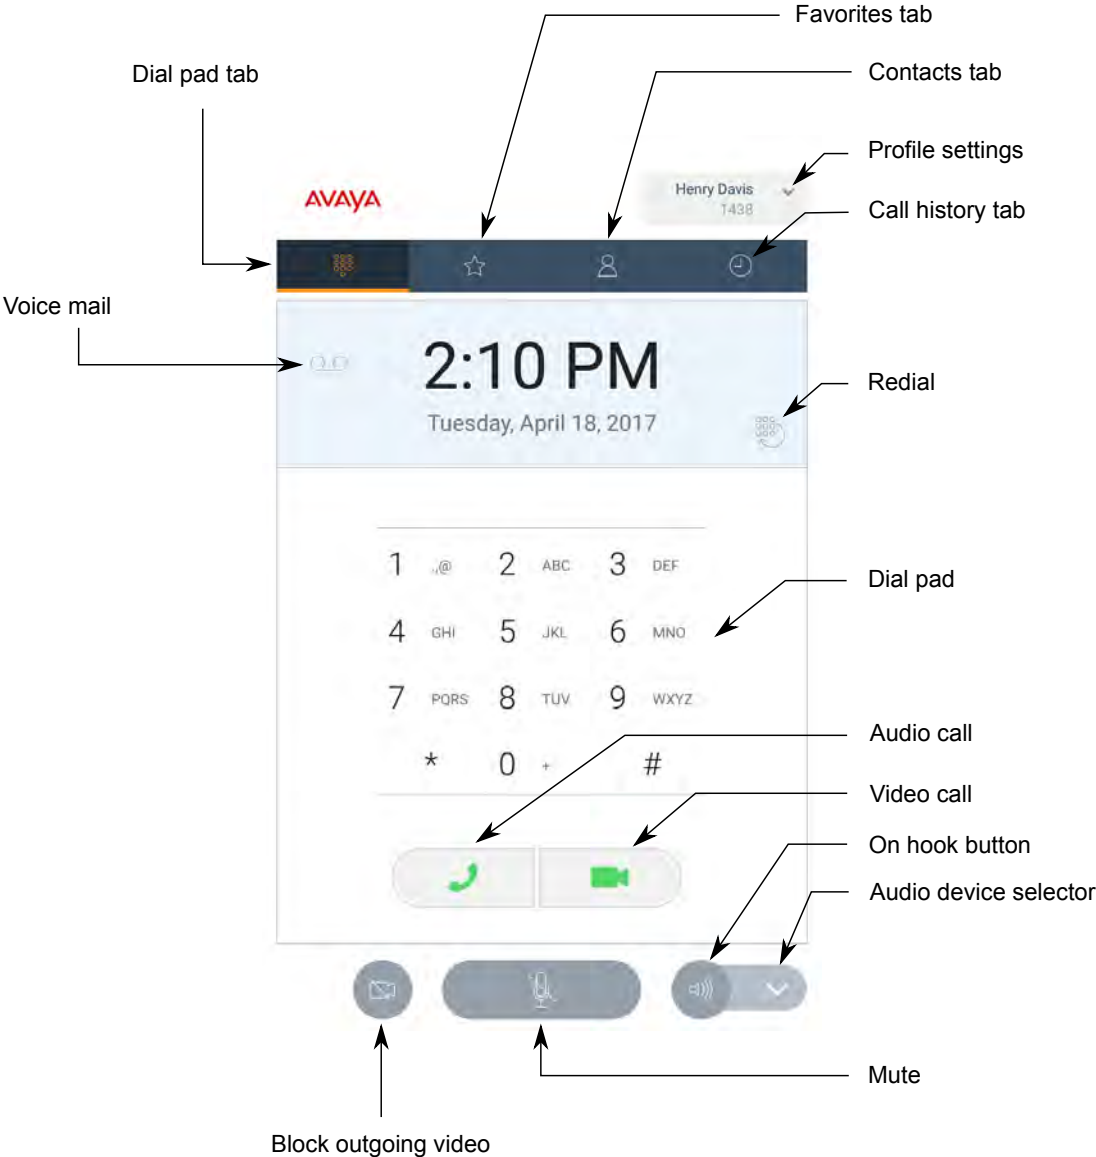

2

1 **K155 device**

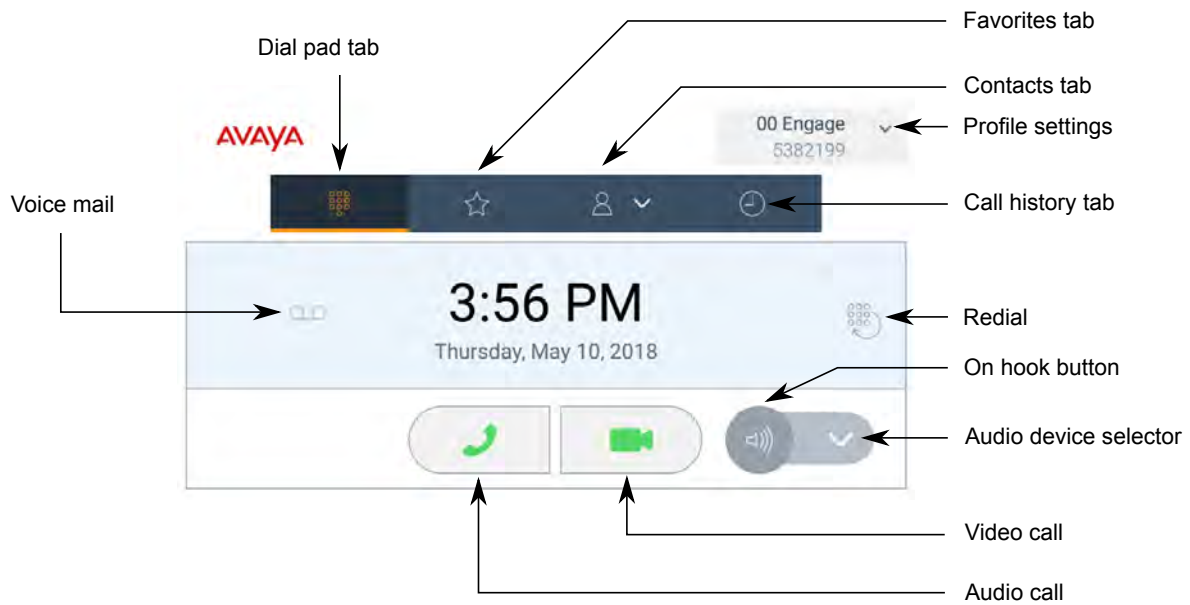


2

3

4 **Contacts screen**


5 The following sections show the Avaya Vantage™ Basic Contacts screen.

1 K165 or K175 device

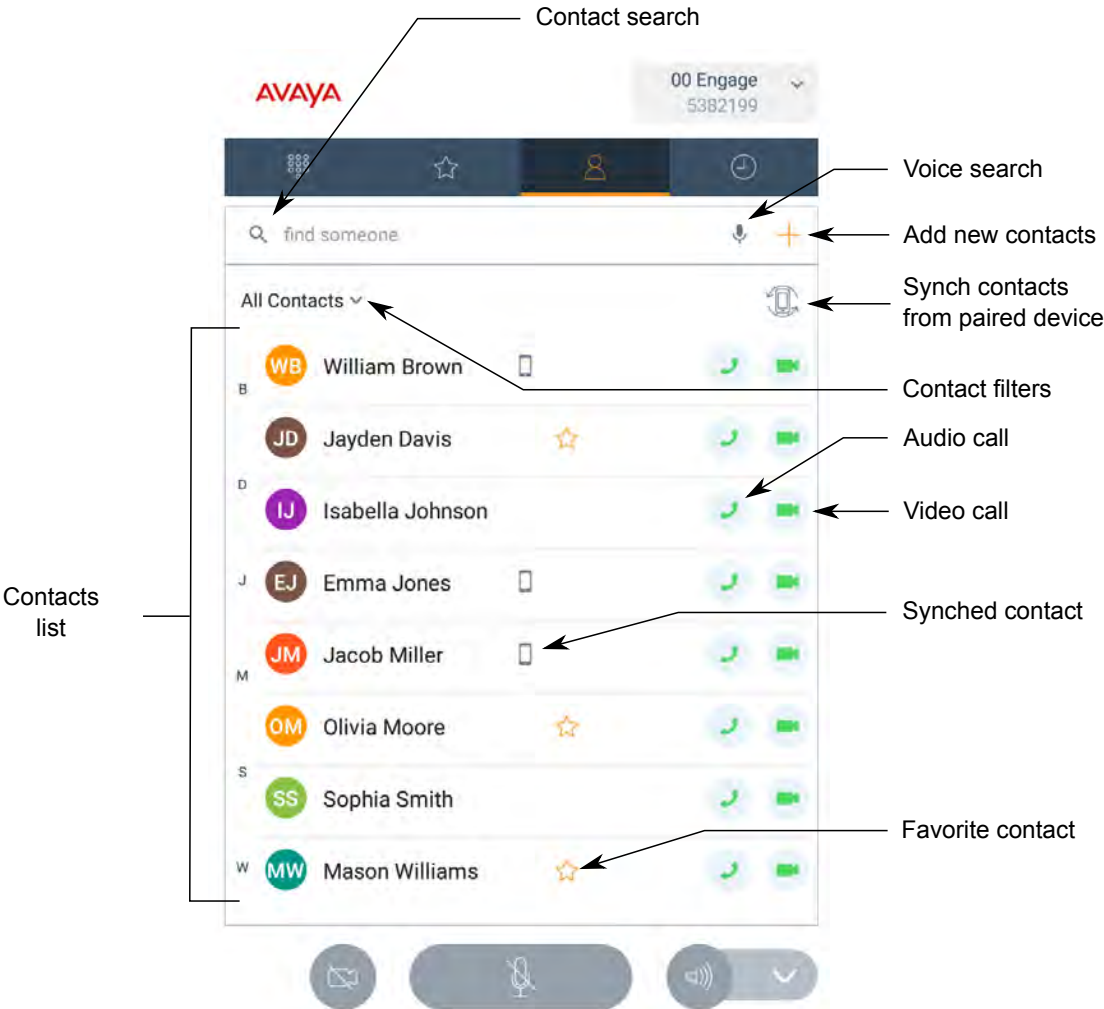

2

1 **K155 device**

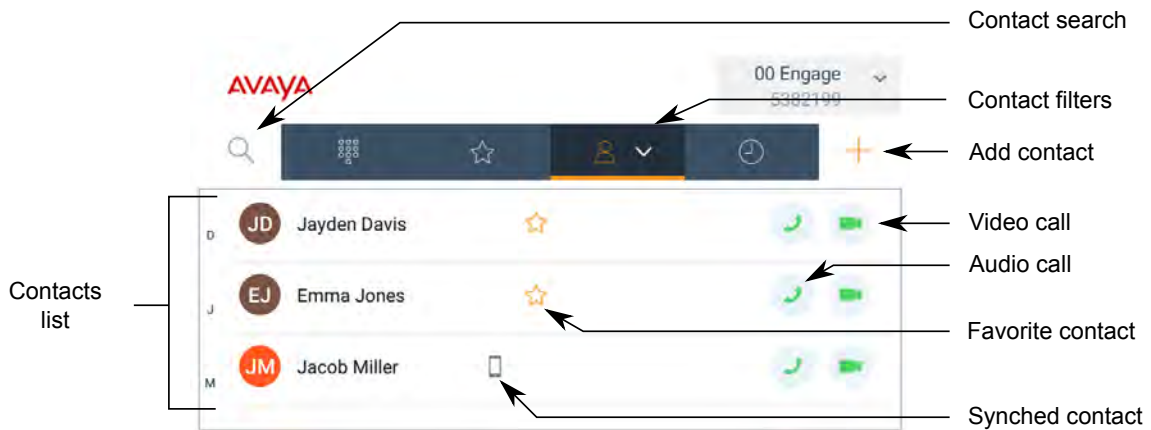


2

3

4 **Call screen**

5 The following sections show the Avaya Vantage™ Basic Call screen.


1 K165 or K175 device

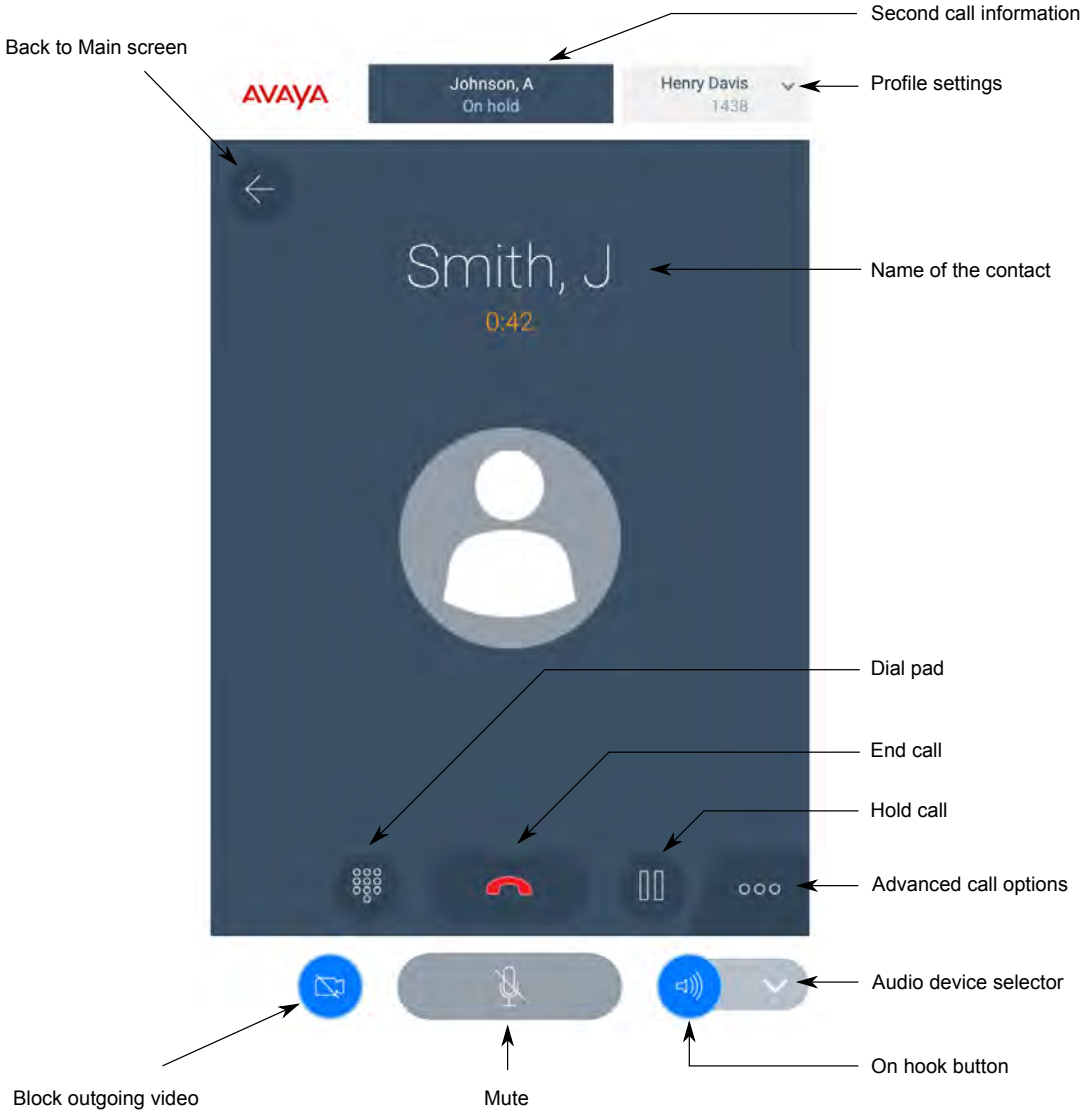

2

1

K155 device

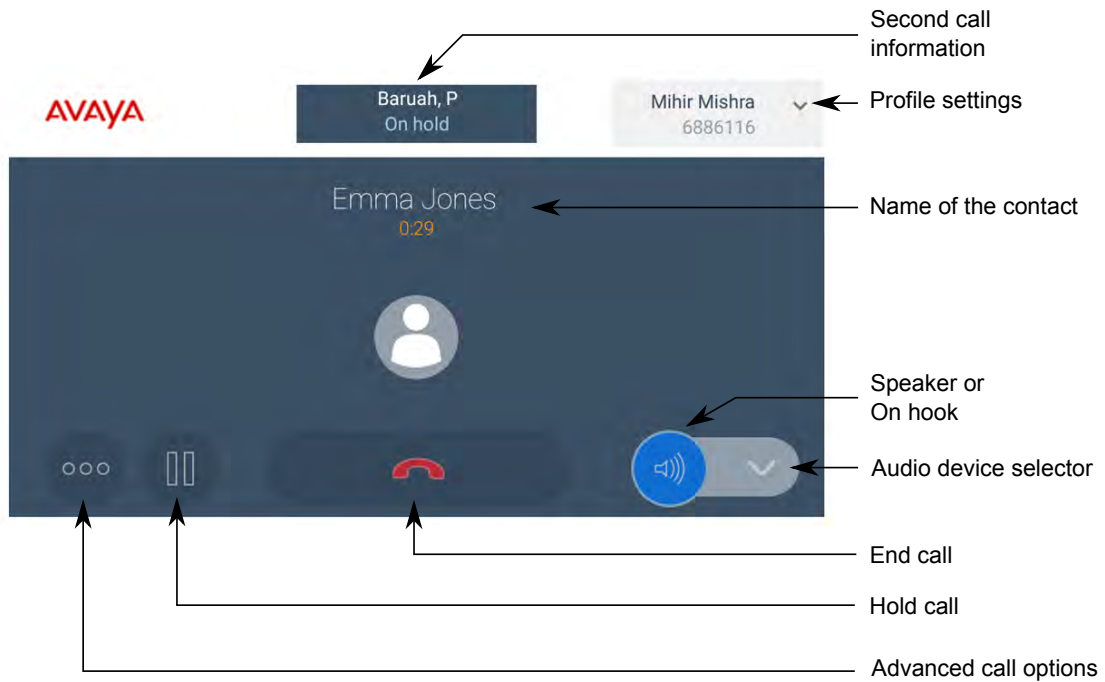

2

Chapter 5: Call management operations

You can perform the following key call management tasks:

- Making audio or video calls
- Answering audio or video calls
- Performing call control operations
- Viewing your call history and missed calls
- Working with conferences

Making audio or video calls

Making an emergency call


About this task

Use this procedure to make a call to a preconfigured emergency services number. Your system administrator can configure the emergency services numbers.


In the Avaya Aura® environment, you can make an emergency call even when you are logged out of Avaya Vantage™ or when Avaya Vantage™ is in the locked state.

In the IP Office environment, you can make an emergency call only when you are logged in to Avaya Vantage™. You cannot make an emergency call from the Login screen. You can make an emergency call from the Lock screen if the Lock mode is enabled and an administrator has configured emergency numbers in the `46xxspecial.txt` file.

Procedure

- To make an emergency call from the Login or the Lock screen, in the lower-right corner of the screen, tap **Emergency call** and do one of the following:
 - To automatically dial the preconfigured emergency number with the highest priority, tap **Auto - dial**.
 - To dial one of preconfigured emergency numbers manually, tap **Manual dial**, enter the number and then tap .

With K165 and K175, you must tap the digits on the screen. With K155, use the physical keypad on the device to dial the number.

- To make an emergency call from Avaya Vantage™ Basic, on the Dial pad screen, enter the emergency number and then tap .

With K165 and K175, you must tap the digits on the screen. With K155, use the physical keypad on the device to dial the number.

Making an audio or video call using the dial pad



Before you begin

If you are using a handset, lift the handset from the cradle.

Procedure



1. Tap the **Dial pad** tab.
2. Enter the telephone number you want to call.

With K165 and K175, you must tap the digits on the screen. With K155, use the physical keypad on the device to dial the number.

3. Tap one of the following:
 - : To make an audio call.
 - : To make a video call.

Making an audio or video call using contacts

Procedure

1. Tap the **Contacts** tab.
2. Select the required contact.
3. Tap one of the following:
 - : To make an audio call.
 - : To make a video call.

Making an audio or video call from your Favorites list



Before you begin

Ensure that you have contacts in your Favorites list.

Note:



On IP Office, you cannot add IP Office personal contacts to your Favorites list.

Procedure

1. Tap the **Favorites** tab.
2. Select the required contact.
3. Tap one of the following:
 - : To make an audio call.
 - : To make a video call.

Making an audio or video call using call history

Procedure

1. Tap the **Call History** tab.
2. Select the required contact or telephone number.
3. Tap one of the following:
 - : To make an audio call.
 - : To make a video call.

Making a second call


About this task



Use this procedure to make a second call while you are already on a call. You can have up to two calls at the same time. When one call is active, the other is placed on hold.

Note:

- 20 For multiple line support to work on IP Office, you must enable the Call Waiting On feature for
- 21 the user account. Otherwise the connection is treated as a single line.

Procedure

1. While on a call, tap .
2. In the Call Features window, tap **New Call**.
Avaya Vantage™ Basic places the first call on hold and displays the Dial pad screen.
3. Do one of the following:
 - Enter the telephone number you want to call.
 28 **With K165 and K175, you must tap the digits on the screen. With K155, use the physical**
 29 **keypad on the device to dial the number.**
 - In the **Contacts** tab, select the required contact.

- 1 • In the **Favorites** tab, select the required contact.
- 2 • In the **Call History** tab, select the required contact or telephone number.
- 3 4. Tap one of the following:
- 4 • : To make an audio call.
- 5 • : To make a video call.






6 After the connection is established, the second call becomes the active call. The first call
7 remains on hold until you toggle between calls.

9 Redialing a number

10 About this task

11 Use this procedure to redial the last dialed number.


12 Procedure



- 13 1. On the Dial pad screen, tap .
- 14 Avaya Vantage™ displays the last dialed number on the screen.
- 15 2. Tap one of the following:
- 16 • : To make an audio call.
- 17 • : To make a video call.
- 18 You can also redial by double tapping  or .

19 Managing calls


21 Answering or declining an incoming call

22 Procedure

- 23 • To answer an audio call, do one of the following:
 - 24 - Tap  on your screen.
 - 25 - Lift the handset from the cradle when you are using a wired or wireless handset.

26 With K155, after answering the call, you can also use the  and  buttons on the device to
27 toggle between your headset or speaker phone.

- 28 • To accept a video call, tap .

- To decline a call, tap .


Entering digits during a call

About this task

Use this procedure if you need to enter DTMF digits during a call. For example, when you check your voice mail, you are prompted to enter digits.

Procedure

- With K165 and K175, do the following:

1. While on an active call, tap .

The application displays the dial pad.

2. Enter the required digits.

- With K155, use the physical keypad on the device to enter the required digits.

On K155, the application does not display the entered digits on the screen.

Muting or unmuting a call


About this task

Use this procedure to mute or unmute your microphone during an active call. When you are on mute, the other party cannot hear you.

A muted call gets unmuted automatically when you switch to a different audio device during the call. However, you can perform call operations, such as putting the call on hold or resuming the call, during a muted call without getting unmuted.


Procedure

- To mute yourself during a call:

- With K165 or K175, tap  on the screen.

- With K155, press the  button on the device keypad.

- To unmute yourself:

- With K165 or K175, tap .

- With K155, press the  button on the device again.

- **(Optional)** On a wireless handset, press the **Mute** button to mute or unmute yourself.

When you mute a call on your wireless handset, the application UI does not indicate that the call is muted.

If you disconnect the call without unmuting the wireless handset, the handset remains muted.


1

2 Placing a call on hold and resuming the call


3

Procedure

4

- To place a call on hold, tap .

5

- To resume the call, tap .

6

7 Toggling between calls

8

About this task

9

Use this procedure to toggle between two calls when one call is active and the other call is on hold.

10

Note:

- 11 For multiple line support to work on IP Office, you must enable the Call Waiting On feature for
- 12 the user account. Otherwise the connection is treated as a single line.

13

Procedure

14

1. At the top of the Call screen, tap the label of the held call.

15

The application displays the inactive or held call on the Call screen.

16

2. Tap .

17

The inactive call becomes the active call, and the other call is placed on hold.

18

19 Transferring a call

20

About this task

21

Use this procedure to transfer a call to another number. A direct transfer, as described in this procedure, is a blind or unattended transfer. When you perform a blind transfer, you cannot notify the other party about the transfer and you cannot return to your original call after starting the transfer procedure.

22

23

24

25

Procedure

26

1. During an active call, tap .

27

2. Tap .

28

3. Do one of the following:

29

- Tap **Enter a number** and then enter the phone number.

30

- Tap **Choose a Person** and then select the required contact from the Contacts, Call History, or Favorites list.

31

4. Tap **Transfer**.

Working with video functionality


About this task

Use this procedure to start, stop, pause and resume video during a call. When you pause your video, the application stops transmitting your video to the other party. When a video is paused, you can still receive video from the other party and your audio is still transmitted to the other party.


* Note:

- If you switch to another application while on a video call, video will be stopped. To start video again, switch back to Avaya Vantage™ Basic.
- For privacy reasons, Avaya Vantage™ Basic always pauses outgoing video when the other party makes a video call or adds video to an existing call. To transmit your video to the other party, you must enable video manually.


Procedure

- To start or stop video, tap  and then tap **Start Video** or **Stop Video**.

- To pause or mute video:

- With K165 or K175, tap .

The icon becomes blue. You can tap this icon again to resume video.

- With K155, press the .

Press this button again to resume video.

Selecting an active audio device

About this task

By default, Avaya Vantage™ uses speakers to transmit audio. If you have a headset or handset connected to your device, you can select which audio device to use in a call.

Procedure

- From the Dial pad or Call screen, tap **Audio device selector** and select the required device from the list.
- To select your wireless handset as an active audio device when on a call, lift the handset from the cradle.

Avaya Vantage™ automatically transfers audio to the wireless handset.

- To select the device speaker when using a wireless handset, do the following:
 1. Select the device speaker from **Audio device selector**.

- 1 2. Place the handset in its cradle.

3 Ending a call


4 About this task

5 Use this procedure to end a call.

6 *** Note:**



- 6 If you receive an incoming call while on another call, you cannot end the first call until you
- 7 answer or decline the second call.

8 Procedure

- 9 • To end an active call, tap  on the screen.
- 10 • If you are using a handset, hang up by placing the handset in its cradle.

11 Viewing call history

12 Procedure

- 13 1. Tap the **Call History** tab.
 - 14 2. Filter the call history using the following options:
 - 15 • **All Calls**
 - 16 • **Missed Calls**
 - 17 • **Outgoing Calls**
 - 18 • **Incoming Calls**
 - 19 3. **(Optional)** To view the call history of the synchronized device:
 - 20 • With K165 or K175, tap , which is at the top-right side of the contacts list.
 - 21 • With K155, in the filter options drop-down () , tap **Bluetooth Sync**.
- 22 Avaya Vantage™ Basic displays the call history of the synchronized mobile device in the
- 23 Call History tab if:
- 24 • Call history sharing is enabled.
 - 25 • The paired mobile device is connected with Avaya Vantage™ .

26 Related links

- 27 [Synchronizing contacts and call history over Bluetooth](#) on page 48

Deleting all call information

Procedure

1. Tap the **Call history** tab.
2. Filter the call history and select **Clear All Calls**.
3. Tap **Delete** in the Confirmation dialog box.

Working with conference calls

Starting a conference call


About this task

Use this procedure to start an audio or video conference call.

Important:

- 12 This procedure does not apply to IP Office deployments. With IP Office, you can only merge
- 13 calls to create a conference call. Video conference is also not supported with IP Office.

Procedure

1. During an active call, tap .
2. In the Call Features window, tap **Add Someone**.
3. Do one of the following:
 - Tap **Enter a number** and then enter the phone number.
 - Tap **Choose a Person** and then select the required contact from the Contacts, Call History, or Favorites list.
4. Tap **Add Someone**.

A call is placed to the selected participant. When the participant answers, the conference starts.

Merging calls to create a conference call



About this task

Use this procedure to merge two calls to create a conference call.

1 **Before you begin**

2 You must have two ongoing calls.

3 **Procedure**

- 4 1. From the Call screen, tap .
- 5 2. Tap  to merge both calls into a conference call.

Chapter 6: Contact management operations

Adding a contact

About this task

Use this procedure to add new contacts in Avaya Vantage™ Basic. You can save a personal contact in the local storage or to the enterprise directory. In the IP Office environment, you can add a personal contact to the **IP Office personal directory**.

In Avaya Vantage™ Basic, you can modify and delete personal contacts added to the enterprise or IP Office personal directory. Any modification to such contacts is synchronized automatically between Avaya Vantage™ Basic and the enterprise or IP Office personal directory.

Note that Avaya Vantage™ deletes local contacts data when another user logs in to the device. To store local contacts data, enable data backup and provide a backup account in the **Settings** menu.

Procedure

1. Tap the **Contacts** tab.
2. Tap **+**.
3. Choose one of the following options:
 - **Local Contact:** To store the contact locally on the device.
 - **Enterprise Contact:** To add the contact to the Avaya Aura® enterprise directory.
 - **Personal Contact:** To add the contact to the **IP Office personal directory**.

Either the **Enterprise Contact** or the **Personal Contact** option is available depending on the environment in which the device is installed.

4. In the **First Name** and **Last Name** fields, enter the name of the new contact.
5. Do the following to add the phone number of the contact:
 - a. Tap **Add phone number**.
 - b. In the drop-down list, select the appropriate phone category.
 - c. In the **Phone** field, enter the phone number.

You must provide at least one phone number for each contact.

Use the on-screen keyboard to enter contact details. Do not use the physical keypad on the K155 device.

- 1 6. **(Optional)** Repeat the previous step to add more phone numbers for the contact.
- 2 7. **(Optional)** Add other information about the contact, such as the job title, company name,
- 3 and address.
- 4 8. Tap **Done**.
- 5 The contacts and their details are displayed in your Contacts list.

6 Editing a contact

7 **About this task**

8 Use this procedure to edit the details of a contact.

9 You can modify local contacts and personal contacts added to the enterprise or IP Office personal
10 directory. Any modification to personal contacts is synchronized automatically between Avaya
11 Vantage™ Basic and the enterprise or IP Office personal directory.

12 **Procedure**

- 13 1. Tap the **Contacts** tab.
- 14 2. In the contacts list, tap the contact that you want to edit.
- 15 3. On the Contact Details page, tap **Edit**.
- 16 4. Tap the field that you want to edit.
- 17 5. Use the on-screen keyboard to modify the information.
- 18 6. Tap **Done**.

19 Deleting a contact

20 **About this task**

21 Use this procedure to delete a contact from the contacts list.

22 You can delete local contacts and personal contacts added to the Avaya Aura® enterprise or IP
23 Office personal directory.

24 **Procedure**

- 25 1. Tap the **Contacts** tab.
- 26 2. In the contacts list, tap the contact that you want to delete.
- 27 3. On the Contact Details page, tap **Delete**.
- 28 4. Tap **Yes** to confirm the action.


1 Searching for a contact

2 About this task

3 Use this procedure to search for a contact.

4 In the IP Office environment, IP Office system contacts are visible only through search.

5 Procedure

- 6 1. Tap the **Contacts** tab.
 - 7 2. On K155, tap the  icon.
 - 8 3. In the **Search** field, start typing the name of the contact that you want to look for.
- 9 The application displays all relevant contacts.

10 IP Office contact search options

12 In the IP Office environment, Avaya Vantage™ Basic and the standard Contacts application ()
13 available on the Avaya Vantage™ device support centralized IP Office directory contact search,
14 which includes the following:

- 15 • IP Office system contacts across a small community network (SCN).
- 16 • IP Office hunt group contacts across a small community network (SCN).
- 17 • IP Office external contacts in the LDAP, system, and HTTP directories configured in IP Office.



18 Setting contact display options

19 About this task

20 Use this procedure to modify how contact names are displayed in the Contacts list. Contacts can
21 be displayed with the first name first or with the last name first.

22 Procedure

- 23 1. In Avaya Vantage™ Basic, tap **Extension > User Settings**.
- 24 2. Tap **Application**.
- 25 3. In Display preferences, tap **Name display preferences** and then select one of the
26 following options:
 - 27 • **First Name First:** To display the contact names with the first name first followed by the
28 last name.
 - 29 • **Last Name First:** To display the contact names with the last name first followed by the
30 first name.

- 1 4. Tap **Name sort preferences** and then select one of the following options:
- 2 • **First Name First**: To sort the contact list based on the first name.
- 3 • **Last Name First**: To sort the contact list based on the last name.

4 Setting a contact as a favorite


5 About this task

6 Use this procedure to add a contact to your Favorites list.

7  **Note:**

- 7 In the IP Office environment, you cannot add IP Office personal contacts to your Favorites list.

8 Procedure

- 9 1. Tap the **Contacts** tab.
- 10 2. Tap the appropriate contact.
- 11 3. In Contact Details, tap , which is beside the contact's name.

12 Synchronizing contacts and call history over Bluetooth

13 About this task

14 Use this procedure to synchronize your mobile phone's contacts and call history with the Avaya Vantage™ device over Bluetooth. After the synchronization, you can access all contacts and call history of the paired phone on your Avaya Vantage™ device when the devices are connected.

17 Contacts from all accounts on your mobile phone, including Google and Facebook, are shared with the Avaya Vantage™ device, but only so long as the devices remain connected. If Bluetooth connectivity is lost, the shared phone contacts and call history data is automatically deleted from the Avaya Vantage™ device.

21 Procedure

22 To pair a mobile phone with the Avaya Vantage™ device, do the following:

- 23 1. On the mobile phone and the Avaya Vantage™ device, turn on Bluetooth.
- 24 2. On the Avaya Vantage™ device, tap **Settings > Bluetooth**.
- 25 3. In Available devices, tap the name of the mobile phone.
- 26 4. On the screens of both devices, do the following:
 - 27 a. Verify the displayed passcode.
 - 28 b. Select the option to allow the paired device to access the contacts and call history.

1 c. Tap **Pair**.

2 To synchronize and share contacts and call history from the paired phone, do the following:

3 5. On the Avaya Vantage™ device, tap **Settings > Bluetooth**.

4 6. In Bluetooth Contact & Call History Sharing, enable the following:

- 5 • **Contact Sharing**
- 6 • **Call History Sharing**

7 The synchronized contacts become available through the following:

- 8 • The Contacts tab in the Avaya Vantage™ Basic or Avaya Equinox® application.
- 9 • The standard Contacts application on the Avaya Vantage™ device.

10 The synchronized call history is available on the Call History tab of the Avaya Vantage™
11 Basic application.

12 *** Note:**

- 13 Any third-party application that is capable of displaying call logs from the default
- 14 telephony application can display the call history from the synchronized mobile device.
- 15 After the Bluetooth connection is disconnected, if such application is caching the call
- 16 history and not clearing the cache, the call history from the synchronized device is
- 17 retained.

17 Filtering contacts



18 Procedure

19 1. Tap the **Contacts** tab.

20 2. Filter the contacts using the following options:

- 21 • **All Contacts:** To view the local and enterprise contacts.
- 22 • **Enterprise Contacts:** To view Avaya Aura® enterprise contacts.
- 23 • **Personal Contacts:** To view IP Office personal contacts.
- 24 • **Local Contacts:** To view the contacts stored in the local storage, such as Google or
- 25 Exchange contacts.

26 3. **(Optional)** To view the contacts of the synchronized device:

- 27 • With K165 or K175, tap , which is at the top-right side of the contacts list.
- 28 • With K155, in the contacts filter drop-down () tap **Bluetooth Sync**.

29 Avaya Vantage™ Basic displays the contacts of the synchronized device under All Contacts
30 and Local Contacts if:

- 31 • Contact sharing is enabled.

Contact management operations

- 1 • The paired device is connected with Avaya Vantage™ .

2 **Related links**

- 3 [Synchronizing contacts and call history over Bluetooth](#) on page 48

Chapter 7: Customization

Modifying the ring tone

About this task

Use this procedure to change the default ring tone for incoming calls in Avaya Vantage™ Basic. You can select from a list of built-in and administrator-downloaded ring tones.

You can change the ring tone in the telephony application but not on the Avaya Vantage™ device.

Procedure

1. In Avaya Vantage™ Basic, tap **Extension > User Settings**.
2. Tap **Audio/Video**.
3. In Ring Preferences, tap **Choose Ringtone**.
4. Select the new ring tone and tap **OK**.

Disabling video using the privacy shutter

About this task

On the K175 device, you can physically prevent the camera from capturing video using a privacy shutter. When you close the shutter, the camera is still on, but it only transmits a black background. The camera LED is also on, indicating that the camera is working.

* Note:

The K155 device does not include a physical shutter. You can use the video mute button (🔇) to disable video.

Procedure

- To disable video capturing, shift the lever located above the camera to the leftmost position so that the camera is entirely covered with the shutter.

If the shutter does not cover the entire camera, the camera might be able to capture partial video.

- To enable video capturing, shift the lever to the rightmost position so that the shutter does not cover the camera.

1 Changing the wallpaper

2 About this task

3 Use this procedure to change the default wallpaper on the Avaya Vantage™ device. You can select
4 an administrator-downloaded wallpaper or any other image file available on the device.

5 Procedure

- 6 1. Tap **Settings > Display**.
- 7 2. Tap **Wallpaper**.
- 8 3. Tap one of the following options available on the device:
 - 9 • **Live wallpapers**
 - 10 • **Photos**
 - 11 • **Wallpapers**
- 12 4. Select the new wallpaper and tap **Set wallpaper**.

Chapter 8: Resources

Documentation

See the following related documents at <http://support.avaya.com>.

Title	Use this document to:	Audience
Deploying		
<i>Installing and Administering Avaya Vantage™</i>	Install, configure, and maintain Avaya Vantage™.	Implementation personnel
Using		
<i>Using Avaya Equinox® for Android, iOS, Mac, and Windows</i>	Set up and use Avaya Equinox® clients.	<ul style="list-style-type: none">• End users• Support personnel
<i>Using Avaya Vantage™ Open</i>	Use Avaya Vantage™	<ul style="list-style-type: none">• End users• Support personnel

Finding documents on the Avaya Support website

Procedure

1. Navigate to <http://support.avaya.com/>.
2. At the top of the screen, type your username and password and click **Login**.
3. Click **Support by Product > Documents**.
4. In **Enter your Product Here**, type the product name and then select the product from the list.
5. In **Choose Release**, select an appropriate release number.
6. In the **Content Type** filter, click a document type, or click **Select All** to see a list of all available documents.

For example, for user guides, click **User Guides** in the **Content Type** filter. The list displays the documents only from the selected category.
7. Click **Enter**.

1 Viewing Avaya Mentor videos

2 Avaya Mentor videos provide technical content on how to install, configure, and troubleshoot
3 Avaya products.

4 About this task

5 Videos are available on the Avaya Support website, listed under the video document type, and on
6 the Avaya-run channel on YouTube.

7 Procedure

- 8 • To find videos on the Avaya Support website, go to <http://support.avaya.com> and perform one
9 of the following actions:
 - 10 - In **Search**, type `Avaya Mentor Videos` to see a list of the available videos.
 - 11 - In **Search**, type the product name. On the Search Results page, select **Video** in the
12 **Content Type** column on the left.
- 13 • To find the Avaya Mentor videos on YouTube, go to www.youtube.com/AvayaMentor and
14 perform one of the following actions:
 - 15 - Enter a key word or key words in the **Search Channel** to search for a specific product or
16 topic.
 - 17 - Scroll down Playlists, and click the name of a topic to see the available list of videos
18 posted on the website.

★ Note:

- 19 Videos are not available for all products.

20 Support

21 Go to the Avaya Support website at <http://support.avaya.com> for the most up-to-date
22 documentation, product notices, and knowledge articles. You can also search for release notes,
23 downloads, and resolutions to issues. Use the online service request system to create a service
24 request. Chat with live agents to get answers to questions, or request an agent to connect you to a
25 support team if an issue requires additional expertise.

27 Using the Avaya InSite Knowledge Base

28 The Avaya InSite Knowledge Base is a web-based search engine that provides:

- 29 • Up-to-date troubleshooting procedures and technical tips
- 30 • Information about service packs
- 31 • Access to customer and technical documentation

- 1 • Information about training and certification programs
- 2 • Links to other pertinent information

3 If you are an authorized Avaya Partner or a current Avaya customer with a support contract, you
4 can access the Knowledge Base without extra cost. You must have a login account and a valid
5 Sold-To number.

6 Use the Avaya InSite Knowledge Base for any potential solutions to problems.

- 7 1. Go to <http://www.avaya.com/support>.
- 8 2. Log on to the Avaya website with a valid Avaya user ID and password.
9 The system displays the Avaya Support page.
- 10 3. Click **Support by Product > Product Specific Support**.
- 11 4. In **Enter Product Name**, enter the product, and press `Enter`.
- 12 5. Select the product from the list, and select a release.
- 13 6. Click the **Technical Solutions** tab to see articles.
- 14 7. Select relevant articles.

Index

A

active call	
entering digits	39
add a contact	45
answering a call	38
Avaya Smart Lock	16
enabling	17
Avaya Vantage Basic	
installing	14
supported features	10
Avaya Vantage device layout	
K155	24
K165 and K175	22
Avaya Vantage overview	9

C

call history	
deleting	43
viewing	42
call management	35
calls	
adding video to a call	41
answering	38
ending	42
making a call using a call history	37
making a call using contacts	36
making a call using dial pad	36
making a call using favorites	36
making an emergency call	35
making a second call	37
toggling between calls	40
transferring	40
call transfer	
unattended transfer	40
change history	8
changing default ring tone	51
changing wallpaper	52
conference call	43
merging calls into conference	43
connecting	
wireless handset	19
connectors and controls	25
contacts	
adding a contact	45
adding to favorites	48
deleting a contact	46
editing a contact	46
filtering	49
making a call using contacts	36
searching	47
contacts and call history	

contacts and call history (<i>continued</i>)	
synchronizing	48
contact search	
IP Office	47

D

declining a call	38
delete the call history	43
deleting a contact	46
device layout	22
Avaya Vantage K155	24
K165 and K175 standard Avaya Vantage device	22
disabling video	51
display	
changing wallpaper	52
document changes	8
DTMF digits	39

E

editing a contact	46
emergency call	35
enabling	
Avaya Smart Lock	17

F

features	10
----------	--------------------

G

Google Play applications	13
--------------------------	--------------------

H

handset	
wireless	19

I

ignoring a call	38
InSite Knowledge Base	54
installing applications	14
IP Office contact search	47

L

layout	
Avaya Vantage K155	24
K165 and K175 standard Avaya Vantage device	22

legal notices
 locking [15](#)
 locking when Smart Lock is enabled [19](#)
 logging in [15](#)
 logging out [15](#)

M

making a call
 using call history [37](#)
 using contacts list [36](#)
 using dial pad [36](#)
 using favorites list [36](#)
 making a call using contacts [36](#)
 making an emergency call [35](#)
 making a second call [37](#)
 merging calls into conference [43](#)
 muting a call [39](#)

N

new in this release [13](#)

P

physical layout [22](#)
 placing a call on hold [40](#)
 ports [25](#)

R

redialing a number [38](#)
 rejecting a call [38](#)
 related documentation [53](#)
 resuming a call [40](#)
 ring tone
 changing default ring tone [51](#)

S

searching contacts [47](#)
 second call [37](#)
 select active audio device [41](#)
 setting contact display options [47](#)
 support [54](#)
 synchronizing contacts and call history [48](#)

T

third party applications [13](#)
 toggling calls [40](#)
 trusted device
 changing [18](#)
 removing [18](#)
 turn on the wireless handset [20](#)

U

unlocking [15](#)
 unmuting a call [39](#)

V

video
 adding video to a call [41](#)
 blocking and resuming [41](#)
 disabling [51](#)
 videos [54](#)
 viewing call history [42](#)

W

wireless handset [19](#)
 features [11](#)
 layout [28](#)
 LED indication [12](#)
 turning on and off [20](#)