

Wireless: digital wireless camera

Operation Manual



Index

Before Using

Technique Parameter.....	3
Packing List.....	3
Layout.....	3

How it Works.....	4
-------------------	---

Function Setup

Scan Mode.....	5
----------------	---

Menu

View Mode.....	5
Rec Store.....	5
Rec Files.....	6
Store Format.....	6
Systems.....	7
Motion Record.....	7
Clock Setting.....	7
Pairing Camera	

Before Using

Technique Parameter


Absolute rating		
Operating Temperature range		-5~50℃
External power supply		DC 5V±10%
Communication range		>250m

Test condition		
Audio output impedance(SPEAKER)		8 ohm
Antenna Impedance		50 ohm

Unit	Receiver		
No	Item		Specification
1	LCD size		7 inch
2	Resolution		800×480
3	Compression Format		MPEG4
4	Recording Resolution		VGA(640×480),QVGA(320×240)
5	Recording Frame Rate		VGA:25fps*; QVGA:20fps*
6	Recording Modes		Manual / Motion Detection
7	HDD interface/Memory		SD Card
8	Hard Drive Support		UP to 32GB SD
9	Frequency		2.400GHz~2.4835GHz (ISM band)
10	Frequency erro		±20ppm
11	Modulation		GFSK
12	Tx power		17dBm±1-2dBm
13	Transmission Rate		3Mbps
14	Rx sensitivity		≤-88dBm
15	AF output		3.5v p-p @MIC 10mV input
16	AF distortion (1KHz mod.)		≤5%
17	AF frequency response		300Hz~2.5KHz
18	Max AF sound level		80~100dBa/spl.

Unit	Camera		
No	Item		Specification
1	Image Sensor		1/4"CMOS
2	Video Quality		420TVL
3	Number of Effective Pixels		VGA(640×480),QVGA(320×240)
4	Minimum Illumination		0 LUX(IR OFF)
5	Day/Night Mode		Color during the day/switches to B&W at night
6	White Balance		Automatic
7	Signal / Noise Ratio		<48dB
8	Electronic Shutter		1/60-1/15,000 NTSC,1/50-15,000 PAL
9	Gain Control		Automatic
10	Backlight Compensation		Yes
11	Wide Dynamic Range		No
12	Lens		3.6mm
13	Viewing Angle		70 degrees
14	current consumption (IR OFF)		200±30mA
15	Power supply		DC 5V
Audio			
16	Microphone		Yes
17	Audio Range		9ft/3m
Night Vision			
18	Night Vision Distance		Up to 12m
19	IR Cut Filter		YES
20	Number of Infra-Red LEDs		30
21	Infra-Red Wavelength		850
22	Infra-Red LED Life		10,000 hours

Layout

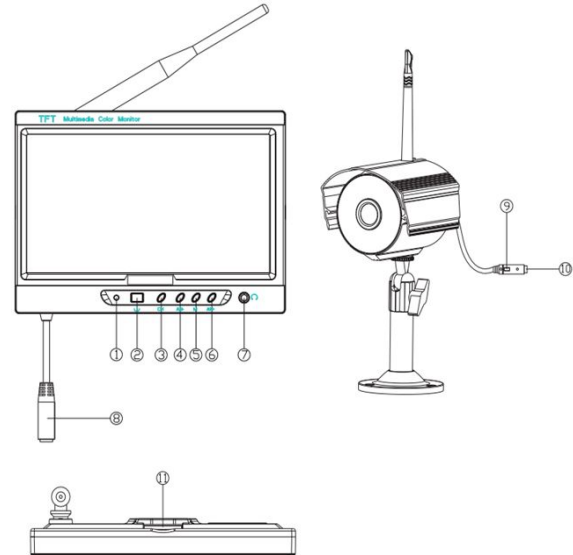

1. IR; 2. Power; 3. CH; 4. AN- 5. M;
 6. AN+ ;7. Earphone*;
 8. DC 5V; 9. Pairing Key;
 10. DC 5V; 11. SD card socket


Packing List



- The package contents:
 One Wireless DVR&Monitor;
 Four Wireless Cameras;
 Five DC 5V Adapters;
 One Remote Control.

How it Works


1. Connect the adapter to Monitor/Camera, then connect the adapter to the AC socket;

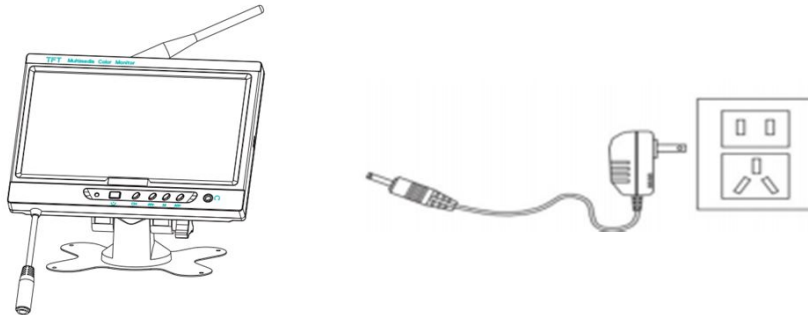


2. Press Power Key on Monitor for more than 2 seconds to open it;



3. The image will come out when Monitor is paired with Camera, the step is shown below

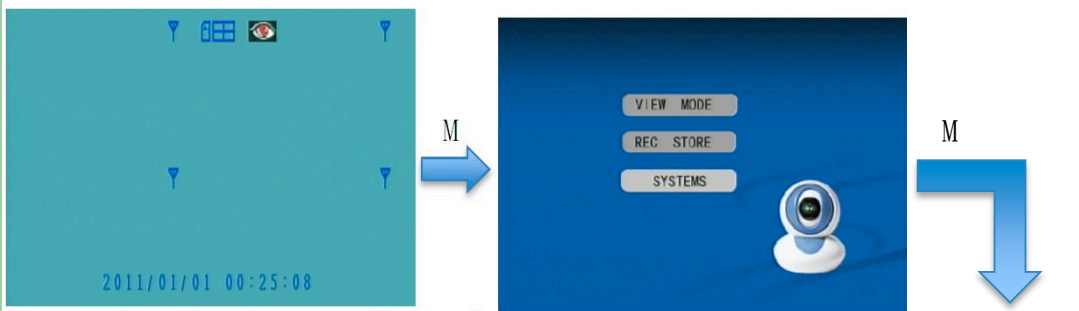

Choose Cam X and press M, a few red arrows will appear, then press Pairing Key on Camera for 2 seconds, if "success" is display on screen, it means pairing is ok, when failed, "Failed" appears.

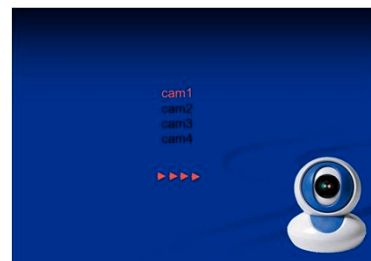


Function Setup


Scan Mode

In this mode, user can view the realtime image.

Keys function are shown below :

CH: Camera switch AN-: volume lower AN+: volume higher M: Menu

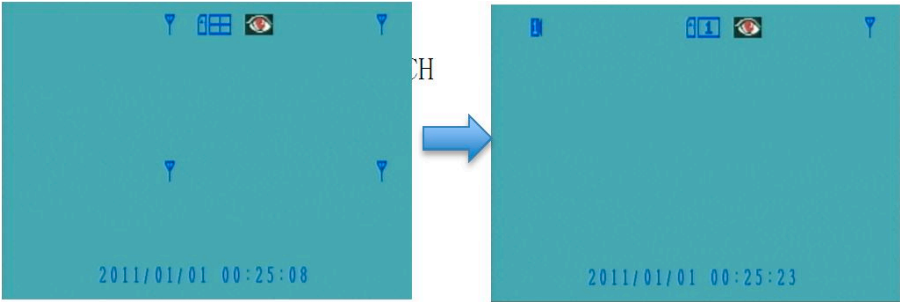


 Means motion detection is on

Menu

AN+, AN-:up, down, CH:exit, M:enter

View Mode

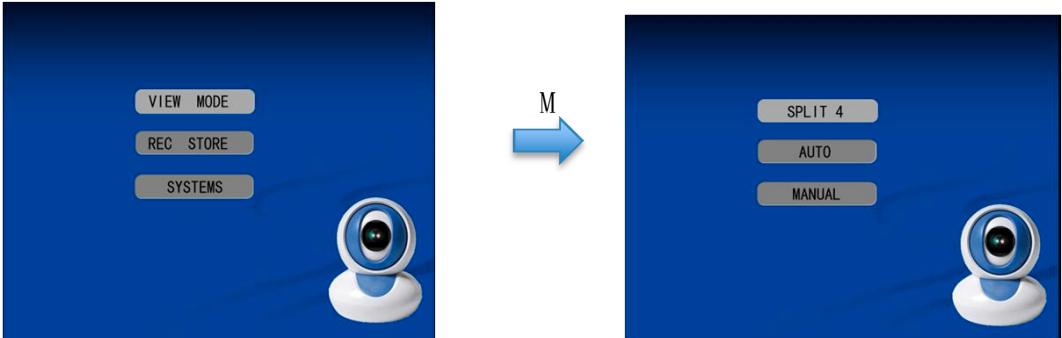


When View Mode icon is highlight, press M to enter.

Split 4 Scan Mode displays 4 picture in picture

Auto Scan Mode display single channel, and each 5s later comes to another channel

Manual Scan Mode single channel, press CH to change

Rec Store

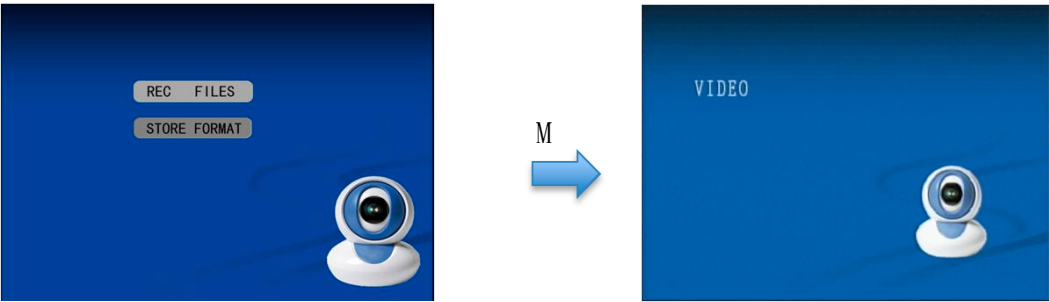

Function Setup



In Rec Store, rec files is store by time.
When playback, CH is for pause, AN+, AN- is playing the previous/the later file.


Store Format

SD Card Overwrite is always on, when SD card is been full, the earliest file in one hour is deleted.
Chooes OK,SD card will be formatted.



Systems

Motion Record

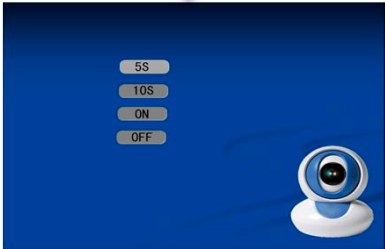


5S means record 5S;
10S means record 10S;
ON means motion detection is on;
OFF means motion detection is off.

Function Setup

Clock Setting

M for choosing, AN-, AN+ for modifying.

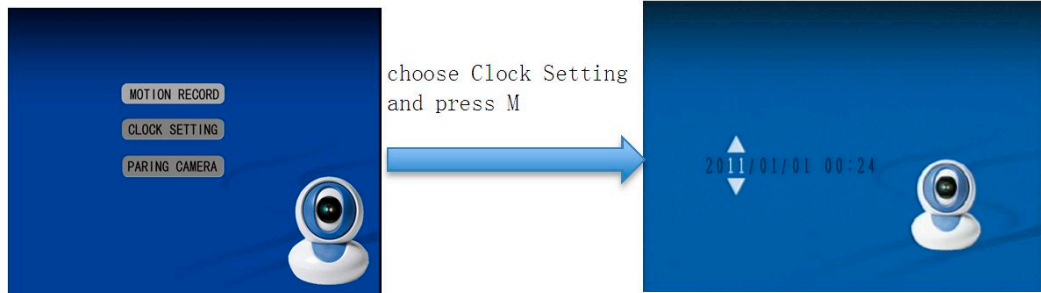

Pairing Camera

Find it in page 3 How it works.

FCC ID: M7U-D702MC This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IC: 2693A-D702MC The device complies with industry Canada license-exempt RSS standard(s). Operation of this device is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement."

Company: BRK Brands Inc

Product: digital wireless camera

Model: D702MC

country of origin: China

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.