


# AP630 Hardware User Guide

Read about and view specifications and compliance information for the AP630 in this topic. Install the AP630 using this topic.

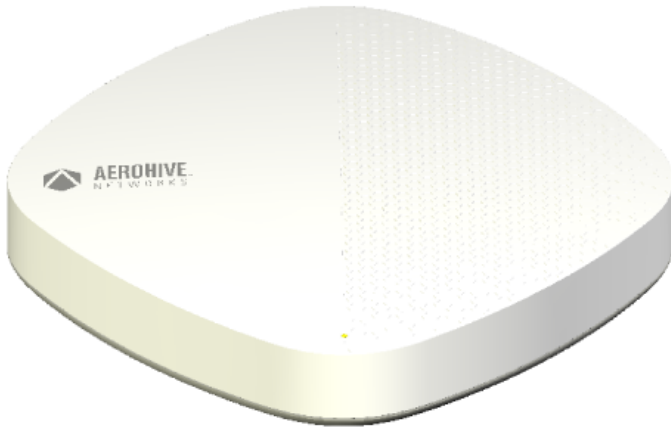

The AP630 is a high-performance, dual-band concurrent access point with one 11ax 4x4 2.4 G and one 11ax 4x4 5 G radio. The AP630 is designed for indoor high-density environments that require HD video streaming and large file transfers. Equipped with two 10/100/100 Mb Ethernet ports, a Console port, and powered by PoE; this device supports IEEE 802.11ax OFDMA (Orthogonal Frequency-Division Multiple Access).

For regulatory and compliance information, see "Regulatory Compliance Statements".

## Important! Change the Country Code

If your access point is configured for the World Regulatory Domain, it is important to set the country code to the country in which the AP will be deployed to meet regulatory requirements and for optimal wireless operation. To do this, follow these steps:



*The country code selection is for World models only and is not available to FCC, CAN, and other country-specific models. Per FCC regulations, all Wi-Fi products marketed in the United States must be set to U.S. channels only.*














1. Power on the AP and allow it to find and connect to HiveManager. Once the AP is connected it appears in the table of devices on the > Devices page.
2. Select the check box next to the AP, and then choose **Assign Country Code** from the *Actions* drop-down list. In the dialog box that appears, select the appropriate country from the drop-down list, and then click **Save**.
3. Upload your changes to the device.

## Safety Guidelines

### Safety Guidelines

The information in this section applies to AP630 devices.

The following safety icons are used in these guidelines to identify the type of precaution:

	This icon indicates a general caution. Failure to comply with a caution notification can result in damage to equipment.
	This icon indicates an electrical caution. Failure to comply with an electrical notification can result in serious injury or death, and extensive damage to equipment.
	This icon indicates a laser caution. Failure to comply with a laser caution can result in serious injury.
The following table lists the safety precautions you should follow when installing your AP630 devices.	
	Aerohive devices must be installed by a professional installer who is certified to install these types of devices and to ensure that they are properly grounded and meet applicable local and national electrical codes.
	These devices are intended for indoor use only.
	Do not install the device in an environment where the operating ambient temperature might exceed the recommended ranges.
	For products available in the USA/Canada market, for the 2.4 GHz band, only channels 1-11 can be operated. Selection of other channels is not possible.
	Changes or modifications made to this device that are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
	Use only attachments and accessories specified by Aerohive.
	These devices are not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities, or with lack of experience or knowledge unless they are given supervision or instruction concerning use of the devices by a person who is responsible for their safety. Children should be supervised to ensure that they do not play with the devices.
	Electrostatic discharge (ESD) can damage equipment and impair electrical circuitry. ESD damage occurs when electronic components are improperly handled and can result in complete or intermittent failures. Be sure to follow ESD-prevention procedures when handling electronic components and equipment.
	During operation, the surfaces of the AP630 can become hot. Use caution when handling.
	To meet federal radiation exposure requirements, these devices should be installed at a minimum distance of 11" (28 cm) from people or animals.

## Install the AP

The following sections describe how to mount your AP on a dropped ceiling track or to a wall.

### Shipping Carton Contents

The AP630 access point shipping carton contains the following items:

- AP630 chassis
- AP630 mounting bracket
- Read Me card

You can mount the AP630 on a flat surface or wall, or on the rails of a standard dropped ceiling grid. There is also an accessory mounting bracket that allows you to install the device in Armstrong-style dropped ceilings.

The following sections describe how to install your AP630 devices and connect them to the network.


Use the following illustration to install the mounting bracket to a dropped ceiling rail.

### Install the AP on a Ceiling Track


---

The AP630 ships with a mounting bracket that lets you easily install it on the rail of a standard dropped ceiling grid.


**1** Align bracket to ceiling rail so that the mounting flanges are parallel to the sides of the rail.

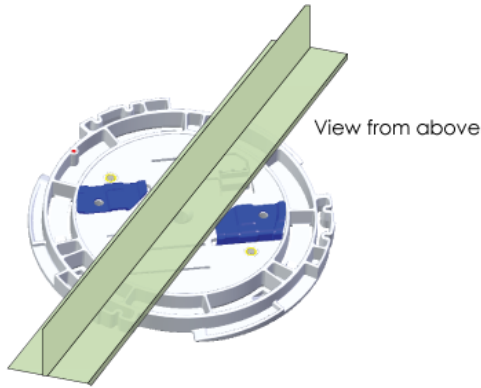


**2** Rotate the bracket so that the flanges hook over the edges of the rail.

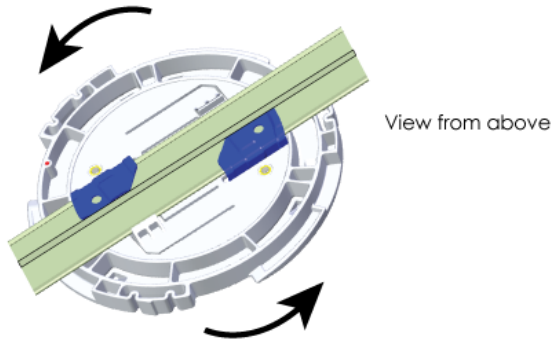


View from below

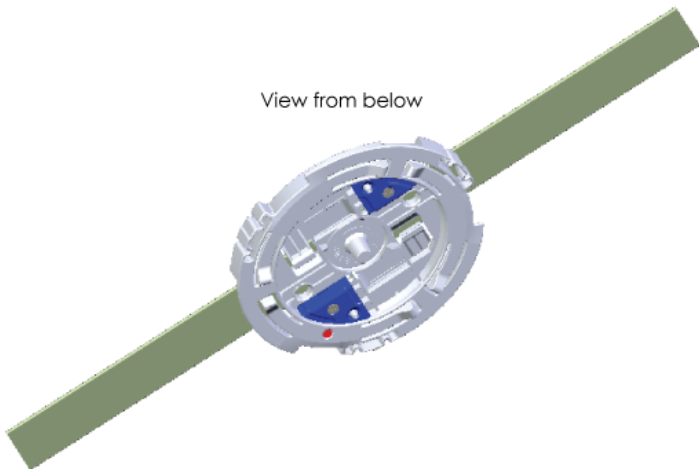


Once the bracket is secure, you can install the AP by aligning the red dot on the bracket with the red dot on the AP. Keeping the dots aligned, raise the AP up until the bracket fits into the circular depression in the bottom of the AP. When the AP is firmly seated, rotate it clockwise (??) until it clicks in to place as shown here.

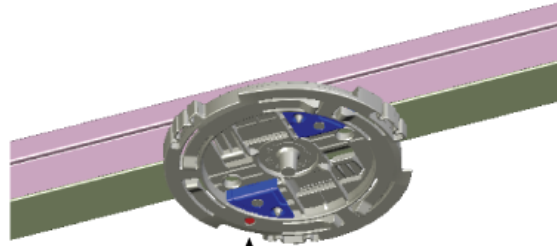

**1** Align the red dot on the bottom of the AP to the red dot on the bracket.

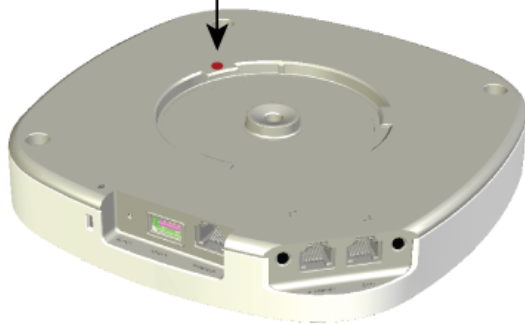

**2** Lift the AP straight up, keeping dots aligned until the bracket is seated in the round depression on the bottom of the device.

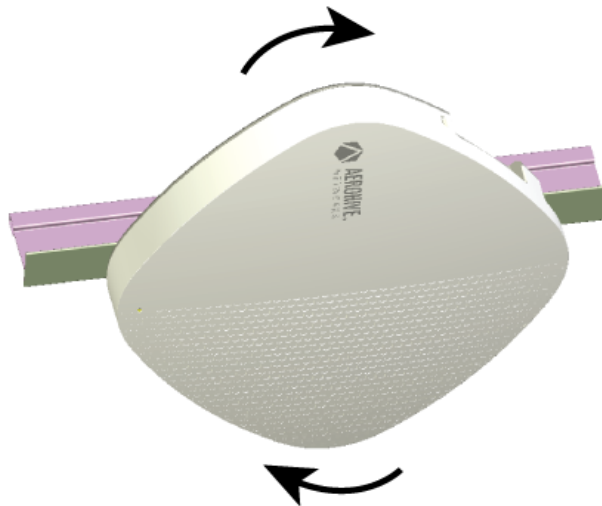

**3** Rotate the AP clockwise until it clicks into place on the

## Mount the AP on a Wall


---

You can use the bracket to mount your AP on a vertical surface. Use the following procedures and illustration:

1. Drill two holes in the wall that are xx" (cm)" from center to center.
2. Install wall mount screws (provided? - what size?)
3. Attach the bracket to the wall using the holes in the mounting flanges as shown.

## Hardware Components

You can see the hardware components of the AP630 in the illustration below and read about them in the sections that follow.

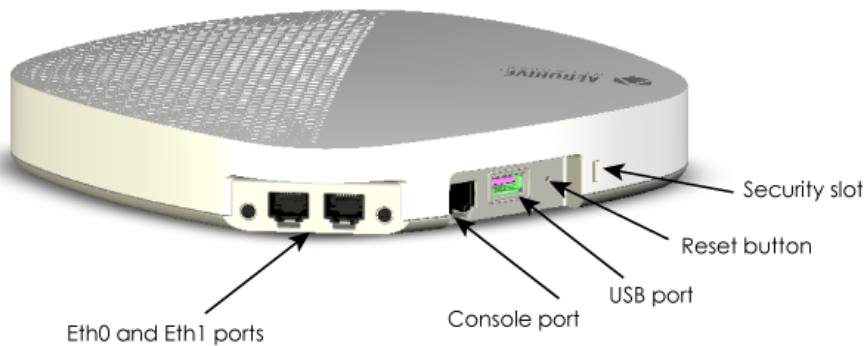

## Component Descriptions

### Status Light

The round status light on the top corner of the device conveys operational states for system power, firmware updates, Ethernet and wireless interface activity, and major alarms. The AP630 has a round status light on the top right corner of the chassis. At setup, this light cycles through the following sequence:

- **Dark:** There is no power to the device.
- **Amber (flashing):** The device is performing a firmware upgrade. Do not power off the device during this process.
- **Amber (steady):** The device has not established a successful CAPWAP connection, or is booting or shutting down.
- **White (steady):** The device has successfully established a CAPWAP connection and is operating normally.

### Ethernet Ports

The AP630 has two RJ45 Ethernet ports (Eth0 and Eth1) that automatically negotiate half- and full-duplex connections with the connecting device. The ports are autosensing and adjust to straight-through and crossover standard Cat2, Cat5, Cat5e, or Cat6 Ethernet cables automatically. The AP receives power through an Ethernet connection to the ETH0 port from PSE (power sourcing equipment) that is compatible with the 802.3at and 802.3at standards.

### Console Port

The AP630 has one RJ45 Console port. Use this port to make a serial connection between your management system and the AP. The management station from which you connect to the device must have a VT100 emulation program, such as Tera Term Pro © (a free terminal emulator) or Hilgraeve HyperTerminal® (provided with Windows® operating systems from XP forward). The serial connection settings are: 9600 bits per second, 8 data bits, no parity, 1 stop bit, no flow control.

### USB Port

The AP630 has a USB port that you can use to connect USB-based beacons (iBeacon, for example) and IoT (Internet of Things) devices. To access the port, remove the screw that secures the protective cover.

### Reset Button

Use the Reset button to reset the device or restore the factory default settings. Insert a paper clip or similar tool into the Reset pinhole and press the button. To reboot the device, press the button for 5 seconds. To return the configuration to the factory default settings, press it for at least 10 seconds. After releasing the button, the indicator light goes dark, and then glows steady amber while the firmware loads and the system performs a self-test. After the software finishes loading and the AP has connected to HiveManager, the status indicator glows steady white. To disable the reset button from resetting the configuration, enter this command:

```
no reset-button reset-config-enable
```

When this command is enabled, pressing the button for 5 seconds will still reboot the AP, but pressing it for more than 10 seconds will not reset its configuration.

## Hardware Specifications

The following sections list radio, device, power, and environmental specifications for the AP630.

### Radio Specifications

#### 802.11a

- 5.150-5.850 GHz operating frequency
- Orthogonal Frequency Division Multiplexing (OFDM) modulation
- Rates (Mbps): 54, 48, 36, 24, 12, 9, 6 with auto fallback

#### 802.11b

- 2.4-2.48 GHz operating frequency
- Direct-Sequence Spread-Spectrum (DSSS) modulation
- Rates (Mbps): 11, 5.5, 2.1 with auto fallback

#### 802.11g

- 2.4-2.48 GHz operating frequency
- Orthogonal Frequency Division Multiplexing (OFDM) modulation
- Rates (Mbps): 54, 48, 36, 24, 12, 9, 6 with auto fallback

#### 802.11n

- 2.4-2.48 and 5.150-5.850 GHz operating frequency
- 802.11n modulation
- Rates: MCS0 - MCS7
- 4x4 MIMO radio
- HT20/HT40 support
- A-MPDU and A-MSDU frame aggregation

#### 802.11ac

- 802.11ac modulation (256-QAM)
- 2.4 - 2.48 GHz MCS0-9, NSS=1-4
- 5.150-5.850 GHz operating frequency
- Rates: MCS0 - MCS9, NSS = 1-4
- 4x4 MIMO radio
- VHT20/VHT40/VHT80 support

#### 802.11ax

- 5.150-5.850 GHz operating frequency
- 802.11ax modulation (1024-QAM)
- Rates: MCS0 - MCS11, NSS = 1-4
- OFDMA support
- 4x4 MU-MIMO
- HE20/HE40/HE80 support

### Transmit Power and Sensitivity Specifications



Output power may be limited by regulatory requirements.

**2.4 G:**

Tolerance +2/-2 dB @25°C

Mode	Data Rate	Power	Unit
11b	1,2,5,5,11	18	dBm
11g	54 Mbps	15	dBm
	48 Mbps	16	dBm
	36 Mbps	17	dBm
	6 Mbps	18	dBm
HE20	MCS0,1,2	18	dBm
	MCS 3	17	dBm
	MCS 4, 5	16	dBm
	MCS 6,7	15	dBm
	MCS 8,9	14	dBm
	MCS 10,11	12	dBm
<b>2.4 G Sensitivity</b>			
11b	1 Mbps	-99	dB
	11 Mbps	-90	dB
11g	6 Mbps	-96	dB
	36 Mbps	-84	dB
	48 Mbps	-80	dB
	54 Mbps	-78	dB
HE20	MCS 0	-95	dB
	MCS 1	-91	dB
	MCS 2	-89	dB
	MCS 3	-86	dB
	MCS 4	-83	dB
	MCS 5	-79	dB
	MCS 6	-77	dB
	MCS 7	-76	dB
	MCS 8	-72	dB
	MCS 9	-70	dB
	MCS 10	-67	dB
MCS 11	-64	dB	

**5 G:**  
**Tolerance +2/-2 dB @25°C**

Mode	Data Rate	Power	Unit
<b>11a</b>	54 Mbps	18	dBm
	48 Mbps	18	dBm
	36 Mbps	19	dBm
	6 Mbps	20	dBm
<b>HE20</b>	MCS 0,1,2	20	dBm
	MCS 3,4	19	dBm
	MCS 5,6	18	dBm
	MCS 7,8	17	dBm
	MCS 9	16	dBm
	MCS 10	15	dBm
	MCS 11	14	dBm
<b>HE40</b>	MCS 0,1,2	19	dBm
	MCS 3,4,5	18	dBm
	MCS 6,7,8	17	dBm
	MCS 9	16	dBm
	MCS 10	15	dBm
	MCS 11	14	dBm
<b>HE80</b>	MCS 0,1,2	19	dBm
	MCS 3,4,5	18	dBm
	MCS 6,7,8	17	dBm
	MCS 9	16	dBm
	MCS 10	15	dBm
	MCS 11	14	dBm
<b>HE160</b>	MCS 0,1,2	19	dBm
	MCS 3,4,5	18	dBm
	MCS 6,7,8	17	dBm
	MCS 9	16	dBm
	MCS 10	15	dBm
	MCS 11	14	dBm
<b>5 G Sensitivity</b>			
<b>11a</b>	6 Mbps	-94	db
	36 Mbps	-83	db
	48 Mbps	-79	db
	54 Mbps	-77	db
<b>HE20</b>	MCS 0	-94	db
	MCS 1	-91	db
	MCS 2	-88	db
	MCS 3	-86	db



Mode	Data Rate	Power	Unit
	MCS 4	-82	db
	MCS 5	-78	db
	MCS 6	-77	db
	MCS 7	-75	db
	MCS 8	-71	db
	MCS 9	-69	db
	MCS 10	-66	db
	MCS 11	-63	db
<b>HE40</b>	MCS 0	-92	db
	MCS 1	-88	db
	MCS 2	-86	db
	MCS 3	-83	db
	MCS 4	-80	db
	MCS 5	-76	db
	MCS 6	-74	db
	MCS 7	-73	db
	MCS 8	-69	db
	MCS 9	-67	db
	MCS 10	-63	db
	MCS 11	-60	db
<b>HE80</b>	MCS 0	-88	db
	MCS 1	-85	db
	MCS 2	-83	db
	MCS 3	-80	db
	MCS 4	-77	db
	MCS 5	-73	db
	MCS 6	-71	db
	MCS 7	-69	db
	MCS 8	-66	db
	MCS 9	-64	db
	MCS 10	-60	db
	MCS 11	-57	db
<b>HE160</b>	MCS 0	-85	db
	MCS 1	-82	db
	MCS 2	-80	db
	MCS 3	-77	db
	MCS 4	-74	db
	MCS 5	-70	db

Mode	Data Rate	Power	Unit
	MCS 6	-68	dB
	MCS 7	-66	dB
	MCS 8	-63	dB
	MCS 9	-61	dB
	MCS 10	-57	dB
	MCS 11	-54	dB

## Device Specifications

- Chassis dimensions: 8.1" W 8.1" H 1.46" D (205 mm x 205 mm x 37 mm)
- Weight: 0.53 pounds (240 grams)
- Four dual-band internal WiFi antennas and one BLE internal antenna
- Eth0 Ethernet port: autosensing 10/100/1000Base-T/TX Mbps, with 802.3at-compliant PoE
- Eth1 Ethernet port: autosensing 10/100/1000Base-T/TX Mbps

## Power Specifications

- PoE input voltage range: 37-57 V
- Typical PoE power consumption is 22 W
- RJ45 power input pins: Wires 4, 5, 7, 8 or 1, 2, 3, and 6


## Environmental Specifications

- Operating temperature: 32° to 104° F (0° to 40° C)
- Storage temperature: -40° to 185° F (-40° to 85° C)
- Relative Humidity: 5 to 95% RH (noncondensing)

## Regulatory Compliance Statements

The regulatory compliance statements in this section apply to Aerohive AP630 devices.

### Japan Indoor Use

 For Japan, the AP630 is restricted for indoor use in the 5150-5350 MHz band only.

### Japan Equipment VCCI-B Statement

この装置は、クラスB情報技術装置です。この装置は、家庭環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。  
取扱説明書に従って正しい取り扱いをして下さい。 VCCI-B

### Compliance Statement - Europe

#### EU Declaration of Conformity

View this information online at [www.aerohive.com/support/regulatory-compliance](http://www.aerohive.com/support/regulatory-compliance)

Aerohive Networks, Inc. declares that this device complies with the essential requirements of the Radio Equipment Directive 2014/53/EC.

- **Bulgarian [български]:** [Aerohive] С настоящото [Aerohive] декларира, че този тип радиосъоръжение [AP630] е в съответствие с Директива 2014/53/EC.
- **Croatian [hrvatski]:** [Aerohive] ovime izjavljuje da je radijska oprema tipa [AP630] u skladu s Direktivom 2014/53/EU.
- **Czech [Česky]:** [Aerohive] Tímto [jméno výrobce] prohlašuje, že typ rádiového zařízení [AP630] je v souladu se směrnicí 2014/53/EU.

- **Danish [Dansk]:** Hermed erklærer [Aerohive], at radioudstyrstypen [AP630] er i overensstemmelse med direktiv 2014/53/EU.
- **Dutch [Nederland]** Hierbij verklaar ik, [Aerohive], dat het type radioapparatuur [AP630] conform is met Richtlijn 2014/53/EU.
- **English:** Hereby, [Aerohive], declares that this [Atom AP30] is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EC.
- **Estonian [Eesti]:** Käesolevaga deklareerib [Aerohive], et käesolev raadioseadme tüüp [AP630] vastab direktiivi 2014/53/EL nõuetele.
- **Finnish [Suomi]:** [Aerohive] vakuuttaa, että radiolaitetyyppi [AP630] on direktiivin 2014/53/EU mukainen..
- **French [Français]:** Le soussigné, [Aerohive], déclare que l'équipement radioélectrique du type [AP630] est conforme à la directive 2014/53/UE.
- **German [Deutsch]:** Hiermit erklärt [Aerohive], dass der Funkanlagentyp [AP630] der Richtlinie 2014/53/EU entspricht.
- **Greek [Ελληνική]:** ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ [Aerohive] ΔΗΛΩΝΕΙ ΟΤΙ [ AP630] ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 2014/53/EC.
- **Hungarian [Magyar]:** [Aerohive] igazolja, hogy a [AP630] típusú rádióberendezés megfelel a 2014/53/EU irányelvnek.
- **Italian [Italiano]:** Il fabbricante, [Aerohive], dichiara che il tipo di apparecchiatura radio [AP630] è conforme alla direttiva 2014/53/UE.
- **Latvian [Latviski]:** Ar šo [Aerohives] deklarē, ka radioiekārta [AP630] atbilst Direktīvai 2014/53/ES.
- **Lithuanian [Lietuvių]:** Aš, [Aerohive], patvirtinu, kad radijo įrenginių tipas [AP630s] atitinka Direktyvą 2014/53/ES.
- **Maltese [Malti]:** B'dan, [Aerohive], niddikjara li dan it-tip ta' tagħmir tar-radju [AP630] huwa konformi mad-Direttiva 2014/53/UE.
- **Polish [Polski]:** [Aerohive] niniejszym oświadczam, że typ urządzenia radiowego [AP630] jest zgodny z dyrektywą 2014/53/UE.
- **Portuguese [Português]:** O(a) abaixo assinado(a) [Aerohive] declara que o presente tipo de equipamento de rádio [AP630] está em conformidade com a Diretiva 2014/53/UE.
- **Romanian [Romania]:** Prin prezenta, [Aerohive] declară că tipul de echipamente radio [AP630] este în conformitate cu Directiva 2014/53/UE.
- **Slovak [Slovensky]:** [Aerohive] týmto vyhlasuje, že rádiové zariadenie typu [AP630] je v súlade so smernicou 2014/53/EÚ.
- **Slovenian [Slovenija]:** [Aerohive] potrjuje, da je tip radijske opreme [AP630] skladen z Direktivo 2014/53/EU.
- **Spanish [Español]:** Por la presente, [Aerohive] declara que el tipo de equipo radioeléctrico [AP630] es conforme con la Directiva 2014/53/UE.
- **Swedish [Sverige]:** Härmed försäkras [Aerohive] att denna typ av radioutrustning [AP630] överensstämmer med direktiv 2014/53/EU.

## USA and Canada Radio Frequency Bands

### a. USA

- 802.11b/g/n/ac: 2.4 GHz band: 2400-2483 MHz
- 802.11a/n/ac/ax: 5 GHz band: 5150-5250 MHz, 5725-5850 MHz
- BLE: 2402-2480 MHz

### b. Canada

- 802.11b/g/n/ac: 2.4 GHz band: 2400-2483 MHz
- 802.11a/n/ac/ax: 5 GHz band: 5150-5250 MHz, 5725-5850 MHz
- BLE: 2402-2480 MHz

## EU Radio Frequency and Power Levels

This product supports the following radio frequencies and power levels in the EU version:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Bulgarian [Български]:** Този продукт поддържа следните радиочестоти и нива на мощност във версията на ЕС:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Croatian [hrvatski]:** Ovaj proizvod podržava sljedeće radijske frekvencije i razinu snage u verziji EU:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Česky [Czech]:** [Tento produkt podporuje následující rádiové frekvence a úrovně výkonu ve verzi EU:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Danish [Dansk]:** Dette produkt understøtter følgende radiofrekvenser og strømniveauer i EU-versionen:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Dutch [Nederland]:** Dit product ondersteunt de volgende radiofrequenties en vermogensniveaus in de EU-versie:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**English:** This product supports the following radio frequencies and power levels in the EU version:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Estonian [Eesti]:** See toode toetab järgmisi raadiosagedusi ja võimsuse taseme ELis versioon:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Finnish [Suomi]:** Tämä tuote tukee seuraavia radiotaajuuksia ja tehoja EU-versiossa:

- 802.11b/g/n/ac, 2.4 GHz band: 2412-2472 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5720 MHz EIRP<30 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**French [Français]:** Ce produit prend en charge les fréquences radio et les niveaux de puissance suivants dans la version EU:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**German [Deutsch]:** Dieses Produkt unterstützt die folgenden Funkfrequenzen und Leistungsstufen in der EU-Version:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Greek [Ελληνική]** Αυτό το προϊόν υποστηρίζει τις ακόλουθες ραδιοσυχνότητες και επίπεδα ισχύος στην έκδοση της ΕΕ:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Hungarian [Magyar]:** Ez a termék a következő rádiófrekvenciákat és teljesítményszinteket támogatja az EU verziójában :

- 802.11b/g/n/ac, 2.4 GHz band: 2412-2472 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5720 MHz EIRP<30 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Italian [Italiano]:** Questo prodotto supporta le seguenti frequenze radio e livelli di potenza nella versione UE:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Latvian [Latviski]:** Šis produkts atbalsta šādus radio frekvences un jaudas līmeni ES versiju:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Lithuanian [Lietuvių]:** Šis produktas palaiko šiuos radijo dažnius ir galios lygį ES versija:

- 802.11b/g/n/ac, 2.4 GHz band: 2412-2472 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5720 MHz EIRP<30 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Maltese [Malti]:** Dan il-prodott jappoġġja l-frekwenzi tar-radju li ġejjin u l-livelli ta 'enerġija fil-verżjoni UE:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Polish [Polski]:** Ten produkt obsługuje następujące częstotliwości radiowe i poziomy mocy w wersji unijnej:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Portuguese [Português]:** Este produto suporta as seguintes frequências de rádio e níveis de potência na versão UE:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Romanian [Romania]:** This product supports the following radio frequencies and power levels in the EU version

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Slovak [Slovensky]:** Tento produkt podporuje nasledujúce rádiové frekvencie a úrovne napájania vo verzii EÚ:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Slovenian [Slovenija]:** Ta izdelek podpira te radijske frekvence in ravni moči v različici EU:

- 802.11b/g/n/ac, 2.4 GHz band: 2412-2472 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5720 MHz EIRP<30 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Spanish [Español]:** Este producto admite las siguientes frecuencias de radio y niveles de potencia en la versión de la UE:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**Swedish [Sverige]:** Denna produkt stöder följande radiofrekvenser och effektnivåer i EU-versionen:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5725 MHz EIRP<30 dBm, 5725-5850 MHz<14 dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

**UK:** This product supports the following radio frequencies and power levels in the EU version:

- 802.11b/g/n/ac, 2.4 GHz band: 2400-2483.5 MHz EIRP<20 dBm
- 802.11a/ac/n/ax: 5 GHz band: 5150-5350 MHz EIRP<23 dBm, 5500-5730 MHz EIRP<30 dBm, 5730-5850 MHz<23dBm
- BLE: 2402-2480 MHz EIRP<10 dBm

## EU Radiation Warning Statement



AT	BE	BG	CH	CY	CZ	DE	DK	EE	EL	ES
FI	FR	HR	HU	IE	IS	IT	LI	LT	LU	LV
MT	NL	NO	PL	PT	RO	SE	SI	SK	TR	UK

To meet radiation exposure requirements, these devices should be installed at a minimum distance of 11" (28 cm) from people or animals.  
Restrictions: 5150-5250 MHz for indoor use only.

**Bulgarian [Български]:** За да отговарят на изискванията за излагане на радиация, тези устройства трябва да бъдат инсталирани на минимално разстояние от 28 см от хората или животните.

Ограничения: 5150-5250 MHz само за вътрешна употреба.

**Croatian [Hrvatski]:** Da bi zadovoljili zahtjeve izloženosti zračenju, ti uređaji trebaju biti instalirani na minimalnoj udaljenosti od 28 cm od ljudi ili životinja.

Ograničenja: 5150-5250 MHz samo za unutarnju uporabu.

**Czech [Česky]:** Aby byly splněny požadavky na ozáření, měly by být tato zařízení instalována v minimální vzdálenosti 28 cm od lidí nebo zvířat.  
Omezení: 5150-5250 MHz pouze pro vnitřní použití.

**Danish [Dansk]:** For at opfylde kravene til strålingseksposering skal disse enheder installeres i mindst 11" (28 cm) afstand fra mennesker eller dyr.  
Restriktioner: 5150-5250 MHz kun til indendørs brug.

**Dutch [Nederland]:** Om aan stralingsblootstelling te voldoen, dienen deze apparaten op een minimumafstand van 11" (28 cm) van mensen of dieren te worden geïnstalleerd.

Beperkingen: 5150-5250 MHz alleen voor gebruik binnenshuis.

**English:** To meet radiation exposure requirements, these devices should be installed at a minimum distance of 11" (28 cm) from people or animals.  
Restrictions: 5150-5250 MHz for indoor use only.

**Estonian [Eesti]:** Et rahuldada kiirituse nõuetele, need seadmed tuleb paigaldada minimaalselt 11" (28 cm) inimestelt või loomadelt.

Piirangud: 5150-5250 MHz sisetingsimustele.

**Finnish [Suomi]:** Säteiläytysvaatimusten täyttämiseksi nämä laitteet on asennettava vähintään 11" (28 cm) etäisyydelle ihmisistä tai eläimistä.  
Rajoitukset: 5150-5250 MHz vain sisäkäyttöön.

**French [Français]:** Pour répondre aux exigences d'exposition aux rayonnements, ces appareils devraient être installés à une distance minimale de 11" (28 cm) des personnes ou des animaux.

Restrictions: 5150-5250 MHz pour usage intérieur seulement.

**German [Deutsch]:** Um die Anforderungen an die Strahlenbelastung zu erfüllen, sollten diese Geräte in einem Abstand von 11" (28 cm) von Personen oder Tieren installiert werden.

Einschränkungen: 5150-5250 MHz nur für den Innenbereich.

**Greek [Ελληνική]:** Για την κάλυψη των απαιτήσεων έκθεσης σε ακτινοβολία, οι συσκευές αυτές πρέπει να τοποθετούνται σε απόσταση τουλάχιστον 28 cm από ανθρώπους ή ζώα.

Περιορισμοί: 5150-5250 MHz μόνο για εσωτερική χρήση.

**Hungarian [Magyar]:** A sugárterhelési követelmények teljesítése érdekében ezeket az eszközöket legalább 11" (28 cm) távolságra kell felszerelni az emberek vagy az állatoktól.

Korlátozások: 5150-5250 MHz csak beltéri használatra.

**Italian [Italiano]:** Per soddisfare i requisiti di esposizione alle radiazioni, questi dispositivi devono essere installati ad una distanza minima di 28 cm da persone o animali.

Restrizioni: 5150-5250 MHz solo per uso interno.

**Latvian [Latviski]:** Lai apmierinātu starojuma iedarbības prasībām, šīs ierīces ir uzstādītas pie minimālo attālumu 11" (28 cm) no cilvēkiem vai dzīvniekiem.

Ierobežojumi: 5150-5250 MHz izmantot tikai telpās.

**Lithuanian [Lietuvių]:** Siekiant patenkinti SPINDULIAVIMĄ reikalavimus, šie įtaisai turi būti įrengiami ne arčiau kaip 11" (28 cm) nuo žmonių ar gyvūnų.  
Apribojimai: 5150-5250 MHz naudoti tik patalpose.

**Maltese [Malti]:** Biex jilħqu l-ħtiġiet ta' espożizzjoni tar-radjazzjoni, dawn il-mezzi għandhom jiġu installati f'distanza minima ta' 11" (28 cm) minn nies jew annimali.

Restrizzjonijiet: MHz 5150-5250 għall-użu fuq ġewwa biss.

**Polish [Polski]:** Aby spełnić wymagania dotyczące narażenia na promieniowanie, urządzenia te powinny być instalowane w odległości minimum 11" (28 cm) od ludzi lub zwierząt.

Ograniczenia: 5150-5250 MHz tylko do użytku wewnątrz.

**Portuguese [Português]:** Para atender aos requisitos de exposição à radiação, esses dispositivos devem ser instalados a uma distância mínima de 28 cm (11") de pessoas ou animais.

Restrições: 5150-5250 MHz para uso interno apenas.

**Romanian [Romania]:** Pentru a îndeplini cerințele de expunere la radiații, aceste dispozitive ar trebui instalate la o distanță minimă de 28 cm de la oameni sau animale.

Restricții: 5150-5250 MHz numai pentru uz intern.

**Slovak [Slovensky]:** Ak chcete splniť požiadavky na vystavenie žiareniu, mali by byť tieto zariadenia inštalované v minimálnej vzdialenosti od ľudí alebo zvierat od minimálnej vzdialenosti 28 cm.

Obmedzenia: 5150-5250 MHz iba pre vnútorné použitie.

**Slovenian [Slovenija]:** Da bi zadovoljili zahteve izpostavljenosti sevanja, morajo biti te naprave nameščene na razdalji najmanj 11" (28 cm) iz ljudi ali živali.

Omejitve: 5150-5250 MHz samo za uporabo v zaprtih prostorih.

**Spanish [Español]:** Para cumplir con los requisitos de exposición a la radiación, estos dispositivos deben instalarse a una distancia mínima de 11" (28 cm) de personas o animales.

Restricciones: 5150-5250 MHz sólo para uso en interiores.

**Swedish [Sverige]:** För att uppfylla kraven på strålningsexponering bör dessa enheter installeras på minst 11" (28 cm) från människor eller djur.

Restriktioner: 5150-5250 MHz endast för inomhusbruk.

## Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the antenna of the receiving devices.
- Increase the separation between this equipment and receiving equipment.
- Connect this equipment into an outlet on a circuit different from that to which the receiving equipment is connected.
- Consult the dealer or an experienced radio or TV technician for help.

**FCC Caution:** Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### IMPORTANT NOTE:

#### Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 11" (28 cm) between the radiator and people or animals.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Country Code selection feature to be disabled for products marketed to the US/CANADA.

## Brazil Statement

Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados.

## Mexico Statement

La operación de este equipo está sujeta a las siguientes dos condiciones

(1) es posible que este equipo o dispositivo no cause interferencia perjudicial y

(2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

The operation of this equipment is subject to the following two conditions:

(1) it is possible that this equipment or device does not cause disruptive interference and

(2) this equipment or device must accept any interference, including interference that may cause undesired operation).

## Industry Canada Statement:

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- This device may not cause interference, and
- This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- l'appareil ne doit pas produire de brouillage, et
- l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

**Caution:**

(i) the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;

**Avertissement:**

(i) les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;

**Dynamic Frequency Selection (DFS):**

Dynamic Frequency Selection (DFS) for devices operating in the bands 5250- 5350 MHz, 5470-5600 MHz and 5650-5725 MHz.

**Sélection dynamique de fréquences (DFS):**

Sélection dynamique de fréquences (DFS) pour les dispositifs fonctionnant dans les bandes 5250-5350 MHz, 5470-5600 MHz et 5650-5725 MHz.

**Radiation Exposure Statement:**

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 28 cm between the radiator and people or animals.

**Déclaration d'exposition aux radiations:**

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 28 cm de distance entre la source de rayonnement et des personnes ou des animaux.

## Taiwan Compliance Information

**AerohiveAP630**

第十二條→經型式認證合格之低功率射頻電機，非經許可，公司，商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。  
第十四條→低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。  
前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

在 5.25-5.35 兆赫頻帶內操作之無線資訊傳輸設備，限於室內使用。  
無線資訊傳輸設備的製造廠商應確保頻率穩定性，如依製造廠商使用手冊上所述正常操作，發射的信號應維持於操作頻帶中。

### Taiwan MPE Warning

電磁波曝露量MPE標準值(MPE) 1mW/cm<sup>2</sup>，送測產品實值為0.734 mW/cm<sup>2</sup>