

**EXHIBIT 7**

**USER'S MANUAL OF EUT**


# 51/71/72/79 SERIES KEYBOARD USER'S GUIDE

Features: The keyboards are fully compatible with IBM AT and PS/2.

## KEYBOARD CABLE CONNECTOR


### AT Compatible Cable (5-pin Din Connector)

Pin#	Signal Name	Voltage
1	Keyboard Clock	+5VDC Signal
2	Ground	0
3	Keyboard Data	+5VDC Signal
4	Power Supply	+5VDC
5	No Connection	

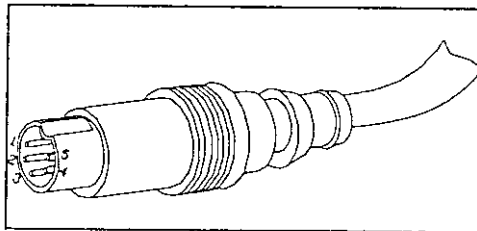

### PS/2 Compatible Cable (6-pin Miniatures Din Connector)

Pin#	Signal Name	Voltage
1	Keyboard Clock	+5VDC Signal
2	Ground	0
3	Keyboard Data	+5VDC Signal
4	Reserved	0
5	+5VDC	+5VDC
6	Reserved	0

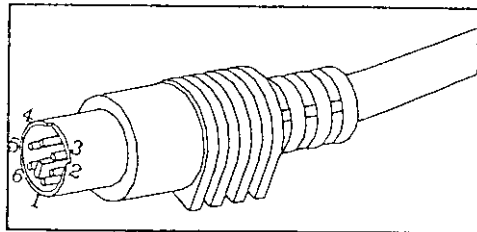

## TECHNICAL DATA

### POWER REQUIREMENT

+5 VDC @170 mA nominal

### ENVIRONMENTAL DATA

Operating temperature : 0°C to 55°C  
Relative humidity : 20% to 95% non-condensing  
Altitude : -1000 ft. to 10000 ft.

IBM AT and PS/2 are registered trademarks of International Business Machines Corporation.

## MECHANICAL DATA

Total Travel	: 3.5 +/- 0.5 mm
Pretravel	: 1.0 +/- 0.5 mm
Operating Life (normal key)	: 20 million cycles min. per key
Peak Load before Make (normal key)	: 60 +/- 20 grams

## FEDERAL COMMUNICATION COMMISSION GUIDELINES

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use only shielded cables to connect I/O devices to this equipment.

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.