

EXHIBIT 6.

USER'S MANUAL

The MDR-8000 series Microwave Digital Radios (see Figure) consists of:

- Solid-state, licensed, digital radios that provide transport for DS1 and E1 in 1.85, 2, 6, 7, 8, 10, and 11 GHz RF bands, DS3 in 2, 6, 7, 8, and 11 GHz RF bands, and OC3 in 6, 7, 8, and 11 GHz RF bands
- Solid-state, unlicensed digital radios that provide transport for DS1 and DS3 in the 5 GHz RF frequency band.

The following capacities and modulation schemes are available:

- MDR-8000 – 2, 4, 8, 12, or 16 North American Standard DS1 channels at either 32 or 128 TCM or 1, 2, or 3 North American Standard DS3 channels with 1, 2, or 3 wayside DS1 channels at 64 QAM
- MDR-8000i – 2, 4, 8, 12, or 16 CCITT E1 channels at either 32 or 128 TCM
- MDR-8000u – 2, 4, 8, or 16 North American Standard DS1 channels at 32 TCM.

SHELF CONFIGURATIONS

The MDR-8000 is available in two shelf configurations: hot-standby and CommPak.

HOT STANDBY SHELF

The MDR-8000 hot-standby shelf is wired hot-standby and can be configured non-standby, where only the A-side is populated, or hot-standby, where both the A- and the B-sides are populated. The hot-standby shelf fits into a standard 19 in. (483 mm) rack and occupies seven vertical rack increments. Up to four fully equipped hot-standby radios can be mounted in a standard 7 ft. rack. The radio is front accessible and can be mounted against a wall or back-to-back against other equipment.

COMMPAK RADIO

The MDR-8000 CommPak radio is available as a full indoor shelf or outdoor unit in a cabinet.

COMMPAK INDOOR SHELF

The CommPak indoor shelf is wired and configured non-standby only. The indoor shelf fits into a standard 19 in. (483 mm) rack and occupies four vertical rack increments (7 in.). The radio is front accessible and can be mounted against a wall or back-to-back against other equipment.

COMMPAK OUTDOOR UNIT

The MDR-8000 outdoor unit consists of the CommPak indoor shelf mounted vertically in a 20 in. high x 7.5 in. wide x 12.5 in. deep enclosure.

STANDARD FEATURES

Standard features include:

- Frequency bands from 1.85 to 11 GHz
- Committee of European Post and Telegraph (CEPT)/Federal Communications Commission (FCC) applications
- DS1, E1, DS3, and OC3 Traffic capacities
- International Telecommunications Union (ITU)/ETSI/FCC compliant
- Five configuration options
- Upstream management compatibility.
- User-friendly Personal Computer (PC) monitor and control
- Automatic Transmitter Power Control (ATPC)
- Adaptive Time Domain Equalization (TDE)
- Extended Link Monitor Channel (ELMC)
- MCS-11/Telemetry Byte Oriented Serial (TBOS) Alarm/Control Interface
- Two independent PCM audio channels

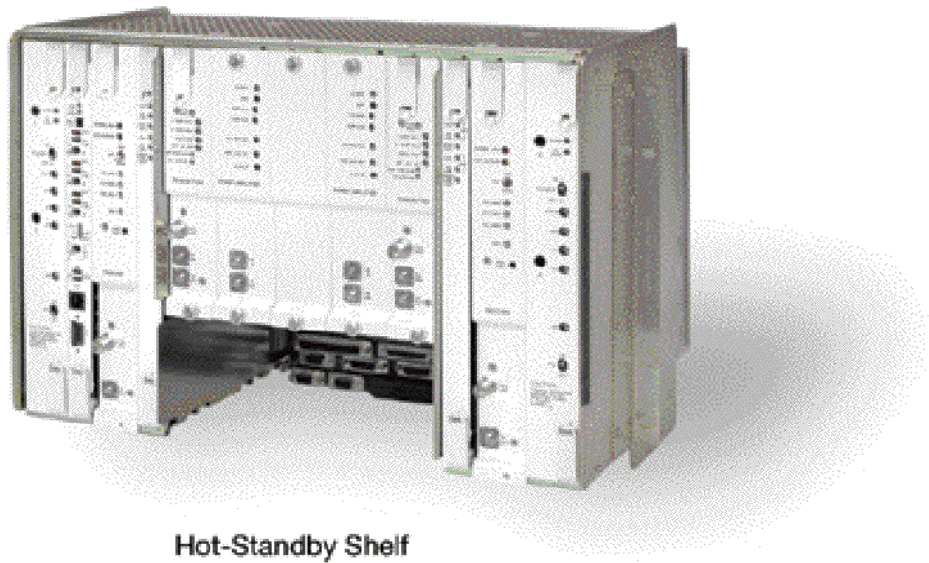


Figure 1 Typical MDR-8000 Series Microwave Digital Radio

Table Physical, Environmental, and Electrical Characteristics

| ITEM | | CHARACTERISTICS | |
|-----------------------------------|---|--|-----------------------|
| PHYSICAL CHARACTERISTICS | | | |
| Dimensions | WIDTH | DEPTH | HEIGHT |
| Hot-Standby Shelf | 483 mm (19 in.) | 406.4 mm (16.25 in.) | 311.15 mm (12.25 in.) |
| CommPak Indoor Shelf | 483 mm (19 in.) | 406.4 mm (16.25 in.) | 177.8 mm (7.0 in.) |
| Weight | (Hot-Standby Terminal) 38.6 kg (85 lbs) | | |
| ENVIRONMENTAL CHARACTERISTICS | | | |
| Ambient Temperature | | | |
| Spec Compliant | | 32° to 122°F (0° to 50°C) | |
| Operating Without Failure | | - 4° to 158°F (- 20° to 70°C) | |
| Nonoperating | | - 40° to 176°F (- 40° to 80°C) | |
| Altitude | | | |
| Operating | | -350 to 16500 ft (-100 to 5000 m) | |
| Nonoperating | | -350 to 40000 ft (-100 to 12000 m) | |
| Relative Humidity | | 5 to 95 percent (without condensation) | |
| Vibration and Shock | | Normal Storage and Handling | |
| Duty Cycle | | Continuous, unattended | |
| COMMON ELECTRICAL CHARACTERISTICS | | | |
| Primary Input Voltage | | ±20.5 to ±60.0 Vdc | |
| RF CHANNEL FREQUENCY (MHZ) | | | |
| MDR-8X02/i-X | | 1850-2285 | |
| MDR-8X05u-X | | 5725-5850 | |
| MDR-8X06/i/s-X | | 5850-7125 | |
| MDR-8X07/i/s-X | | 7125-7750 | |
| MDR-8X08/i/s-X | | 7700-8500 | |
| MDR-8X10/i/s-X | | 10440-10680 | |
| MDR-8X11/i/s-X | | 10700-11700 | |
| XMT OUTPUT POWER (DBM, NOMINAL) | | XMTR (NO PA) | OPTIONAL PA INSTALLED |
| MDR-8X02/i-X | | +14 | +30 or +33 |
| MDR-8505u-X | | +15 | +25 or +30 |
| MDR-8605u-X | | +14 | +23 or +29 |
| MDR-8X06/i/s-X | | +14 | +23 or +29 or +31 |
| MDR-8X07/i/s-X | | +14 | or +33 |

| | | |
|----------------|-----|-------------------|
| MDR-8X08/i/s-X | +14 | +28 or +30 |
| MDR-8X10/i/s-X | +15 | +28 or +30 or +32 |
| MDR-8X11/i/s-X | +15 | +23 or +27 or +29 |
| | | +23 or +27 or +29 |

Note: XMT Power Referenced at the SMA output of the diplexer filter or the top of the stack for waveguide stacking configurations.

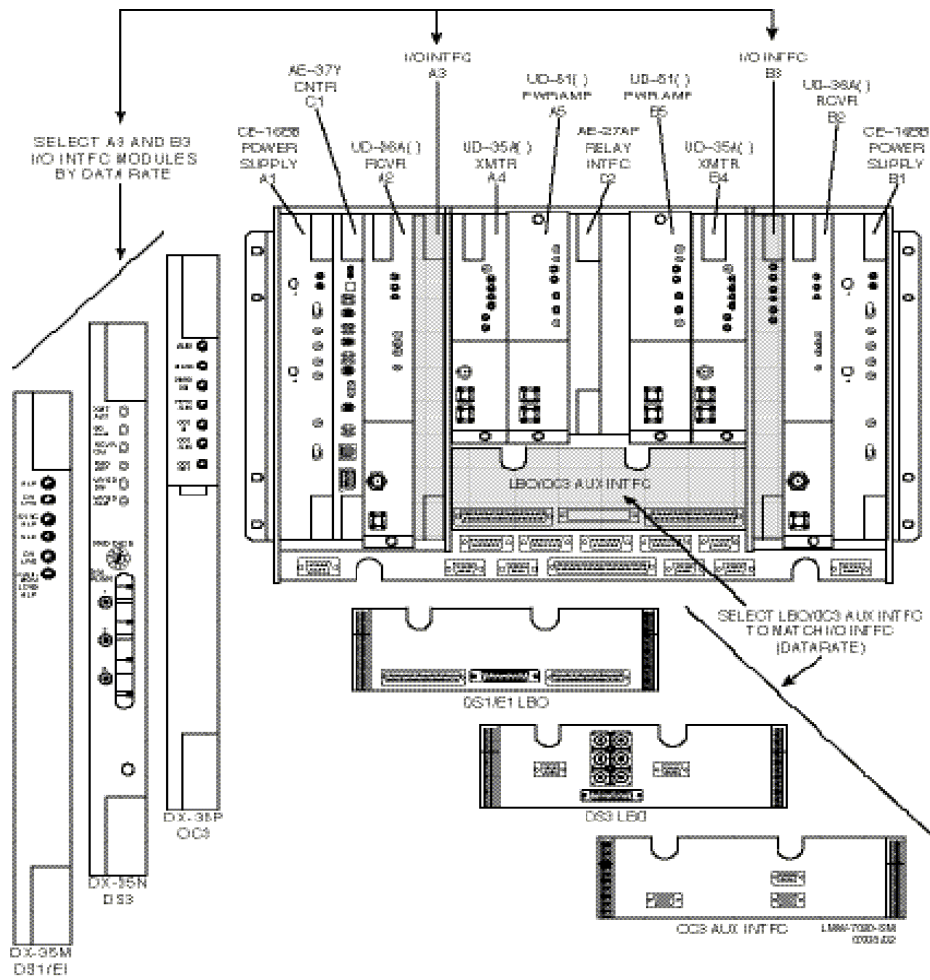


Figure 1. Typical MDR-8000 Hot-Standby Shelf Component