


LiftMaster®

Commercial Door Operators

Frequency Translator Model CPRPT Owner's Manual

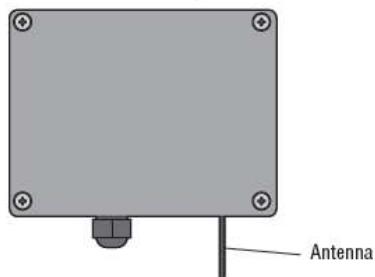

The Frequency Translator is for applications with 390MHz receivers. The Frequency Translator receives a radio signal from a 390MHz remote control and transmits a 315MHz signal so you can operate your Passport receiver.

Package Includes

- (1) Passport Translator
- (1) 12 Volt DC 2.0 Amp Plug-in Power Supply
- (2) Compression Fittings

Installation



- 1: Remove Translator cover (4 screws)
- 2: Loosen strain relief nut and insert power cable
- 3: Connect power cable to Translator power conductors using supplied compression fittings
- 4: Mount the Translator unit
 - ~ Orient Translator upright (Antenna Down)
 - ~ Orient Antenna straight down

(Note: Please keep Translator at least 0.5" away from all metal surfaces to maximize radio range)

- 5: Supply power to the Translator
- 6: Press the send button on any 390MHz Passport transmitter device and confirm blinking LED
- 7: Replace Translator cover

WARNING

To prevent possible **SERIOUS INJURY** or **DEATH** from a moving gate or garage door:

- ALWAYS keep remote controls out of reach of children. NEVER permit children to operate, or play with remote control transmitters.
- Activate gate or door ONLY when it can be seen clearly, is properly adjusted, and there are no obstructions to door travel.
- ALWAYS keep gate or garage door in sight until completely closed. NEVER permit anyone to cross path of moving gate or door.

Troubleshooting

If the Passport receiver does not activate, confirm that the Receiver/Transmitter indicator light blinks 4 times when pressing the 390 MHz remote button.

Ensure the unit is wired properly.

NOTICE: To comply with FCC and or Industry Canada (IC) rules, adjustment or modifications of this receiver and/or transmitter are prohibited, except for changing the code setting or replacing the battery. THERE ARE NO OTHER USER SERVICEABLE PARTS.
Tested to Comply with FCC Standards FOR HOME OR OFFICE USE. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Accessories

Passport Transmitters:

| | |
|---------|---|
| CPT1 | 390MHz 1-Button Visor |
| CPT2 | 390MHz 2-Button Visor |
| CPT3 | 390MHz 3-Button Visor |
| CPT4 | 390MHz 4-Button Visor |
| CPTK1 | 390MHz 1-Button Keychain |
| CPTK1PH | 390MHz 1-Button Keychain w/Proximity Chip |
| CPTK3 | 390MHz 3-Button Keychain |
| CPTK3PH | 390MHz 3-Button Keychain w/Proximity Chip |

Passport Receivers:

| | |
|-------|-------------------------|
| CPWR3 | 315MHz Wiegand Receiver |
|-------|-------------------------|

Rating: 12Vdc, 40mA

For service dial our toll free number:
1-800-528-2817