


# AW55-50SN, AW55-51SN, AF23/33, RE5F22A ZIP KIT®

PART NUMBER AW55-50SN-ZIP

**QUICK GUIDE** 

Parts are labeled here in order of installation. See other side of sheet for details on Zip Kit contents.

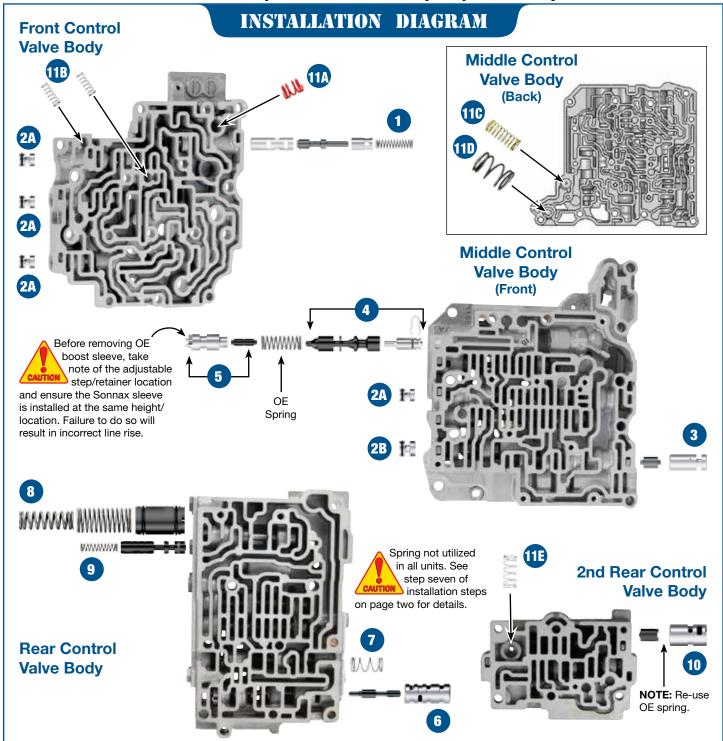

In addition to general rebuilding tips and technical information, the technical booklet included in this kit contains vacuum testing and additional repair options for higher mileage units or for repairing specific complaints which are beyond the scope of this kit.

©2016 Sonnax Industries, Inc.

AW55-50SN-ZIP-Guide 11-22-16



#### **Zip Kit Contents & Installation Steps**

# Step 1 Replace OE Solenoid Modulator Line-up

**NOTE:** Remove all OE bore components. Discard all except OE end plug and retainer which will be reused.

Install Sonnax solenoid modulator valve assembly with open end outboard, followed by the spacer sleeve also with orificed end outboard. Install Sonnax spring. Reinstall OE end plug and retainer.

#### **Packaging Pocket 1**

• Valve • Valve Sleeve • Spacer Sleeve • Spring

# **Step 2** Replace **OE End Plugs**

Place O-rings into shallow grooves on end plugs. Lubricate with Sonnax slippery stick O-LUBE. Roll on bench to size. Install end plugs with the O-ring end outboard.

#### Packaging Pocket 2

**2A.** • End Plugs, Small (4) • O-Rings, Small (6) 2 extra

**2B.** • End Plugs, Large • O-Rings, Large (2) 1 extra

# Step 3 Replace OE Solenoid Relay Assembly

#### **Packaging Pocket 3**

• Valve • Sleeve

# Step 4 Replace OE Pressure Regulator Valve

**CAUTION:** Before removing OE boost sleeve, take note of the adjustable step/retainer location and ensure the Sonnax sleeve is installed at the same height/location. Failure to do so will result in incorrect line rise.

**NOTE:** Remove all OE bore components. Discard all except OE spring and retainer to use in Step 5.

Place O-ring into single, deep and narrow groove on balance pin. Lubricate with Sonnax slippery stick O-LUBE. Roll on bench to size. Install balance pin into pressure regulator valve, then install assembly into bore. Retain balance pin in the bottom of the bore with retaining clip. Make sure clip fits in groove securely. Due to casting variations, filing a small amount of material from the inboard face of the balance pin may be required. Remove only enough material to securely install the clip. For vacuum testing of the Sonnax valve, only the inboard (balance) and outboard/spring (SLT) locations need to be checked.

#### Packaging Pocket 4

Components are Patent Pending

• PR Valve • Balance Pin • O-Rings (2) 1 extra • Retaining Clip

# **Step 5 Replace OE Boost Valve Assy**

Place OE spring over open end of boost sleeve. Install spring end first and retain in bore with OE retainer. Make sure to install the Sonnax sleeve at the same height/location as the OE sleeve.

#### **Packaging Pocket 5**

Valve
 Sleeve

# Step 6 Replace OE Lockup Relay Control Valve

#### **Packaging Pocket 6**

Valve
 Sleeve

# Step 7 Replace OE B5 Control Valve Spring

CAUTION: This spring is used in "B" or "C" valve body castings only (Figures 1 and 4 of Installation and Testing booklet show I.D. location). If your B5 control valve did not originally use a spring ("A" casting or no letter), DO NOT install Sonnax spring.

If an "A" or no-letter casting core is to be used in a vehicle that originally contained a "B" or "C" casting, spring must be installed. Position spring on inboard end of valve.

#### **Packaging Pocket 7**

Spring

# Step 8 Replace OE Line Pressure Accumulator Piston & Springs

Place O-rings into shallow grooves on pistons. Lubricate with Sonnax slippery stick O-LUBE. Roll on bench to size. Install piston with open end facing outboard. Then install large spring followed by small spring.

#### **Packaging Pocket 8**

- Accumulator Piston O-Rings (3) 1 extra Spring, Large
- Spring, Small

# Step 9 Replace OE Secondary Regulator Valve & Spring

Place scarf-cut seal into shallow groove on valve. Rolling the seal into a smaller diameter before placing the seal in the groove will help to keep the seal surface below the valve diameter, allowing for easier installation. Install valve into bore, seal end first, followed by the spring.

**NOTE:** Due to the design changes on the Sonnax valve, vacuum testing at the two inboard ports is not a valid sealing test. The Sonnax valve requires balance fluid to travel through the valve and push the seal outward to conform to the worn bore.

#### **Packaging Pocket 9**

• Valve • Seals (2) 1 extra • Spring

# Step 10 Replace OE Lockup Control Valve Assembly

#### Packaging Pocket 10

• Valve • Sleeve

NOTE: Re-use OE spring.

## Step 1 Replace OE Springs

#### Packaging Pocket 11

11A. Line Relief Spring, Red

**11B.** B4 Release & Reverse Inhibit Small Springs (2), No color **NOTE**: These are not used in all castings.

**11C.** TCC Check Valve Spring, Yellow

11D. Cooler Bypass Spring, Large, No color

**11E.** TCC Check Valve Spring, White


AW55-50SN-ZIP-Guide 11-22-16



## AW55-50SN, AW55-51SN, AF23/33, RE5F22A ZIP KIT®

#### PART NUMBER AW55-50SN-ZIP

#### **INSTALLATION & TESTING BOOKLET**

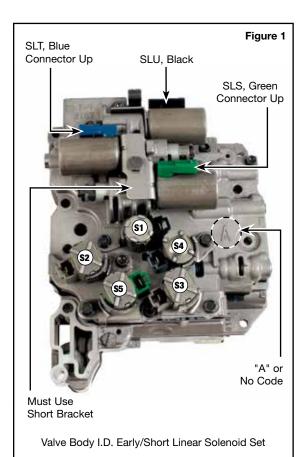

**IMPORTANT NOTE:** The AW55-50SN/51SN, AF23/33, RE5F22A transmission is used in GM, Volvo, Saturn, Saab, Opel and Renault vehicles. What is a normal operating condition for one vehicle may not be for another due to the differences in operating modes and shift strategies used by the various manufacturers. The OE specifications given in this booklet are for GM units. Check OE information specific for your application during rebuild.

## **Electronic Cautions**

#### Reflashing

The TCM (transmission control module) has memorized values that aid in shift control. Most of the manufacturers have upgrades for this application. Check OE bulletins and with your local dealers to ensure the latest updates have been performed for your application.

#### **Shift Adaptations**

This transmission uses adaptive strategy to adjust the various shift feels. After valve body work, these shift adaptations must be cleared and relearned or shift feel complaints and reduced transmission life can occur. The different manufacturers use different relearn procedures. Check OE specifications to ensure proper relearn for your application.

#### **Solenoids**

This unit uses 3 linear solenoids (SLU, SLT and SLS) calibrated to the valve body that are critical to shift feel (**Figure 1**). These solenoids overlap electronically and hydraulically which makes diagnosis difficult. Additional technical and rebuild/ replace information is included on pages 2-4. This transmission also uses 5 on/off style solenoids used to control the position of the shift valves. All solenoids should be cleaned to remove debris that results in sticking and malfunction.

#### **Apply Component Chart**

Figure 2

																•
Range	Gear	SOL S1	SOL S2	SOL S3	SOL S4	SOL S5	Second Clutch (B2)	Coast Clutch (B1)	Second Sprag (F1)	Low Sprag (F2)	Low/Rev Clutch (B3)	FWD Clutch (C1)	Direct Clutch (C2)	4-5 Clutch (C3)	3rd Band (B4)	1-2/Rev Clutch (B5)
Park	Р	Off	Off	Off	Off	Off										Applied
Reverse	R	Off*	Off	On*	Off	On*					Applied		Applied			Applied
Neutral	N	Off	Off	Off	Off	Off										Applied
	1	On	Off	On	Off	Off				Hold		Applied				Applied
	2	Off	On	On	Off	Off	Applied	Applied	Hold			Applied				Applied
Б.	3	Off	On	On	On	Off	Applied	Applied	Hold			Applied			Applied	
Drive	4	Off	On	Off	On	Off	Applied	Applied	Hold			Applied		Applied		
	5	Off	Off	Off	On	Off	Applied					Applied	Applied	Applied		
	Limp	Off	Off	Off	Off	Off	Applied					Applied	Applied	Applied		
	1	On	Off	On	Off	Off				Hold		Applied				Applied
Interm	2	Off	On	On	Off	Off	Applied	Applied	Hold			Applied				Applied
	3	Off	On	On	On	Off	Applied	Applied	Hold			Applied			Applied	
	1 E/B	On	Off	On	Off	On				Hold	Applied	Applied				Applied
Low	2	Off	On	On	Off	Off	Applied	Applied	Hold			Applied				Applied

<sup>\*</sup> If vehicle speed is above 7 km/h (4 mph), the TCM commands the shift solenoids to inhibit reverse



## **Solenoids**

#### **On/Off Shift Solenoids**

The chart provides resistances for checking solenoids, function to aid in diagnosis, and connector and wire color to ensure proper assembly.

#### Linear (SLU, SLS, SLT) Solenoids

Handle these solenoids with care. Inadvertent turning of the adjuster at the end of the solenoid will affect pressure control and cause shift complaints. It is also common for these solenoids to crack at the casting neck flange area or connectors due to rough shipping and handling. Examine the solenoids first to ensure they are not cracked or otherwise damaged and are free of debris.

# Linear Solenoid Installation

The length of the SLT and SLS solenoid snouts have changed, as well as the retaining bracket and installation orientation of the connectors. The SLU reamains the same for all valve bodies. Proper matching of parts and correct installation is necessary to avoid shift complaints (**Figures 1, 3–7**).

#### No Code & A Code Castings


SLT and SLS: Connector faces up (away from 5 on/off solenoid) when properly installed (**Figure 1**).


- If short SLS and SLT solenoids (1.408" w/hole) are used, an early style bracket must be used (**Figures 5 & 6**).
- If long SLS and SLT solenoids (1.510" w/slot) are used, a late style bracket must be used (**Figures 5 & 6**).

#### **B & C Code Castings**

SLT & SLS: Connector faces down (toward the 5 on/off solenoid) when properly installed (Figure 4).

- Must use long solenoid (1.510" w/slot) (Figure 6)
- Must use late bracket (Figure 5)







#### **Solenoid Apply Chart**

Figure 3

Solenoid	Connector	Wire Color (s)	Flow	Resistance	Function
SLU Black		Green/Brown	N.C.	5.0 - 5.6 ohms at 68"	TCC apply, reverse 1-2, 2-3 up/down shift
SLT Blue		Green/Gray	N.O.	5.0 - 5.6 ohms at 68"	Line rise, engagements, converter pressure
SLS	Green	Blue/Red	N.O.	5.0 - 5.6 ohms at 68"	Clutch pressure, shift quality
S1	Black	White	N.O.	13.5 - 15.5 ohms at 68"	1st, 1-2 shift, reverse
S2	Black/Gray	Black	N.O GM N.C Volvo	13.5 - 15.5 ohms at 68"	2nd, 3rd, 4-5 shift
S3	Gray	Yellow	N.C.	13.5 - 15.5 ohms at 68"	Reverse, 3-4 shift fwd engagement
S4	Blue/Green	Purple/Red	N.O.	13.5 - 15.5 ohms at 68"	3, 4, 5, 2-3 shift
S5 Green/Red/ Gray		Blue/Black - '02 Volvo	N.C.	13.5 - 15.5 ohms at 68"	Reverse engagement

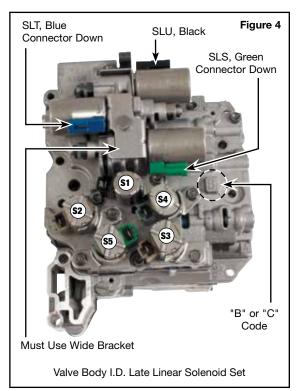



11-22-16 AW55-50SN-ZIP-Booklet



#### **Linear Solenoid Strategy**

#### Figure 8

Gear	SLU	SLT	SLS
Park/Drive		Х	
Park/Reverse		Х	Х
1-2, 2-1	Χ		
2-3	Х	Х	
3-2	Х		Х
3-4, 4-3	TC		Х
4-5, 5-4	TC		Х
TCC	Х		
All Up & Downshifts		Х	Х

**Key:** X = Greatest effect of this solenoid on shift indicated.

**Solenoid Adjustments** 

#### ,

Solenoid		Adjust Inward (CW)	Adjust Outward (CCW)		
		Increase SLT pressure if:	Decrease SLT pressure if:		
	SLT Line Rise Solenoid Blue Connector	<ul><li>Neutral-to-Drive delay</li><li>Long shifts</li><li>Low cooler flow</li></ul>	Long 2-3 shift due to clutch overlap (2-3 Bind-up)     3-2 Coastdown bump     Harsh forward engagement     Harsh TCC apply     Loss of lube or cooler flow		
	SLS Shift Pressure Solenoid Green Connector	<ul> <li>Increase SLS pressure if:</li> <li>Soft upshifts</li> <li>Low speed 2-3 flare</li> <li>Slight RPM flare on 3-4, 4-5 shifts</li> </ul>	Decrease SLS pressure if:  Harsh reverse Harsh 1-2 shift Harsh 2-3 shift with end bump Loss of TCC apply High C1 clutch pressure 3-2 Shift flare/bang		
	SLU  Lockup Solenoid  Black Connector	Decrease SLU pressure if:  Soft shifts Early TCC apply No TCC lockup	Increase SLU pressure if:  • Hard 1-2, 2-1 shift • Firm/Late TCC apply		

#### **Important Solenoid Port Check**

Always double-check that the solenoid ports mate radially to the ports in the valve body casting.

#### **Linear Solenoid Adjustment**


The adjustment screws on the end of the solenoids set the spring force against the valve. The spring opposes the force of the solenoid coil. To avoid severe drivability issues, the adjuster should be set at or near the OE position, which averages .195" (Figure 7) measured from the end of the adjuster to the end of the solenoid manifold. If the adjustment is too far off (either in or out) a variety of drivability issues occur. In many instances, an out-of-adjustment solenoid may cause the TCM to set a gear ratio code or a solenoid amperage high/low code. Turning the SLT adjuster counter-clockwise reduces SLT pressure, which will lower line and converter pressure. Turning the SLS adjuster counter-clockwise reduces SLS pressure, which

will reduce clutch apply pressures. The charts in **Figures 8 & 9** are for reference on which solenoids to adjust and in what direction, should tuning be required.

#### **Heat Testing Linear Solenoids**

A common issue found with the linear solenoids is a hot drivability concern. This happens when the plunger starts to seize within the coil bushings at operating temperature. The results are acceptable shifts when cool, but a harsh downshift or flare upshift (often 3-2 and 2-3) over the 215°F range. If you suspect this, a slow or sticking linear solenoid can be identified by a hot soak test. Heat the solenoid to operating temperature. Using a shop rag or some method of protecting your hand from the heat, pry and hold the valve away from the plunger (with a pick or small screwdriver through casting slot) and shake the solenoid. In a good solenoid, the plunger shaft will be free to rattle back and forth (Figures 10 & 11).



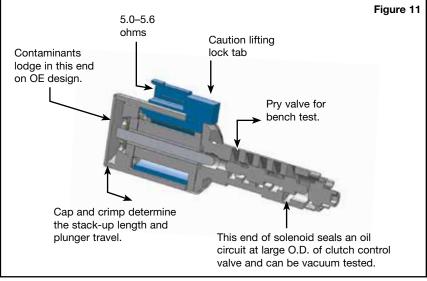

©2016 Sonnax Industries, Inc.

AW55-50SN-ZIP-Booklet 11-22-16

TC = Drivability effect on converter clutch.



#### **Solenoid Replacements**

Aisin AW 55-50SN, 55-51SN, AF23/33 and RE5F22A linear solenoids are used to control line rise (SLT), the converter clutch (SLU) and the oil flow rate and accumulation for the clutch circuits (SLS). The flow-to and function of these solenoids overlap, making diagnosis difficult. The solenoids are prone to sticking of the internal pintle, creating inconsistent movement of the solenoid valves. Shift complaints and pressure/flow related issues result. Remanufactured linear solenoid kits (set of three solenoids) from Sonnax (Figure 12) were developed with an exclusive Sonnax process that eliminates sticking solenoid problems. These solenoids are 100% tested for pressure curve performance on a valve body test stand and calibrated to OE specifications. Readjustment should not be required if the valve body leakage has been addressed and a relearn process completed.

## Casting & Plate Combinations


There are various castings and plates that must be properly matched to ensure correct function. The front control valve body (Figure 13) may have an exhaust hole that will correlate to the need for a check valve & spring on the opposite side (Figure 14). Castings with this exhaust hole must be matched with a middle control casting with 2 flags (Figure 15) and a rear control plate with the two noted orifices.



#### Remanufactured Linear Solenoid Kits

Sonnax Part Number	Kit Style
59947-68K	Early/Short
59947-69K	Early/Long
59947-70K	Late/Long

Caution: Ensure correct style of SLS/SLT solenoid, based on connector direction and bracket design (Figures 1, 4 - 6).

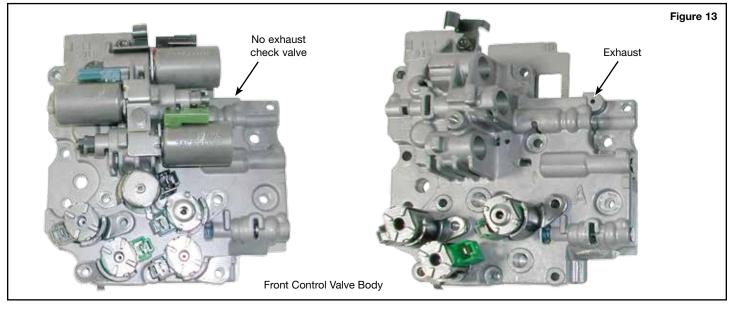





Figure 14

Two Flag Casting: (As shown) Must go with exhaust type

One Flag Casting: (Not shown/flag on right) Assemblies with a non-exhaust plate and front control.

Middle Control Valve Body - Cover Side

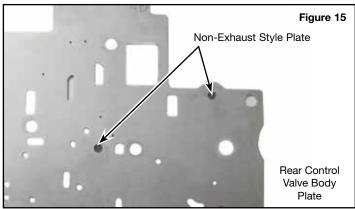

11-22-16 AW55-50SN-ZIP-Booklet



## **Critical Wear Areas & Vacuum Test Locations**



NOTE: OE valves are shown in rest position and should be tested in rest position unless otherwise indicated. Test locations are pointed to with an arrow. Springs are not shown for visual clarity. Low vacuum reading indicates wear and Sonnax parts noted for replacement. For specific vacuum test information, refer to individual part instructions included in kits and available at www.sonnax.com.


#### AW55-50SN Valve Body

#### **Neutral Relay Valve**

- No neutral control
- No drive
- Slips in Drive

Replace with Sonnax Part No. 59947-35K

Requires F-59947-TL34 & VB-FIX



**Front Control Valve Body** (No exhaust style)

#### Solenoid Modulator Valve

- Loss of 3rd, 4th and 5th gear
- No TCC apply Low line pressure
- Delayed forward 2-3 flare upshifts
- 5th Gear only

Replace with Sonnax Part No. 59947-34K

Requires F-59947-TL34 & VB-FIX

#### **Solenoid Relay Valve** & Plunger/Sleeve Assembly

- No TCC apply Shift concerns Harsh shifts in all ranges
- Engine stall during engagements B5 clutch distress

• No upshifts after 2nd or flare on 2-3 shift

Replace with Sonnax Part No. 59947-05K


#### 3rd Gear Band (B4) Release Valve

- 2-3, 3-2 Shift concern 3-2 Neutral
- Harsh 3-2 coast downshift
- 2-3 Flare
   2-3 Neutral

Replace with Sonnax Part No. 59947-26K

Requires F-59947-TL26 & VB-FIX

Seal the port on the opposite side of casting when testing these locations.

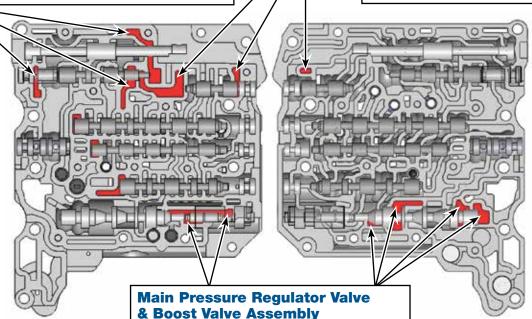

**Middle Control Valve Body** (Cover side)

Harsh or soft shifts
 Late shifts
 Reverse slips

Delayed engagements
 Converter apply/release

Replace with Sonnax Part No. 59947-07K or 59947-12K

59947-12K Requires F-59947-TL12 & VB-FIX

**Middle Control Valve Body** (Rear side)

AW55-50SN-ZIP-Booklet 11-22-16



## **Critical Wear Areas & Vacuum Test Locations**

**NOTE:** OE valves are shown in rest position and should be tested in rest position unless otherwise indicated. Test locations are pointed to with an arrow. Springs are not shown for visual clarity. Low vacuum reading indicates wear and Sonnax parts noted for replacement. For specific vacuum test information, refer to individual part instructions included in kits and available at **www.sonnax.com**.

#### AW55-50SN Valve Body • Rear Control (Back, Front and Side views)

# **Shift Pressure Control Valve**

- Harsh shifts
- B1, B2, and/or C2 Clutches burned
- No 5th gear
- High line pressure in Reverse
- Low Reverse pressure

Replace with Sonnax Part No. 59947-38K

#### Line Pressure Control (SLT) Accumulator Assembly

- Delayed Forward engagement
- Low line pressure
- Harsh shifts
- Flare 2-3 upshift
- Erratic SLT pressure

Replace with Sonnax Part No. 59947-LPC

#### **Shift Pressure Control Plunger Valve**

- Harsh shifts B1, B2 and/or C2 Clutches burned
- High line pressure Low Reverse pressure

Replace with Sonnax Part No. 59947-75K

#### **M2 Shift Valve**

- No Reverse
- No neutral control
- No 1st, 2nd, 3rd & 4th gear

# **Shift Pressure Relay Valve**


- Slips in Reverse
- No engine braking in 2nd, 3rd & 4th gear

# Secondary Regulator Valve Overheated fluids Harsh Reverse Overheated/damaged bushings & converter

- TCC slippage/RPM surge
- Poor shift quality
- High/Low SLT pressure

Replace with Sonnax Part No. 59947-16K

Requires F-59947-TL16 & VB-FIX

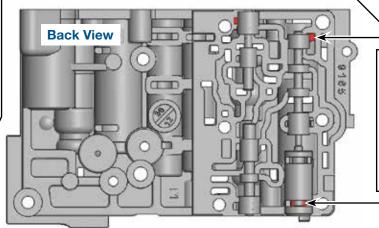


#### **Lockup Relay Valve**

- TCC apply/release problems
- Inadequate lubrication
- Converter codes

Replace with Sonnax Part No. 59947-01K or 59947-77K

59947-77K Requires F-97741-TL20 & VB-FIX

Seal the port on the opposite side of casting when testing these locations.




# Lockup Control Valve & Sleeve/Plunger Assembly

- TCC apply/release problems
- Converter codes
- Burnt converter

Replace with Sonnax Part No. 59947-03K or 59947-29K

59947-29K Requires F-59947-TL29, F-15741-TL29PL & VB-FIX

No. 2 Rear Control Valve Body




11-22-16 AW55-50SN-ZIP-Booklet




# **OE Exploded View**


#### Front & Middle Control Valve Body • AW55-50SN Valve Body Shown Here

NOTE: Depending upon vehicle application, the OE springs shown may not be present.

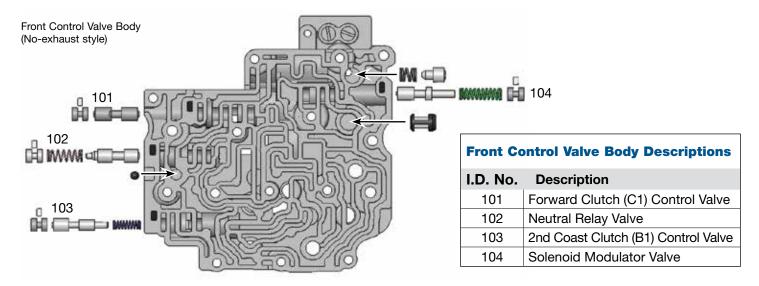

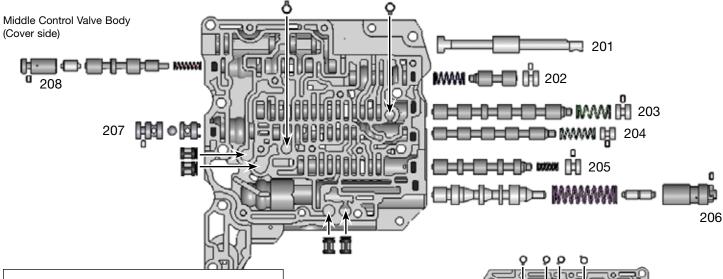

Middle (	Middle Control Valve Body Descriptions				
I.D. No.	Description				
201	Manual Valve				
202	3rd Gear Band (B4) Release Valve				
203	U1 Shift Valve				
204	M1 Shift Valve				
205	U2 Shift Valve				
206	Primary Regulator Valve & Plunger Valve Assembly				
207	Reverse Shift Ball Check Valve				
208	Solenoid Relay Valve & Plunger Valve Assembly				



©2016 Sonnax Industries, Inc.


AW55-50SN-ZIP-Booklet 11-22-16


No. 2 Rear Control



## **OE Exploded View**

#### Rear & No. 2 Rear Control Valve Body • AW55-50SN Valve Body Shown Here



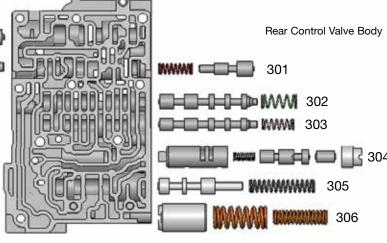

No. 2 Rear Control
Valve Body Descriptions

I.D. No. Description


401 Lockup Control Valve
& Plunger Valve Assembly

402 Reverse Shift Restrict Ball
Check Valve


403 2nd Clutch (B2) Control Valve

& Plunger Valve Assembly

308

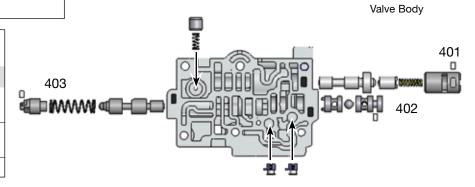

#### **Bolt Locations**

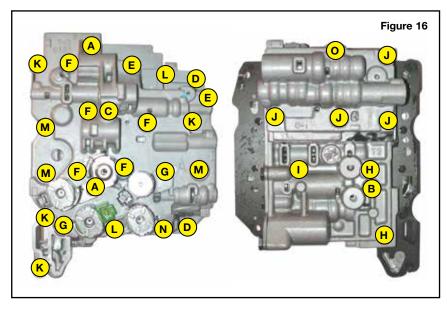

#### **Torque Specification Chart** Figure 17

Bolt ID	Length (mm)	Torque (in-lb)	No. Bolts Required
Α	10	62	2
В	12	62	1
С	13	62	1
D	16	89	2
E	16	62	2
F	20	62	5
G	28	62	2
Н	35	62	2
I	40	62	1
J	49.5	62	4
K	50	89	4
L	50	62	2
М	55	62	3
N	62	62	1
0	76	62	1

11-22-16 AW55-50SN-ZIP-Booklet