



**VT SERIES UL-LISTING REQUIREMENTS**


**MODELS WITH 3, 4 OR 5 POSITION TERMINAL STRIP**

**FREQUENCY RESPONSE: 600-5500Hz**


**SENSITIVITY 96dB (1W/1M)**

TERMINAL STRIP NO. OF TERMINALS	VT/VTF MODELS WITH 3, 4 OR 5 POSITION TERMINAL STRIP P					
3	VT/VTF-22U	VT/VTF-22UC	VT/VTF-27U	VT/VTF-27UC	VTB-5	VTB-6
4	VT/VTF-17U	VT/VTF-17UC				
5	VT/VTF-152U	VT/VTF-152UC	VT/VTF-157U	VT/VTF-157UC	VTB-3	VTB-4

**SPEAKER #1**

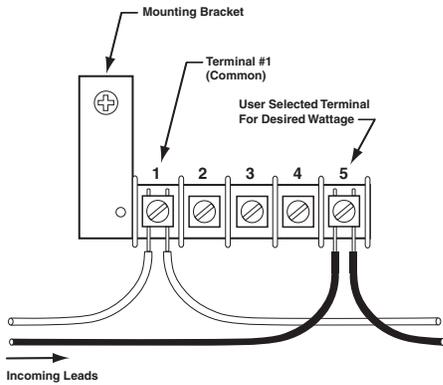


**SPEAKER #2**

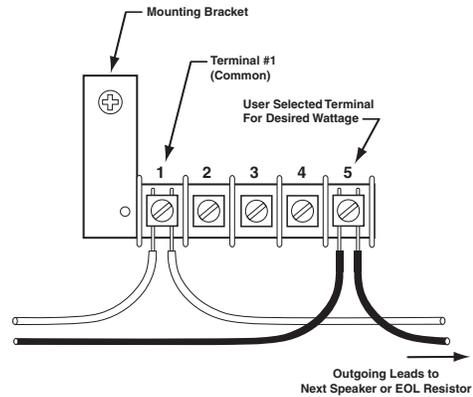

VT/VTF-17U VT/VTF-17UC			VT/VTF-27U VT/VTF-27UC VTB-5			VT/VTF-22U VT/VTF-22UC VTB-6			VT/VTF-157U VT/VTF-157UC 70 VTB-3			VT/VTF-152U VT/VTF-152UC VTB-4		
70V Line Xfmr			70V Line Xfmr			25V Line Xfmr			70V Line Xfmr			25V Line Xfmr		
Term	Color	Watt	Term	Color	Watt	Term	Color	Watt	Term	Color	Watt	Term	Color	Watt
1	Red	Com	1	Red	Com	1	Red	Com	1	Wht	Com	1	Wht	Com
2	Blu	1/4	2	Blu	1	2	Blu	1	+2	Red	2	2	Red	2
3	Yel	1/2	3	Wht	2	3	Wht	2	+3	Gry	4	3	Gry	4
4	Wht	1							+4	Brn	8	4	Brn	8
									+5	Grn	15	5	Grn	15

**VT/VTF MODELS WITH 2 POSITION TERMINAL STRIP:**

**VT/VTF-154U, VT/VTF-158U, VTB-2, VTB-1**

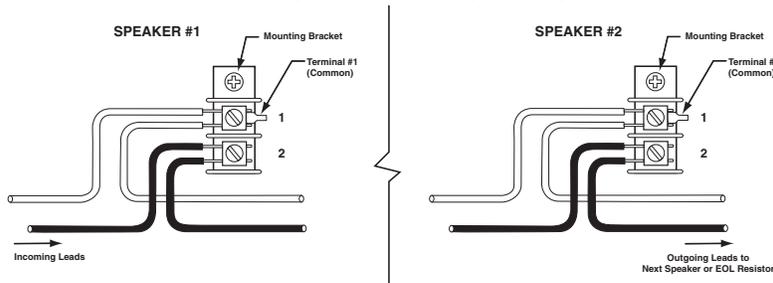

**MODELS WITH POSITION TERMINAL STRIP**

**NOTE:** To conform with U.L. 464 and 1480 requirements, wires must be connected to appropriate terminals as shown in wiring diagram. Do not use looped wire under terminals. Break wire run to provide for supervision of connection.

- Models with a "C" suffix include a supervisory capacitor for installation with supervised circuitry. Maximum supervised circuit voltage is 24 VDC.
- For use in ambient temperature ranges from -40°C to 66°C.

**Installation must comply with all Building Codes and NFPA guidelines. Installation must adhere to N.E.C. and NFPA 70/72 wiring directives and comply with all National and Local Building Codes.**

*Specifications are subject to change without notice*



[www.AtlasSound.com](http://www.AtlasSound.com)

1601 JACK MCKAY BOULEVARD ENNIS, TEXAS U.S.A. • TELEPHONE: (800) 876-3332 • FAX: (800) 765-3435

©2005 ATLAS SOUND LP

Printed in U.S.A.

00105

ATS000746 RevC 01/05

PN 8805000