




COLOR TELEVISION RECEIVER

Chassis : KS9A(N)

Model : CL21M16MNZXBDB

SERVICE Manual

COLOR TELEVISION RECEIVER

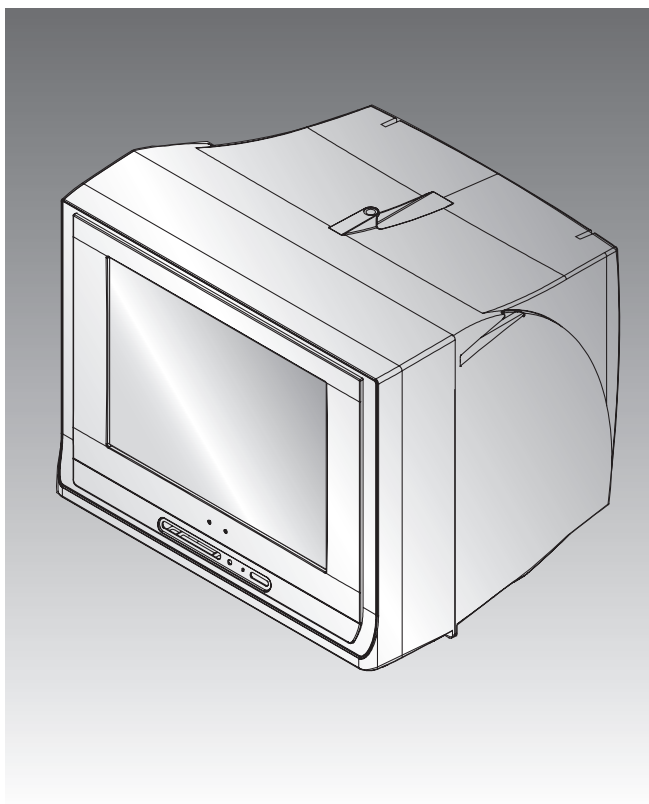

CONTENTS

1. Specifications
2. Alignment and Adjustments
3. Exploded View & Part List
4. Electrical Part List
5. PCB Diagram
6. Schematic Diagrams



ELECTRONICS

This Service Manual is a property of Samsung Electronics Co., Ltd.
Any unauthorized use of Manual can be punished under applicable
International and/or domestic law.

© Samsung Electronics Co., Ltd. **Nov. 2005**
Printed in Korea
AA82-03146A

1. Specifications

Regions	North America	South Central America	MEXICO
Broadcasting System	NTSC		
Tuning System	Electronic Remote Control System		
Receiving Channels	VHF (CH 2 ~ 13)		
	UHF (CH 14 ~ 69)		
	CATV (CH 1, 14 ~ 125)		
ANTENNA INPUT RESISTANCE	VHF, UHF 75 unbalanced		
Intermediate Frequency	Video : 45.75 MHz		
	Sound : 41.25 MHz		
	Chrominance Subcarrier: 42.17 MHz		
Power Supply	AC 120V, 60Hz	AC 100~240V, 60Hz	AC 120V, 60Hz

MEMO

2. Alignment and Adjustments

2-1 General Alignment Instructions

1. Usually, a color TV-VCR needs only slight touch-up adjustment upon installation. Check the basic characteristics such as height, horizontal and vertical sync and focus.
2. Observe the picture for good black and white details. There should be objectionable color shading; if color shading is present, demagnetize, perform purity and convergence adjustments described below.
3. Use the specified test equipment or its equivalent.
4. Correct impedance matching is essential.
5. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test results.
6. Connect the TV only to an AC power source with voltage and frequency as specified on the backcover nameplate.
7. Do not attempt to connect or disconnect any wires while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.
8. To protect against shock hazard, use an isolation transformer.

2-2 Automatic Degaussing

A degaussing coil is mounted around the picture tube, so that external degaussing after moving the TV should be unnecessary. But the receiver must be properly degaussed upon installation.

The degaussing coil operates for about 1 second after the power is switched ON. If the set is moved or turned in a different direction, the power should be OFF for at least 10 minutes.

If the chassis or parts of the cabinet become magnetized, poor color purity will result. If this happens, use an external degaussing coil. Slowly move the degaussing coil around the faceplate of the picture tube and the sides and front of the receiver. Slowly withdraw the coil to a distance of about 6 feet before turning power OFF.

If color shading persists, perform the following Color purity and Convergence adjustments.

2-3 High Voltage Check

CAUTION : There is no high voltage adjustment on this chassis. The B+ power supply should be +135 volts (with full color- bar input and normal picture level).

1. Connect a digital voltmeter to the second anode of the picture tube.
2. Turn on the TV. Set the Brightness and Contrast controls to minimum (zero beam current).
3. Adjust the Brightness and contrast controls to both extremes. Ensure that the high voltage does not exceed 30 KV under any conditions.

2-4 FOCUS Adjustment


1. Input a black and white signal.
2. Adjust the tuning control for the clearest picture.
3. Adjust the FOCUS control for well defined scanning lines in the center area of the screen.

2-5 Factory Adjustment

2-5-1 Service Mode

1. To enter the “Service Mode”, Press the remote-control keys in this sequence :

- If you do not have Factory remote-control




- If you have Factory remote-control



2-5-2 Factory Mode OSD

2-5-2 ADJUST

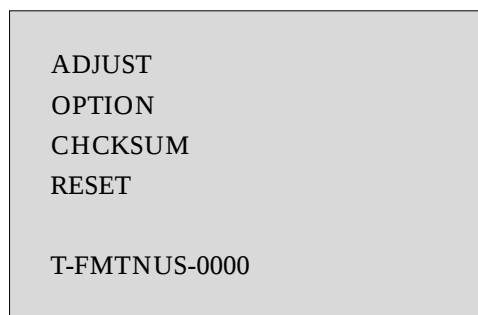



No	Deflection	Remark	INITIAL	MIN	MAX	ADJUST
1	HS	Adjust	37	0	63	30
2	VA	Adjust	34	0	63	22
3	VSL	Adjust	30	0	63	23
4	VS	FIX	31	0	63	25
5	AGC	Adjust	33	0	63	33
6	CDL	FIX	9	0	15	9
7	SCT	Adjust	10	0	23	10
8	SBT	Adjust	7	0	23	7
9	BLR	Adjust	28	0	63	28
10	BLB	Adjust	43	0	63	43
11	RG	Adjust	30	0	63	30
12	GG	FIX	32	0	63	32
13	BG	Adjust	46	0	63	46
14	SC	FIX	29	0	63	33
15	STT	FIX	5	0	7	5
16	AKB	FIX	0	0	1	0
17	NDL	FIX	1	0	15	1
18	NSR	FIX	5	0	23	10
19	VOL	FIX	10	0	63	10
20	MVOL	FIX	7	0	50	7
21	RPO0	FIX	1	0	1	1
22	RPO1	FIX	1	0	1	1
23	CAP	FIX	12	0	15	12
24	FMWS	FIX	0	0	1	0
25	AGCS	FIX	1	0	3	1
26	OMD	FIX	15	0	63	15
27	SCL	FIX	3	0	3	3
28	PWL	FIX	13	0	15	15
29	MUS	FIX	1	0	1	1
30	SCBT	FIX	40	0	63	40
31	SSP	FIX	5	0	20	5
32	DNSR	FIX	17	0	23	10
33	DSBT	FIX	0	0	23	0
34	DCDL	FIX	6	0	16	9
35	DBLR	FIX	32	0	63	32
36	DBLB	FIX	32	0	63	32
37	DSK	FIX	0	0	1	0

 Option


No	Item	Initial	21" FLAT	Remark
1	Video Mute	Off	Off	Video Mute time between the Channel changes
2	Audio	STEREO	STEREO	Audio MONO/STEREO Option
3	2ND SIF	EXTERNAL	EXTERNAL	SIF Option
4	Auto Power	Off	Off	Turns on automatically when the Master Power is turned ON
5	Audio Mute	On	On	Mutes the Audio when there is no source signal
6	Start Language	English	English	Preset OSD (On-Screen Display) language at time of purchase
7	Hotel Mode	Off	Off	
8	Blue Screen	On	On	Blue Screen when there is no source signal
9	V-Chip	Off	Off	
10	AV Option	AV1/2/DVD	AV1/2	Back Jack Option
11	AFN	Off	Off	

 White Balance


Item	21" FLAT	Remark
Hight Light	275/265/45FL	
Low Light	275/265/1.5FL	

2-6 Screen Change (I2C Bus Geometric Adjustment)

1 V SHIFT (VS)

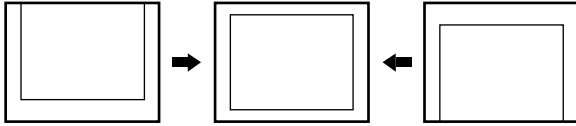


4 V SC (SC)

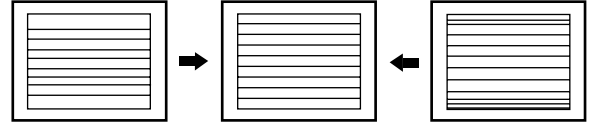


2 V AMP (VA)



5 H SHIFT (HS)

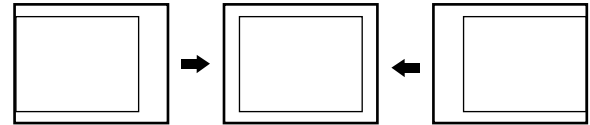

3 V SLOPE (VSL)

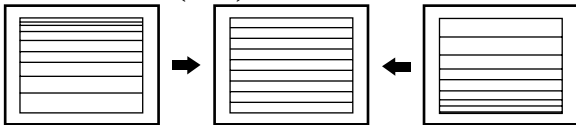


MEMO

3. Exploded View & Part List

3-1 CL21M16MNZXBDB

You can search for the updated part code through ITSELF web site.
URL:<http://itself.sec.samsung.co.kr>

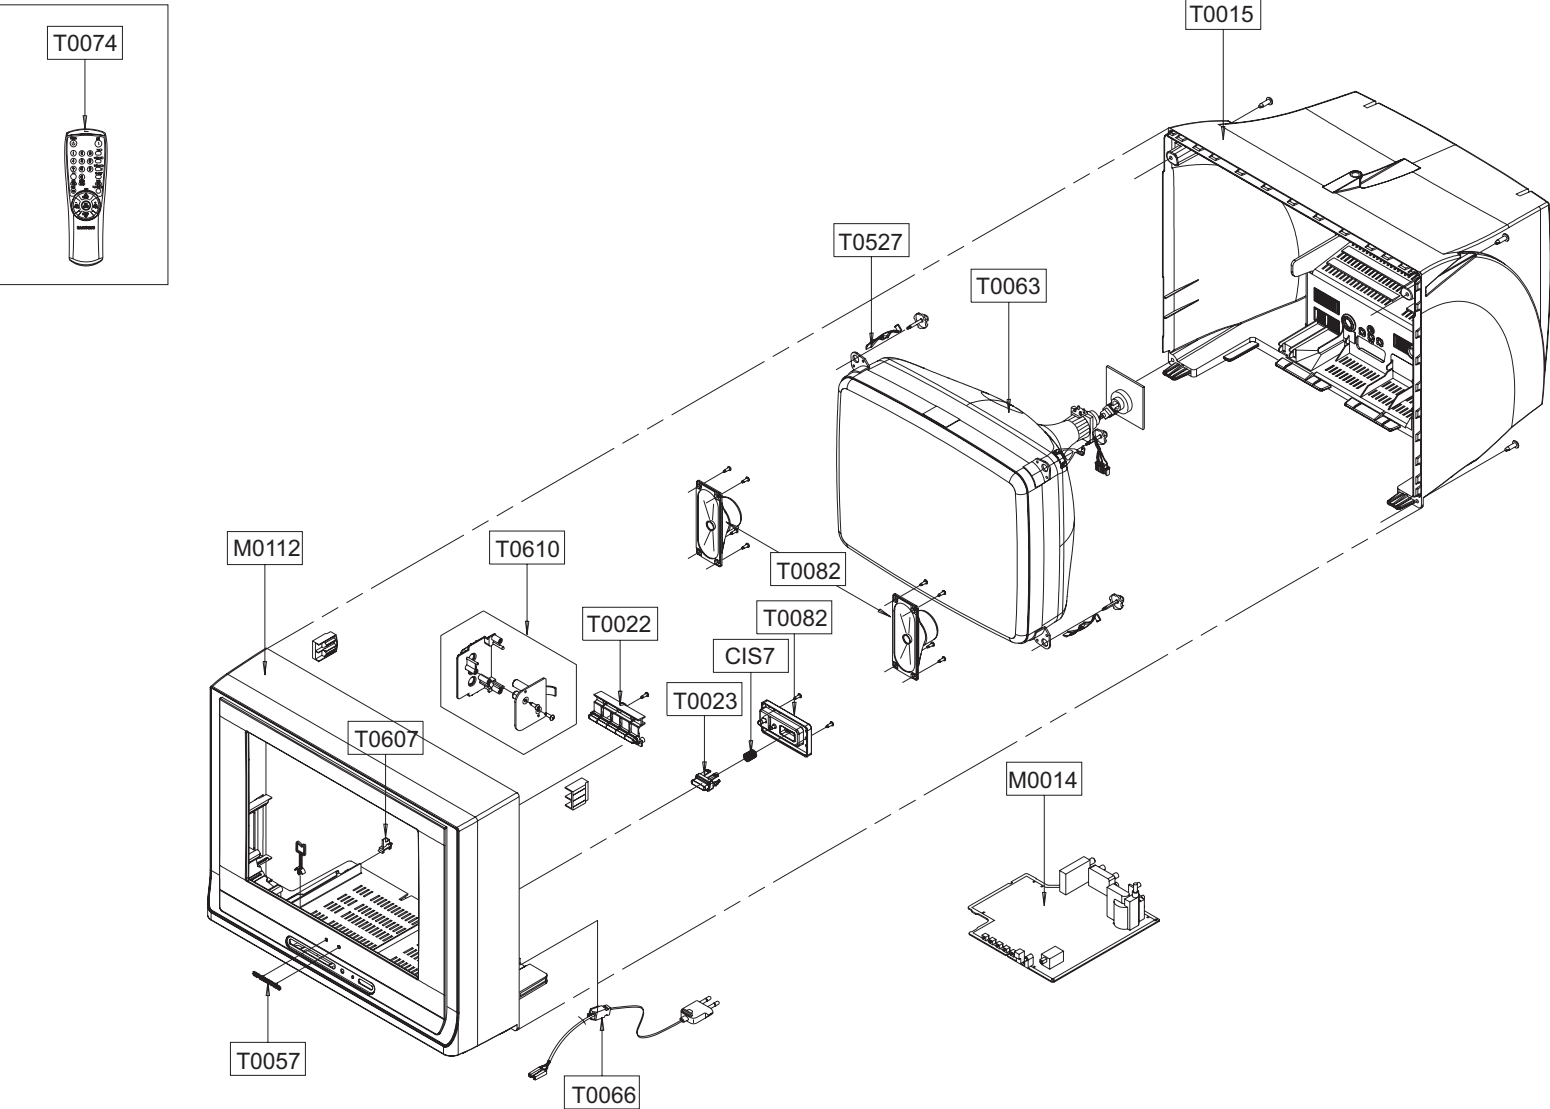

Loc.No.	Code No.	Description;Specification	Q'ty	S.N.A
CIS7	AA61-60003J	SPRING ETC-CS;-;SUS304,-,-,OD6,N7,OD6,-,	1	S.N.A
M0014	AA94-15366A	ASSY PCB MAIN;KS9A;F/V,CL21M16MNZXBDB	1	
M0112	AA63-01011A	COVER-FRONT;21M16,HIPS,T2.5,HB,G4309,SV0	1	S.N.A
T0015	AA64-03842A	CABINET BACK;21M16,SAMEX,HIPS,HB,G4309	1	
T0022	AA64-03957A	KNOB CONTROL;21M16,SAMEX,ABS,HB,G3676,SV	1	S.N.A
T0023	AA64-03823A	KNOB-POWER;29M16,ABS,HB,G3676,SVM3012	1	
T0057	AA64-70123A	BADGE-BRAND;NEW,AL,L50,FLAT,SILVER,SAMSU	1	
T0063	AA03-00439A	CRT COLOR;A51QDK690X(K),+380,1.75,18.2,2	1	
T0066	AA96-20109C	ASSY POWER CORD;-;CP2/NO(4.0),H/C300,KKP	1	
T0074	AA59-00316B	REMOCON;TM75,ET,32,G6148A,NT,EX	1	
T0082	3001-001190	SPEAKER;7W,8OHM,87DB,150HZ	2	
T0082	AA64-03838A	WINDOW LED;15,17M16,PC,CLR	1	S.N.A
T0527	AA65-00009B	CLAMPER CORE-D,COIL;21A8,NYLON 66,V0,-,-	4	
T0607	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	1	
T0610	AA96-01546A	ASSY PCB P-A/V SIDE;TXN1634FX,K15D	1	

You can search for the updated part code through ITSELF web site.

URL: <http://itself.sec.samsung.co.kr>

4. Electrical Part List

4-1 CL21M16MNZXBDB

Level	Loc.No.	Code No.	Description;Specification	Remark	Level	Loc.No.	Code No.	Description;Specification	Remark
ASSY CHASSIS					△	...	T0066	AA96-20109C ASSY POWER CORD;-;CP2(NO(4.0),H/C300,KKP	
					...	...	T0268	AA39-10006X CBF-POWER CORD;-;KKP419C,KLCE-2F,2.286MT	
					...	...	T0010	AA61-20284A HOLDER-P-CORD,PP,-,-,BLK,VO,KE-002	S.N.A
					...	...	IC501	AA96-50311A ASSY HEAT SINK P,-;VIDEO,AA62-30175D,TDA	S.N.A
					...	...	T0074	1201-001159 IC-VIDEO AMP;6107,ZSIP,9P,-,SINGLE,-,PLA	
					...	...	M0081	6003-000334 SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	S.N.A
					...	...	T0175	AA62-30175D HEAT SINK-PS;-;SECC,T1.0,-,33X15X30 FT-2	S.N.A
					...	...	M0014	AA97-15319A ASSY AUTO-MAIN;KS9A,F/V,21M16,LATIN,STER	S.N.A
					...	...	D201	0401-000005 DIODE-SWITCHING;1N4148,75V,150mA,DO-35,T	
					...	...	D808	0401-000005 DIODE-SWITCHING;1N4148,75V,150mA,DO-35,T	
					...	...	D810	0401-000005 DIODE-SWITCHING;1N4148,75V,150mA,DO-35,T	
					...	...	D811	0401-000005 DIODE-SWITCHING;1N4148,75V,150mA,DO-35,T	
					...	...	D803	0401-000006 DIODE-SWITCHING;BAV21,250V,200MA,DO-35,T	
					...	...	D804	0401-000006 DIODE-SWITCHING;BAV21,250V,200MA,DO-35,T	
					...	...	D303	0402-000132 DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
					...	...	D809	0402-000132 DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
					...	...	D814	0402-000132 DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
					...	...	D501	0402-000254 DIODE-RECTIFIER;RGPI0J,600V,1A,DO-41,TP	
					...	...	D813	0402-000493 DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
					...	...	D302	0402-000534 DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
					...	...	D403	0402-000540 DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
					...	...	D301	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1A,TS-1	
					...	...	D304	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1A,TS-1	
					...	...	D401	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1A,TS-1	
					...	...	D502	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1A,TS-1	
					...	...	D503	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1A,TS-1	
					...	...	D504	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1A,TS-1	
					...	...	D812	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1A,TS-1	
					△	...	D801S	0402-001111 DIODE-RECTIFIER;1N5397GP,600V,1.5A,-,TP	
					△	...	D802S	0402-001111 DIODE-RECTIFIER;1N5397GP,600V,1.5A,-,TP	
					△	...	D803S	0402-001111 DIODE-RECTIFIER;1N5397GP,600V,1.5A,-,TP	
					△	...	D804S	0402-001111 DIODE-RECTIFIER;1N5397GP,600V,1.5A,-,TP	
					...	...	DZ211	0403-000508 DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
					...	...	DZ213	0403-000508 DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
					...	...	DZ215	0403-000508 DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
					...	...	DZ216	0403-000508 DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
					...	...	DZ401	0403-000508 DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
					...	...	DZ402	0403-000508 DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
					...	...	DZ601	0403-000508 DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
					...	...	DZ602	0403-000508 DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
					...	...	DZ807	0403-000508 DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
					...	...	DZ810	0403-000508 DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
					...	...	DZ803	0403-000699 DIODE-ZENER;TZP27B,27-30.8V,1000MW,DO-41	
					...	...	DZ101	0403-000700 DIODE-ZENER;TZP33A,5%,1000MW,DO-41,TP	
					...	...	DZ303	0403-000700 DIODE-ZENER;TZP33A,5%,1000MW,DO-41,TP	
					...	...	DZ201	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ202	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ203	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ204	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ205	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ206	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ306	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ307	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ501	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ502	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ503	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ504	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ806	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ808	0403-000720 DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
					...	...	DZ801	0403-001140 DIODE-ZENER;RD10ESAB-T4,9.7-10.2V,400MW,	
					...	...	DZ305	0403-001221 DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
					...	...	DZ804	0403-001316 DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500MW,DO	
					...	...	DZ802	0403-001318 DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500MW,DO	
					...	...	DZ805	0403-001327 DIODE-ZENER;MTZJ18A,16.22-17.06V,500MW,D	
					...	...	DZ301	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.2V,500MW,DO	
					...	...	DZ302	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.2V,500MW,DO	
0.1	M0017	AA91-09297A	ASSY CHASSIS;KS9A;F/V,BDB,STEREO	S.N.A					
.2	M0014	AA94-15366A	ASSY PCB MAIN;KS9A;F/V,CL21M16MNZXBDB						
...	T0245	0202-001366	SOLDER-WIRE FLUX;-;RS60S,D1.2,63Sn/37Pb,	S.N.A					
...	D402	0402-001599	DIODE-RECTIFIER;DGP30L,1500,3A,DO-201AD(						
...	D805	0402-001603	DIODE-RECTIFIER;MUR480E,800V,4A,DO-201AD						
...	D807	0402-001604	DIODE-RECTIFIER;MUR420,200V,4A,DO-201AD,						
...	Q804	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,T0-220,ST,6						
△	PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST						
...	IC106	1001-001279	IC-VIDEO SWITCH;NJM2533,BIPOLAR,DIP,8P,3						
...	IC112	1103-001209	IC-EEPROM;24C04,512x8,DIP,8P,10.16x7.11m						
...	IC101	1204-000506	IC-IF DETECTOR;LA7510,SIP,9P,-,PLASTIC,1						
...	ICS601	1204-001662	IC-AUDIO PROCESSOR;MSP3425G-B8,DIP,52P,5						
...	T0900	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T						
...	P803T	1404-001264	THERMISTOR-PTC;4.5OHM,+30/-20%,220V,290V						
△	CY801S	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,BK,15X						
△	CR403S	2301-001401	C-FILM,LEAD-PPF;27nF,5%,630V,TP,19x11x17						
△	CR401S	2303-000282	C-FILM,LEAD-PPF;6nF,5%,1.6KV,TP,29*23*8						
△	CR406S	2306-000179	C-FILM,LEAD-PPF;300nF,5%,250V,TP,20x18.5						
...	C801	2401-000534	C-AL;150uF,20%,400V,GP,BK,25x30,10						
...	X201	2801-004033	CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,300						
...	X601	2801-004379	CRYSTAL-UNIT;18.432MHz,30ppm,28-AAM,8pF,						
△	SF101S	2904-001107	FILTER-SAW AV;45.75MHz,SIP5K,TP,12.6dB,N						
△	SF102S	2904-001255	FILTER-SAW AV;45.75MHz,SIP5K,ST,12.2dB,M						
...	SWN01	3404-000295	SWITCH-TACT;12VDC,50mA,160gf,8.4X22.7,SP						
△	RL801S	3501-001053	RELAY-POWER;5VDC,530MW,10000MA,1FORMA,15						
...	FD802	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.						
△	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,Ni-						
...	CN604	3711-002643	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,ST						
...	CN701	3711-003641	HEADER-BOARD TO CABLE;BOX,12P,1R,2.5mm,S						
...	JA701	3722-001895	JACK-PIN;6P(9P),8.3MM,Ni,YEL/WHT/REDX2,-						
...	T0119	AA09-00485A	IC MICOM;TDA9381PS/N3/3-OTP,CS21M16,64,3	S.N.A					
△	T801S	AA26-00043B	TRANS SWITCHING;CS21S5T,80-280V,PM2,PL3						
...	T401	AA26-50001B	TRANS-HORIZ DRIVE;-,-,7.1mH,-,102uH,						
...	T0010	AA27-00296A	COIL CHOKE;220UH,CPTTV,220UH,10%,3A,DR14						
...	T0296	AA27-30003L	COIL LINEARITY;-;73uH,DR12x15,0.55mm,-,B						
△	LX801S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,-						
...	D0254	AA32-00014A	MODULE REMOCON;346VF2,38KHZ,940MM,MESH,V						
...	T0245	AA39-20620C	LEAD CONNECTOR-ASSY;9P,500MM,YBNH250-09						
...	CIS3	AA40-00016A	TUNER-F/S;TDQ-6F/13F2S,NTSC,181CH,45.75M						
...	CN401	AA60-40012F	PIN-GT;4P,2.36PI,6/12/14mm,NYLON66,LOCKI	S.N.A					
△	PD801S	AA60-40012G	PIN-GT;3P,2.36PI,10/5mm,NYLON66,LOCKING	S.N.A					
...	CIS1	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	S.N.A					
...	CIS1	AA65-30111A	CLAMPER CORE-WIRE;ALL MODEL,NYLON,VO,WHT	S.N.A					
...	IC301	AA96-00244M	ASSY HEAT SINK P;LA78040N,SA,AA64-00046	S.N.A					
...	CIS1	0205-001154	OIL-SILICON;G746,-,-	S.N.A					
...	T0088	1204-002121	IC-VERTICAL DEF.;LA78040N,T0220,7P,-,PLA						
...	M0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A					
...	T0175	AA62-00046A	HEAT SINK-PS;-,-,T1.0,-,D1(DREAM) 60X25X	S.N.A					
...	IC603	AA96-00244N	ASSY HEAT SINK P;SCREW,AA62-00046A,AN752	S.N.A					
...	CIS1	0205-001154	OIL-SILICON;G746,-,-	S.N.A					
...	T0124	1201-002050	IC-POWER AMP;AN7522N,SIP,12P,29.6x7.7mm,						
...	M0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A					
...	T0175	AA62-00046A	HEAT SINK-PS;-,-,T1.0,-,D1(DREAM) 60X25X	S.N.A					
...	IC802	AA96-00245A	ASSY HEAT SINK P;AA62-00055A,KA7632	S.N.A					
...	IC062	1203-001939	IC-MULTI REG.;7632,SIP,10P,-,PLASTIC,3.3						
...	M0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	S.N.A					
...	T0175	AA62-00055A	HEAT SINK-PS;-,-,T1.0,-,35*15*25,D1,-,-	S.N.A					
...	Q401	AA96-02906A	ASSY HEAT SINK P;AA62-00145A,SCREW,ST200	S.N.A					
...	CIS1	0205-001154	OIL-SILICON;G746,-,-	S.N.A					
...	M0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A					
...	T0105	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A					
...	T0098	AA62-00145A	HEAT SINK;KS9A,A1050,T1.0,23.50,WHITE,PS	S.N.A					
...		0502-001255	TR-POWER;ST2001HI(028Y),NPN,55000mW,-,ST						

Level	Loc.No.	Code No.	Description;Specification	Remark	Level	Loc.No.	Code No.	Description;Specification	Remark
....4	DZ304	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.2V,500MW,DO		4	R830	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	DZ212	0403-001373	DIODE-ZENER;MTZJ5.1A,4.85-5.03V,500MW,DO		4	R227	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	DZ214	0403-001373	DIODE-ZENER;MTZJ5.1A,4.85-5.03V,500MW,DO		4	R228	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	Q201	0501-000283	TR-SMALL SIGNAL;KSA539,P,NP,400mW,TO-92,T		4	R601	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	Q203	0501-000283	TR-SMALL SIGNAL;KSA539,P,NP,400mW,TO-92,T		4	R602	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	Q402	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-92,T		4	R603	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	Q803	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-92,T		4	R604	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T		4	R109	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T		4	R251	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	Q802	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T		4	R203	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	IC602	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL		4	R610	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	IC012	1203-001217	IC-POS.ADJUST REG.;431,TO-92,3P,4.58MIL		4	R613	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
△....4	VX802S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP		4	R110	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R207	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm		4	R250	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R254	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm		4	R108	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R255	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm		4	R222	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R218	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R212	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R206	2001-000010	R-CARBON;68KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R215	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R301	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP,2.4X6.4MM		4	R704	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R843	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4MM		4	R707	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R409	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4MM		4	R306	2001-001050	R-CARBON(S);1.5KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4MM		4	R504	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R808	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4MM		4	R414	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R252	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R819	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R258	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R820	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R615	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM		△....4	R832	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R107	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	RR401S	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R836	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R233	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R814	2001-001105	R-CARBON(S);20OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R235	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R816	2001-001105	R-CARBON(S);20OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R237	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R840	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R240	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R411	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R241	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R405	2001-001116	R-CARBON(S);27OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R242	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R821	2001-001131	R-CARBON(S);33KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R243	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R809	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R244	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R810	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R245	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R818	2001-001154	R-CARBON(S);5.1KOHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R246	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R815	2001-001163	R-CARBON(S);560OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R262	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R805	2001-001170	R-CARBON(S);6.8OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R263	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R850	2001-001170	R-CARBON(S);6.8OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R264	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R831	2001-001197	R-CARBON(S);910OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R501H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
....4	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R502H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
....4	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R503	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
....4	R607	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		△....4	RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
....4	R608	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R801	2003-000994	R-METAL OXIDE(S);33Kohm,5%,2W,AF,TP,3.9x	
....4	R614	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R804	2003-000994	R-METAL OXIDE(S);33Kohm,5%,2W,AF,TP,3.9x	
....4	R703	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R407	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
....4	R713	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R834	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
....4	R224	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R835	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
....4	R249	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R315	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
....4	R291	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R316	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
....4	R618	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R827	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
....4	R807	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R403	2003-002151	R-METAL OXIDE;18KOHM,5%,2W,AG,TP,6X16MM	
....4	R828	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R402	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
....4	R842	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R307	2004-001371	R-METAL(S);1.5Kohm,1%,1/2W,AA,TP,2.4x6.4MM	
....4	R225	2001-000325	R-CARBON;120OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R817	2004-001377	R-METAL(S);120Kohm,1%,1/2W,AA,TP,2.4x6.4MM	
....4	R205	2001-000397	R-CARBON;180KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R424	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4MM	
....4	R239	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R423	2004-001407	R-METAL(S);82.5Kohm,1%,1/2W,AA,TP,2.4x6.4MM	
....4	R247	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R219	2004-001914	R-METAL;39Kohm,2%,1/8W,AA,TP,1.8x3.5mm	
....4	R617	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R822	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.4MM	
....4	R833	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R304	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
....4	R234	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R305	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
....4	R236	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R420	2008-000264	R-FUSIBLE(S);1ohm,5%,1W,AF,TP,3.9x10mm	
....4	R238	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R825	2008-000264	R-FUSIBLE(S);1ohm,5%,1W,AF,TP,3.9x10mm	
....4	R253	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R421	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
....4	R256	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R303	2008-000290	R-FUSIBLE(S);2.4ohm,5%,2W,AF,TP,3.9x10mm	
....4	R257	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R824	2008-001033	R-FUSIBLE(S);10ohm,5%,2W,AF,TP,3.9x10mm	
....4	R259	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R302	2008-001076	R-FUSIBLE(S);1.8ohm,5%,2W,AF,TP,3.9x10mm	
....4	R214	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM		4	R505	2008-001138	R-FUSIBLE;2.4OHM,5%,1W,AF,TP,3.9X10MM	
....4	R829	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM		△....4	FD801S	2008-001163	R-PICO FUSIBLE;10mohm,20%,1W,AA,TP,2.3x6.4MM	
....4	R208	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	C605	2201-000017	C-CERAMIC,DISC;1nF,10%,50V,Y5P,-5x3.5mm	
....4	R609	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	C302	2201-000259	C-CERAMIC,DISC;0.18NF,10%,500V,Y5P,TP,5	
....4	R611	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	C601	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
....4	R202	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	C602	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
....4	R248	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM		4	C816	2201-000375	C-CERAMIC,DISC;0.22NF,5%,50V,RH,TP,12.5X	
....4	R261	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM		△....4	CR409S	2201-000406	C-CERAMIC,DISC;0.22NF,10%,2KV,Y5P,TP,6.3	

Level	Loc.No.	Code No.	Description;Specification	Remark	Level	Loc.No.	Code No.	Description;Specification	Remark
....4	C244	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3		4	C308	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
....4	C245	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3		4	C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5mm	
....4	C408	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.		4	C203	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
△	CR404S	2201-000639	C-CERAMIC,DISC;0.68NF,10%,2KV,Y5P,TP,9X5		4	C220	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4	C503	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5		4	C820	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4	C811	2201-000991	C-CERAMIC,DISC;0.56NF,10%,2KV,Y5P,TP,7.5		4	C607	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
....4	C814	2201-002028	C-CERAMIC,DISC;0.47NF,10%,2KV,Y5P,TP,7.5		4	C627	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
....4	C105	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V		4	C219	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4	C111	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V		4	C614	2401-000620	C-AL;2.2uF,10%,50V,GP,TP,5x11,5	
....4	C120	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V		4	C403	2401-000625	C-AL;2.2uF,20%,160V,GP,TP,6.3x11,5	
....4	C243	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V		4	C704	2401-000758	C-AL;0.22UF,20%,50V,GP,TP,5X11,5	
....4	C114	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.		4	C707	2401-000758	C-AL;0.22UF,20%,50V,GP,TP,5X11,5	
....4	C603	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.		4	C827	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
....4	C629	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.		4	C110	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4	C223	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3		4	C615	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
....4	C224	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3		4	C620	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
....4	C239	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3		4	C504	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
....4	C505	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP		4	C304	2401-001838	C-AL;470uF,20%,25V,WT,TP,10x16,5	
....4	C211	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V		4	C636	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
....4	C217	2301-000004	C-FILM,LEAD-PEF;2.2nF,5%,100V,TP,5.5X10X		4	C637	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
....4	C234	2301-000004	C-FILM,LEAD-PEF;2.2nF,5%,100V,TP,5.5X10X		4	C815	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
....4	C638	2301-000004	C-FILM,LEAD-PEF;2.2nF,5%,100V,TP,5.5X10X		4	C824	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
....4	C639	2301-000004	C-FILM,LEAD-PEF;2.2nF,5%,100V,TP,5.5X10X		4	C608	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4	C248	2301-000013	C-FILM,LEAD-PEF;4.7nF,5%,100V,TP,10.5x12		4	C609	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4	C109	2301-000016	C-FILM,LEAD-PEF;22nF,5%,100V,TP,7.2x4.5x		4	C610	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4	C804	2301-000016	C-FILM,LEAD-PEF;22nF,5%,100V,TP,7.2x4.5x		4	C611	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4	C810	2301-000016	C-FILM,LEAD-PEF;22nF,5%,100V,TP,7.2x4.5x		4	C306	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4	C613	2301-000108	C-FILM,LEAD-PEF;1.5nF,5%,50V,TP,6.5x3.0x		4	C813	2401-002290	C-AL;47uF,20%,160V,GP,TP,13x20,5	
....4	C622	2301-000108	C-FILM,LEAD-PEF;1.5nF,5%,50V,TP,6.5x3.0x		4	C101	2401-002594	C-AL;220uF,20%,16V,GP,TP,8x11,5,5	
....4	C630	2301-000110	C-FILM,LEAD-PEF;1.8nF,5%,100V,TP,7x3.0x6		4	C237	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4	C634	2301-000110	C-FILM,LEAD-PEF;1.8nF,5%,100V,TP,7x3.0x6		4	C406	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4	C407	2301-000148	C-FILM,LEAD-PEF;10nF,5%,100V,TP,7x3.2x7m		4	C706	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4	C621	2301-000148	C-FILM,LEAD-PEF;10nF,5%,100V,TP,7x3.2x7m		4	C817	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
....4	C705	2301-000148	C-FILM,LEAD-PEF;10nF,5%,100V,TP,7x3.2x7m		4	C818	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
....4	C805	2301-000204	C-FILM,LEAD-PEF;2.7nF,5%,50V,TP,7.4x3.9x		4	C102	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
....4	C502	2301-000213	C-FILM,LEAD-PEF;220nF,5%,250V,TP,21.5x11		4	C631	2401-003139	C-AL;1000uF,20%,25V,WT,TP,10*20,5mm	
....4	C309	2301-000253	C-FILM,LEAD-PEF;39NF,5%,100V,TP,7.5X4.5X		4	C112	2401-003900	C-AL;0.47UF,20%,50V,HR,TP,5*11,5	
....4	C420	2301-001065	C-FILM,LEAD-PPF;47nF,5%,630V,TP,19x15.5x		4	C113	2401-003900	C-AL;0.47UF,20%,50V,HR,TP,5*11,5	
....4	C806	2301-001435	C-FILM,LEAD-PPF;1.5nF,5%,1.2kV,TP,15x8x1		4	L810	2701-000002	INDUCTOR-AXIAL;100UH,10%,4298	
....4	C225	2301-001664	C-FILM,LEAD-OTHER;100nF,3%,50V,TP,20x16x		4	L102	2701-000114	INDUCTOR-AXIAL;10UH,10%,2534	
....4	C312	2305-000149	C-FILM,LEAD-PEF;100nF,5%,100V,TP,12x12.5		4	L103	2701-000114	INDUCTOR-AXIAL;10UH,10%,2534	
....4	C301	2305-000285	C-FILM,LEAD-PEF;220NF,5%,100V,TP,10.5X5.		4	L202	2701-000114	INDUCTOR-AXIAL;10UH,10%,2534	
....4	C207	2305-000289	C-FILM,LEAD-PEF;220nF,5%,63V,TP,-,5mm		4	L204	2701-000114	INDUCTOR-AXIAL;10UH,10%,2534	
....4	C215	2305-000289	C-FILM,LEAD-PEF;220nF,5%,63V,TP,-,5mm		4	L603	2701-000114	INDUCTOR-AXIAL;10UH,10%,2534	
....4	C216	2305-000289	C-FILM,LEAD-PEF;220nF,5%,63V,TP,-,5mm		4	L801	2701-000114	INDUCTOR-AXIAL;10UH,10%,2534	
....4	C233	2305-000289	C-FILM,LEAD-PEF;220nF,5%,63V,TP,-,5mm		4	R101	2701-000114	INDUCTOR-AXIAL;10UH,10%,2534	
△	CR405S	2305-000382	C-FILM,LEAD-PEF;4.7nF,5%,400V,TP,-,5mm		4	R102	2701-000114	INDUCTOR-AXIAL;10UH,10%,2534	
....4	C238	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm		4	L203	2701-000127	INDUCTOR-AXIAL;15UH,10%,2534	
....4	C240	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm		4	L301	2701-000142	INDUCTOR-AXIAL;1UH,10%,2534	
....4	C103	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L302	2701-000142	INDUCTOR-AXIAL;1UH,10%,2534	
....4	C208	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L404	2701-000142	INDUCTOR-AXIAL;1UH,10%,2534	
....4	C210	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L701	2701-000158	INDUCTOR-AXIAL;22UH,10%,2534	
....4	C218	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L230	2701-000159	INDUCTOR-AXIAL;22UH,10%,4298	
....4	C222	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L201	2701-000163	INDUCTOR-AXIAL;27UH,10%,3070	
....4	C230	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L601	2701-000169	INDUCTOR-AXIAL;3.9UH,10%,2534	
....4	C242	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L602	2701-000169	INDUCTOR-AXIAL;3.9UH,10%,2534	
....4	C247	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L205	2701-000177	INDUCTOR-AXIAL;33UH,10%,2534	
....4	C606	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L206	2701-000177	INDUCTOR-AXIAL;33UH,10%,2534	
....4	C618	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L307	2701-000178	INDUCTOR-AXIAL;33UH,10%,3070	
....4	C632	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L804	2701-001030	INDUCTOR-AXIAL;43UH,10%,4514	
....4	C635	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L303	2701-001034	INDUCTOR-AXIAL;22UH,10%,4514	
....4	C803	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	L304	2701-001034	INDUCTOR-AXIAL;22UH,10%,4514	
....4	C819	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x		4	F101	2901-000297	FILTER-EMI ON BOARD;-3A,-,-,3.5x5,TP,-	
....4	C802	2401-000015	C-AL;33uF,20%,50V,WT,-,6.3x11mm,2.5		4	F101	2901-000297	FILTER-EMI ON BOARD;-3A,-,-,3.5x5,TP,-	
....4	C812	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5		4	F101	2901-000299	FILTER-EMI ON BOARD;-6A,UL/CSA,-,9x7.5,	
....4	C209	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5		4	Z201	2903-000129	FILTER-CERAMIC;BR,4.5MHz,-,-,TP,-	
....4	C213	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5		4	L2514	3301-000287	BEAD-AXIAL;-3.5x1.0x6.0mm,3000mA,TP,,,50	S.N.A
....4	C229	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5		4	L2514	3301-001223	BEAD-AXIAL;62ohm,3.5x0.8x5mm,,TP,,,	S.N.A
....4	C241	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5		4	L2514	3301-001223	BEAD-AXIAL;62ohm,3.5x0.8x5mm,,TP,,,	S.N.A
....4	C246	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5		4	L2514	3301-001223	BEAD-AXIAL;62ohm,3.5x0.8x5mm,,TP,,,	S.N.A
....4	C249	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5		4	L2514	3301-001223	BEAD-AXIAL;62ohm,3.5x0.8x5mm,,TP,,,	S.N.A
....4	C604	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5		4	L2514	3301-001223	BEAD-AXIAL;62ohm,3.5x0.8x5mm,,TP,,,	S.N.A
....4	C612	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5		4	SW201	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
....4	C619	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5		4	SW202	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
....4	C821	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5		4	SW203	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
....4	C823	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5		4	SW204	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
....4	C307	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,		4	SW205	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	

Level	Loc.No.	Code No.	Description;Specification	Remark
....4	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4	CN909	AA37-00001A	CONNECTOR-FBT FIX PIN;JM-3500,CPTTV,0.36	
....4	CN909	AA37-00001A	CONNECTOR-FBT FIX PIN;JM-3500,CPTTV,0.36	
....4	T0077	AA41-01026C	PCB MAIN;CT-21M16,FR-1,C,245X245,KS9A,1A	S.N.A
....4	R621	2001-000773	R-CARBON;470KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	EL301	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4	EL302	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4	EL402	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4	EL601	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4	EL602	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4	EL801	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4	EL802	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4	EY401	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY402	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY403	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY404	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY405	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY406	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY407	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY408	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY409	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY410	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY411	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY412	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY413	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY414	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY416	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY417	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY419	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY420	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY422	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY423	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY424	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY425	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY501	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY701	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY702	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY803	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY804	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY805	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY806	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY809	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY810	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY811	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY812	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY813	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY814	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY815	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY817	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY818	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY819	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY820	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY821	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY822	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY827	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY830	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY833	6042-000002	EYELET;ID1.5,OD2.L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	GT501	BH71-40300A	PIN-HINGE;BRASS,D2.361,HEAT/SINK,SN	S.N.A
....4	GT804	BH71-40300A	PIN-HINGE;BRASS,D2.361,HEAT/SINK,SN	S.N.A
....4	GT805	BH71-40300A	PIN-HINGE;BRASS,D2.361,HEAT/SINK,SN	S.N.A
△...3	IC801S	AA96-00242F	ASSY HEAT SINK P;AA62-30186J,1203-002916	S.N.A
....4	CIS1	0205-001154	OIL-SILICON;G746,-,-	S.N.A
....4	T0086	1203-002916	IC-PWM CONTROLLER;KA5Q0765RTH-YDTU,TO-22	S.N.A
....4	M0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	T0066	AA62-30171J	HEAT SINK-ES;-,-,SILVER,-,DREAM1,-,-,-	S.N.A
....3	T0245	0202-001373	SOLDER-WIRE FLUX;CF-110VH-2A,-,-,-	S.N.A
....3	T444S	AA26-00231A	TRANS FBT;FOK14A001,CPTTV,3.65mH,3166,FE	S.N.A
....3	LD201	AA96-00555A	ASSY LED GUIDE;-,-,UEX-LD-030,GREEN	S.N.A

ASSY P/MATERIAL

0.1	M0113	AA92-08851A	ASSY P/MATERIAL;21M16	S.N.A
..2	T0214	AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A
..2	T0524	AA69-01209A	BAG PE;SHEET,25-27,W54,L60,FOAM,OEM.	S.N.A

Level	Loc.No.	Code No.	Description;Specification	Remark
ASSY ACCESSORY				
0.1	M0045	AA92-10405A	ASSY ACCESSORY;CL21M16MNZXXAO,KS9A	S.N.A
..2	M0045	AA96-02609A	ASSY ACCESSORY;CL21M16MNZXXAO,KS9A	S.N.A
...3	T0075	AA42-00004A	ANT ROD;CXD1334,VHF,4SDODIPOLE850MMBRN	
...3	T0524	AA69-01195A	BAG PE;CL29A6W8X,HDPETO.012,93/4X151/2	S.N.A
...3	T0903	AA26-90001F	TRANS MATCHING;-,-,300ohm/75ohm,NTSC,40-89	
...3	T0074	AA59-00316B	REMOCON;TM75,ET,32,G6148A,NT,EX	
...3	T0610	AA68-03242B	MANUAL-SAFETY GUIDE;TH-ENG,SAFETY GUIDE,	S.N.A
...3	T0511	AA68-03484A	MANUAL USERS;COMM,SPA,W/P100(G),B5,GR,KS	S.N.A
...3	T0511	AA68-03485A	MANUAL USERS;COMM,ENG,W/P100(G),B5,GR,KS	S.N.A
..2	T0251	3721-000136	PLUG-CONVERSION;2P,4.0mm,N,NI	

ASSY COVER FRONT

0.1	M0001	AA90-04956D	ASSY COVER FRONT;CL21M16MNZXXAX	S.N.A
..2	M0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
..2	M0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
..2	CCM1	AA60-10050R	SCREW-MACHINE;-,-,SWRCH18A,M5,L31.5,HH,+,W	
..2	T0607	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	
..2	T0057	AA64-70123A	BADGE-BRAND;NEW,AL,L50,FLAT,SILVER,SAMSU	
..2	CIS1	AA65-00011C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
..2	CIS1	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	S.N.A
..2	CIS1	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	S.N.A
..2	CIS1	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
..2	T0610	AA96-01546A	ASSY PCB P-A/V SIDE;TXN1634FX,K15D	
...3	RE01	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
...3	RE02	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
...3	CE01	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
...3	CE02	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11.5	
...3	JE601	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
...3	JR01	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
...3	T0245	AA39-20071D	LEAD CONNECTOR-ASSY;-,-,12P,300,YBNH025-12,	
...3	T0091	AA41-00414A	PCB-SIDE A/V;CT21D8,FR-1,1L,A,1.6T,245x2	S.N.A
...3	T0245	0202-001373	SOLDER-WIRE FLUX;CF-110VH-2A,-,-,-	S.N.A
..2	T0382	BP61-00495C	HOLDER-CARE;PJT,ACRYL-FOAM,TO.25,W30.0mm	S.N.A
..2	T0082	3001-001190	SPEAKER;7W,8OHM,87DB,150HZ	
..2	T0245	AA39-20505M	LEAD CONNECTOR-ASSY;-,-,4P,350,700MM,YSH025	
..2	T0003	AA96-02875A	ASSY COVER P-FRONT;21M16,HIPS,HB,G4309,S	
...3	M0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	M0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0069	AA60-00091G	SPACER-FELT;-,-,FELT,200X10,-,-,BLK,TO.5,-	S.N.A
...3	CIS7	AA61-60003J	SPRING ETC-CS;-,-,SUS304,-,-,OD6,N7,OD6,-,	S.N.A
...3	M0112	AA63-01011A	COVER-FRONT;21M16,HIPS,T2.5,HB,G4309,SV0	S.N.A
...3	T0023	AA64-03823A	KNOB-POWER;29M16,ABS,HB,G3676,SVM3012	
...3	T0082	AA64-03838A	WINDOW LED;15,17M16,PC,CLR	S.N.A
...3	T0022	AA64-03957A	KNOB CONTROL;21M16,SAMEX,ABS,HB,G3676,SV	S.N.A
...3	T0382	BP61-00509C	HOLDER-CARE;PJT,ACRYL-FOAM,TO.25,W20.0mm	S.N.A

ASSY COVER REAR

0.1	M0002	AA90-04957D	ASSY COVER REAR;21M16,SAMEX,HIPS,HB,G430	S.N.A
..2	M0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	M0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0069	AA60-00091J	SPACER-FELT;-,-,FELT,330X10,-,-,BLK,TO.5,-	S.N.A
..2	T0569	AA61-00356B	HOLDER-TUNER,F/JACK;501F,ABS,-,-,BLK,H	S.N.A
..2	INL/CAUT	AA64-02052A	INLAY;CAUTION,73X93,W/O-FCC,LGRY-TXT,BLK	S.N.A
..2	T0015	AA64-03842A	CABINET BACK;21M16,SAMEX,HIPS,HB,G4309	
..2	T0066	AA64-03873B	INLAY-BACK;21M16,20,PS,SHEET,TO.3,BLK,KS	S.N.A
..2	T0522	AA65-30008A	CLAMPER CORE-CORD;-,-,PE,HB,-,BLK,-	S.N.A

ASSY CPT

0.1	T0521	AA91-08875A	ASSY CPT;ORION;A51QDK190X,380MG,1.85MH,1	S.N.A
..2	T0079	AA27-00002A	MAGNET CONVERGENCE;JH291-11D,29.1MM	
..2	T0089	AA27-00256A	COIL DEGAUSSING;-,-,21IHCH,10%,35TS,4.5OHM,	
..2	T0299	AA63-60028A	SPACER-DY;-,-,NEOPRENE,-,-,BLK,-,-,V0 W1	S.N.A
..2	T0527	AA65-00009B	CLAMPER CORE-D,COIL;21A8,NYLON 66,V0,-,-	
..2	T0603	AA98-70014D	ASSY TBC WIRE P;TVI,22,NTSC,PAL,1P,UL101	S.N.A


Level	Loc.No.	Code No.	Description;Specification	Remark	Level	Loc.No.	Code No.	Description;Specification	Remark
-------	---------	----------	---------------------------	--------	-------	---------	----------	---------------------------	--------

△	.2	T0063	AA03-00439A CRT COLOR;A51QDK690X(K),+380,1.75,18.2,2	
△	.2	T0078	AA27-50005D DEFLECTION YOKE;:,CDY-MT2137A1,S/T,A51QDK	

MEMO

5. PCB Diagram

5-1 MAIN PCB


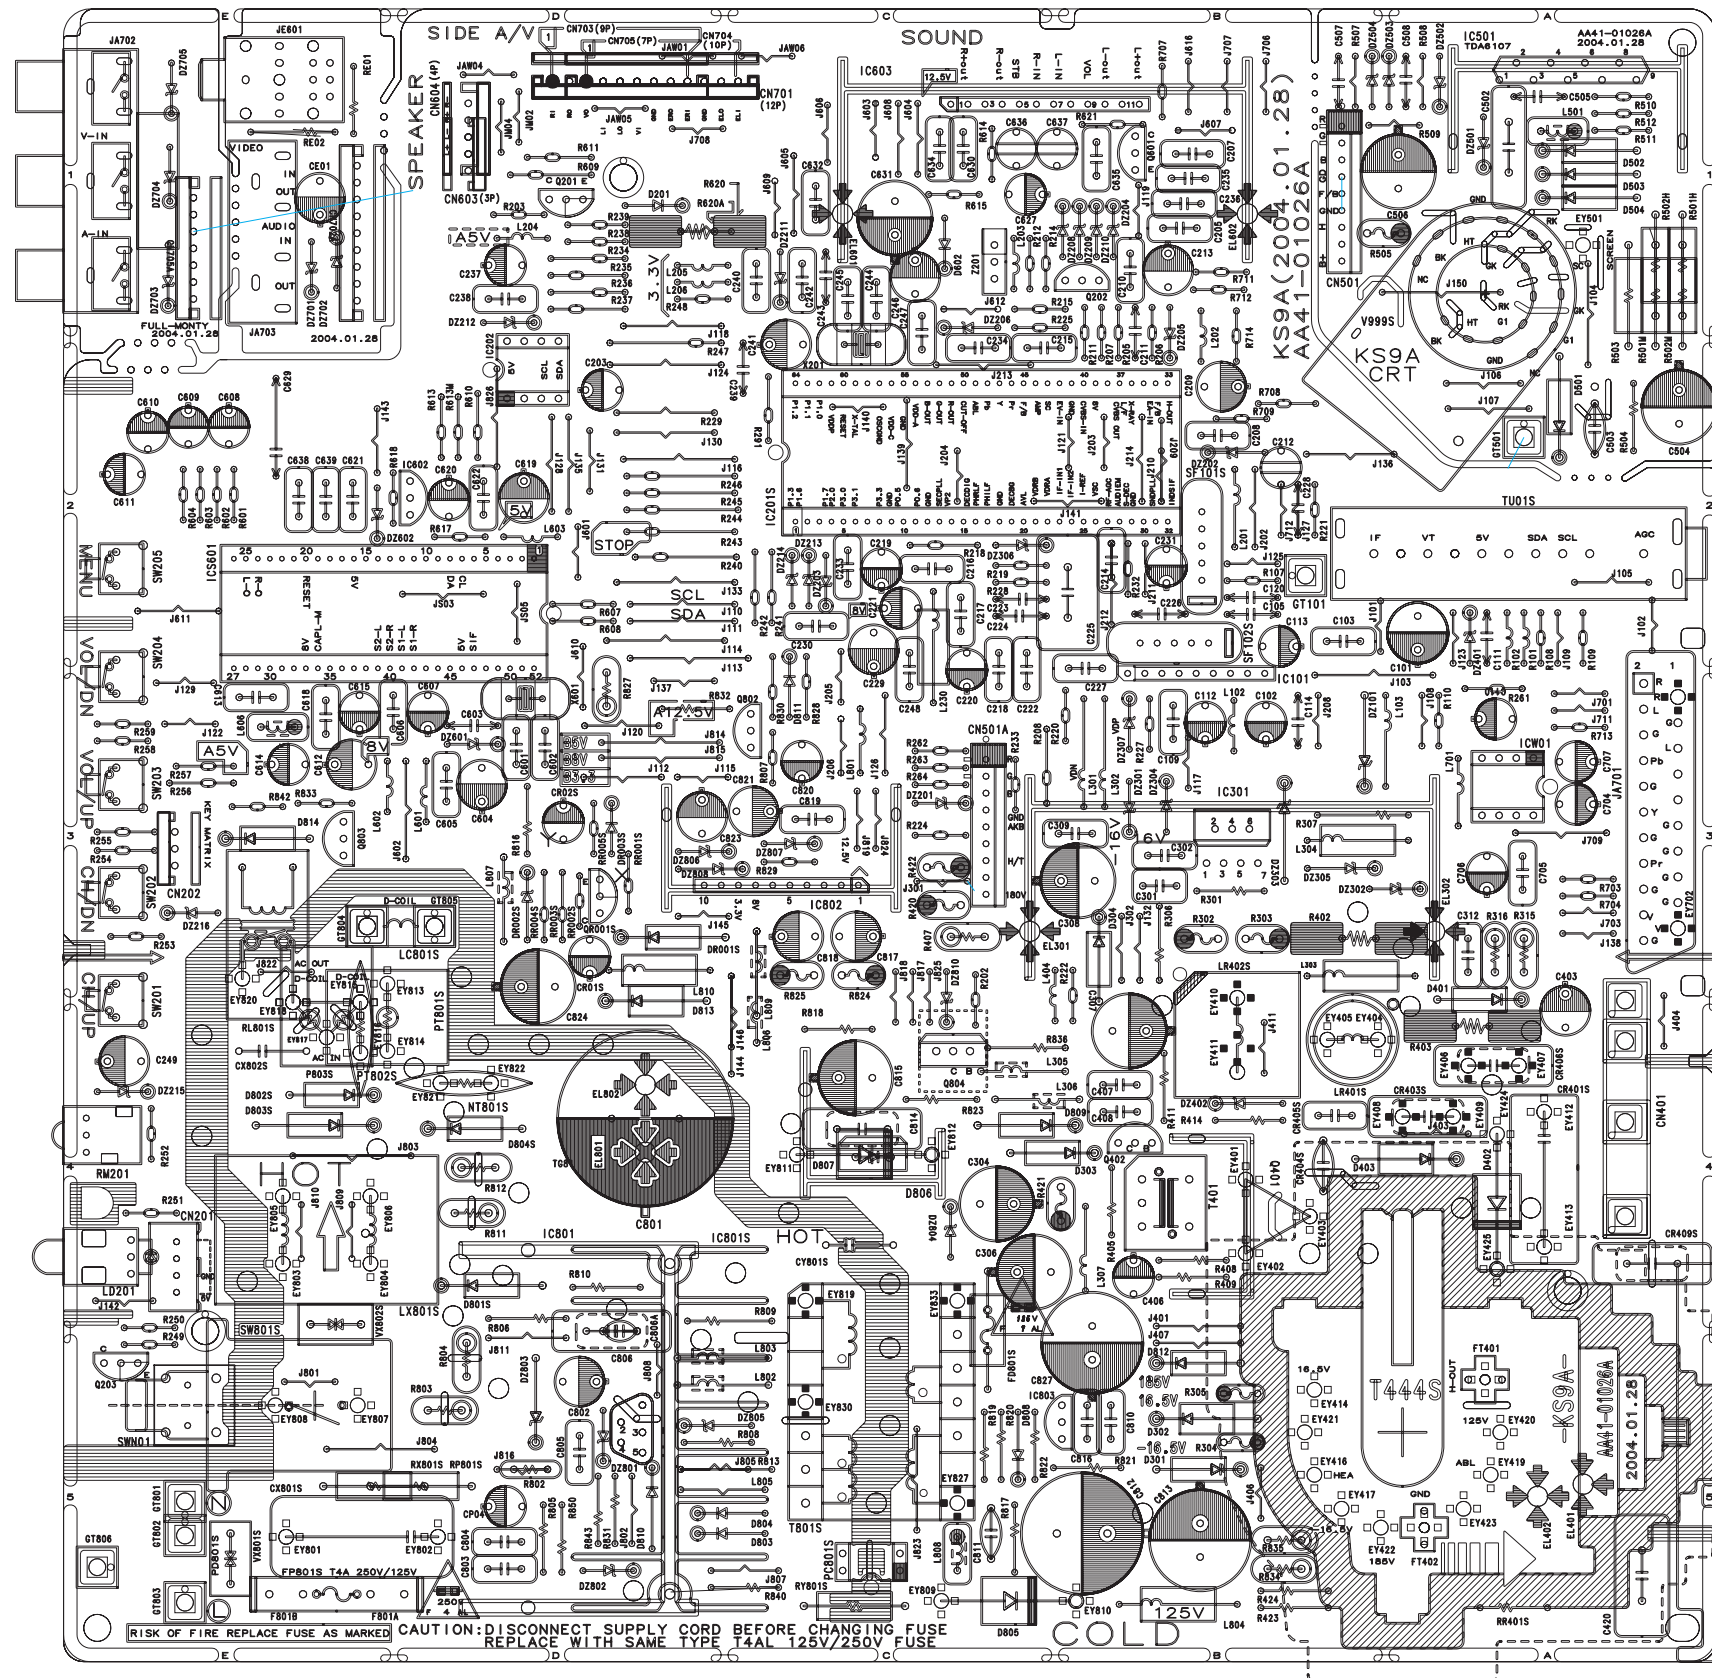


6. Schematic Diagrams

6-1 MICOM








This Document can not be used without Samsung's authorization.

CHASSIS:Full Monty
SCHEMATIC DIAGRAM
MODEL:CT-

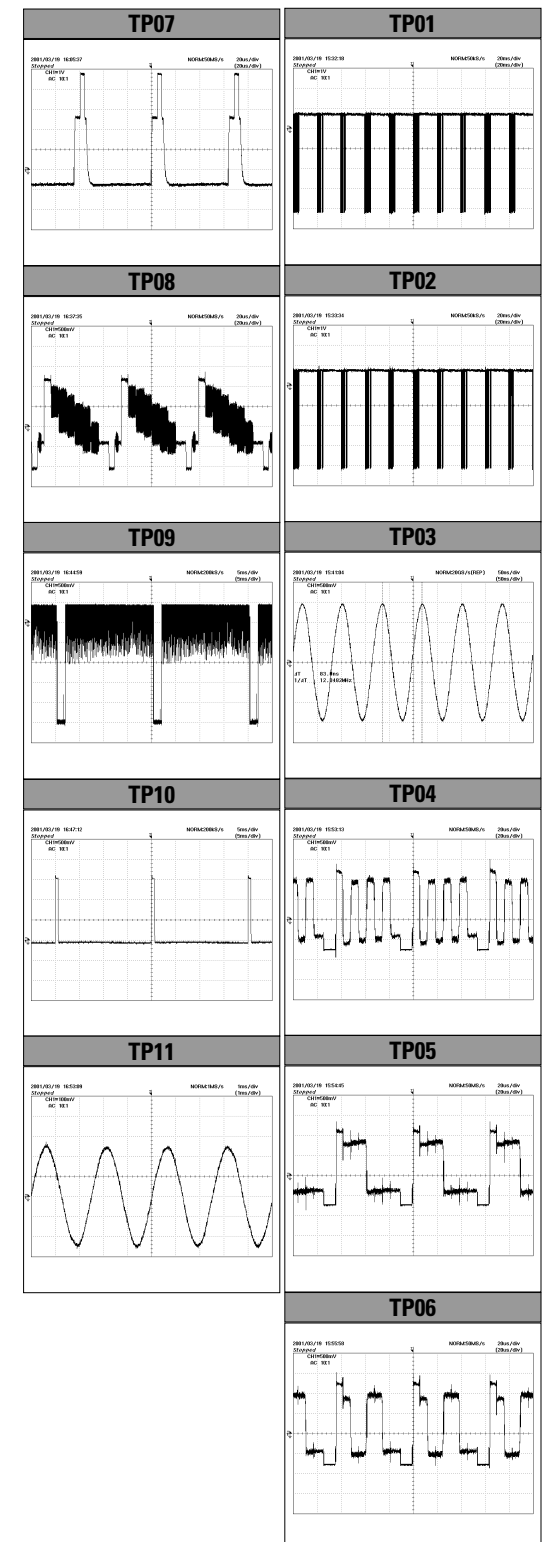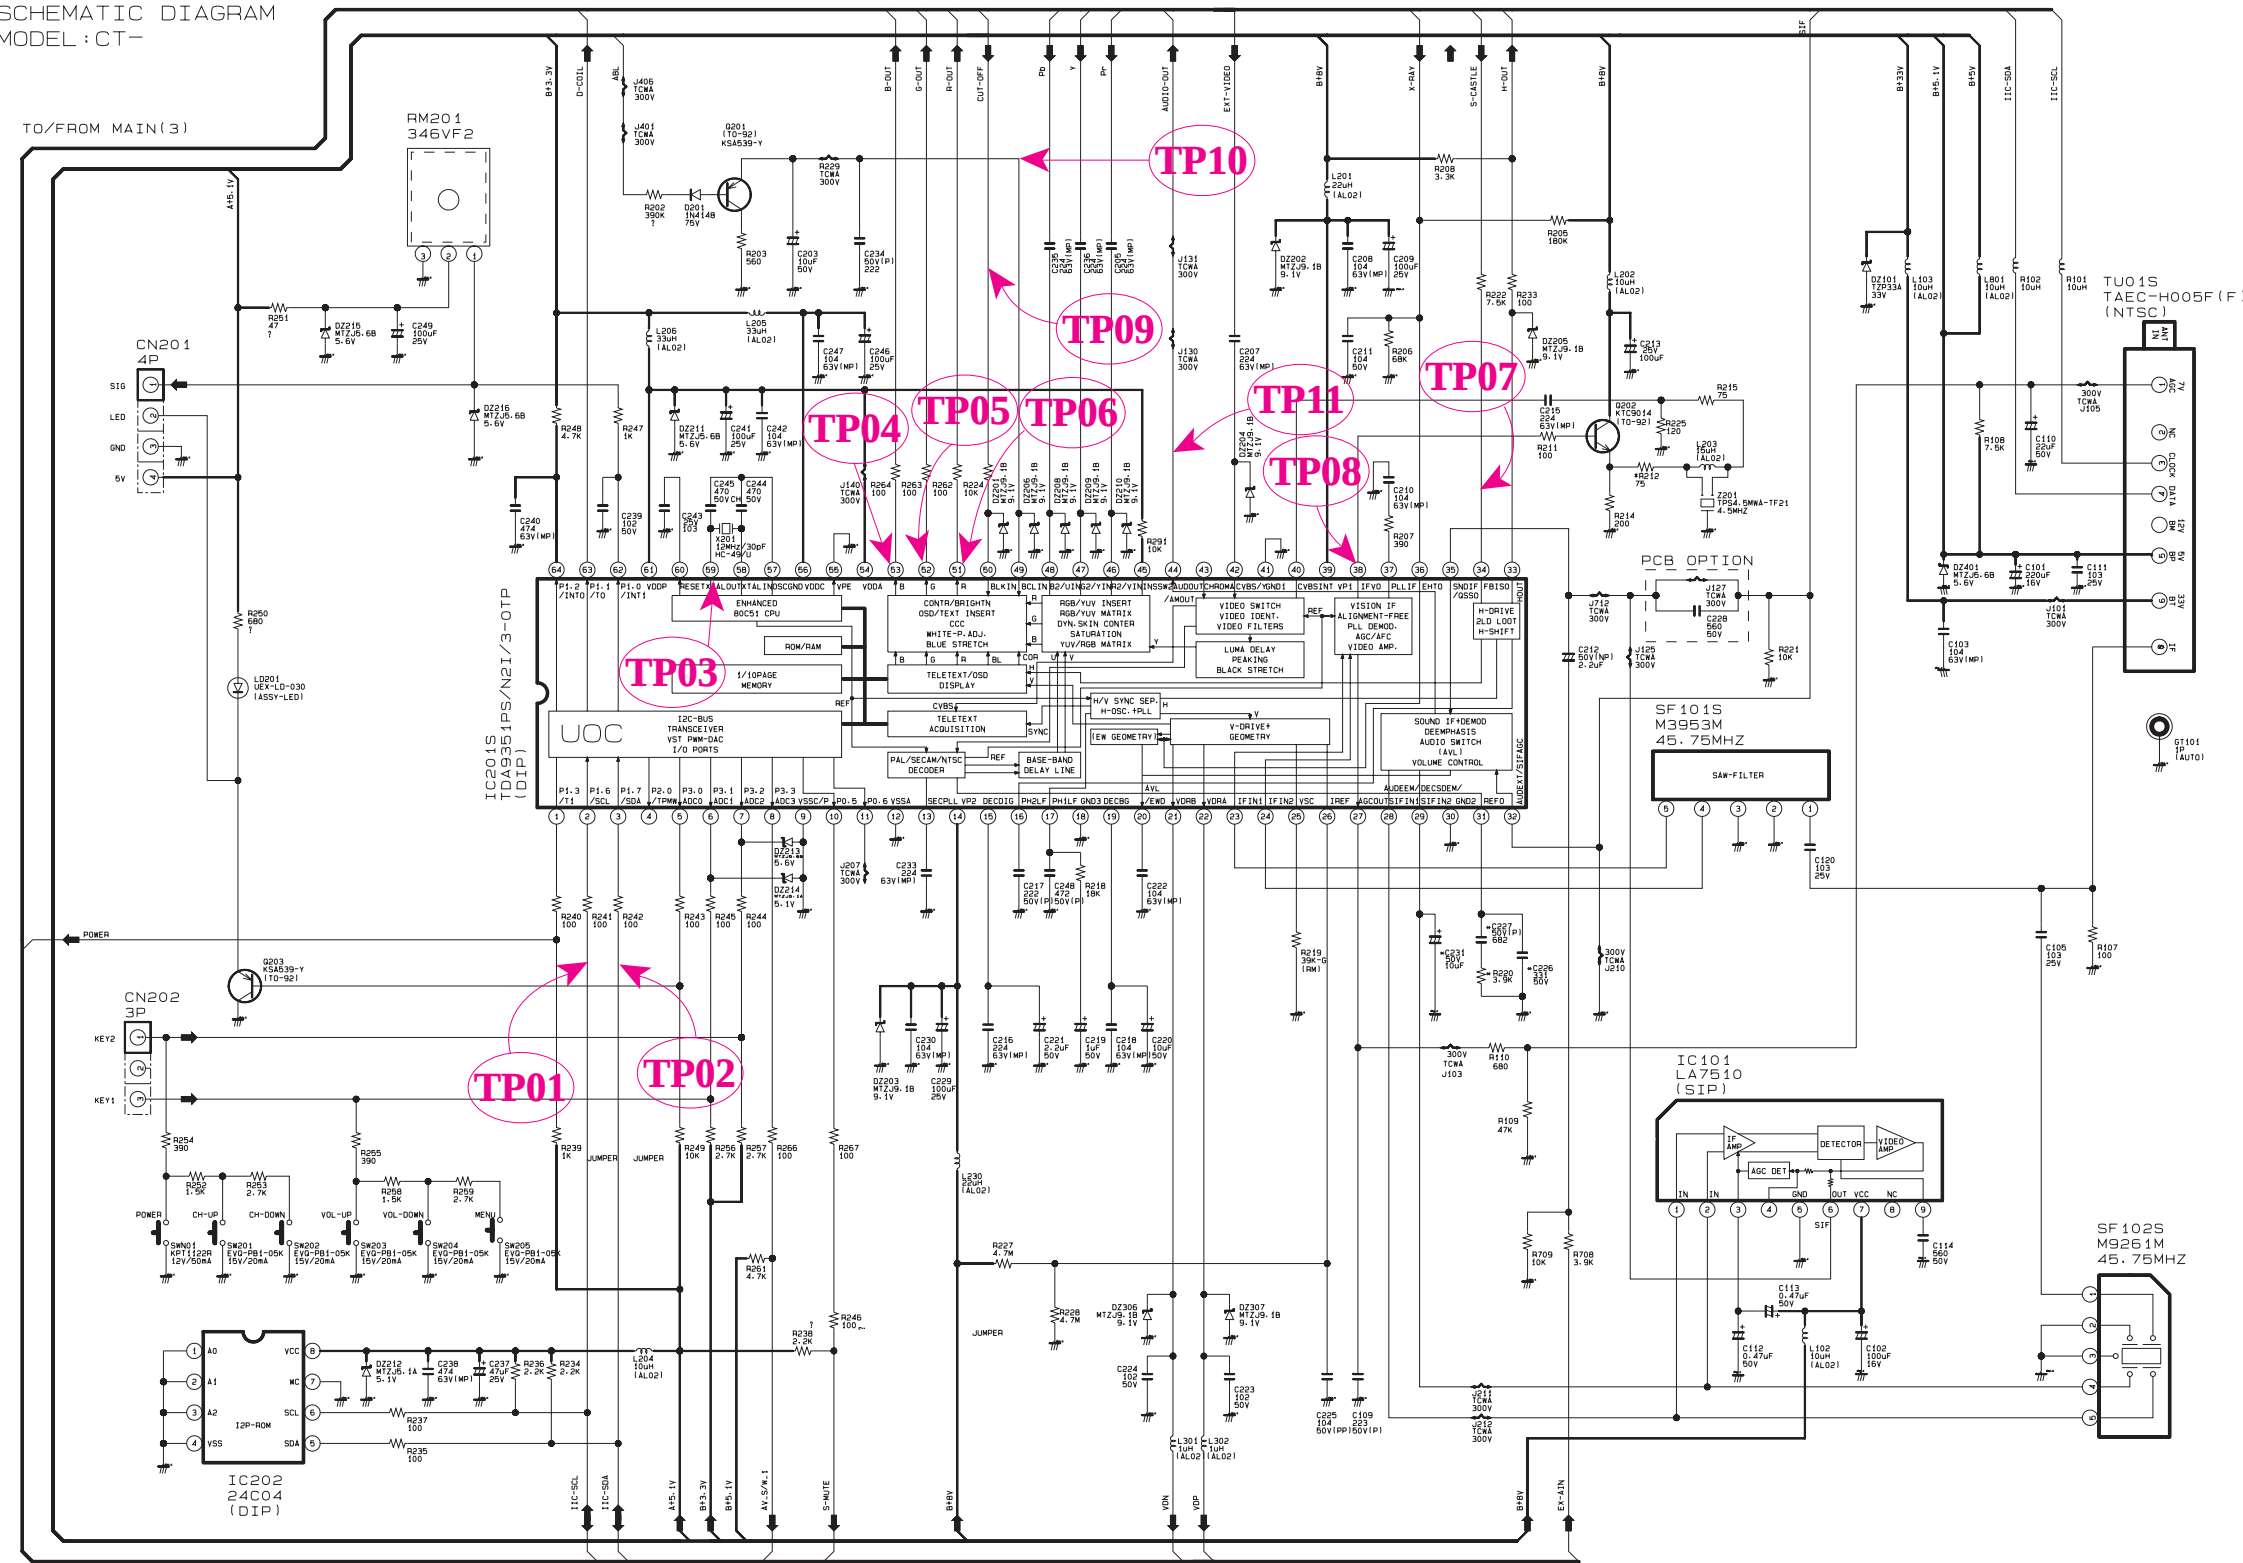


6-2 POWER

This Document can not be used without Samsung's authorization.

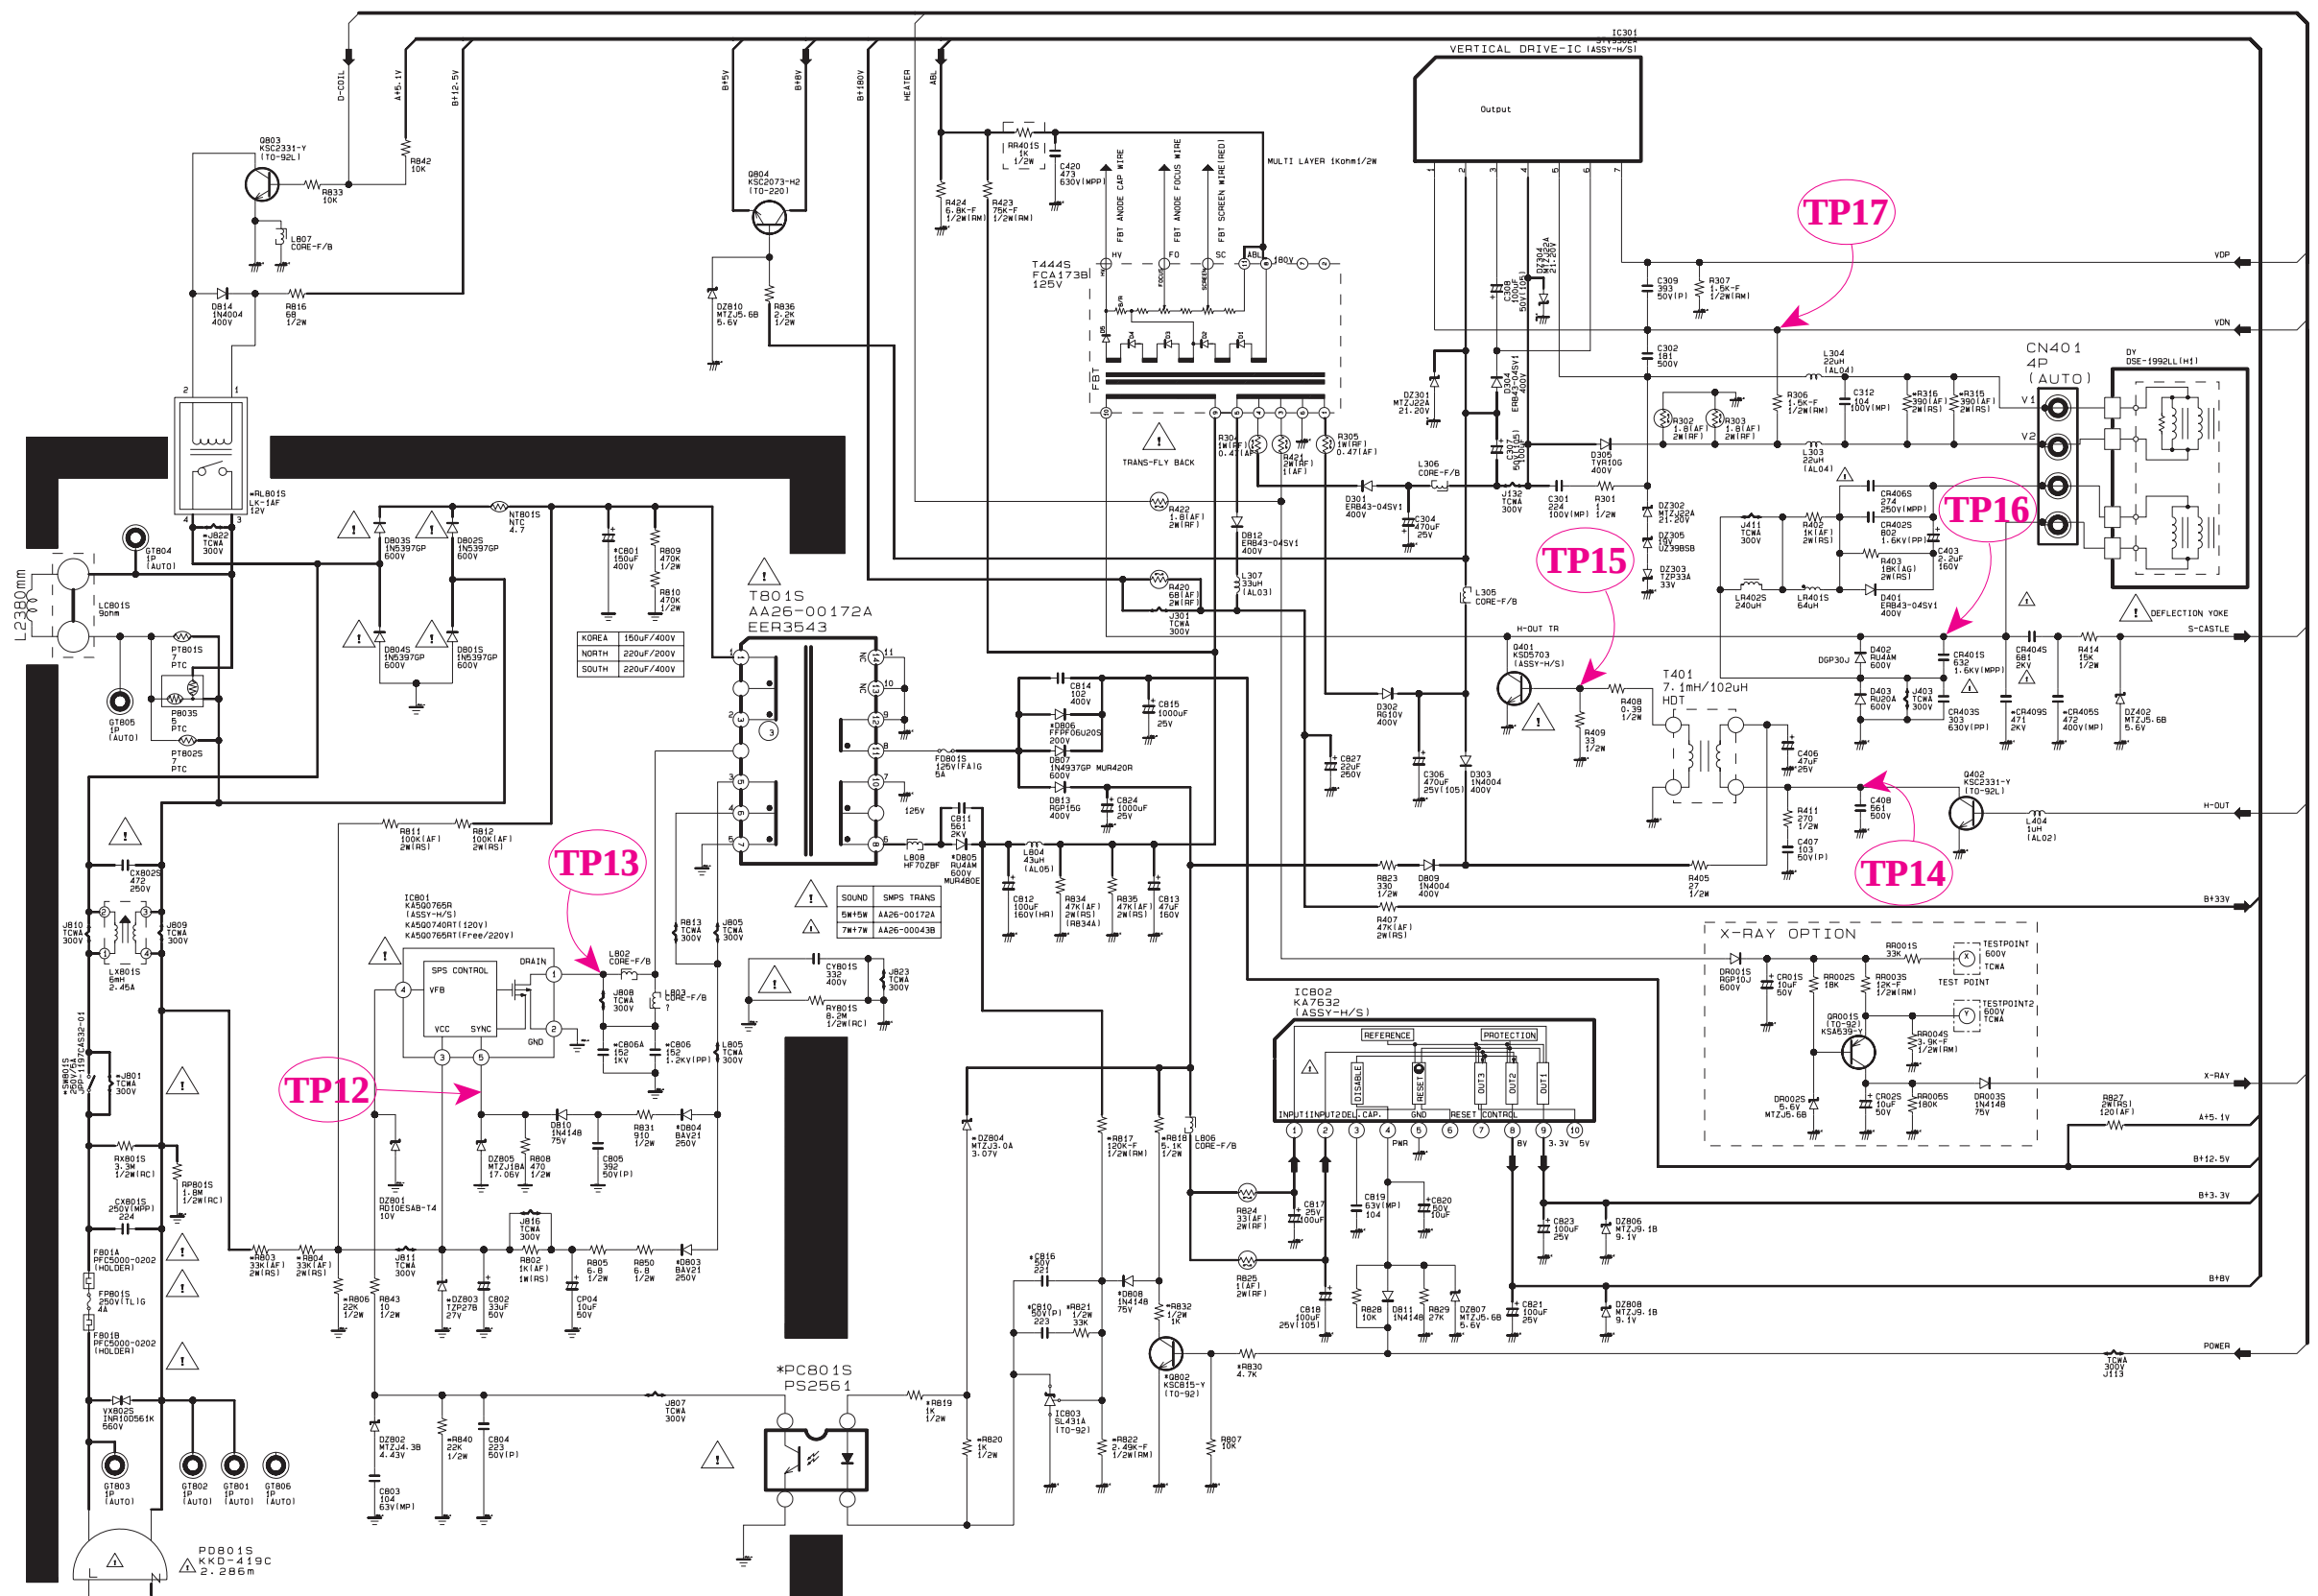

This Document can not be used without Samsung's authorization.

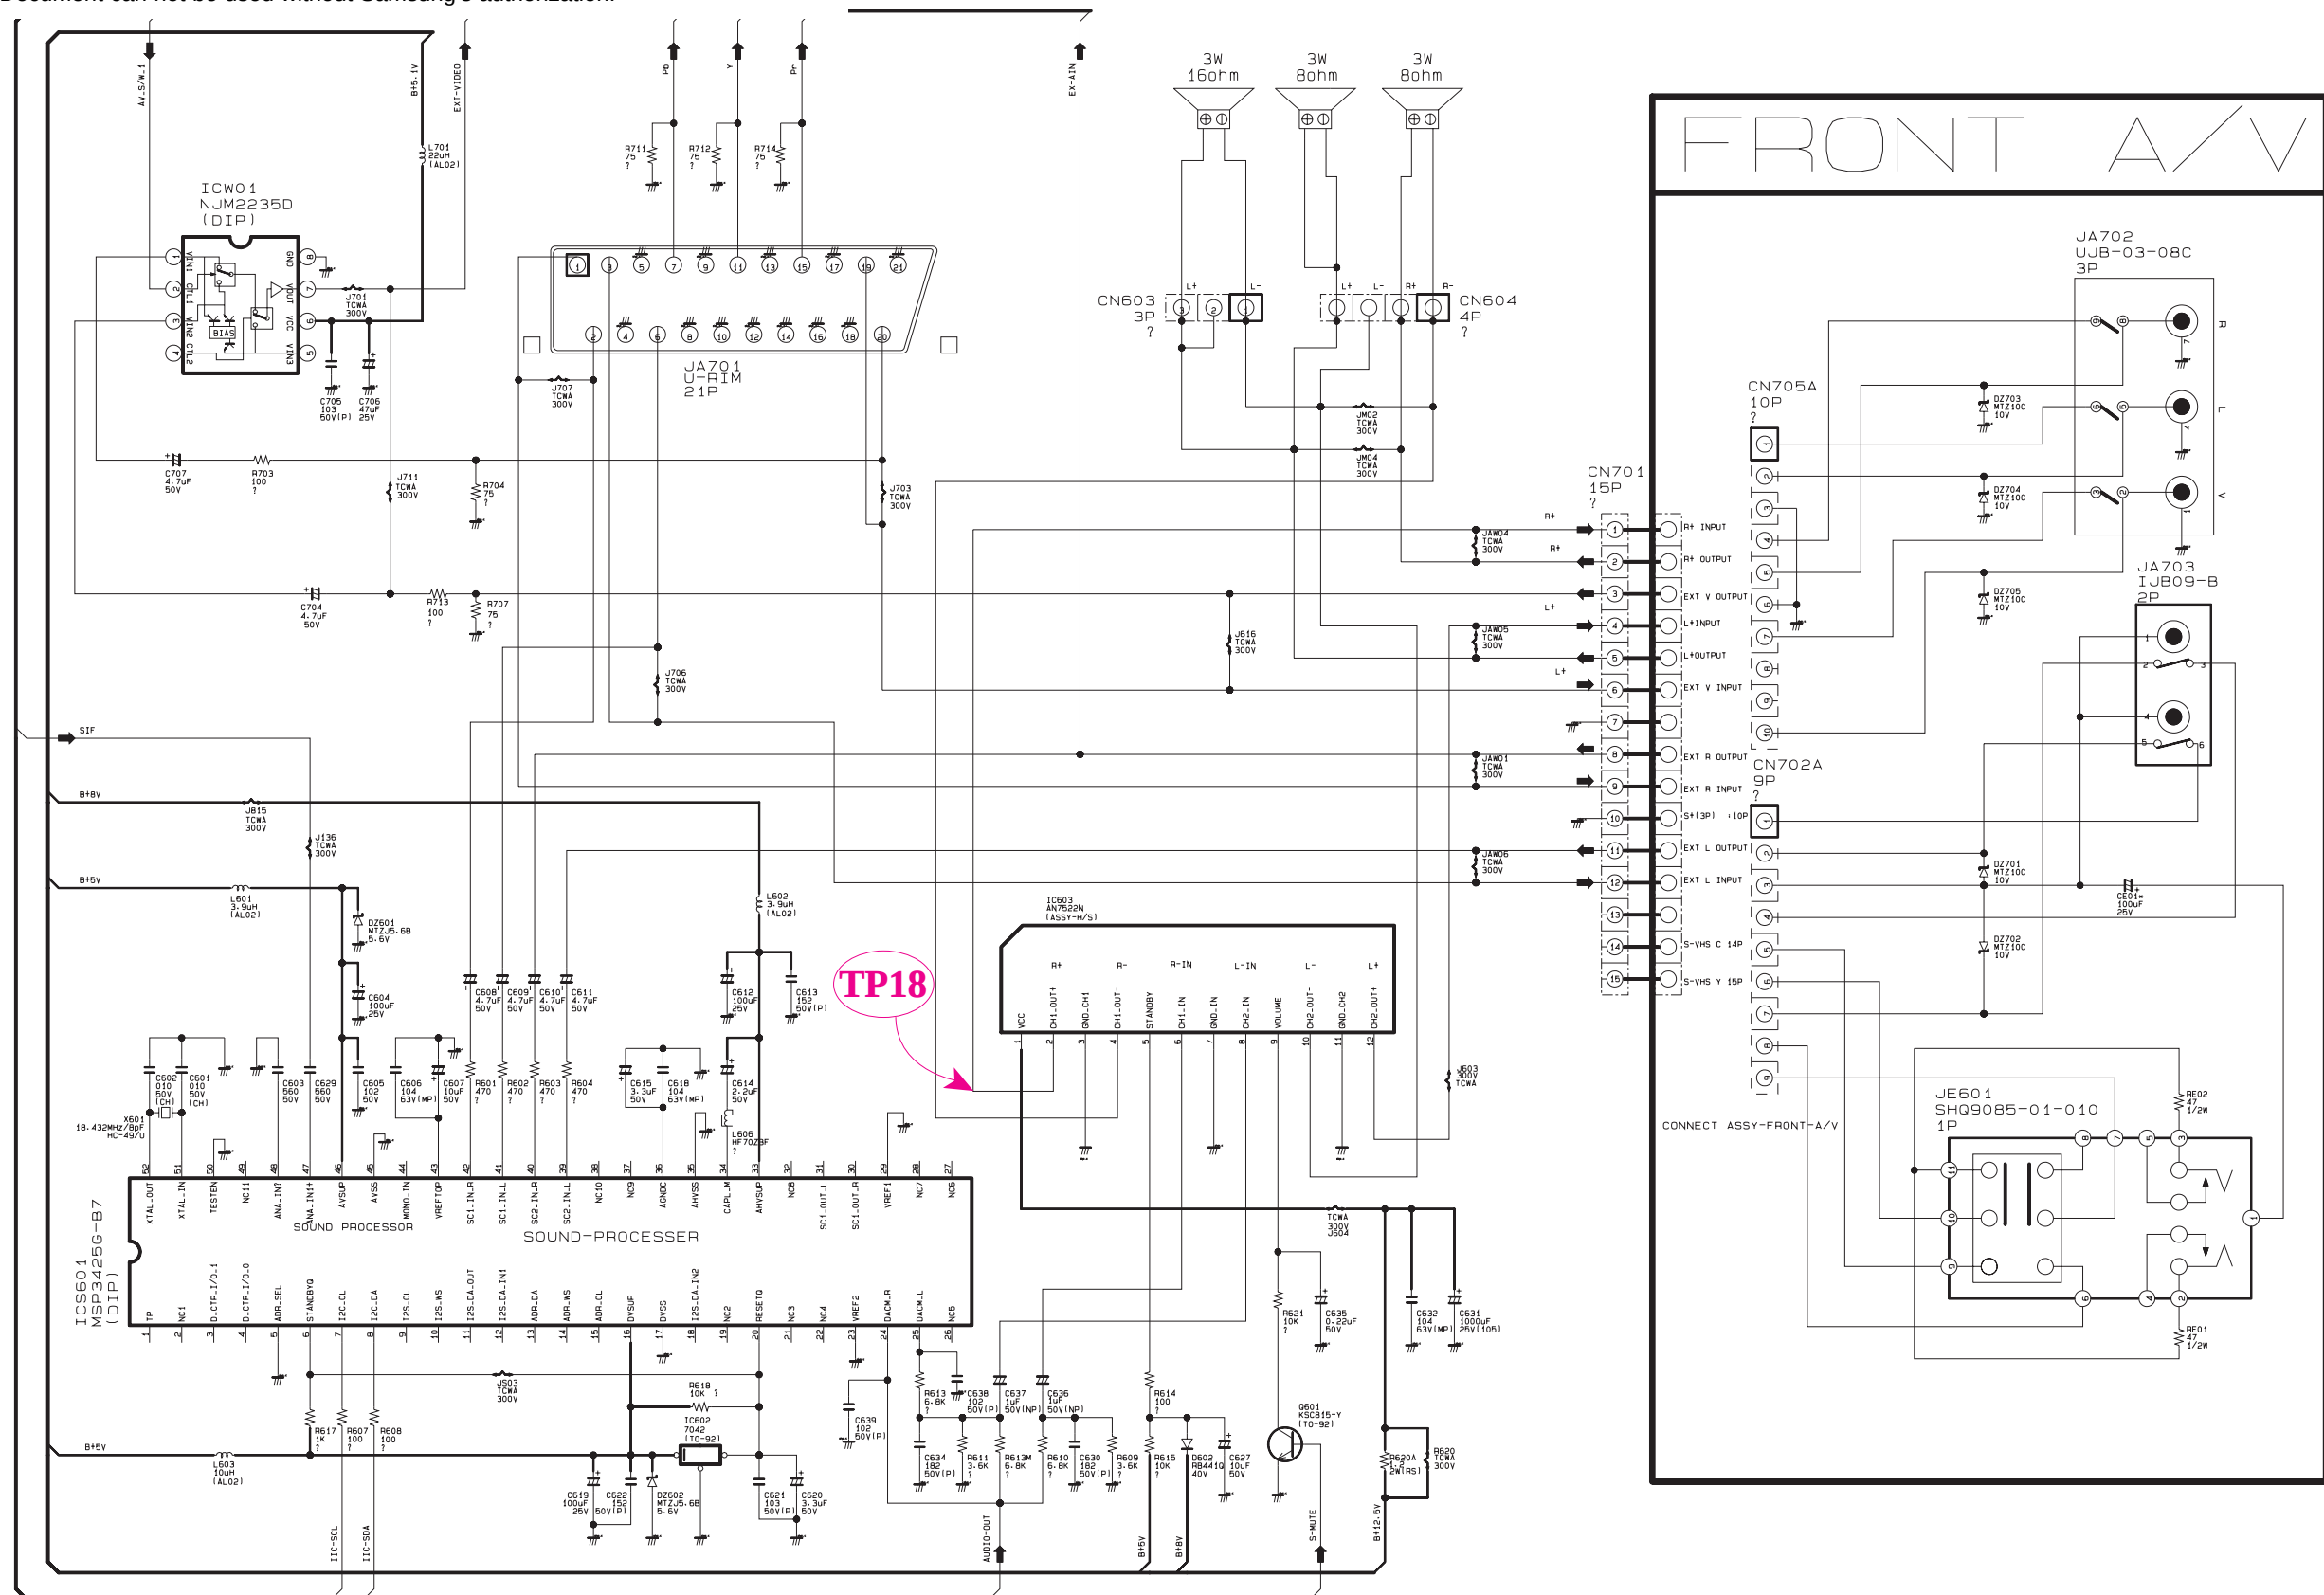

CRT Board

The schematic diagram illustrates the electrical connections for a CRT Board. It features three main functional blocks: the R/G/B Drive-IC, the Mini Neck, and the CRT-Socket.

R/G/B Drive-IC: This integrated circuit, labeled IC501 (TDA6107Q, ASSY-H/S), is responsible for driving the red, green, and blue electron guns. It has nine pins: V1 (B), V2 (R), V3 (G), GND, VDD, PROBE 1, PROBE 2, PROBE 3, and PROBE 4. The B, R, and G pins are connected to the corresponding color channels of the Mini Neck. The GND pin is connected to the common ground. The VDD pin is connected to the +5V supply. The PROBE pins are connected to the Mini Neck.

Mini Neck: This block contains the Mini Neck IC (V9995A, UCS-MN-002, 7P) and the Mini Neck IC (V9995, DHE-A98-700MSS, 11P). The Mini Neck IC has nine pins: 1 (B), 2 (R), 3 (G), 4 (GND), 5 (VDD), 6 (PROBE 1), 7 (PROBE 2), 8 (PROBE 3), and 9 (PROBE 4). The Mini Neck IC has eleven pins: 1 (B), 2 (R), 3 (G), 4 (GND), 5 (VDD), 6 (PROBE 1), 7 (PROBE 2), 8 (PROBE 3), 9 (PROBE 4), 10 (VDD), and 11 (GND). The Mini Neck IC is connected to the Mini Neck IC via a 10MΩ resistor (R504) and a 10μF capacitor (C504).

CRT-Socket: This block contains the CRT-Socket IC (GT501, 1P, AUTO) and the CRT-Socket IC (GT501, 1P, AUTO). The CRT-Socket IC has one pin: 1 (GND). The CRT-Socket IC has one pin: 1 (GND). The CRT-Socket IC is connected to the CRT-Socket IC via a 10MΩ resistor (R504) and a 10μF capacitor (C504).

Other Components: The schematic includes various passive components such as resistors (R501, R502, R503, R504, R505, R506, R507, R508, R509, R510, R511, R512, R513, R514, R515, R516, R517, R518, R519, R520, R521, R522, R523, R524, R525, R526, R527, R528, R529, R530, R531, R532, R533, R534, R535, R536, R537, R538, R539, R540, R541, R542, R543, R544, R545, R546, R547, R548, R549, R550, R551, R552, R553, R554, R555, R556, R557, R558, R559, R560, R561, R562, R563, R564, R565, R566, R567, R568, R569, R570, R571, R572, R573, R574, R575, R576, R577, R578, R579, R580, R581, R582, R583, R584, R585, R586, R587, R588, R589, R590, R591, R592, R593, R594, R595, R596, R597, R598, R599, R600, R601, R602, R603, R604, R605, R606, R607, R608, R609, R610, R611, R612, R613, R614, R615, R616, R617, R618, R619, R620, R621, R622, R623, R624, R625, R626, R627, R628, R629, R630, R631, R632, R633, R634, R635, R636, R637, R638, R639, R640, R641, R642, R643, R644, R645, R646, R647, R648, R649, R650, R651, R652, R653, R654, R655, R656, R657, R658, R659, R660, R661, R662, R663, R664, R665, R666, R667, R668, R669, R670, R671, R672, R673, R674, R675, R676, R677, R678, R679, R680, R681, R682, R683, R684, R685, R686, R687, R688, R689, R690, R691, R692, R693, R694, R695, R696, R697, R698, R699, R700, R701, R702, R703, R704, R705, R706, R707, R708, R709, R710, R711, R712, R713, R714, R715, R716, R717, R718, R719, R720, R721, R722, R723, R724, R725, R726, R727, R728, R729, R730, R731, R732, R733, R734, R735, R736, R737, R738, R739, R740, R741, R742, R743, R744, R745, R746, R747, R748, R749, R750, R751, R752, R753, R754, R755, R756, R757, R758, R759, R760, R761, R762, R763, R764, R765, R766, R767, R768, R769, R770, R771, R772, R773, R774, R775, R776, R777, R778, R779, R780, R781, R782, R783, R784, R785, R786, R787, R788, R789, R790, R791, R792, R793, R794, R795, R796, R797, R798, R799, R800, R801, R802, R803, R804, R805, R806, R807, R808, R809, R810, R811, R812, R813, R814, R815, R816, R817, R818, R819, R820, R821, R822, R823, R824, R825, R826, R827, R828, R829, R830, R831, R832, R833, R834, R835, R836, R837, R838, R839, R840, R841, R842, R843, R844, R845, R846, R847, R848, R849, R850, R851, R852, R853, R854, R855, R856, R857, R858, R859, R860, R861, R862, R863, R864, R865, R866, R867, R868, R869, R870, R871, R872, R873, R874, R875, R876, R877, R878, R879, R880, R881, R882, R883, R884, R885, R886, R887, R888, R889, R890, R891, R892, R893, R894, R895, R896, R897, R898, R899, R900, R901, R902, R903, R904, R905, R906, R907, R908, R909, R910, R911, R912, R913, R914, R915, R916, R917, R918, R919, R920, R921, R922, R923, R924, R925, R926, R927, R928, R929, R930, R931, R932, R933, R934, R935, R936, R937, R938, R939, R940, R941, R942, R943, R944, R945, R946, R947, R948, R949, R950, R951, R952, R953, R954, R955, R956, R957, R958, R959, R960, R961, R962, R963, R964, R965, R966, R967, R968, R969, R970, R971, R972, R973, R974, R975, R976, R977, R978, R979, R980, R981, R982, R983, R984, R985, R986, R987, R988, R989, R990, R991, R992, R993, R994, R995, R996, R997, R998, R999, R1000, R1001, R1002, R1003, R1004, R1005, R1006, R1007, R1008, R1009, R1010, R1011, R1012, R1013, R1014, R1015, R1016, R1017, R1018, R1019, R1020, R1021, R1022, R1023, R1024, R1025, R1026, R1027, R1028, R1029, R1030, R1031, R1032, R1033, R1034, R1035, R1036, R1037, R1038, R1039, R1040, R1041, R1042, R1043, R1044, R1045, R1046, R1047, R1048, R1049, R1050, R1051, R1052, R1053, R1054, R1055, R1056, R1057, R1058, R1059, R1060, R1061, R1062, R1063, R1064, R1065, R1066, R1067, R1068, R1069, R1070, R1071, R1072, R1073, R1074, R1075, R1076, R1077, R1078, R1079, R1080, R1081, R1082, R1083, R1084, R1085, R1086, R1087, R1088, R1089, R1090, R1091, R1092, R1093, R1094, R1095, R1096, R1097, R1098, R1099, R1100, R1101, R1102, R1103, R1104, R1105, R1106, R1107, R1108, R1109, R1110, R1111, R1112, R1113, R1114, R1115, R1116, R1117, R1118, R1119, R1120, R1121, R1122, R1123, R1124, R1125, R1126, R1127, R1128, R1129, R1130, R1131, R1132, R1133, R1134, R1135, R1136, R1137, R1138, R1139, R1140, R1141, R1142, R1143, R1144, R1145, R1146, R1147, R1148, R1149, R1150, R1151, R1152, R1153, R1154, R1155, R1156, R1157, R1158, R1159, R1160, R1161, R