

**SHARP®****SERVICE MANUAL**

SE0028LF92S00

Issued: 19<sup>th</sup> April 2004**AK-45 CHASSIS****MODEL 28LF-92EES**

In the interests of user safety (required by safety regulations in some countries) the set should be restored to its original condition and only parts identical to those specified should be used.

In order to service the model 28LF-92EES, refer to the AK-45 Chassis Service Manual (SE00AK45CHA00).

**CONTENTS**

ELECTRICAL SPECIFICATIONS .....	3
IMPORTANT SERVICING NOTES .....	4
CONTROLS & TERMINALS .....	5
PRINTED WIRING BOARD LAYOUT .....	7
PARTS LISTING .....	8
HOW TO UPDATE THE TECHNICAL INFORMATION .....	15

**SHARP CORPORATION**

This document has been published to be used for after sales service only.


**SERVICE MANUAL UPDATE LOG SHEET**

<b>Technical Report No. Technical Bulletin No.</b>	<b>Cause / Solution</b>	<b>Part No.</b>	<b>Page No.</b>	<b>Application Data /Serial No.</b>

Use this page to keep any special servicing information as Technical Report (Bulletin), Technical Information, etc. If only part number changes are required, just change part number directly the part number in the Parts Listing Section. If you need more information, please refer to the Technical Report (Bulletin).

## ELECTRICAL SPECIFICATIONS

- Power Input ..... 220V-240 Volts AC 50 Hz
- Power Consumption  
 Normal Operation (Method IEC60107) ..... 90 W  
 Stand-by Operation ..... < 4 W
- Audio Power Output Rating (MPO) / Impedance  
 Internal Left Speaker ..... 10 W, 7 Ω  
 Internal Right Speaker ..... 10 W, 7 Ω
- Speakers  
 2 ways speaker elliptic (2 pcs) ..... 50 x 120 mm
- Convergence (Maximum Misconvergence)

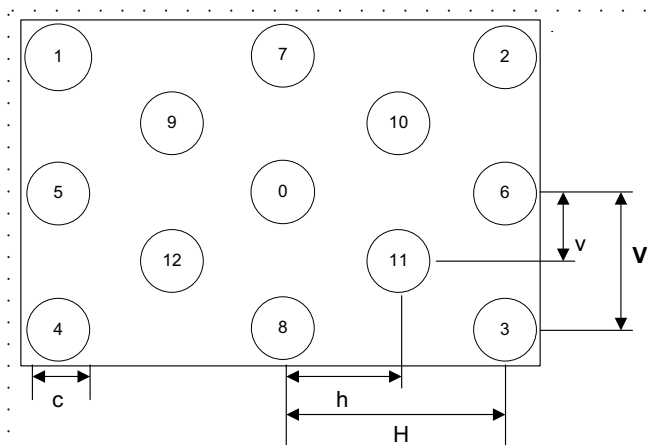

Position of measuring points on the screen

Distance of measuring points (mm)	
H (2h = H)	270
V (2v = V)	140
c	10

- Picture Intermediate frequency  
 L' ..... 33.9MHz  
 L, B/G, D/K, I ..... 38.9MHz
- Sound Carrier Trap  
 L' ..... 40.4MHz  
 L, D/K ..... 32.4MHz  
 B/G ..... 33.4MHz  
 I ..... 32.9MHz
- Adjacent Sound Carrier Trap  
 L' ..... 32.4MHz  
 L, D/K, B/G ..... 40.4MHz  
 I ..... 40.9MHz
- Adjacent Picture Carrier Trap  
 L' ..... 41.9MHz  
 L, D/K, I ..... 30.9MHz  
 B/G ..... 31.9MHz
- Aerial Input Impedance  
 VHF/UHF ..... 75 ohm Unbalanced
- Tuning Ranges ..... 45.75MHz thru 855.25 MHz  
 VHF: IR A - J / S1 - S41 CH (Hiperband)  
 E2 - E12 / F2 - F10  
 UHF: I21 - I69 CH / E21 - E69

Admissible misconvergence in X - and Y - direction (mm)

Measuring points		misconvergence
Centre	0	0.4
Corner points	1 ; 2 ; 3 ; 4	1.8
Medium points	9 ; 10 ; 11 ; 12	1.4
right, left	5 ; 6	1.2
top, bottom	7 ; 8	1.2

•White Level

Apply the rated voltage at the rated frequency to the TV set, while it is receiving full white pattern RF signal of 60 dB/μV from its RF input via the pattern generator.  
 Turn all picture controls to maximum value. Measure the colour temperatures at the center of the screen by using the colour analyzer.

**X=0.290 ± 0.015      Y=0.300 ± 0.015**

Specifications are subject to change without prior notice.

**MODEL DESTINATION (Operation Manual Languages)**

**28LF-92EES: Español, Português.**

**WARNING**

The chassis in this receiver is partially hot. Use an isolation transformer between the line cord plug and power receptacle, when servicing this chassis.  
 To prevent electric shock, do not remove cover. No user-serviceable parts inside. Refer servicing to qualified service personnel.

## IMPORTANT SERVICING NOTES

Only qualified service personnel are allowed to carry out maintenance and repair of this receiver.

### Servicing of High Voltage System and CRT

It is important that the static charge is removed from the high voltage system when carrying out work on the receiver. This can be achieved by connecting a 10K resistor (with a suitably insulated lead) from the CRT cavity connector to the CRT ground tag. This must be carried out with the AC supply disconnected from the receiver.

Note the following:

- The CRT in this receiver employs Integral Implosion Protection.
- If the CRT has to be changed it **MUST** be replaced with the correct type for continued safe working.
- **DO NOT** lift the CRT by its neck.
- When handling the CRT, ensure that shatterproof goggles are worn.
- Ensure that the CRT is discharge before handling.

### X-Ray

This receiver is designed to keep any x-ray emission to an absolute minimum. Some fault conditions and servicing procedures may produce potentially hazardous x-ray radiation levels. This is a problem when in close proximity to the receiver for long periods of time. To reduce any risks associated with this, please observe the following precautions:


1. When undertaking any servicing on this chassis, **DO NOT** increase the EHT to more than 30 KV, (at a instantaneous beam current of 1800  $\mu$ A).
2. Ensure that during normal operation the EHT does not exceed 28,15 KV (at a beam current of 1800  $\mu$ A). This level has been preset in the factory. Always check that this level has not been exceeded after carrying out any repair on the receiver.
3. **DO NOT** replace the CRT with any other type than that specified in the parts listing as this may cause excessive x-ray radiation.

### Before returning the receiver to the customer

In addition to the above checks, the following should also be carried out before returning the receiver to the customer.

1. Inspect all the leads to ensure that they are dressed correctly and that they are not obstructed or pinched by any other parts.
2. Ensure that all protective devices are in good condition. These will include nonmetallic control knobs, insulating fish papers, cabinets backs, compartment covers or shields, mechanical insulators, etc.

## CONTROLS & TERMINALS

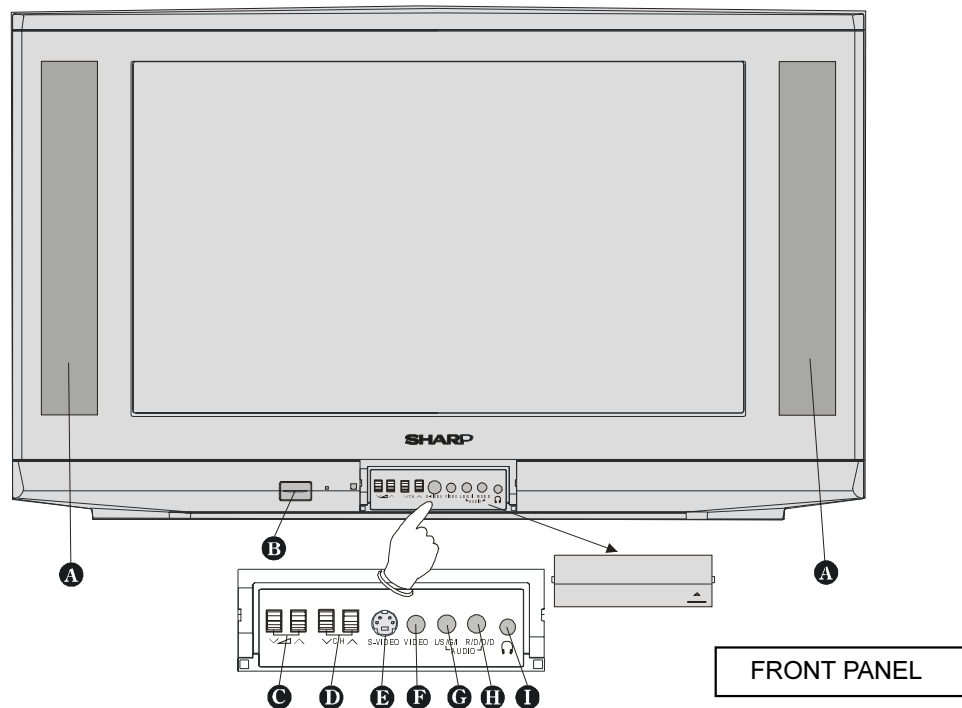

- A** Speakers (left + right)
- B**  $\text{\textcircled{I}}$  = Power On / Off
- C**  $\text{\textcircled{v}} \text{\textcircled{^}}$  = Volume -/+
- D**  $\text{\textcircled{v}} \text{\textcircled{CH}} \text{\textcircled{^}}$  = Program -/+
- E** S-VIDEO

- F** VIDEO
- G** AUDIO L (L/S/G/I) = Audio left
- H** AUDIO R (R/D/D/D) = Audio right
- I**  $\text{\textcircled{H}}$  = Headphone 3,6 mm  $\varnothing$


### REAR TV

#### RF Input

1. Aerial terminal


#### 21-pin In/Out

2. 21-pin Audio/Video (RGB) (AV-1) With PAL/SECAM/NTSC Video Input
3. 21-pin Audio/Video (AV-2) With PAL/SECAM/NTSC Video Input

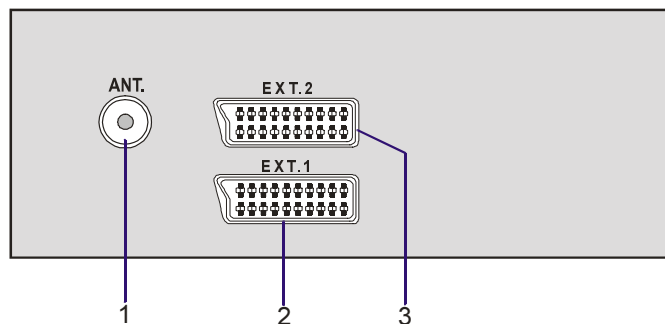

# REMOTE CONTROL


- ① = Stand By
- ② = Cursor Up
- ③ = Cursor Right
- ④ OK = OK
- ⑤ = Info (Program Menu)
- ⑥ 0 - 9 = Direct Program
- ⑦ = Double Digit
- ⑧ = Wide mode button
- ⑨ P/CH+ = Program +
- ⑩ = Volume +
- ⑪ = TV / Quit Menu
- ⑫ = EXT button  
(EXT-1, RGB, EXT-2, F-AV, SVHS)
- ⑬ **Yellow** = Feature Menu
- ⑭ **Blue** = Installation Menu
- ⑮ = Hold
- ⑯ = Update
- ⑰ = Index Page
- ⑱ = Reveal
- ⑲ = Expand
- ⑳ = Mix
- ㉑ = Teletext
- ㉒ = Time
- ㉓ **Red** = Sound Menu
- ㉔ **Green** = Picture Menu
- ㉕ = Mute
- ㉖ I-II = Mono/Stereo - Dual I-II
- ㉗ = - Volume
- ㉘ - P/CH = -Program
- ㉙ = Flash back button
- ㉚ **M** = Menu
- ㉛ = Cursor Down
- ㉜ = Cursor Left

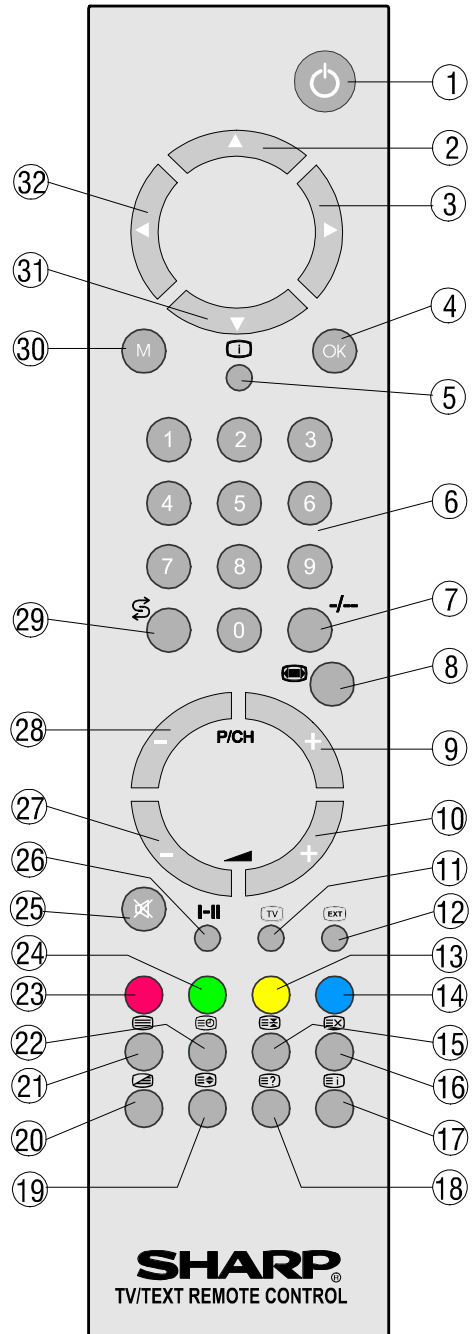




# CHASSIS LAYOUT

Mother Unit

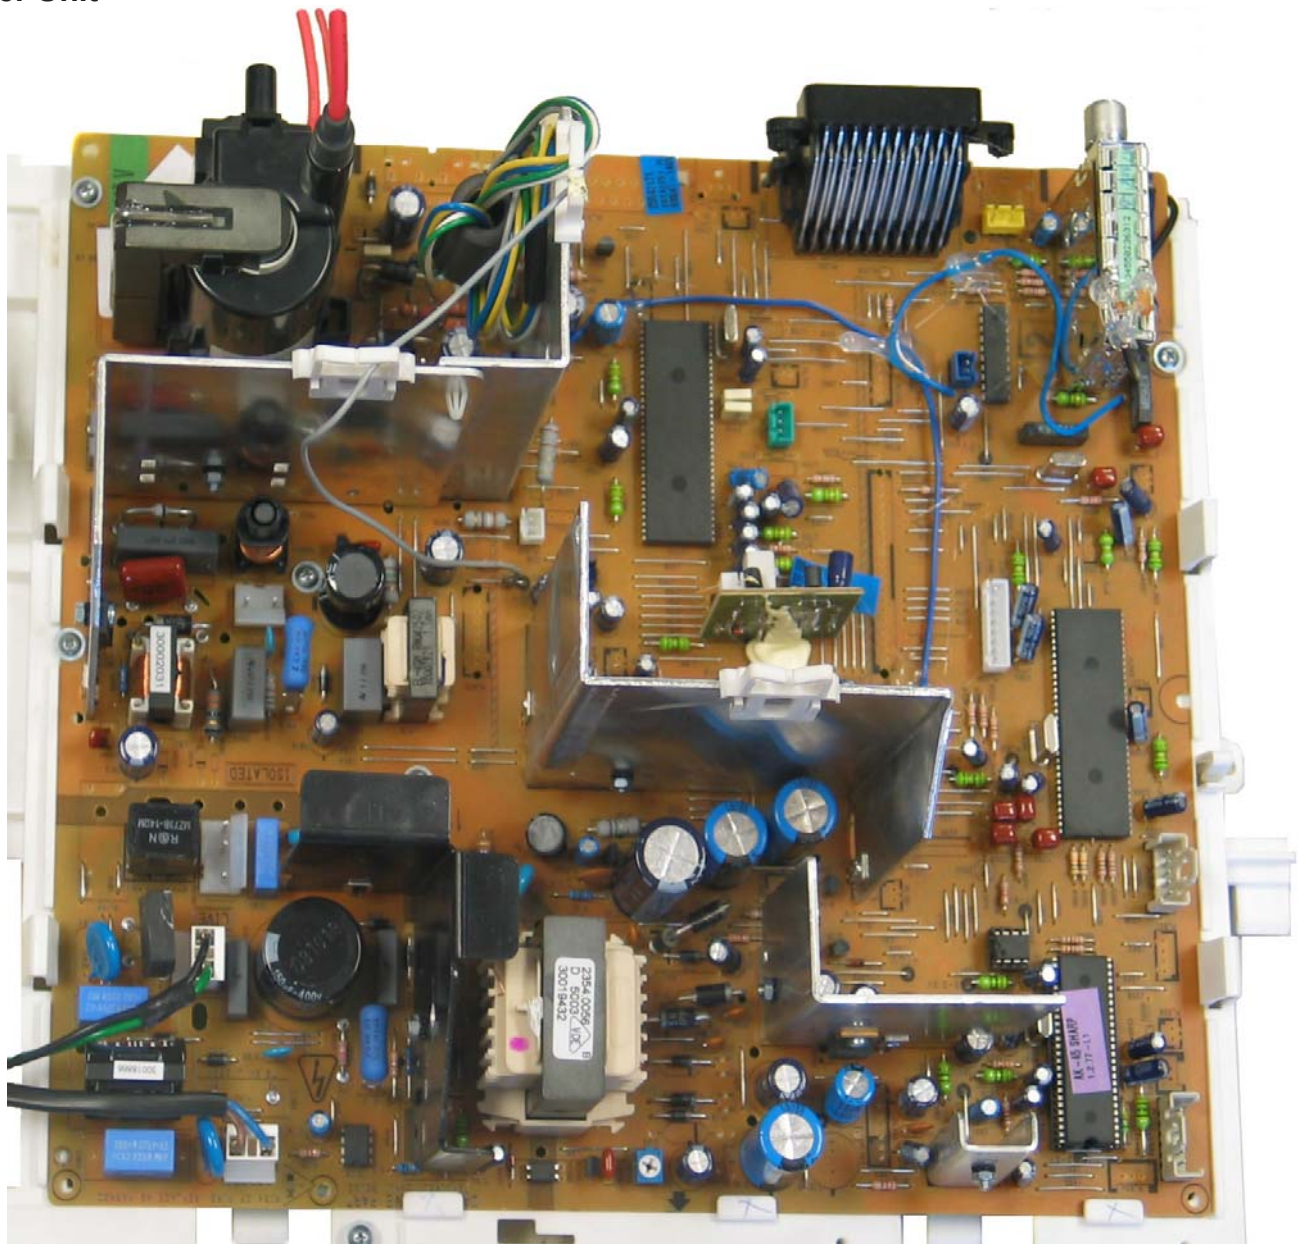

CRT Unit

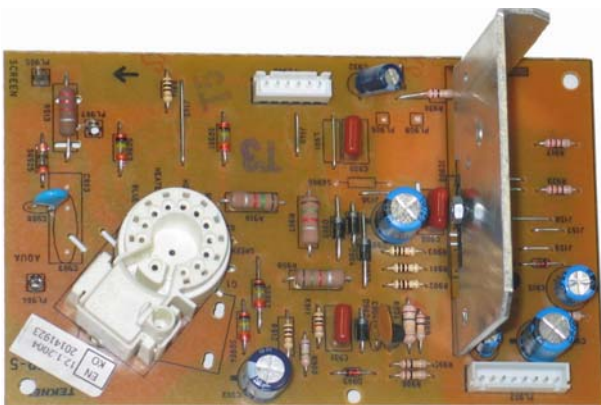

Control Panel Unit



# PARTS LISTING

## REPLACEMENT PARTS

Replacement parts which have special safety characteristics are identified in this manual. Electrical components having such features are identified by  $\Delta$  in the Replacement Parts Listing.

The use of a substitute replacement part which does not have the same safety characteristics as the factory recommended is not permitted.

Replacement parts not shown in this service manual may create shock fire, or other hazards.

### HOW TO ORDER REPLACEMENT PARTS

To have your order completed promptly and correctly please supply the following information.

1. MODEL NUMBER
2. REF. NO.
3. PART NO. (\*)
4. DESCRIPTION
5. CODE
6. QUANTITY

(\*) When ordering any part, a "V" should be added before the Part No.

REF No.	(*) PARTS	DESCRIPTION	SN CODE	EX CODE
<b>PICTURE TUBE</b>				
.	30016948	28" CPT TUBE 16.9 50HZ REAL FLAT	CK	DF
.	30029092	28" 16.9 RF DEG COIL&EARTH CB. WO/UL S	AL	AX
<b>TUNER</b>				
TU200	30009637	TUNER WSP (PLL) 38.9 MK2 - BATCH	AR	BC
<b>INTEGRATED CIRCUITS</b>				
IC1	30001665	IC LM358N	AA	AE
IC100	30015087	IC SAFE OPTOCOUPLER TCET1102G	AA	AE
IC100	30001669	PREAMPLIFIER TFMS1380	AD	AM
IC101	30001622	IC 7805 (1A)	AB	AF
IC101	30018063	IC HT48RA0A OTP	AF	AR
IC102	30001668	IC LM317T	AC	AH
IC103	30001668	IC LM317T	AC	AH
IC104	30001500	IC LM7808	AC	AH
IC106	30011968	IC SMPS MC44608 DIP8	AF	AQ
IC116	30001506	IC TL431	AC	AH
IC200	30019492	IC VDP3134Y	AP	BA
IC201	30001619	IC VIDEO SWITCH TEA6415C DIP20	AM	AY
IC206	30021083	IC TDA9886T/V3-SO24	AL	AX
IC301	30016113	IC AAMP TDA7269A 2*14W MULTIWATT11	AH	AV
IC500	20152368	PR.IC.45-SHARP 1.2.77-L.1	AS	BD
IC502	20142752	IC 24C16 V054L5314A00000110812	AB	AF
IC600	30007793	IC STV9379FA	AK	AW
IC601	30001506	IC TL431	AC	AH
IC700	30013658	IC MSP3410G SDIP64	AS	BD
IC704	30001518	IC TDA1308	AE	AP
IC900	30018768	IC TDA6109	AK	AW
IC901	30014346	IC 78L05 TO-92 (100mA)	AA	AE
IC902	30014346	IC 78L05 TO-92 (100mA)	AA	AE
<b>TRANSISTORS</b>				
Q1	30001452	TR BC327	AA	AC
Q100	30001453	TR BC337	AA	AC
Q102	30001386	TR MTP6N60E (PLASTIC)	AE	AP
Q103	30001454	TR BC548B	AA	AC
Q106	30001454	TR BC548B	AA	AC
Q107	30001428	TR BF423	AA	AC
Q108	30001457	TR BC848B SMD	AA	AC
Q109	30001457	TR BC848B SMD	AA	AC
Q110	30001384	TR MCR22-6	AB	AG
Q112	30001458	TR BC858B SMD	AA	AB
Q113	30001457	TR BC848B SMD	AA	AC
Q114	30001457	TR BC848B SMD	AA	AC
Q2	30001453	TR BC337	AA	AC
Q200	30001457	TR BC848B SMD	AA	AC
Q201	30001457	TR BC848B SMD	AA	AC
Q202	30001457	TR BC848B SMD	AA	AC

REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
Q203	30001457	TR BC848B SMD	AA	AC
Q208	30001457	TR BC848B SMD	AA	AC
Q216	30001457	TR BC848B SMD	AA	AC
Q218	30001458	TR BC858B SMD	AA	AB
Q220	30001457	TR BC848B SMD	AA	AC
Q221	30001457	TR BC848B SMD	AA	AC
Q222	30001457	TR BC848B SMD	AA	AC
Q223	30001457	TR BC848B SMD	AA	AC
Q3	30001453	TR BC337	AA	AC
Q4	30001452	TR BC327	AA	AC
Q500	30001457	TR BC848B SMD	AA	AC
Q501	30001457	TR BC848B SMD	AA	AC
Q502	30001457	TR BC848B SMD	AA	AC
Q503	30001457	TR BC848B SMD	AA	AC
Q504	30001457	TR BC848B SMD	AA	AC
Q505	30001458	TR BC858B SMD	AA	AB
Q508	30001457	TR BC848B SMD	AA	AC
Q511	30001457	TR BC848B SMD	AA	AC
Q513	30001458	TR BC858B SMD	AA	AB
Q600	30001429	TR BUK444-200A	AD	AM
Q601	30001435	TR NBJT BC639 1A/100V TO92	AA	AB
Q602	30001441	TR BUJ2508AF	AE	AP
Q603	30001458	TR BC858B SMD	AA	AB
Q605	30001458	TR BC858B SMD	AA	AB
Q606	30001458	TR BC858B SMD	AA	AB
Q700	30001458	TR BC858B SMD	AA	AB
Q703	30001458	TR BC858B SMD	AA	AB
Q704	30001457	TR BC848B SMD	AA	AC
Q900	30001427	TR BF422	AA	AE
Q901	30001458	TR BC858B SMD	AA	AB
Q902	30001458	TR BC858B SMD	AA	AB
Q903	30001458	TR BC858B SMD	AA	AB
Q904	30001458	TR BC858B SMD	AA	AB
Q905	30001458	TR BC858B SMD	AA	AB
Q906	30001452	TR BC327	AA	AC
<b>DIODES</b>				
D1	30009699	DIODE ZENER SMD BZT55C12	AA	AB
D100	30001329	DIODE 1N4007 1A/1000V 30A	AA	AB
D100	30001279	LED RED/GREEN LTL293SJ	AC	AH
D100	30002733	LED INFRARED IR333	AA	AC
D101	20108354	DIODE BRIDGE GBU4M 4A/1000V 150A(FORMLU)	AB	AE
D101	30001371	DIODE ZENER 5.1V ZPD	AA	AB
D102	30001371	DIODE ZENER 5.1V ZPD	AA	AB
D103	30001318	DIODE BA159 1A/800V 20A	AA	AB
D103	30001371	DIODE ZENER 5.1V ZPD	AA	AB
D104	30001318	DIODE BA159 1A/800V 20A	AA	AB
D104	30001371	DIODE ZENER 5.1V ZPD	AA	AB
D105	30001318	DIODE BA159 1A/800V 20A	AA	AB
D105	30001371	DIODE ZENER 5.1V ZPD	AA	AB
D106	30001344	DIODE ZENER 6.2V 1/2W	AA	AB
D106	30001371	DIODE ZENER 5.1V ZPD	AA	AB
D107	30001371	DIODE ZENER 5.1V ZPD	AA	AB
D108	30001315	DIODE BYD33D 1A/200V 20A	AA	AE
D110	30001288	DIODE BYV27-200 2A/200V 50A	AA	AD
D111	30001323	DIODE BY299 2A/800V 70A	AA	AD
D112	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA
D113	30003720	DIODE ZENER BZT55C5V6 5.6V SMD	AA	AB
D114	30001285	DIODE 1N4148 SMD	AA	AB
D118	30009366	DIODE UF5402 3A/200V 150A	AB	AF
D119	30009366	DIODE UF5402 3A/200V 150A	AB	AF
D121	20092405	CN.ASY.37-DIODE UF5407+FERRITE BAR 5*8	AB	AE
D125	30001285	DIODE 1N4148 SMD	AA	AB
D127	30001315	DIODE BYD33D 1A/200V 20A	AA	AE
D129	30001285	DIODE 1N4148 SMD	AA	AB
D130	30001329	DIODE 1N4007 1A/1000V 30A	AA	AB
D131	30001318	DIODE BA159 1A/800V 20A	AA	AB



REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
D132	30001285	DIODE 1N4148 SMD	AA	AB	L203	30001996	FIXED COIL 22UH Q40 K	AA	AB
D133	30003722	DIODE ZENER ZPD15V	AA	AA	L206	30001979	FIXED COIL 1UH Q45 M-A	AA	AB
D134	30001285	DIODE 1N4148 SMD	AA	AB	L207	30001979	FIXED COIL 1UH Q45 M-A	AA	AB
D2	30009699	DIODE ZENER SMD BZT55C12	AA	AB	L212	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D200	30001285	DIODE 1N4148 SMD	AA	AB	L213	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D204	30001285	DIODE 1N4148 SMD	AA	AB	L214	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D205	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA	L215	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D206	30018735	DIODE ZENER BZT55C15 15V SMD	AA	AB	L216	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D207	30018735	DIODE ZENER BZT55C15 15V SMD	AA	AB	L217	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D208	30018735	DIODE ZENER BZT55C15 15V SMD	AA	AB	L218	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D209	30018735	DIODE ZENER BZT55C15 15V SMD	AA	AB	L220	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D212	30001285	DIODE 1N4148 SMD	AA	AB	L227	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D213	30012411	DIODE BA782 SMD	AA	AD	L232	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D214	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA	L236	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D215	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA	L239	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D216	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA	L247	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D217	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA	L251	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D218	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA	L252	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D219	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA	L263	30001979	FIXED COIL 1UH Q45 M-A	AA	AB
D220	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA	L264	30001979	FIXED COIL 1UH Q45 M-A	AA	AB
D221Y	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA	L265	30001979	FIXED COIL 1UH Q45 M-A	AA	AB
D222Y	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA	L266	30001987	FIXED COIL 4.7UH Q70 K-A	AA	AB
D506	30012412	DIODE ZENER 2.4V SMD	AA	AB	L500	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
D601	30001377	DIODE ZENER 33V UZT 33B	AB	AF	L501	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
D602	30001318	DIODE BA159 1A/800V 20A	AA	AB	L502	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
D603	30001299	DIODE UF5404 3A/400V 150A	AA	AD	L503	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
D604	30001299	DIODE UF5404 3A/400V 150A	AA	AD	L504	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
D609	30001318	DIODE BA159 1A/800V 20A	AA	AB	L505	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
D610	30001318	DIODE BA159 1A/800V 20A	AA	AB	L506	30006770	FIXED COIL 0.22UH	AA	AB
D611	30007681	DIODE UF5407 3A/800V 150A	AB	AF	L601	30002031	FIXED COIL INJECTION 15MH	AD	AL
D612	30001285	DIODE 1N4148 SMD	AA	AB	L602	30002156	LINEARITY COIL 30UH 110° (AK19)	AD	AL
D613	30001291	DIODE HER107 1A/800V 30A	AA	AB	L603	30002829	FIXED COIL BRIDGE 1.5MH	AD	AL
D614	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA	L700	30001996	FIXED COIL 22UH Q40 K	AA	AB
D615	30001318	DIODE BA159 1A/800V 20A	AA	AB	L701	30001996	FIXED COIL 22UH Q40 K	AA	AB
D617	30025773	DIODE ZENER SMD BZT55B5V1	AA	AA	L702	30001996	FIXED COIL 22UH Q40 K	AA	AB
D622	30001285	DIODE 1N4148 SMD	AA	AB	L703	30001996	FIXED COIL 22UH Q40 K	AA	AB
D623	30001285	DIODE 1N4148 SMD	AA	AB	L711	30001996	FIXED COIL 22UH Q40 K	AA	AB
D624	30001285	DIODE 1N4148 SMD	AA	AB	L714	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D625	30001320	DIODE GUC BY228	AB	AF	L715	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
D627	30001284	DIODE 1N4148 0.15A/100V 0.5A	AA	AB	L717	30001979	FIXED COIL 1UH Q45 M-A	AA	AB
D628	30001285	DIODE 1N4148 SMD	AA	AB	L719	30001968	FERRITE BEAD (0805) BLM21B201S	AA	AE
D701	30007761	DIODE ZENER SMD BZT55C3V6	AA	AB			<b>CERAMIC FILTERS</b>		
D702	30001285	DIODE 1N4148 SMD	AA	AB	Z200	30014261	FILTER SAW K3958M	AF	AR
D706	30001285	DIODE 1N4148 SMD	AA	AB	Z201	30012545	FILTER SAW K9656M	AG	AR
D902	30001318	DIODE BA159 1A/800V 20A	AA	AB			<b>TRANSFORMERS</b>		
D903	30001284	DIODE 1N4148 0.15A/100V 0.5A	AA	AB	TR100	30019432	TRF SMPS SAFE AK45 110° (170-270V)	AG	AS
D904	30001318	DIODE BA159 1A/800V 20A	AA	AB	TR600	30021290	TRF FBT SAFE 110° 50HZ LAYER	AS	BC
D905	30001318	DIODE BA159 1A/800V 20A	AA	AB	TR601	30002090	LINE DRIVER NEW TYPE	AD	AM
D907	30001318	DIODE BA159 1A/800V 20A	AA	AB		30015614	TRF PFC SAFE 0.9A 42 MH EP	AL	AX
D908	30014353	DIODE BAT85	AA	AC			<b>CAPACITORS</b>		
D909	30001285	DIODE 1N4148 SMD	AA	AB	C1	30000353	CAP EL 100UF 25V M	AA	AB
D910	30001285	DIODE 1N4148 SMD	AA	AB	C100	30000190	CAP CER 100PF 50V J CH	AA	AB
		<b>PACKAGED CIRCUITS</b>			C100	30000352	CAP EL 100UF 16V M	AA	AB
X100	30002852	XTAL REZ 455KHZ	AA	AD	C101	30000190	CAP CER 100PF 50V J CH	AA	AB
X200	30002851	XTAL 4MHZ L.C-30PF	AC	AH	C101	30012560	CAP SMD 100PF 50V J (0603)	AA	AB
X201	30008778	XTAL 20.25MHZ	AB	AF	C102	30000084	CAP MKT SAFE 150NF 275V M AC P=15	AC	AG
X500	30006662	XTAL 6MHZ	AC	AH	C102	30000190	CAP CER 100PF 50V J CH	AA	AB
X700	30001756	XTAL 18.432MHZ	AE	AP	C102	30012560	CAP SMD 100PF 50V J (0603)	AA	AB
		<b>COILS</b>			C103	30000094	CAP MKT SAFE 220NF 275V M AC	AA	AB
L100	30001979	FIXED COIL 1UH Q45 M-A	AA	AB	C103	30000190	CAP CER 100PF 50V J CH	AA	AB
L101	30018866	LINE FILTER SAFE 2X22MH 10mmX12.5mm	AC	AH	C103	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
L101	30001979	FIXED COIL 1UH Q45 M-A	AA	AB	C104	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
L102	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD	C105	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB
L103	30001992	FIXED COIL 10UH Q65 K-A	AA	AB	C105	30000433	CAP CER 1NF 1KV M B	AA	AB
L107(NOT2)	30007308	CAP CER 220PF 1KV K (PULSE)	AA	AD					

REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
C106	30000371	CAP EL 22UF 50V M	AA	AB	C226	30000352	CAP EL 100UF 16V M	AA	AB
C106	30000290	CAP CER 10NF 50V Z F	AA	AB	C227	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C107	30000420	CAP EL 150UF 400V M	AF	AQ	C229	30000345	CAP EL 10UF 50V M	AA	AB
C107	30000290	CAP CER 10NF 50V Z F	AA	AB	C231	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C108	30000161	CAP MKP SAFE 47NF 630V J	AB	AE	C233	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C109	30000371	CAP EL 22UF 50V M	AA	AB	C234	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB
C111	30007308	CAP CER 220PF 1KV K (PULSE)	AA	AD	C235	30012610	CAP SMD 10NF 50V J (0603)	AA	AB
C113	30006940	CAP CER 2.7NF 1KV K B	AA	AB	C237	30012583	CAP SMD 1.5NF 50V K (0603)	AA	AA
C114	30007308	CAP CER 220PF 1KV K (PULSE)	AA	AD	C238	30012610	CAP SMD 10NF 50V J (0603)	AA	AB
C115	30000440	CAP CER SAFE 2.2NF 4KV M	AA	AC	C240	30012559	CAP SMD 10PF 50V D COG (0603)	AA	AA
C118	30007308	CAP CER 220PF 1KV K (PULSE)	AA	AD	C242	30012560	CAP SMD 100PF 50V J (0603)	AA	AB
C119	30000090	CAP MKT 22NF 100V J	AA	AB	C246	30012586	CAP SMD 22NF 50V K (0603)	AA	AB
C120	30007308	CAP CER 220PF 1KV K (PULSE)	AA	AD	C248	30012586	CAP SMD 22NF 50V K (0603)	AA	AB
C121	30012560	CAP SMD 100PF 50V J (0603)	AA	AB	C249	30012610	CAP SMD 10NF 50V J (0603)	AA	AB
C122	30007308	CAP CER 220PF 1KV K (PULSE)	AA	AD	C252	30000387	CAP EL 33UF 50V M	AA	AB
C124	30000376	CAP EL 220UF 25V M	AA	AB	C253	30000345	CAP EL 10UF 50V M	AA	AB
C126	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C255	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB
C127	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C258	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C129	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C259	30000345	CAP EL 10UF 50V M	AA	AB
C130	30000436	CAP CER 10NF 1KV ZE	AA	AC	C260	30012585	CAP SMD 2.2NF 50V K R (0603)	AA	AB
C133	30018259	CAP EL 4700UF 25V M	AC	AG	C261	30012588	CAP SMD 33NF 50V K (0603)	AA	AA
C134	30018259	CAP EL 4700UF 25V M	AC	AG	C262	30012610	CAP SMD 10NF 50V J (0603)	AA	AB
C135	30018259	CAP EL 4700UF 25V M	AC	AG	C263	30012588	CAP SMD 33NF 50V K (0603)	AA	AA
C137	30000367	CAP EL 1UF 250V M	AA	AB	C264	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB
C138	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C265	30000109	CAP MKT 470NF 63V J	AA	AD
C140	30000393	CAP EL 3.3UF 50V M	AA	AB	C266	30000109	CAP MKT 470NF 63V J	AA	AD
C141	30000359	CAP EL 1000UF 16V M	AA	AC	C267	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C142	30000387	CAP EL 33UF 50V M	AA	AB	C268	30012590	CAP SMD 47NF 50V K (0603)	AA	AA
C145	30000375	CAP EL 220UF 16V M	AA	AB	C269	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C146	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C270	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C147	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C271	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C148	30000360	CAP EL 1000UF 25V M	AA	AE	C273	30012590	CAP SMD 47NF 50V K (0603)	AA	AA
C149	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB	C274	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C150	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C275	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C152	30000375	CAP EL 220UF 16V M	AA	AB	C276	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C154	30000375	CAP EL 220UF 16V M	AA	AB	C277	30000345	CAP EL 10UF 50V M	AA	AB
C155	30000375	CAP EL 220UF 16V M	AA	AB	C278	30012559	CAP SMD 10PF 50V D COG (0603)	AA	AA
C156	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C279	30012559	CAP SMD 10PF 50V D COG (0603)	AA	AA
C157	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C280	30000345	CAP EL 10UF 50V M	AA	AB
C160	30000076	CAP MKT SAFE 100NF 275V M AC	AB	AE	C282	30012585	CAP SMD 2.2NF 50V K R (0603)	AA	AB
C161	30000440	CAP CER SAFE 2.2NF 4KV M	AA	AC	C283	30000345	CAP EL 10UF 50V M	AA	AB
C162	30007708	CAP CER 1NF 1KV K (PULSE)	AA	AD	C284	30012585	CAP SMD 2.2NF 50V K R (0603)	AA	AB
C164	30000362	CAP EL 1UF 50V M	AA	AB	C286	30000345	CAP EL 10UF 50V M	AA	AB
C165	30000362	CAP EL 1UF 50V M	AA	AB	C287	30012607	CAP SMD 150PF 50V J (0603)	AA	AA
C166	30000225	CAP CER 220PF 50V J SL	AA	AB	C288	30012589	CAP SMD 4.7NF 50V K (0603)	AA	AB
C168	30000161	CAP MKP SAFE 47NF 630V J	AB	AE	C289	30012589	CAP SMD 4.7NF 50V K (0603)	AA	AB
C170	30012566	CAP SMD 22PF 50V J (0603)	AA	AB	C290	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C171	30012590	CAP SMD 47NF 50V K (0603)	AA	AA	C292	30012589	CAP SMD 4.7NF 50V K (0603)	AA	AB
C172	30000313	CAP CER 22NF 50V Z F	AA	AB	C293	30012607	CAP SMD 150PF 50V J (0603)	AA	AA
C173	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C296	30012589	CAP SMD 4.7NF 50V K (0603)	AA	AB
C174	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C3	30000353	CAP EL 100UF 25V M	AA	AB
C175	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C300	30012589	CAP SMD 4.7NF 50V K (0603)	AA	AB
C176	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C301	30012607	CAP SMD 150PF 50V J (0603)	AA	AA
C2	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C302	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C202	30012643	RES SMD 1/16W 120R J (0603)	AA	AA	C304	30012607	CAP SMD 150PF 50V J (0603)	AA	AA
C208	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB	C308	30012589	CAP SMD 4.7NF 50V K (0603)	AA	AB
C209	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB	C327	30000109	CAP MKT 470NF 63V J	AA	AD
C210	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB	C331	30012572	CAP SMD 390PF 50V J (0603)	AA	AA
C212	30000352	CAP EL 100UF 16V M	AA	AB	C333	30012579	CAP SMD 82PF 50V J (0603)	AA	AB
C213	30012609	CAP SMD 68NF 50V K (0603)	AA	AB	C348	30000109	CAP MKT 470NF 63V J	AA	AD
C214	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB	C349	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C215	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB	C350	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C217	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB	C351	30000345	CAP EL 10UF 50V M	AA	AB
C218	30012610	CAP SMD 10NF 50V J (0603)	AA	AB	C352	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C222	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB	C353	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C225	30000109	CAP MKT 470NF 63V J	AA	AD	C355	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB

REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
C356	30000109	CAP MKT 470NF 63V J	AA	AD	C706	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C357	30000345	CAP EL 10UF 50V M	AA	AB	C707	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C358	30000345	CAP EL 10UF 50V M	AA	AB	C708	30000407	CAP EL 470UF 16V M	AA	AC
C359	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB	C712	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C360	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB	C713	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C361	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C715	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C362	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C716	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C4	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C717	30000092	CAP MKT 220NF 63V J	AA	AD
C5	30000078	CAP MKT 1UF 100V M	AB	AF	C718	30000092	CAP MKT 220NF 63V J	AA	AD
C506	30000345	CAP EL 10UF 50V M	AA	AB	C719	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB
C507	30000393	CAP EL 3.3UF 50V M	AA	AB	C720	30000345	CAP EL 10UF 50V M	AA	AB
C508	30000345	CAP EL 10UF 50V M	AA	AB	C721	30012576	CAP SMD 56PF 50V J CH (0603)	AA	AA
C509	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C722	30012576	CAP SMD 56PF 50V J CH (0603)	AA	AA
C510	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C724	30000345	CAP EL 10UF 50V M	AA	AB
C511	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C725	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C514	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C728	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C515	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C729	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB
C516	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C730	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB
C517	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C731	30012583	CAP SMD 1.5NF 50V K (0603)	AA	AA
C518	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C732	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C519	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C733	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB
C520	30012573	CAP SMD 47PF 50V J (0603)	AA	AB	C734	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C521	30012573	CAP SMD 47PF 50V J (0603)	AA	AB	C735	30000393	CAP EL 3.3UF 50V M	AA	AB
C522	30000345	CAP EL 10UF 50V M	AA	AB	C736	30000345	CAP EL 10UF 50V M	AA	AB
C523	30000345	CAP EL 10UF 50V M	AA	AB	C737	30000345	CAP EL 10UF 50V M	AA	AB
C524	30000345	CAP EL 10UF 50V M	AA	AB	C738	30012576	CAP SMD 56PF 50V J CH (0603)	AA	AA
C525	30000345	CAP EL 10UF 50V M	AA	AB	C739	30000345	CAP EL 10UF 50V M	AA	AB
C527	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C740	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C530	30000375	CAP EL 220UF 16V M	AA	AB	C741	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C531	30000393	CAP EL 3.3UF 50V M	AA	AB	C742	30012565	CAP SMD 1.8PF 50V J CH (0603)	AA	AA
C537	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB	C743	30012565	CAP SMD 1.8PF 50V J CH (0603)	AA	AA
C601	30000351	CAP EL 10UF 350V M	AA	AE	C744	30000345	CAP EL 10UF 50V M	AA	AB
C603	30000402	CAP EL 47UF 100V M	AA	AB	C745	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C604	30000075	CAP MKT 100NF 250V K (DC)	AA	AD	C746	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C605	30000406	CAP EL 47UF 250V M (HR) 105°	AD	AL	C747	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C607	30012610	CAP SMD 10NF 50V J (0603)	AA	AB	C748	30012583	CAP SMD 1.5NF 50V K (0603)	AA	AA
C608	30000409	CAP EL 470UF 25V M	AA	AD	C749	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C609	30000082	CAP MKT 15NF 63V J	AA	AB	C750	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C612	30000348	CAP EL 10UF 160V M	AA	AB	C751	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C613	30000360	CAP EL 1000UF 25V M	AA	AE	C754	30000352	CAP EL 100UF 16V M	AA	AB
C614	30000360	CAP EL 1000UF 25V M	AA	AE	C763	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB
C616	30023448	CAP MKP 4.3NF 2KV J	AA	AD	C764	30012567	CAP SMD 220PF 50V J (0603)	AA	AB
C617	30000161	CAP MKP SAFE 47NF 630V J	AB	AE	C765	30016654	CAP SMD 100NF 16V K R (0603)	AA	AB
C618	30000444	CAP CER 470PF 1KV KB	AA	AB	C767	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB
C619	30000367	CAP EL 1UF 250V M	AA	AB	C769	30000345	CAP EL 10UF 50V M	AA	AB
C621	30000136	CAP MKP SAFE 12NF 2000V %3.5	AC	AG	C771	30000345	CAP EL 10UF 50V M	AA	AB
C622	30000137	CAP MKP 15NF 630V J	AC	AG	C772	30000345	CAP EL 10UF 50V M	AA	AB
C623	30000162	CAP MKP SAFE 470NF 250V J	AD	AL	C774	30012567	CAP SMD 220PF 50V J (0603)	AA	AB
C624	30013003	CAP MKP SAFE 1UF 250V J P=15	AC	AG	C775	30012585	CAP SMD 2.2NF 50V K R (0603)	AA	AB
C628	30016126	CAP SMD 220NF 16V K R (0603)	AA	AB	C776	30000352	CAP EL 100UF 16V M	AA	AB
C630	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C779	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C631	30000296	CAP CER 100NF 100V Z F	AA	AB	C781	30012590	CAP SMD 47NF 50V K (0603)	AA	AA
C632	30000074	CAP MKT 100NF 63V J	AA	AC	C782	30000352	CAP EL 100UF 16V M	AA	AB
C633	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	C783	30012590	CAP SMD 47NF 50V K (0603)	AA	AA
C635	30012584	CAP SMD 1.8NF 50V K R (0603)	AA	AA	C784	30000362	CAP EL 1UF 50V M	AA	AB
C636	30009208	CAP CER 470PF 1KV K (PULSE)	AA	AC	C785	30012585	CAP SMD 2.2NF 50V K R (0603)	AA	AB
C637	30000332	CAP SMD 4.7NF 50V K (0805)	AA	AB	C786	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C638	30000092	CAP MKT 220NF 63V J	AA	AD	C789	30000362	CAP EL 1UF 50V M	AA	AB
C643	30000092	CAP MKT 220NF 63V J	AA	AD	C791	30000362	CAP EL 1UF 50V M	AA	AB
C644	30012591	CAP SMD 5.6NF 50V K (0603)	AA	AA	C793	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C645	30012591	CAP SMD 5.6NF 50V K (0603)	AA	AA	C794	30012581	CAP SMD 1NF 50V K R (0603)	AA	AB
C646	30000296	CAP CER 100NF 100V Z F	AA	AB	C795	30012585	CAP SMD 2.2NF 50V K R (0603)	AA	AB
C648	30000069	CAP MKT 1NF 100V J	AA	AC	C796	30012585	CAP SMD 2.2NF 50V K R (0603)	AA	AB
C700	30000352	CAP EL 100UF 16V M	AA	AB	C803	30012573	CAP SMD 47PF 50V J (0603)	AA	AB
C701	30000345	CAP EL 10UF 50V M	AA	AB	C808	30000345	CAP EL 10UF 50V M	AA	AB
C702	30012583	CAP SMD 1.5NF 50V K (0603)	AA	AA	C809	30000409	CAP EL 470UF 25V M	AA	AD

REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
C810	30012574	CAP SMD 470PF 50V J (0603)	AA	AA	R142	30012657	RES SMD 1/16W 1K J (0603)	AA	AB
C811	30012574	CAP SMD 470PF 50V J (0603)	AA	AA	R143	30020455	RES SMD 1/16W 1.5K F (0603)	AA	AA
C900	30000075	CAP MKT 100NF 250V K (DC)	AA	AD	R144	30000480	RES SMD 1/10W 100K J (0805)	AA	AB
C902	30000415	CAP EL 4.7UF 250V M	AA	AC	R145	30020457	RES SMD 1/16W 910R F (0603)	AA	AA
C904	30000287	CAP CER 10NF 50V K B	AA	AA	R146	30012697	RES SMD 1/16W 5.1K J (0603)	AA	AA
C905	30000350	CAP EL 10UF 250V M	AA	AD	R147	30020455	RES SMD 1/16W 1.5K F (0603)	AA	AA
C906	30000075	CAP MKT 100NF 250V K (DC)	AA	AD	R148	30020457	RES SMD 1/16W 910R F (0603)	AA	AA
C908	30000438	CAP CER 2.2NF 2KV	AA	AD	R149	30012657	RES SMD 1/16W 1K J (0603)	AA	AB
C909	30000359	CAP EL 1000UF 16V M	AA	AC	R150	30000466	RES CF 1/4W 1K J	AA	AB
C910	30000294	CAP SMD 100NF 50V K (0805)	AA	AB	R151	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
C913	30000294	CAP SMD 100NF 50V K (0805)	AA	AB	R152	30001224	RES FUSE SAFE 1/2W 0.22R J	AA	AB
C914	30012577	CAP SMD 560PF 50V J (0603)	AA	AA	R153	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB
C915	30000407	CAP EL 470UF 16V M	AA	AC	R154	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
C916	30000352	CAP EL 100UF 16V M	AA	AB	R155	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
C918	30012577	CAP SMD 560PF 50V J (0603)	AA	AA	R156	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
C919	30012577	CAP SMD 560PF 50V J (0603)	AA	AA	R157	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
C920	30012577	CAP SMD 560PF 50V J (0603)	AA	AA	R158	30012657	RES SMD 1/16W 1K J (0603)	AA	AB
C921	30000294	CAP SMD 100NF 50V K (0805)	AA	AB	R161	30012657	RES SMD 1/16W 1K J (0603)	AA	AB
C931	30000075	CAP MKT 100NF 250V K (DC)	AA	AD	R162	30000494	RES SMD 1/10W 120R J (0805)	AA	AA
C932	30000367	CAP EL 1UF 250V M	AA	AB	R164	30000593	RES SMD 1/10W 2.2K J (0805)	AA	AB
C934	30012603	CAP SMD 100NF 25V K R (0603)	AA	AB	R165	30001159	RES MO 1W 0.33R J	AA	AB
C TUNER	30000285	CAP CER 1NF 100V KB	AA	AA	R166	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
		<b>RESISTORS</b>			R167	30018085	CAP VAR SAFE 510V K MFCN14D511	AA	AD
R1	30012673	RES SMD 1/16W 270R J (0603)	AA	AB	R168	30018085	CAP VAR SAFE 510V K MFCN14D511	AA	AD
R100	30000718	RES CF 1/4W 4.7K J	AA	AB	R2	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R100	30000689	RES CF 1/4W 3.9K J	AA	AB	R200	30012713	RES SMD 1/16W 75R J (0603)	AA	AB
R100	30012510	RES SMD 1/16W 100R J (0603)	AA	AB	R201	30012713	RES SMD 1/16W 75R J (0603)	AA	AB
R101	30000896	RES MF 1/4W 160K G	AA	AA	R202	30012713	RES SMD 1/16W 75R J (0603)	AA	AB
R101	30000526	RES CF 1/4W 1.5K J	AA	AB	R203	30012713	RES SMD 1/16W 75R J (0603)	AA	AB
R101	30000489	RES SMD 1/10W 1R J (0805)	AA	AB	R204	30012713	RES SMD 1/16W 75R J (0603)	AA	AB
R102	30000594	RES CF 1/4W 22K J	AA	AB	R205	30012713	RES SMD 1/16W 75R J (0603)	AA	AB
R103	30000770	RES CF 1/4W 680R J	AA	AB	R206	30000459	RES CF 1/4W 100R J	AA	AB
R103	30012509	RES SMD 1/16W 100K J (0603)	AA	AB	R207	30000459	RES CF 1/4W 100R J	AA	AB
R104	30000594	RES CF 1/4W 22K J	AA	AB	R208	30012510	RES SMD 1/16W 100R J (0603)	AA	AB
R105	30000982	RES MF 1/4W 4.7K J	AA	AA	R209	30012510	RES SMD 1/16W 100R J (0603)	AA	AB
R105	30000712	RES CF 1/4W 470R J	AA	AB	R210	30012662	RES SMD 1/16W 2.7K J (0603)	AA	AB
R106	30000593	RES SMD 1/10W 2.2K J (0805)	AA	AB	R211	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB
R106	30000712	RES CF 1/4W 470R J	AA	AB	R215	30012713	RES SMD 1/16W 75R J (0603)	AA	AB
R107	30000712	RES CF 1/4W 470R J	AA	AB	R217	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R108	30000452	RES CF 1/4W 10R J	AA	AB	R219	30000792	RES CF 1/4W 75R J	AA	AB
R108	30000650	RES CF 1/4W 33R J	AA	AB	R220	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R109	30000650	RES CF 1/4W 33R J	AA	AB	R221	30000792	RES CF 1/4W 75R J	AA	AB
R110	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	R222	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R110	30000471	RES CF 1/4W 10K J	AA	AB	R230	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R111	30000808	RES CF 1/4W 82R J	AA	AB	R231	30000792	RES CF 1/4W 75R J	AA	AB
R112	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	R232	30012713	RES SMD 1/16W 75R J (0603)	AA	AB
R112	30000471	RES CF 1/4W 10K J	AA	AB	R233	30012657	RES SMD 1/16W 1K J (0603)	AA	AB
R113	30000808	RES CF 1/4W 82R J	AA	AB	R234	30012702	RES SMD 1/16W 560R J (0603)	AA	AA
R116	30001173	RES MO 1W 0.47R J	AA	AB	R235	30000655	RES CF 1/4W 330R J	AA	AB
R117	30001257	RES MG SAFE 1/2W 4.7M J	AA	AD	R236	30012713	RES SMD 1/16W 75R J (0603)	AA	AB
R118	30000580	RES CF 1/4W 22R J	AA	AB	R237	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R119	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	R238	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R122	30014022	RES SMD 1/16W 47R J (0603)	AA	AA	R239	30012713	RES SMD 1/16W 75R J (0603)	AA	AB
R126	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	R241	30012510	RES SMD 1/16W 100R J (0603)	AA	AB
R127	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB	R242	30012696	RES SMD 1/16W 47K J (0603)	AA	AB
R129	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB	R247	30000500	RES CF 1/4W 12K J	AA	AB
R130	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	R248	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R131	30000886	RES MF 1/4W 1.5K F	AA	AB	R254	30012657	RES SMD 1/16W 1K J (0603)	AA	AB
R132	30000886	RES MF 1/4W 1.5K F	AA	AB	R256	30012655	RES SMD 1/16W 180R J (0603)	AA	AA
R133	30000880	RES MF 1/4W 130K F	AA	AA	R259	30000593	RES SMD 1/10W 2.2K J (0805)	AA	AB
R134	30000575	RES SMD 1/10W 2K J	AA	AB	R260	30012669	RES SMD 1/16W 22K J (0603)	AA	AB
R137	30000481	RES CF 1/4W 1M J	AA	AB	R261	30012677	RES SMD 1/16W 3.3K J (0603)	AA	AA
R138	30000660	RES CF 1/4W 3.3K J	AA	AB	R265	30000459	RES CF 1/4W 100R J	AA	AB
R139	30000593	RES SMD 1/10W 2.2K J (0805)	AA	AB	R266	30000459	RES CF 1/4W 100R J	AA	AB
R140	30001174	RES MO 2W 0.47R J	AA	AB	R267	30012657	RES SMD 1/16W 1K J (0603)	AA	AB
R141	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	R268	30012641	RES SMD 1/16W 10K J (0603)	AA	AB



REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
R269	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	R429	30012510	RES SMD 1/16W 100R J (0603)	AA	AB
R270	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	R430	30012510	RES SMD 1/16W 100R J (0603)	AA	AB
R272	30012713	RES SMD 1/16W 75R J (0603)	AA	AB	R5	30012642	RES SMD 1/16W 120K J (0603)	AA	AB
R274	30012702	RES SMD 1/16W 560R J (0603)	AA	AA	R503	30012510	RES SMD 1/16W 100R J (0603)	AA	AB
R276	30000593	RES SMD 1/10W 2.2K J (0805)	AA	AB	R504	30012510	RES SMD 1/16W 100R J (0603)	AA	AB
R277	30012679	RES SMD 1/16W 3.9K J (0603)	AA	AB	R505	30000471	RES CF 1/4W 10K J	AA	AB
R278	30012713	RES SMD 1/16W 75R J (0603)	AA	AB	R506	30000471	RES CF 1/4W 10K J	AA	AB
R279	30012713	RES SMD 1/16W 75R J (0603)	AA	AB	R507	30012696	RES SMD 1/16W 47K J (0603)	AA	AB
R280	30012713	RES SMD 1/16W 75R J (0603)	AA	AB	R508	30012696	RES SMD 1/16W 47K J (0603)	AA	AB
R281	30012673	RES SMD 1/16W 270R J (0603)	AA	AB	R509	30012696	RES SMD 1/16W 47K J (0603)	AA	AB
R282	30012668	RES SMD 1/16W 220R J (0603)	AA	AA	R510	30012696	RES SMD 1/16W 47K J (0603)	AA	AB
R283	30012707	RES SMD 1/16W 680R J (0603)	AA	AB	R512	30012668	RES SMD 1/16W 220R J (0603)	AA	AA
R284	30012684	RES SMD 1/16W 330R J (0603)	AA	AA	R513	30012662	RES SMD 1/16W 2.7K J (0603)	AA	AB
R285	30012707	RES SMD 1/16W 680R J (0603)	AA	AB	R516	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB
R286	30012707	RES SMD 1/16W 680R J (0603)	AA	AB	R518	30012662	RES SMD 1/16W 2.7K J (0603)	AA	AB
R288	30000770	RES CF 1/4W 680R J	AA	AB	R519	30000466	RES CF 1/4W 1K J	AA	AB
R289	30012707	RES SMD 1/16W 680R J (0603)	AA	AB	R520	30012650	RES SMD 1/16W 15K J (0603)	AA	AB
R299	30012510	RES SMD 1/16W 100R J (0603)	AA	AB	R521	30012679	RES SMD 1/16W 3.9K J (0603)	AA	AB
R308	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	R522	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB
R310	30012713	RES SMD 1/16W 75R J (0603)	AA	AB	R523	30012712	RES SMD 1/16W 8.2K J (0603)	AA	AB
R316	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	R524	30012679	RES SMD 1/16W 3.9K J (0603)	AA	AB
R317	30000792	RES CF 1/4W 75R J	AA	AB	R526	30012679	RES SMD 1/16W 3.9K J (0603)	AA	AB
R318	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	R527	30012679	RES SMD 1/16W 3.9K J (0603)	AA	AB
R326	30000815	RES CF 1/4W 8.2K J	AA	AB	R528	30012650	RES SMD 1/16W 15K J (0603)	AA	AB
R327	30000480	RES SMD 1/10W 100K J (0805)	AA	AB	R533	30012685	RES SMD 1/16W 33K J (0603)	AA	AA
R330	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	R535	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R334	30012713	RES SMD 1/16W 75R J (0603)	AA	AB	R537	30000466	RES CF 1/4W 1K J	AA	AB
R336	30000466	RES CF 1/4W 1K J	AA	AB	R538	30012508	RES SMD 1/16W 1.8K J (0603)	AA	AB
R337	30000466	RES CF 1/4W 1K J	AA	AB	R539	30012508	RES SMD 1/16W 1.8K J (0603)	AA	AB
R338	30000466	RES CF 1/4W 1K J	AA	AB	R540	30012508	RES SMD 1/16W 1.8K J (0603)	AA	AB
R342	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	R541	30012662	RES SMD 1/16W 2.7K J (0603)	AA	AB
R343	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB	R548	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R349	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	R549	30012657	RES SMD 1/16W 1K J (0603)	AA	AB
R350	30012510	RES SMD 1/16W 100R J (0603)	AA	AB	R550	30012679	RES SMD 1/16W 3.9K J (0603)	AA	AB
R351	30012510	RES SMD 1/16W 100R J (0603)	AA	AB	R553	30012695	RES SMD 1/16W 470R J (0603)	AA	AB
R352	30012698	RES SMD 1/16W 5.6K J (0603)	AA	AB	R554	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB
R353	30012685	RES SMD 1/16W 33K J (0603)	AA	AA	R555	30012506	RES SMD 1/16W 1.5K J (0603)	AA	AB
R354	30012677	RES SMD 1/16W 3.3K J (0603)	AA	AA	R556	30012703	RES SMD 1/16W 56K J (0603)	AA	AA
R355	30012643	RES SMD 1/16W 120R J (0603)	AA	AA	R561	30012982	RES SMD 1/16W 10R J 0603	AA	AA
R356	30012707	RES SMD 1/16W 680R J (0603)	AA	AB	R564	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB
R357	30012644	RES SMD 1/16W 12K J (0603)	AA	AB	R565	30012510	RES SMD 1/16W 100R J (0603)	AA	AB
R358	30012655	RES SMD 1/16W 180R J (0603)	AA	AA	R566	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R359	30012669	RES SMD 1/16W 22K J (0603)	AA	AB	R567	30000459	RES CF 1/4W 100R J	AA	AB
R4	30012677	RES SMD 1/16W 3.3K J (0603)	AA	AA	R568	30000459	RES CF 1/4W 100R J	AA	AB
R400	30012669	RES SMD 1/16W 22K J (0603)	AA	AB	R571	30012657	RES SMD 1/16W 1K J (0603)	AA	AB
R404	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB	R582	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R406	30012650	RES SMD 1/16W 15K J (0603)	AA	AB	R583	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R409	30012713	RES SMD 1/16W 75R J (0603)	AA	AB	R585	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R411	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	R586	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R412	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	R587	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R413	30012713	RES SMD 1/16W 75R J (0603)	AA	AB	R588	30012697	RES SMD 1/16W 5.1K J (0603)	AA	AA
R414	30012713	RES SMD 1/16W 75R J (0603)	AA	AB	R589	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R415	30012679	RES SMD 1/16W 3.9K J (0603)	AA	AB	R590	30012679	RES SMD 1/16W 3.9K J (0603)	AA	AB
R416	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R591	30012711	RES SMD 1/16W 75K J (0603)	AA	AA
R417	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R6	30012673	RES SMD 1/16W 270R J (0603)	AA	AB
R418	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R600	30012510	RES SMD 1/16W 100R J (0603)	AA	AB
R419	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R601	30000470	RES CF 1/2W 10K J	AA	AA
R420	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R603	20147207	CN.ASY.45-R.F.1/2W0.47R+F.B.3.5X4.7X0.8	AA	AB
R421	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R604	30001244	RES FUSE SAFE 1/2W 0.47R J	AA	AB
R422	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R605	30000927	RES MF 1/4W 220K J	AA	AB
R423	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R607	30012695	RES SMD 1/16W 470R J (0603)	AA	AB
R424	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R608	30001100	RES MO 1W 150R J	AA	AB
R425	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R611	30001229	30001229	AA	AC
R426	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R612	30000471	RES CF 1/4W 10K J	AA	AB
R427	30012661	RES SMD 1/16W 2.4K J (0603)	AA	AA	R613	30001234	RES FUSE 2W 33R J	AA	AC
R428	30012510	RES SMD 1/16W 100R J (0603)	AA	AB	R614	30001229	30001229	AA	AC

REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
R616	30018904	RES MO 5W 4.7K J	AA	AD	R794	30012695	RES SMD 1/16W 470R J (0603)	AA	AB
R618	30001229	RES FUSE SAFE 1W 2.2R J	AA	AC	R815	30012644	RES SMD 1/16W 12K J (0603)	AA	AB
R621	30012696	RES SMD 1/16W 47K J (0603)	AA	AB	R817	30012641	RES SMD 1/16W 10K J (0603)	AA	AB
R622	30012696	RES SMD 1/16W 47K J (0603)	AA	AB	R818	30000723	RES CF 1/4W 47K J	AA	AB
R623	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	R819	30012679	RES SMD 1/16W 3.9K J (0603)	AA	AB
R624	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB	R820	30012696	RES SMD 1/16W 47K J (0603)	AA	AB
R625	30000480	RES SMD 1/10W 100K J (0805)	AA	AB	R900	30000788	RES CF 1/4W 6.8M J	AA	AB
R626	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB	R901	30000459	RES CF 1/4W 100R J	AA	AB
R627	30000480	RES SMD 1/10W 100K J (0805)	AA	AB	R902	30000459	RES CF 1/4W 100R J	AA	AB
R628	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	R903	30000459	RES CF 1/4W 100R J	AA	AB
R629	30012674	RES SMD 1/16W 27K J (0603)	AA	AB	R904	30000535	RES CF 1/2W 150K J	AA	AB
R630	30000872	RES MF 1/4W 120K F	AA	AA	R905	30000477	RES CF 1/4W 100K J	AA	AB
R631	30000872	RES MF 1/4W 120K F	AA	AA	R906	30000477	RES CF 1/4W 100K J	AA	AB
R632	30014465	RES SMD 1/16W 2.7K F (603)	AA	AA	R907	30023197	RES CC 1W 1.5K K	AA	AD
R636	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	R908	30023197	RES CC 1W 1.5K K	AA	AD
R637	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	R909	30000477	RES CF 1/4W 100K J	AA	AB
R638	30012674	RES SMD 1/16W 27K J (0603)	AA	AB	R910	30023197	RES CC 1W 1.5K K	AA	AD
R639	30001162	RES MO 1W 390R J	AA	AB	R911	30000466	RES CF 1/4W 1K J	AA	AB
R640	30001134	RES MO 2W 2.2R J	AA	AB	R912	30000458	RES CF 1/2W 100R J	AA	AB
R641	30000965	RES MF 1/2W 0.33R J	AA	AA	R913	30021483	RES CC 1W 2.2K K	AA	AD
R644	30000649	RES CF 1/2W 33R J	AA	AB	R914	30000459	RES CF 1/4W 100R J	AA	AB
R645	30000580	RES CF 1/4W 22R J	AA	AB	R915	30012649	RES SMD 1/16W 150R J (0603)	AA	AB
R646	30012654	RES SMD 1/16W 180K J (0603)	AA	AA	R916	30014128	RES SMD 1/16W 33R J (0603)	AA	AA
R647	30012650	RES SMD 1/16W 15K J (0603)	AA	AB	R917	30000583	RES CF 1/4W 220R J	AA	AB
R648	30012658	RES SMD 1/16W 1M J (0603)	AA	AA	R919	30012644	RES SMD 1/16W 12K J (0603)	AA	AB
R649	30001228	RES FUSE SAFE 1/2W 2.2R J	AA	AB	R920	30012698	RES SMD 1/16W 5.6K J (0603)	AA	AB
R650	30001082	RES MO 1/2W 1K J	AA	AB	R921	30012649	RES SMD 1/16W 150R J (0603)	AA	AB
R652	30000848	RES MF 1/4W 1K F	AA	AB	R922	30014128	RES SMD 1/16W 33R J (0603)	AA	AA
R653	30012509	RES SMD 1/16W 100K J (0603)	AA	AB	R923	30000583	RES CF 1/4W 220R J	AA	AB
R654	30012708	RES SMD 1/16W 68K J (0603)	AA	AA	R925	30012649	RES SMD 1/16W 150R J (0603)	AA	AB
R655	30012674	RES SMD 1/16W 27K J (0603)	AA	AB	R926	30014128	RES SMD 1/16W 33R J (0603)	AA	AA
R656	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	R927	30000583	RES CF 1/4W 220R J	AA	AB
R657	30000466	RES CF 1/4W 1K J	AA	AB	R928	30012510	RES SMD 1/16W 100R J (0603)	AA	AB
R658	30000466	RES CF 1/4W 1K J	AA	AB	R930	30000477	RES CF 1/4W 100K J	AA	AB
R7	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	R931	30012667	RES SMD 1/16W 220K J (0603)	AA	AB
R700	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R932	30012707	RES SMD 1/16W 680R J (0603)	AA	AB
R701	30012695	RES SMD 1/16W 470R J (0603)	AA	AB	R933	30012707	RES SMD 1/16W 680R J (0603)	AA	AB
R702	30012657	RES SMD 1/16W 1K J (0603)	AA	AB			<b>MISCELLANEOUS PARTS</b>		
R703	30012510	RES SMD 1/16W 100R J (0603)	AA	AB	.	20090585	CHASSIS FRAME 288X (AK37)	AE	AP
R704	30012510	RES SMD 1/16W 100R J (0603)	AA	AB	.	20140457	BACK COVER 2862W EKO2GRAY(I)	AS	BD
R705	30012510	RES SMD 1/16W 100R J (0603)	AA	AB	.	20141081	SNOW BOX ASSY 2862W RF	AM	AY
R710	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	.	20140469	SNOW BOX TOP 2862W	AD	AN
R713	30012510	RES SMD 1/16W 100R J (0603)	AA	AB	.	20140470	SNOW BOX BOTTOM 2862W	AD	AN
R714	30012510	RES SMD 1/16W 100R J (0603)	AA	AB	.	20141084	SCR.ASSY.2862W W/SB AK45/52	AE	AP
R715	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	.	20108124	BACK DOOR AK45/52 (I)	AC	AH
R718	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	.	35000212	SCREW S C ZNSY YSMB 2.9*13	AA	AB
R719	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	.	35000212	SCREW S C ZNSY YSMB 2.9*13	AA	AB
R723	30000459	RES CF 1/4W 100R J	AA	AB	.	35000217	SCREW S C SYF YFMB 3.5*9.5	AA	AB
R724	30012510	RES SMD 1/16W 100R J (0603)	AA	AB	.	35004572	SCREW P C AgSYF YSB 4x20	AA	AB
R725	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	.	35005084	SCREW C ZN RYAKB 6x30	AA	AB
R726	30012657	RES SMD 1/16W 1K J (0603)	AA	AB	.	35005418	SCREW P C ZN YSB 3.5x10 (KN1031 T35X10)	AA	AB
R742	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB	.	35009300	SCREW P C ZN FYSB 4X16 (D:11)	AA	AB
R746	30012692	RES SMD 1/16W 4.7K J (0603)	AA	AB	.	20142751	CHS.ASSY.45-317C2114121123G1129D	BP	CF
R747	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	.	30018087	CNAS 2P/350 TRFPFC DIS W/C	AA	AE
R749	30012709	RES SMD 1/16W 7.5K J (0603)	AA	AA	.	35000217	SCREW S C SYF YFMB 3.5*9.5	AA	AB
R753	30014076	RES SMD 1/16W 4.7R J (0603)	AA	AA	.	20140466	BRACKET CHS XX62-64W (I) V.0	AD	AM
R754	30012709	RES SMD 1/16W 7.5K J (0603)	AA	AA	.	60000009	FR-HIPS NATR.V-0	AK	AV
R755	30014076	RES SMD 1/16W 4.7R J (0603)	AA	AA	.	35005061	SCREW RB C SK ZN YFMB 2.9*9.5	AA	AA
R756	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	.	30007728	CABLE 1P R2.6 50 W/CLIPS	AA	AC
R759	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	.	30009833	CABL 1P/100 SIS	AA	AB
R760	30012702	RES SMD 1/16W 560R J (0603)	AA	AA	.	30009833	CABL 1P/100 SIS	AA	AB
R762	30012641	RES SMD 1/16W 10K J (0603)	AA	AB	.	30019101	CABL 1P/350 DIS UL1672AWG22	AA	AB
R763	30012702	RES SMD 1/16W 560R J (0603)	AA	AA	.	40006432	MOUNTING BUTTON (MB-10)	AA	AB
R765	30012669	RES SMD 1/16W 22K J (0603)	AA	AB	.	30009005	IC 24C16	AF	AQ
R766	30012669	RES SMD 1/16W 22K J (0603)	AA	AB	.	30012631	CNAS 2P/760 DIS W/BL C+FER UL2547 AWG24	AB	AG
R793	30012695	RES SMD 1/16W 470R J (0603)	AA	AB					



REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
.	30027382	SPEAKER 7R 12W F/R 60x120MM-28&32" SHARP	AE	AP	PL708	30001762	CONN HEADER 2P 2.5MM(9.7MM) TOP	AA	AC
.	40016872	SPEAKER BRACKET 286XW	AA	AE	PL709	30001764	CONN HEADER 2P 2.5MM(9.7MM) TOP BLACK	AA	AC
.	20151304	POWER CORD ASSY.(2.4MT W/FTZ)(LONGWELL)	AD	AM	PL711	30001836	CONN HEADER 3P 2.5MM TOP BLACK SD	AA	AB
.	30028208	POWER CORD SAFE EURO 2.2M SHARP W/FILTER	AG	AT	PL901	30028447	SOCKET CRT SAFE NARROWNECK W/GND INCHANG	AA	AE
.	20151924	MD.ASY.SB112-FAV+HP+SVHS 2862/3262 (AK45)	AS	BD	PL902	30010039	CONN HEADER 8P 2.5MM TOP WHT	AA	AB
.	35000136	FUSE HOLDER TK79-A (GRAY)	AA	AD	PL902	30027546	CNAS 5P/350 SHL+3P/350 SIS RGB W/DC+FER	AD	AM
.	20152358	FRONT 2862W W/H SLV285S(P)(PW/S)	AT	BE	PL903	30001850	CONN HEADER 6P 2.5MM TOP WHT SD	AA	AC
.	20152375	CONTROL PANEL DOOR 2862W (SLV285S/P)	AD	AL	PL903	30030432	CNAS 6P-4P/500+1P/850 SIS W/3C+FR UL1007	AA	AC
.	20152376	SPEAKER GRILL 2862W SLV285S(P)	AF	AQ	PL905	35000135	TEST PIN 1.1MM	AA	AB
.	20004519	CABLE HOLDER CRT (I)	AA	AB	PL909	35000135	TEST PIN 1.1MM	AA	AB
.	20140467	BRACKET BF 2862W (I) V.0	AA	AD	S224	30000452	RES CF 1/4W 10R J	AA	AB
.	60000009	FR-HIPS NATR.V-0	AK	AV	S225	30012982	RES SMD 1/16W 10R J 0603	AA	AA
.	35008849	DOOR METAL SPRING (30mmX20mmX0.5mm)	AA	AC	S226	30012982	RES SMD 1/16W 10R J 0603	AA	AA
.	35008850	METAL WASHER XX6XW (SHARP)	AA	AB	S227	30012982	RES SMD 1/16W 10R J 0603	AA	AA
.	40016871	DOOR SPACER (M10)	AA	AB	SG901	30000428	SPARK GAP 300V	AB	AG
.	40016873	WASHER 2862W	AA	AB	SG902	30000428	SPARK GAP 300V	AB	AG
.	20152713	LBL.BCK.CVR.SHARP 28LF92E(ES)AK45	AA	AC	SG903	30000428	SPARK GAP 300V	AB	AG
.	20147245	LBL.BCK.CVR.ASSY (TV) (WO/UL)SHARP	AA	AC	SG904	30000428	SPARK GAP 300V	AB	AG
.	20143026	R/C 1548 SHARP (EKO2GRAY/I) (GRAY/S)	AM	AY	SG905	30021532	SPARK GAP 1500V	AC	AG
.	20142229	UKV.B.ASSY.UK12 (SMD)	AE	AQ	SW100	30002181	SWITCH TACT(4)	AA	AC
.	50043630	WARRANTY CARD SHARP (ESP)	AB	AF	SW101	30002181	SWITCH TACT(4)	AA	AC
.	50048412	I/B SHARP 28LF92E(ES) P/AK45/1548/ES/POR	AC	AK	SW102	30002181	SWITCH TACT(4)	AA	AC
.	20152717	LBL.CART.BOX SHARP 28LF92E(ES) AK45	AA	AC	SW103	30002181	SWITCH TACT(4)	AA	AC
.	20153349	BUTTON ASSY 2862W/3262WRF (SLV285S(P))	AC	AK	SW104	30017848	SWITCH SAFE ON/OFF 4A/128A JVC(PANASONI)	AC	AH
.	35008861	SPRING ON/OFF SWITCH 1462 SHARP(SHARP)	AA	AA	TH101	30001268	THERMISTOR 3P	AD	AM
.	35000010	EARTH SPRING (4CM)	AA	AB					
.	20160076	CRT B.ASSY.TP45B-5-SI.FOC.(AK45)SHARP(RF)	AR	BB					
.	30015231	ROTATION COIL AK33 29"	AE	AQ					
.	40016814	LOGO SHARP (D.C.-SILVER)28-32"	AD	AK					
.	50043896	CONTROL STICKER 2862W	AD	AM					
B-B	30009834	CABL 1P/60 SIS	AA	AB					
D100	20060150	BRACKET LED 20	AA	AD					
F100	20000848	FUSE ASSY.TK79-A (2.5A)	AA	AD					
J344	30001996	FIXED COIL 22UH Q40 K	AA	AB					
JK100	30026584	TV JACK BOARD JXTI046	AG	AS					
JK101	30001902	JACK HEADPHONE STEREO WO/SW	AC	AH					
NOT	30011742	CABL 1P/25 SIS	AA	AB					
PL1	30001912	PIN F 5P/2.5MM (11.5MM)	AA	AD					
PL100	30001792	CONN HEADER 2P 7.5MM TOP WHT	AA	AC					
PL100	30020822	CNAS 6P/450 FLT W/C+FER UL2468AWG24	AC	AG					
PL101	30001795	CONN HEADER 3P 5/7.5MM TOP WHT	AA	AC					
PL101	30001838	CONN HEADER 3P 2.5MM TOP YELLOW SD	AA	AC					
PL101	30020137	CNAS 600 FAV SVHS W/DC+FER	AF	AQ					
PL102	30001792	CONN HEADER 2P 7.5MM TOP WHT	AA	AC					
PL102	30001830	CONN HEADER 2P 2.5MM TOP BLUE SD	AA	AB					
PL102	30020137	CNAS 600 FAV SVHS W/DC+FER	AA	AB					
PL103	30001839	CONN HEADER 3P 2.5MM TOP GREEN SD	AA	AC					
PL103	30020137	CNAS 600 FAV SVHS W/DC+FER	AA	AB					
PL104	30008726	CNAS 3P/550 FLT W/BLK C UL2468AWG24	AB	AF					
PL107	30001792	CONN HEADER 2P 7.5MM TOP WHT	AA	AC					
PL107	30014711	CNAS 2P/250 W/DC	AB	AF					
PL108	30001792	CONN HEADER 2P 7.5MM TOP WHT	AA	AC					
PL2	30001829	CONN HEADER 2P 2.5MM TOP WHT SD	AA	AB					
PL204	30010921	DOUBLE-DECK SCART SOCKET	AD	AM					
PL206	30010039	CONN HEADER 8P 2.5MM TOP WHT	AA	AB					
PL207	30001830	CONN HEADER 2P 2.5MM TOP BLUE SD	AA	AB					
PL214	35000135	TEST PIN 1.1MM	AA	AB					
PL500	30001783	CONN HEADER 5P 2.5MM TOP BD	AA	AC					
PL502	30001784	CONN HEADER 6P 2.5MM TOP BD	AA	AC					
PL509	20108005	MD.ASY.RT45-ROTATION (TILT) AK45	AD	AM					
PL602	30001792	CONN HEADER 2P 7.5MM TOP WHT	AA	AC					
PL602	30016483	CNAS 2P/600 HRZ DIS W/C UL1672AWG24	AA	AE					
PL603	30001829	CONN HEADER 2P 2.5MM TOP WHT SD	AA	AB					
PL603	30019083	CNAS 2P/600 SIS W/C+FER UL1007AWG24	AB	AF					
PL604	30001850	CONN HEADER 6P 2.5MM TOP WHT SD	AA	AC					
PL703	30001839	CONN HEADER 3P 2.5MM TOP GREEN SD	AA	AC					

## How to update the Technical Information appeared on this Service Manual

1. Web site: <https://www.vestelservice.com>
2. Select: **Technical Support**
3. Login: **101278**
4. Password: **SHPII278**

By this access you can consult the latest schematic diagram or request the Parts Listing of a concrete Production Date / Serial Number.

By this way it can be also consulted the issued Technical Reports (Service Bulletins).

# SHARP®

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission of the publisher.

**Technical information and Production:**

**Vestel Electronik AS**

PRINTED BY:

ON:

**Technical information re-issued:**

**SHARP ELECTRONICA ESPAÑA S.A.  
Service Manual Group  
Engineering Dept.  
Polígono Industrial Can Sant Joan  
08190 Sant Cugat del Vallès  
Barcelona  
Spain**

Think Ecology, please use



**RECYCLED PAPER**

**SHARP®****SERVICE MANUAL**

SE00AK45CHA00

Issued: 20<sup>th</sup> Jan. 2004PAL<sub>B/G, I</sub> / SECAM<sub>L/L', B/G, D/K</sub> SYSTEM COLOUR TELEVISION**CHASSIS AK-45**

In the interests of user safety (required by safety regulations in some countries) the set should be restored to its original condition and only parts identical to those specified should be used.

**CONTENTS**

TABLE OF CONTENTS .....	3
INTRODUCTION .....	6
CIRCUIT DESCRIPTIONS .....	6
INTEGRATED CIRCUIT DESCRIPTIONS .....	10
SERVICE MODE ADJUSTMENTS .....	23
BLOCK DIAGRAM .....	61
CIRCUIT DIAGRAMS .....	62
HOW TO UPDATE THE TECHNICAL INFORMATION .....	73

**SHARP CORPORATION**

This document has been published to be used for after sales service only.

### **SERVICE MANUAL UPDATE LOG SHEET**

<b>Technical Report No. Technical Bulletin No.</b>	<b>Cause / Solution</b>	<b>Part No.</b>	<b>Page No.</b>	<b>Application Data /Serial No.</b>

Use this page to keep any special servicing information as Technical Report (Bulletin), Technical Information, etc. If only part number changes are required, just change part number directly the part number in the Parts Listing Section. If you need more information, please refer to the Technical Report (Bulletin).

## TABLE OF CONTENTS

<b>1.INTRODUCTION</b> .....	6
<b>2.TUNER</b> .....	6
<b>3.IF PART (TDA9885/86)</b> .....	6
<b>4.VIDEO SWITCH TEA6415</b> .....	7
<b>5.MULTI STANDARD SOUND PROCESSOR</b> .....	7
<b>6.SOUND OUTPUT STAGE WITH TDA7269A</b> .....	7
<b>7.VERTICAL OUTPUT STAGE WITH STV9379FA</b> .....	7
<b>8.VIDEO OUTPUT AMPLIFIER TDA6108</b> .....	7
<b>9.POWER SUPPLY (SMPS)</b> .....	8
<b>10.MICROCONTROLLER SDA55XX</b> .....	8
10.1.General Features .....	8
10.2.External Crystal and Programmable Clock Speed .....	8
10.3.Microcontroller Features .....	8
10.4.Memory .....	8
10.5.Display Features .....	8
10.6.Acquisition Features .....	9
10.7.Ports .....	9
<b>11.CLASS AB STEREO HEADPHONE DRIVER TDA1308</b> .....	9
<b>12.SAW FILTERS</b> .....	9
<b>13.IC DESCRIPTIONS</b> .....	10
<b>13.1.LM317T</b> .....	10
13.1.1.Description .....	10
13.1.2.Features .....	10
<b>13.2.TDA1308T</b> .....	10
13.2.1.General Description .....	10
13.2.2.Features .....	10
13.2.3.Pinning .....	11
<b>13.3.MSP34X0G (MSP3410G)</b> .....	11
13.3.1.Description .....	11
13.3.2.Features .....	12
13.3.3.Pin connections .....	12
<b>13.4.VDP313xY</b> .....	13
13.4.1.Introduction .....	13
13.4.2.Features .....	14
13.4.3.Pin Connections and short descriptions .....	14
<b>13.5.TEA6415C</b> .....	15
13.5.1.General Description .....	15
13.5.2.Features .....	15
13.5.3.Pinning .....	16
<b>13.6.STV9379FA</b> .....	16
13.6.1.Description .....	16
13.6.2.Features .....	16
13.6.3.Pinning .....	16
<b>13.7.TDA7269A</b> .....	17
13.7.1.Description .....	17
13.7.2.Features .....	17
<b>13.8.LM7800 (LM7805/LM7808)</b> .....	17
13.8.1.Description .....	17
13.8.2.Features .....	17
<b>13.9.AT24C08</b> .....	17
13.9.1.Description .....	17
13.9.2.Features .....	17
13.9.3.Pin Configurations .....	18

<b>13.10.SDA5555</b> .....	18
13.10.1.General definition .....	18
13.10.2.Features .....	18
<b>13.11.MC44608</b> .....	19
13.11.1.Description .....	19
13.11.2.General Features .....	20
13.11.3.Pin Connections .....	20
<b>13.12.TCET1102G</b> .....	21
13.12.1.Description .....	21
13.12.2.Applications .....	21
13.12.3.Features .....	21
<b>13.13.TDA9885T</b> .....	21
13.13.1.General Description .....	21
13.13.2.Features .....	21
13.13.3.Pinning.....	22
<b>13.14.PI5V330</b> .....	22
13.14.1.General Description .....	22
<b>14.AK45 CHASSIS PRODUCTION SERVICE MODE ADJUSTMENTS</b> .....	23
<b>14.1.SERVICE MENU</b> .....	23
<b>14.2.ADJUST MENU</b> .....	23
<b>14.3.OPTIONS MENU</b> .....	35
Option 0. Video Processor Crystal Indication .....	35
Option 1. (0x01) Video Processor Decoder Mode Register.....	35
Option 2. (0x18) Video Processor Blanking Control .....	35
Option 3. (0x19) Video Processor Cathode Drive Level .....	36
Option 4. ....	36
Option 5. CTI Available, Mono AVL.....	36
Option 6. ....	36
Option 7. OPTIONHOTELACTIVE, PLL_VST, PIP Zoom Mode, PIP Position .....	36
Option 8. IF Frequency.....	37
Option 9. Standard Available.....	37
Option 10. Scart, Combfilter, Teletext, Language .....	38
Option 11. PLL Tuner Control 1 Byte.....	38
Option 12. PLL Tuner Control 2 Low Byte .....	38
Option 13. PLL Tuner Control 2 Mid Byte .....	39
Option 14. PLL Tuner Control 2 High Byte .....	39
Option 15. PLL Tuner VHF LOW – VHF HIGH Crossover Low Byte .....	39
Option 16. PLL Tuner VHF LOW – VHF HIGH Crossover High Byte .....	39
Option 17. PLL Tuner VHF HIGH – UHF Crossover Low Byte .....	39
Option 18. PLL Tuner VHF HIGH – UHF Crossover High Byte.....	39
Option 19. PIP PLL Tuner Control 1 Byte.....	40
Option 20. PIP PLL Tuner Control 2 Low Byte .....	40
Option 21. PIP PLL Tuner Control 2 Mid Byte .....	40
Option 22. PIP PLL Tuner Control 2 High Byte.....	40
Option 23. PIP PLL Tuner VHF LOW – VHF HIGH Crossover Low Byte .....	40
Option 24. PIP PLL Tuner VHF LOW – VHF HIGH Crossover High Byte.....	40
Option 25. PIP PLL Tuner VHF HIGH – UHF Crossover Low Byte.....	41
Option 26. PIP PLL Tuner VHF HIGH – UHF Crossover High Byte.....	41
Option 27. Language Available 1 .....	41
Option 28. Language Available 2 .....	41
Option 29. Language Available 3 and Zoom Mode Available .....	41
Option 30. Country .....	42
Option 31. Prescaler MSP FM (AVL=OFF).....	42
Option 32. Prescaler MSP NICAM (AVL=OFF) .....	42
Option 33. Prescaler MSP SCART (AVL=OFF) .....	43
Option 34. Prescaler MSP I2S (AVL=OFF).....	43
Option 35. Not used.....	43
Option 36. Not used.....	43
Option 37. Reserved for USA .....	43
Option 38. TV Teletext Mode Selection, Child Lock, Equalizer Country.....	43



Option 39. Personal Preference Equalizer Band 1 .....	44
Option 40. Personal Preference Equalizer Band 2 .....	44
Option 41. Personal Preference Equalizer Band 3 .....	44
Option 42. Personal Preference Equalizer Band 4 .....	44
Option 43. Personal Preference Equalizer Band 5 .....	44
Option 44. Sound Effect (Standard; Music; Speech; Jazz; Pp) .....	44
Option 45. Volume Offset Left .....	44
Option 46. Volume Offset Right .....	44
Option 47. Volume Offset Center .....	45
Option 48. Volume Offset Rear .....	45
Option 49. Surround Delay .....	45
Option 50. FM Prescaler .....	45
Option 51. NICAM Prescaler .....	45
Option 52. Scart Input Prescaler .....	45
Option 53. I2S Prescaler .....	45
Option 54. Scart Output Prescaler .....	45
Option 55. Speaker Setup .....	46
Option 56. Audio Options Available Or Not .....	46
Option 57. Stereo Threshold .....	46
Option 58. MSP Audio Flags .....	47
Option 59. NICAM Threshold .....	47
Option 60. Power Delay Time .....	47
<b>14.4.OPTION TABLE RECOMMENDED VALUES .....</b>	<b>50</b>
<b>14.5.SCREEN ADJUSTMENT (FBT SCREEN) .....</b>	<b>52</b>
<b>14.6.GEOMETRY ADJUSTMENT .....</b>	<b>53</b>
4:3 FORMATS .....	53
16:9 FORMATS .....	54
<b>15.BLOCK DIAGRAM .....</b>	<b>61</b>
<b>16.CIRCUIT DIAGRAMS .....</b>	<b>62</b>
<b>17. HOW TO UPDATE THE TECHNICAL INFORMATION .....</b>	<b>73</b>
<b>17.1. HOW TO UPDATE THE TECHNICAL INFORMATION APPEARED ON THIS SERVICE         MANUAL (AND RELATIVES) .....</b>	<b>73</b>
<b>17.2. NVM / EEPROM RECORDER .....</b>	<b>73</b>
<b>17.3. CHASSIS LABEL INFORMATION .....</b>	<b>73</b>
<b>17.4. CODE BAR LABEL INFORMATION .....</b>	<b>74</b>

## 1. INTRODUCTION

11AK45 is a 50Hz colour television capable of driving 24" + CRT sizes (beginning from 24" 16:9 up to 33").

The chassis is capable of operation in PAL, SECAM, NTSC (playback) colour standards and multiple transmission standards as B/G, D/K, I/I', and L/L'.

Sound system output is supplying 2x10W (10%THD) for left and right outputs of 8ohm speakers.

TV supports FASTTEXT. It is possible to decode transmissions including high graphical data.

The chassis is equipped with three full EuroScarts; only one of them supports RGB input, one headphone output, one FAV input, one SVHS input (via SCART)

## 2. TUNER

The hardware and software of the TV is suitable for tuners, supplied by different companies, which are selected from the Service Menu. These tuners can be combined VHF, UHF tuners suitable for CCIR systems B/G, H, L, L', I and I'. The tuning is available through the digitally controlled I<sup>2</sup>C bus (PLL). Below you will find info on one of the Tuners in use.

### General description of UV1316:

The UV1316 tuner belongs to the UV 1300 family of tuners, which are designed to meet a wide range of applications. It is a combined VHF, UHF tuner suitable for CCIR systems B/G, H, L, L', I and I'. The low IF output impedance has been designed for direct drive of a wide variety of SAW filters with sufficient suppression of triple transient.

### Features of UV1316:

1. Member of the UV1300 family small sized UHF/VHF tuners
2. Systems CCIR: B/G, H, L, L', I and I'; OIRT: D/K
3. Digitally controlled (PLL) tuning via I<sup>2</sup>C-bus
4. Off-air channels, S-cable channels and Hyperband
5. World standardized mechanical dimensions and world standard pinning
6. Compact size
7. Complies to "CENELEC EN55020" and "EN55013"

### Pinning:

1. Gain control voltage (AGC) : 4.0V, Max: 4.5V
2. Tuning voltage
3. I<sup>2</sup>C-bus address select : Max: 5.5V
4. I<sup>2</sup>C-bus serial clock : Min:-0.3V, Max: 5.5V
5. I<sup>2</sup>C-bus serial data : Min:-0.3V, Max: 5.5V
6. Not connected
7. PLL supply voltage : 5.0V, Min: 4.75V, Max: 5.5V
8. ADC input
9. Tuner supply voltage : 33V, Min: 30V, Max: 35V
10. Symmetrical IF output 1
11. Symmetrical IF output 2

## 3. IF PART (TDA9885/86)


The TDA9885 is an alignment-free single standard (without positive modulation) vision and sound IF signal PLL.

The TDA9886 is an alignment-free multistandard (PAL, SECAM and NTSC) vision and sound IF signal PLL. Both devices can be used for TV, VTR, PC and set-top box applications.

The following figure shows the simplified block diagram of the integrated circuit.

The integrated circuit comprises the following functional blocks:

VIF amplifier, Tuner and VIF-AGC, VIF-AGC detector, Frequency Phase-Locked Loop (FPLL) detector, VCO and divider, Digital acquisition help and AFC, Video demodulator and amplifier, Sound carrier trap, SIF amplifier, SIF-AGC detector, Single reference QSS mixer, AM demodulator, FM demodulator and acquisition help, Audio amplifier and mute time constant, I<sup>2</sup>C-bus transceivers and MAD (module address), Internal voltage stabilizer.

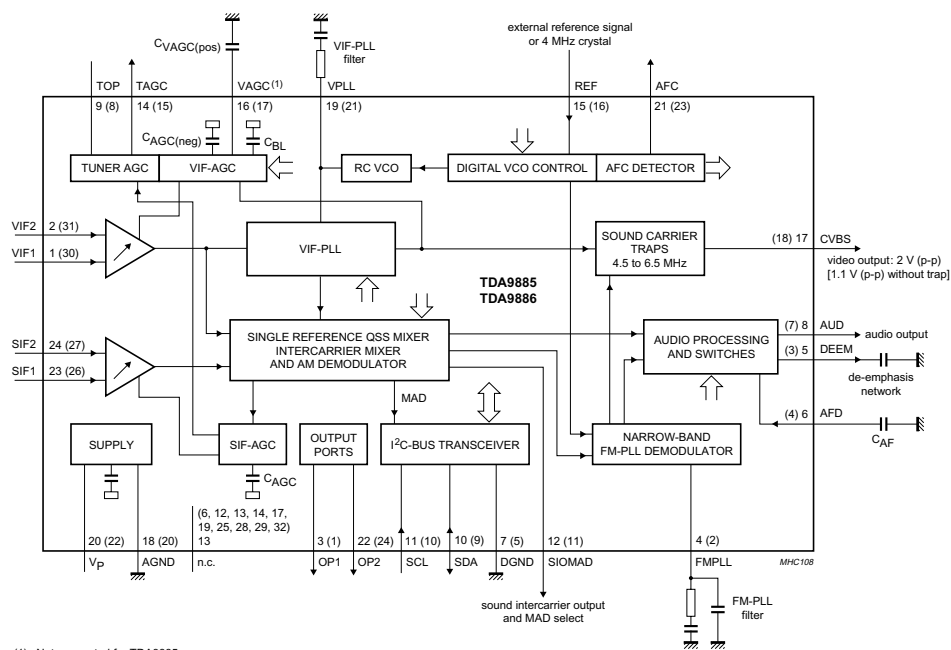

(1) Not connected for TDA9885.  
Pin numbers for TDA9885HN and TDA9886HN in parenthesis.

#### 4.VIDEO SWITCH TEA6415

In case of three or more external sources are used, the video switch IC TEA6415 is used. The main function of this device is to switch 8 video-input sources on the 6 outputs. Each output can be switched on only one of each input. On each input an alignment of the lowest level of the signal is made (bottom of sync. top for CVBS or black level for RGB signals). Each nominal gain between any input and output is 6.5dB. For D2MAC or Chroma signal the alignment is switched off by forcing, with an external resistor bridge, 5VDC on the input. Each input can be used as a normal input or as a MAC or Chroma input (with external Resistor Bridge). All the switching possibilities are changed through the BUS. Driving 75ohm load needs an external resistor. It is possible to have the same input connected to several outputs.

#### 5.MULTI STANDARD SOUND PROCESSOR

The MSP 34x10G family of single-chip Multi-standard Sound Processors covers the sound processing of all analog TV-Standards worldwide, as well as the NICAM digital sound standards. The full TV sound processing, starting with analog sound IF signal-in, down to processed analog AF-out, is performed on a single chip. The DBX noise reduction, or alternatively, MICRONAS Noise Reduction (MNR) is performed alignment free.

#### 6.SOUND OUTPUT STAGE WITH TDA7269A

The TDA7269A is class AB dual Audio power amplifier assembled in the Multi-watt package, specially designed for high quality sound application as Hi-Fi music centers and stereo TV sets.

#### 7.VERTICAL OUTPUT STAGE WITH STV9379FA

The IC STV9379FA is the vertical deflection booster circuit. Two supply voltages, +14V and -14V are needed to scan the inputs VERT+ and VERT-, respectively. And a third supply voltage, +60V for the flyback limiting is needed. The vertical deflection coil is connected in series between the output and feedback to the input.

#### 8.VIDEO OUTPUT AMPLIFIER TDA6108

The TDA6108Q includes three video output amplifiers is intended to drive the three cathodes of a colour picture tube.

## 9. POWER SUPPLY (SMPS)

The DC voltages required at various parts of the chassis are provided by an SMPS transformer controlled by the IC MC44608, which is designed for driving, controlling and protecting switching transistor of SMPS. The transformer generates 145V for Horizontal output stage, +/-14V for audio amplifier, 5V and 3.3V stand by voltage and 8V, 12V and 5V supplies for other different parts of the chassis. An optocoupler is used to control the regulation of line voltage and stand-by power consumption. There is a regulation circuit in secondary side. This circuit produces a control voltage according to the changes in 145V DC voltage, via an optocoupler (TCET1102G) to pin3 of the IC.

During the switch on period of the transistor, energy is stored in the transformer. During the switch off period energy is fed to the load via secondary winding. By varying switch-on time of the power transistor, it controls each portion of energy transferred to the secondary side such that the output voltage level remains nearly independent of load variations.

## 10. MICROCONTROLLER SDA55XX

### 10.1. General Features

- Feature selection via special function register
- Simultaneous reception of TTX, VPS, PDC, and WSS (line 23)
- Supply Voltage 2.5 and 3.3 V
- ROM version package PSDIP52-2, PMQFP64-1
- Romless version package PMQFP100-2, PLCC84-2

### 10.2. External Crystal and Programmable Clock Speed

- Single external 6MHz crystal, all necessary clocks are generated internally
- CPU clock speed selectable via special function registers.
- Normal Mode 33.33 MHz CPU clock, Power Save mode 8.33 MHz

### 10.3. Microcontroller Features

- 8bit 8051 instruction set compatible CPU.
- 33.33-MHz internal clock (max.)
- 0.360 ms (min.) instruction cycle
- Two 16-bit timers
- Watchdog timer
- Capture compare timer for infrared remote control decoding
- Pulse width modulation unit (2 channels 14 bit, 6 channels 8 bit)
- ADC (4 channels, 8 bit)
- UART (rx, tx)

### 10.4. Memory

- Non-multiplexed 8-bit data and 16 ... 20-bit address bus (ROMless Version)
- Memory banking up to 1Mbyte (Romless version)
- Up to 128 Kilobyte on Chip Program ROM
- Eight 16-bit data pointer registers (DPTR)
- 256-bytes on-chip Processor Internal RAM (IRAM)
- 128bytes extended stack memory.
- Display RAM and TXT/VPS/PDC/WSS-Acquisition-Buffer directly accessible via MOVX
- UP to 16KByte on Chip Extended RAM (XRAM) consisting of;
  - 1 Kilobyte on-chip ACQ-buffer-RAM (access via MOVX)
  - 1 Kilobyte on-chip extended-RAM (XRAM, access via MOVX) for user software
  - 3 Kilobyte Display Memory

### 10.5. Display Features

- ROM Character Set Supports all East and West European Languages in single device
- Mosaic Graphic Character Set
- Parallel Display Attributes
- Single/Double Width/Height of Characters
- Variable Flash Rate
- Programmable Screen Size (25 Rows x 33...64 Columns)
- Flexible Character Matrixes (HxV) 12 x 9...16
- Up to 256 Dynamical Redefinable Characters in standard mode; 1024 Dynamical Redefinable Characters in Enhanced Mode
- CLUT with up to 4096 colour combinations

- Up to 16 Colours per DRCS Character
- One out of Eight Colours for Foreground and Background Colours for 1-bit DRCS and ROM Characters
- Shadowing
- Contrast Reduction
- Pixel by Pixel Shiftable Cursor With up to 4 Different Colours
- Support of Progressive Scan and 100 Hz.
- 3 X 4Bits RGB-DACs On-Chip
- Free Programmable Pixel Clock from 10 MHz to 32MHz
- Pixel Clock Independent from CPU Clock
- Multinorm H/V-Display Synchronization in Master or Slave Mode

#### 10.6.Acquisition Features

- Multi-standard Digital Data Slicer
- Parallel Multi-norm Slicing (TTX, VPS, WSS, CC, G+)
- Four Different Framing Codes Available
- Data Caption only limited by available Memory
- Programmable VBI-buffer
- Full Channel Data Slicing Supported
- Fully Digital Signal Processing
- Noise Measurement and Controlled Noise Compensation
- Attenuation Measurement and Compensation
- Group Delay Measurement and Compensation
- Exact Decoding of Echo Disturbed Signals

#### 10.7.Ports

- One 8-bit I/O-port with open drain output and optional I<sup>2</sup>C Bus emulation support (Port0)
- Two 8-bit multifunction I/O-ports (Port1, Port3)
- One 4-bit port working as digital or analogue inputs for the ADC (Port2)
- One 2-bit I/O port with secondary function (P4.2, 4.3, 4.7)
- One 4-bit I/O-port with secondary function (P4.0, 4.1, 4.4) (Not available in P-SDIP 52)

### 11.CLASS AB STEREO HEADPHONE DRIVER TDA1308

The TDA1308 is an integrated class AB stereo headphone driver contained in a DIP8 plastic package. The device is fabricated in a 1 mm CMOS process and has been primarily developed for portable digital audio applications.

### 12.SAW FILTERS

K3953M:

#### Standard

B/G, D/K, I, L/L'

#### Features

TV IF filter with Nyquist slopes at 33,90 MHz and 38,90 MHz

Constant group delay

Suitable for GENELEC EN 55020

#### Terminals

Tinned CuFe alloy

#### Pin configuration

1 Input

2 Input - ground

3 Chip carrier - ground

4 Output

5 Output

K3958M:

#### Standard

B/G, D/K, I, L/L'

#### Features

TV IF filter with Nyquist slopes at 33.90 MHz and 38.90 MHz

Constant group delay

Terminal and Pin configuration are the same with K3953M

K9356M:

**Standard**

B/G, D/K, I, L

**Features**

TV IF audio filter with pass band for sound carriers at 32,40 MHz (D/K, L), 32,90 MHz (I) and 33,40 MHz (B/G)

Terminal and Pin configuration are the same with K3953M

K9656M:

**Standard**

B/G, D/K, I, L/L'

**Features**

TV IF audio filter with two channels

Channel 1 (L') with one pass band for sound carriers at 40,40 MHz (L') and 39,75 MHz (L'- NICAM)

Channel 2 (B/G, D/K, L, I) with one pass band for sound carriers between 32,35 MHz and 33,40 MHz

Terminal and Pin configuration are the same with K3953M

## 13.IC DESCRIPTIONS

LM317T	TDA1308T
MSP3410G	VDP3130Y
TEA6415	STV9379FA
TDA7269A	LM7805/LM7808
24C08	SDA55XX
MC44608	TCET1102G
TDA9885T	

### 13.1.LM317T

#### 13.1.1.Description

The LM317T is an adjustable 3 terminal positive voltage regulator capable of supplying in excess of 1.5 amps over an output range of 1.25 to 37 volts. This voltage regulator is exceptionally easy to use and requires only two external resistors to set the output voltage. Further, it employs internal current limiting, thermal shutdown and safe area compensation, making it essentially blow-out proof. The LM317 serves a wide variety of applications including local, on card regulation. This device can also be used to make a programmable output regulator, or by connecting a fixed resistor between the adjustment and output, the LM317 can be used as a precision current regulator.

#### 13.1.2.Features

- Output Current in Excess of 1.5 A
- Output Adjustable between 1.2 V and 37 V
- Internal Thermal Overload Protection
- Internal Short Circuit Current Limiting Constant with Temperature
- Output Transistor Safe-Area Compensation
- Floating Operation for High Voltage Applications
- Available in Surface Mount D<sup>2</sup>PAK, and Standard 3-Lead Transistor Package
- Eliminates Stocking many Fixed Voltages

### 13.2.TDA1308T

#### 13.2.1.General Description

The TDA1308 is an integrated class AB stereo headphone driver contained in an SO8 or a DIP8 plastic package. The device is fabricated in a 1 mm CMOS process and has been primarily developed for portable digital audio applications. It gets its input from two analog audio outputs (DACA\_L and DACA\_R) of MSP 34x0G. The gain of the output is adjustable by the feedback resistor between the inputs and outputs.

#### 13.2.2.Features

- Wide temperature range
- No switch ON/OFF clicks
- Excellent power supply ripple rejection



- Low power consumption
- Short-circuit resistant
- High performance
- high signal-to-noise ratio
- High slew rate
- Low distortion
- Large output voltage swing.


### 13.2.3.Pinning

SYMBOL	PIN	DESCRIPTION
OUTA	1	Output A
INA(neg)	2	Inverting input A
INA(pos)	3	Non-inverting input A
V <sub>SS</sub>	4	Negative supply
INB(pos)	5	Non-inverting input B
INB(neg)	6	Inverting input B
OUTB	7	Output B
V <sub>DD</sub>	8	Positive supply

## 13.3.MSP34X0G (MSP3410G)

### 13.3.1.Description

The MSP 34x0G family of single-chip Multi standard Sound Processors covers the sound processing of all analog TV-Standards worldwide, as well as the NICAM digital sound standards. The full TV sound processing, starting with analog sound IF signal-in, down to processed analog AF-out, is performed on a single chip. Figure shows a simplified functional block diagram of the MSP 34x0G.

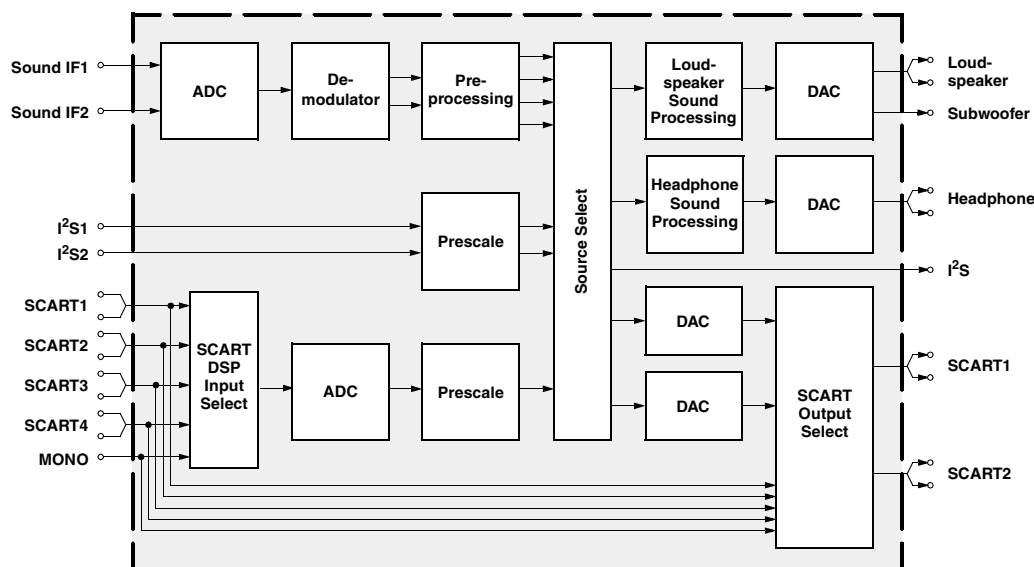

This new generation of TV sound processing ICs now includes versions for processing the multi channel television sound (MTS) signal conforming to the standard recommended by the Broadcast Television Systems Committee (BTSC). The DBX noise reduction, or alternatively, MICRONAS Noise Reduction (MNR) is performed alignment free. Other processed standards are the Japanese FM-FM multiplex standard (EIA-J) and the FM Stereo Radio standard. Current ICs have to perform adjustment procedures in order to achieve good stereo separation for BTSC and EIA-J. The MSP 34x0G has optimum stereo performance without any adjustments.

All MSP 34x0G versions are pin and software downward compatible to the MSP34x0D. The MSP34x0G further simplifies controlling software. Standard selection requires a single I<sup>2</sup>C transmission only.

The MSP 34x0G has built-in automatic functions: The IC is able to detect the actual sound standard automatically (Automatic Standard Detection). Furthermore, pilot levels and identification signals can be evaluated internally with subsequent switching between mono/stereo/bilingual; no I<sup>2</sup>C interaction is necessary (Automatic Sound Selection).

### 13.3.2.Features

Standard Selection with single I<sup>2</sup>C transmission  
 Automatic Standard Detection of terrestrial TV standards  
 Automatic Sound Selection (mono/stereo/bilingual), new registers MODUS, STATUS  
 Two selectable sound IF (SIF) inputs  
 Automatic Carrier Mute function  
 Interrupt output programmable (indicating status change)  
 Loudspeaker / Headphone channel with volume, balance, bass, treble, loudness  
 AVC: Automatic Volume Correction  
 Subwoofer output with programmable low-pass and complementary high-pass filter  
 5-band graphic equalizer for loudspeaker channel  
 Spatial effect for loudspeaker channel  
 Four Stereo SCART (line) inputs, one Mono input; two Stereo SCART outputs  
 Complete SCART in/out switching matrix  
 Two I<sup>2</sup>S inputs; one I<sup>2</sup>S output  
 Dolby Pro Logic with DPL 351xA coprocessor  
 All analog FM-Stereo A2 and satellite standards; AM-SECAM L standard  
 Simultaneous demodulation of (very) high-deviation FM-Mono and NICAM  
 Adaptive deemphasis for satellite (Wegener-Panda, acc. to ASTRA specification)  
 ASTRA Digital Radio (ADR) together with DRP 3510A  
 All NICAM standards  
 Korean FM-Stereo A2 standard

### 13.3.3.Pin connections

NC = not connected; leave vacant  
 LV = if not used, leave vacant  
 X = obligatory; connect as described in circuit diagram  
 DVSS: if not used, connect to DVSS  
 AHVSS: connect to AHVSS

Pin No.	Pin No.					Pin Name	Type	Connection (if not used)	Short Description
	PLCC 68-pin	PSDIP 64-pin	PSDIP 52-pin	PQFP 80-pin	PLQFP 64-pin				
1	16	14	9	8	ADR_WS	OUT	LV	ADR word strobe	
2	-	-	-	-	NC		LV	Not connected	
3	15	13	8	7	ADR_DA	OUT	LV	ADR Data Output	
4	14	12	7	6	I2S_DA_IN1	IN	LV	I <sup>2</sup> S1 data input	
5	13	11	6	5	I2S_DA_OUT	OUT	LV	I <sup>2</sup> S data output	
6	12	10	5	4	I2S_WS	IN/OUT	LV	I <sup>2</sup> S word strobe	
7	11	9	4	3	I2S_CL	IN/OUT	LV	I <sup>2</sup> S clock	
8	10	8	3	2	I2C_DA	IN/OUT	X	I <sup>2</sup> C data	
9	9	7	2	1	I2C_CL	IN/OUT	X	I <sup>2</sup> C data	
10	8	-	1	64	NC		LV	Not connected	
11	7	6	80	63	STANDBYQ	IN	X	Stand-by (low-active)	
12	6	5	79	62	ADR_SEL	IN	X	I <sup>2</sup> C bus address select	
13	5	4	78	61	D_CTR_I/O_0	IN/OUT	LV	D_CTR_I/O_0	
14	4	3	77	60	D_CTR_I/O_1	IN/OUT	LV	D_CTR_I/O_1	
15	3	-	76	59	NC		LV	Not connected	
16	2	-	75	58	NC		LV	Not connected	
17	-	-	-	-	NC		LV	Not connected	
18	1	2	74	57	AUD_CL_OUT	OUT	LV	Audio clock output (18.432 MHz)	
19	64	1	73	56	TP		LV	Test pin	
20	63	52	72	55	XTAL_OUT	OUT	X	Crystal oscillator	
21	62	51	71	54	XTAL_IN	IN	X	Crystal oscillator	
22	61	50	70	53	TESTEN	IN	X	Test pin	
23	60	49	69	52	ANA_IN2+	IN	AVSS via 56 pF/LV	IF Input 2 (can be left vacant, only if IF input 1 is also not in use)	
24	59	48	68	51	ANA_IN-	IN	AVSS via 56 pF/LV	IF common (can be left vacant, only if IF input 1 is also not in use)	
25	58	47	67	50	ANA_IN1+	IN	LV	IF input 2	
26	57	46	66	49	AVSUP		X	Analog power supply 5v	
-	-	-	65	-	AVSUP		X	Analog power supply 5v	

-	-	-	64	-	NC		LV	Not connected
-	-	-	63	-	NC		LV	Not connected
27	56	45	62	48	AVSS		X	Analog ground
-	-	-	61	-	AVSS		X	Analog ground
28	55	44	60	47	MONO_IN	IN	LV	Mono input
-	-	-	59	-	NC		LV	Not connected
29	54	43	58	46	VREFTOP		X	Reference voltage IF A/D converter
30	53	42	57	45	SC1_IN_R	IN	LV	SCART 1 input, right
31	52	41	56	44	SC1_IN_L	IN	LV	SCART 1 input, left
32	51	-	55	43	ASG1		AHVSS	Analog Shield Ground 1
33	50	40	54	42	SC2_IN_R	IN	LV	SCART 2 input, right
34	49	39	53	41	SC2_IN_L	IN	LV	SCART 2 input, left
35	48	-	52	40	ASG2		AHVSS	Analog Shield Ground 2
36	47	38	51	39	SC3_IN_R	IN	LV	SCART 3 input, right
37	46	37	50	38	SC3_IN_L	IN	LV	SCART 3 input, left
38	45	-	49	37	ASG4		AHVSS	Analog Shield Ground 4
39	44	-	48	36	SC4_IN_R	IN	LV	SCART 4 input, right
40	43	-	47	35	SC4_IN_L	IN	LV	SCART 4 input, left
41	-	-	46	-	NC		LV or AHVSS	Not connected
42	42	36	45	34	AGNDC		X	Analog reference voltage
43	41	35	44	33	AHVSS		X	Analog ground
-	-	-	43	-	AHVSS		X	Analog ground
-	-	-	42	-	NC		LV	Not connected
-	-	-	41	-	NC		LV	Not connected
44	40	34	40	32	CAPL_M		X	Volume capacitor MAIN
45	39	33	39	31	AHVSUP		X	Analog power supply 8V
46	38	32	38	30	CAPL_A		X	Volume capacitor AUX
47	37	31	37	29	SC1_OUT_L	OUT	LV	SCART output 1, left
48	36	30	36	28	SC1_OUT_R	OUT	LV	SCART output 1, right
49	35	29	35	27	VREF1		X	Reference ground 1
50	34	28	34	26	SC2_OUT_L	OUT	LV	SCART output 2, left
51	33	27	33	25	SC2_OUT_R	OUT	LV	SCART output 2, right
52	-	-	32	-	NC		LV	Not connected
53	32	-	31	24	NC		LV	Not connected
54	31	26	30	23	DACM_SUB	OUT	LV	Subwoofer output
55	30	-	29	22	NC		LV	Not connected
56	29	25	28	21	DACM_L	OUT	LV	Loudspeaker out, left
57	28	24	27	20	DACM_R	OUT	LV	Loudspeaker out, right
58	27	23	26	19	VREF2		X	Reference ground 2
59	26	22	25	18	DACA_L	OUT	LV	Headphone out, left
60	25	21	24	17	DACA_R	OUT	LV	Headphone out, right
-	-	-	23	-	NC		LV	Not connected
-	-	-	22	-	NC		LV	Not connected
61	24	20	21	16	RESETQ	IN	X	Power-on-reset
62	23	-	20	15	NC		LV	Not connected
63	22	-	19	14	NC		LV	Not connected
64	21	19	18	13	NC		LV	Not connected
65	20	18	17	12	I2S_DA_IN2	IN	LV	I <sup>2</sup> S2-data input
66	19	17	16	11	DVSS		X	Digital ground
-	-	-	15	-	DVSS		X	Digital ground
-	-	-	14	-	DVSS		X	Digital ground
67	18	16	13	10	DVSUP		X	Digital power supply 5V
-	-	-	12	-	DVSUP		X	Digital power supply 5V
-	-	-	11	-	DVSUP		X	Digital power supply 5V
68	17	15	10	9	ADR_CL	OUT	LV	ADR clock

## 13.4.VDP313xY

### 13.4.1.Introduction

The VDP 313xY is a video IC family of high-quality single-chip video processors. Modular design and a sub-micron technology allow the economic integration of features in all classes of TV sets. The VDP 313xY family is based on the VDP 31xxB including YCRCB inputs for DVD component signals.

The VDP 313xY includes complete video, display and deflection processing. All processing is done digitally, the video front-end and video backend are interfacing to the analog world. Most functions of the VDP can be controlled by software via I<sup>2</sup>C-Bus interface

### 13.4.2.Features

#### Video Decoding and Processing

- four CVBS, one S-VHS input, one YC R C B component input
- integrated high-quality A/D converters and associated clamp and AGC circuits
- adaptive 2H comb filter Y/C separator
- multistandard colour decoder PAL/NTSC/SECAM including all substandards
- multistandard sync decoder
- automatic standard recognition
- black-line detector
- linear horizontal scaling (0.25...4), as well as non-linear horizontal scaling “Panoramavision”
- black-level expander
- dynamic peaking
- soft limiter (gamma correction)
- colour transient improvement

#### RGB Processing and Deflection

- programmable RGB matrix
- two analog RGB / Fastblank inputs
- half-contrast switch
- picture frame generator
- scan velocity modulation output
- high-performance H/V deflection
- separate ADC for tube measurements
- EHT compensation
- angle and bow correction
- one 20.25 MHz crystal, few external components
- I<sup>2</sup>C-Bus Interface
- 64-pin PSDIP package

### 13.4.3.Pin Connections and short descriptions

NC = not connected

X = obligatory; connect as described in circuit diagram

OUT = Output

LV = if not used, leave vacant

IN = Input

SUPPLY = Supply Pin

Pin no PSDIP 64-pin	Pin name	Type	Connection (if not used)	Short description
1	TEST	IN	GNDD	Test Input
2	RESQ	IN	X	Reset Input
3	SCL	IN/OUT	X	I <sup>2</sup> C Bus Clock
4	SDA	IN/OUT	X	I <sup>2</sup> C Bus Data
5	GNDD	SUPPLY	X	Digital Ground
6	HCS	IN	LV	Half Contrast Switch Input
7	FSY	OUT	LV	Front Sync Output
8	CSY	OUT	LV	Composite Sync Output
9	VS	OUT	LV	Vertical Sync Output (=VS Bit of MSY for TPU)
10	INTLC	OUT	LV	Interface Control Output
11	VPROT	IN	GNDAB	Vertical Protection Input
12	SAFETY	IN	GNDAB	Safety Input
13	HFLB	IN	HOUT	Horizontal Flyback Input
14	GNDD	SUPPLY	X	Digital Ground
15	VSUPD	SUPPLY	X	Digital Supply Voltage (3.3V)
16	GNDD	SUPPLY	X	Digital Ground
17	VSUPD	SUPPLY	LV	Digital Supply Voltage (3.3V)
18	P0	IN/OUT	LV	Port 1, Bit 0
19	P1	IN/OUT	LV	Port 1, Bit 1
20	P2	IN/OUT	GNDD	Port 1, Bit 2
21	P3	IN/OUT	GNDD	Port 1, Bit 3
22	P4	IN/OUT	GNDD	Port 1, Bit 4
23	P5	IN/OUT	GNDD	Port 1, Bit 5
24	P6	IN/OUT	GNDD	Port 1, Bit 6

25	GNDD	SUPPLY	X	Digital Ground
26	RSW2	OUT	GNDAB	Range Switch 2 for Measurement ADC
27	RSW1	OUT	GNDAB	Range Switch 1 for Measurement ADC
28	SENSE	IN	GNDAB	Sense ADC Input
29	GNDM	SUPPLY	X	Ground, MADC Input
30	VERTQ	OUT	LV	Inverted Vertical Sawtooth Output
31	VERT	OUT	LV	Vertical Sawtooth Output
32	E/w	OUT	LV	Vertical Parabola Output
33	XREF	IN	X	Reference Input for RGB DACs
34	SVMOUT	OUT	VSUPAB	Analog Scan Velocity Modulation Output
35	GNDAB	SUPPLY	X	Analog Ground Backend
36	VSUPAB	SUPPLY	X	Analog Supply Voltage (5.0V) Backend
37	ROUT	OUT	VSUPAB	Analog Red Output
38	GOUT	OUT	VSUPAB	Analog Green Output
39	BOUT	OUT	VSUPAB	Analog Blue Output
40	VRD	IN	X	DAC Reference
41	RIN	IN	GNDAB	Analog Red Input
42	GIN	IN	GNDAB	Analog Green Input
43	BIN	IN	GNDAB	Analog Blue Input
44	FBLIN	IN	GNDAB	Fast Blank Input
45	RIN2	IN	GNDAB	Analog Red Input2
46	GIN2	IN	GNDAB	Analog Green Input2
47	BIN2	IN	GNDAB	Analog Blue Input2
48	FBLIN2	IN	GNDAB	Fast Blank Input2
49	CLK20	OUT	LV	20.25 MHz System Clock Output
50	HOUT	OUT	X	Horizontal Drive Output
51	XTAL 1	IN	X	Analog Crystal Input
52	XTAL 2	OUT	X	Analog Crystal Output
53	CIN 2/CRIN		LV	Analog Chroma 2/Component C <sub>R</sub> Input
54	CBIN	IN	LV	Component C <sub>B</sub> Input
55	GNDAF	SUPPLY	X	Analog Ground Front-end
56	SGND	IN	GNDAF	Signal Ground for Analog Input
57	VRT	IN	X	Reference Voltage Top, Video ADC
58	VSUPAF	SUPPLY	X	Analog Supply Voltage (5.0V) Front-end
59	VOUT	OUT	LV	Analog Video Output
60	CIN1	IN	VRT	Analog Chroma 1 Input
61	VIN1	IN	VRT	Analog Video 1 Input
62	VIN2	IN	VRT	Analog Video 2 Input
63	VIN3	IN	VRT	Analog Video 3 Input
64	VIN4	IN	VRT	Analog Video 4 Input

## 13.5.TEA6415C

### 13.5.1.General Description

The main function of the IC is to switch 8 video input sources on 6 outputs. Each output can be switched on only one of each input. On each input an alignment of the lowest level of the signal is made (bottom of synch. top for CVBS or black level for RGB signals). Each nominal gain between any input and output is 6.5dB. For D2MAC or Chroma signal the alignment is switched off by forcing, with an external resistor bridge, 5 V<sub>DC</sub> on the input. Each input can be used as a normal input or as a MAC or Chroma input (with external resistor bridge). All the switching possibilities are changed through the BUS. Driving 75Ω load needs an external transistor. It is possible to have the same input connected to several outputs. The starting configuration upon power on (power supply: 0 to 10V) is undetermined. In this case, 6 words of 16 bits are necessary to determine one configuration. In other case, 1 word of 16 bits is necessary to determine one configuration.

### 13.5.2.Features

- 20MHz Bandwidth
- Cascadable with another TEA6415C (Internal address can be changed by pin 7 voltage)
- 8 Inputs (CVBS, RGB, MAC, CHROMA,...)
- 6 Outputs
- Possibility of MAC or chroma signal for each input by switching-off the clamp with an external resistor bridge
- Bus controlled

- 6.5dB gain between any input and output
- 55dB crosstalk at 5mHz
- Fully ESD protected

### **13.5.3.Pinning**

1. Input: Max: 2Vpp, Input Current: 1mA, Max: 3mA
2. Data: Low level: -0.3V Max: 1.5V,  
High level: 3.0V Max: Vcc+0.5V
3. Input: Max: 2Vpp, Input Current: 1mA, Max: 3mA
4. Clock: Low level: -0.3V Max: 1.5V,  
High level: 3.0V Max: Vcc+0.5V
5. Input: Max : 2Vpp, Input Current: 1mA, Max: 3mA
6. Input: Max: 2Vpp, Input Current: 1mA, Max: 3mA
7. Prog
8. Input: Max : 2Vpp, Input Current: 1mA, Max: 3mA
9. Vcc: 12V
10. Input: Max : 2Vpp, Input Current: 1mA, Max: 3mA
11. Input: Max : 2Vpp, Input Current: 1mA, Max: 3mA
12. Ground
13. Output: 5.5Vpp, Min: 4.5Vpp
14. Output: 5.5Vpp, Min: 4.5Vpp
15. Output: 5.5Vpp, Min: 4.5Vpp
16. Output: 5.5Vpp, Min: 4.5Vpp
17. Output: 5.5Vpp, Min: 4.5Vpp
18. Output: 5.5Vpp, Min: 4.5Vpp
19. Ground
20. Input: Max: 2Vpp, Input Current: 1mA, Max: 3mA

## **13.6.STV9379FA**

### **13.6.1.Description**

Designed for monitors and high performance TVs, the STV9379FA vertical deflection booster can handle flyback voltage up to 90V. Further to this, it is possible to have a flyback voltage, which is more than the double of the supply (Pin 2). This allows to decrease the power consumption, or to decrease the flyback time for a given supply voltage. The STV9379FA operates with supplies up to 42V and provides up to 2.6APP output current to drive the yoke. The STV9379FA is offered in HEPTAWATT package.

### **13.6.2.Features**

Power Amplifier  
Thermal Protection  
Output Current Up To 2.6APP  
Flyback Voltage Up To 90V (on Pin 5)  
Suitable For DC Coupling Application  
External Flyback Supply

### **13.6.3.Pinning**

Pin1 : Output Stage Supply  
Pin2 : Output  
Pin3 : GND or Negative Supply  
Pin4 : Flyback Supply  
Pin5 : Supply Voltage  
Pin6 : Inverting Input  
Pin7 : Non-inverting Input

## 13.7.TDA7269A

### 13.7.1.Description

The TDA7269A is class AB dual Audio power amplifier assembled in the Multiwatt package, specially designed for high quality sound application as Hi-Fi music centers and stereo TV sets.

### 13.7.2.Features

Wide Supply Voltage Range Up To  $\pm 20V$   
 Split Supply  
 High Output Power  
 14 + 14W @THD =10%,  $R_L = 8\Omega, V_S = +16V$   
 No Pop at Turn-On/Off  
 Mute (Pop Free)  
 Stand-By Feature (Low  $I_q$ )  
 Short Circuit Protection To Gnd  
 Thermal Overload Protection

## 13.8.LM7800 (LM7805/LM7808)

### 13.8.1.Description

The L7800 series of three-terminal positive regulators is available in TO-220 TO-220FP TO-3 and D 2 PAK packages and several fixed output voltages, making it useful in a wide range of applications. These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation. Each type employs internal current limiting, thermal shutdown and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

### 13.8.2.Features

Output Current Up To 1.5 A  
 Output Voltages of 5; 5.2; 6; 8; 8.5; 9; 12; 15; 18; 24V  
 Thermal Over load protection  
 Short Circuit Protection  
 Output Transition SOA Protection

## 13.9.AT24C08

### 13.9.1.Description

The AT24C01A/02/04/08/16 provides 1024/2048/4096/8192/16384 bits of serial electrically erasable and programmable read-only memory (EEPROM) organized as 128/256/512/1024/2048 words of 8 bits each. The device is optimized for use in many industrial and commercial applications where low-power and low-voltage operation are essential. The AT24C01A/02/04/08/16 is available in space-saving 8-pin PDIP, (AT24C01A/02/04/08/16), 8-lead TSSOP (AT24C01A/02/04/08/16) and 8-lead JEDEC SOIC (AT24C01A/02/04/08/16) packages and is accessed via a 2-wire serial interface. In addition, the entire family is available in 5.0V (4.5V to 5.5V), 2.7V (2.7V to 5.5V), 2.5V (2.5V to 5.5V) and 1.8V (1.8V to 5.5V) versions.

### 13.9.2.Features

- Low-voltage and Standard-voltage Operation
  - 5.0 (V CC = 4.5V to 5.5V)
  - 2.7 (V CC = 2.7V to 5.5V)
  - 2.5 (V CC = 2.5V to 5.5V)
  - 1.8 (V CC = 1.8V to 5.5V)
- Internally Organized 128 x 8 (1K), 256 x 8 (2K), 512 x 8 (4K), 1024 x 8 (8K) or 2048 x 8 (16K)
- 2-wire Serial Interface
- Schmitt Trigger, Filtered Inputs for Noise Suppression
- Bi-directional Data Transfer Protocol
- 100 kHz (1.8V, 2.5V, 2.7V) and 400 kHz (5V) Compatibility
- Write Protect Pin for Hardware Data Protection



- 8-byte Page (1K, 2K), 16-byte Page (4K, 8K, 16K) Write Modes
- Partial Page Writes are Allowed
- Self-timed Write Cycle (10 ms max)
- High-reliability
  - Endurance: 1 Million Write Cycles
  - Data Retention: 100 Years
- Automotive Grade and Extended Temperature Devices Available
- 8-lead JEDEC SOIC, 8-pin PDIP and 8-lead TSSOP Packages

### 13.9.3.Pin Configurations

Pin name	Function
A0-A2	Address Inputs
SDA	Serial Data
SCL	Serial Clock Input
WP	Write Protect
NC	No Connect

## 13.10.SDA5555

### 13.10.1.General definition

The SDA55XX is a single chip teletext decoder for decoding World System Teletext data as well as Video Programming System (VPS), Program Delivery Control (PDC), and Wide Screen Signalling (WSS) data used for PAL plus transmissions (Line 23). The device also supports Closed caption acquisition and decoding. The device provides an integrated general-purpose, fully 8051-compatible Microcontroller with television specific hardware features. Microcontroller has been enhanced to provide powerful features such as memory banking, data pointers, and additional interrupts etc. The on-chip display unit for displaying Level 1.5 teletext data can also be used for customer defined on screen displays. Internal XRAM consists of up to 16 Kbytes. Device has an internal ROM of up to 128 KBytes. ROMless versions can access up to 1 MByte of external RAM and ROM. The SDA 55XX supports a wide range of standards including PAL, NTSC and contains a digital slicer for VPS, WSS, PDC, TTX and Closed Caption, an accelerating acquisition hardware module, a display generator for Level 1.5 TTX data and powerful On screen Display capabilities based on parallel attributes, and Pixel oriented characters (DRCS).

### 13.10.2.Features

#### General

- Feature selection via special function register
- Simultaneous reception of TTX, VPS, PDC, and WSS (line 23)
- Supply Voltage 2.5 and 3.3 V
- ROM version package PSDIP52-2, PMQFP64-1
- Romless version package PMQFP100-2, PLCC84-2

#### External Crystal and Programmable Clock Speed

- Single external 6MHz crystal, all necessary clocks are generated internally
- CPU clock speed selectable via special function registers.
- Normal Mode 33.33 MHz CPU clock, Power Save mode 8.33 MHz

#### Microcontroller Features

- 8bit 8051 instruction set compatible CPU.
- 33.33-MHz internal clock (max.)
- 0.360ms (min.) instruction cycle
- Two 16-bit timers
- Watchdog timer
- Capture compare timer for infrared remote control decoding
- Pulse width modulation unit (2 channels 14 bit, 6 channels 8 bit)
- ADC (4 channels, 8 bit)
- UART

**Memory**

- Non-multiplexed 8-bit data and 16 ... 20-bit address bus (ROMless Version)
- Memory banking up to 1Mbyte (ROMless version)
- Up to 128 Kilobyte on Chip Program ROM
- Eight 16-bit data pointer registers (DPTR)
- 256-bytes on-chip Processor Internal RAM (IRAM)
- 128bytes extended stack memory.
- Display RAM and TXT/VPS/PDC/WSS-Acquisition-Buffer directly accessible via MOVX
- UP to 16KByte on Chip Extended RAM (XRAM) consisting of;
  - 1 Kilobyte on-chip ACQ-buffer-RAM (access via MOVX)
  - 1 Kilobyte on-chip extended-RAM (XRAM, access via MOVX) for user software
  - 3 Kilobyte Display Memory

**Display Features**

- ROM Character Set Supports all East and West European Languages in single device
- Mosaic Graphic Character Set
- Parallel Display Attributes
- Single/Double Width/Height of Characters
- Variable Flash Rate
- Programmable Screen Size (25 Rows x 33...64 Columns)
- Flexible Character Matrixes (HxV) 12 x 9...16
- Up to 256 Dynamical Redefinable Characters in standard mode; 1024 Dynamical Redefinable Characters in Enhanced Mode
- CLUT with up to 4096 colour combinations
- Up to 16 Colours per DRCS Character
- One out of Eight Colours for Foreground and Background Colours for 1-bit DRCS and ROM Characters
- Shadowing
- Contrast Reduction
- Pixel by Pixel Shiftable Cursor With up to 4 Different Colours
- Support of Progressive Scan and 100 Hz.
- 3 X 4Bits RGB-DACs On-Chip
- Free Programmable Pixel Clock from 10 MHz to 32MHz
- Pixel Clock Independent from CPU Clock
- Multinorm H/V-Display Synchronization in Master or Slave Mode

**Acquisition Features**

- Multistandard Digital Data Slicer
- Parallel Multi-norm Slicing (TTX, VPS, WSS, CC, G+)
- Four Different Framing Codes Available
- Data Caption only Limited by available Memory
- Programmable VBI-buffer
- Full Channel Data Slicing Supported
- Fully Digital Signal Processing
- Noise Measurement and Controlled Noise Compensation
- Attenuation Measurement and Compensation
- Group Delay Measurement and Compensation
- Exact Decoding of Echo Disturbed Signals

**Ports**

- One 8-bit I/O-port with open drain output and optional I<sup>2</sup>C Bus emulation support (Port 0)
- Two 8-bit multifunction I/O-ports (Port 1, Port 3)
- One 4-bit port working as digital or analog inputs for the ADC (Port 2)
- One 2-bit I/O port with secondary functions (P4.2, 4.3, 4.7)
- One 4-bit I/O-port with secondary function (P4.0, 4.1, 4.4) (Not available in P-SDIP 52)

**13.11.MC44608****13.11.1.Description**

The MC44608 is a high performance voltage mode controller designed for off-line converters. This high voltage circuit that integrates the start-up current source and the oscillator capacitor, requires few

external components while offering a high flexibility and reliability. The device also features a very high efficiency stand-by management consisting of an effective Pulsed Mode operation. This technique enables the reduction of the stand-by power consumption to approximately 1W while delivering 300mW in a 150W SMPS.

- Integrated Start-Up Current Source
- Lossless Off-Line Start-Up
- Direct Off-Line Operation
- Fast Start-Up

**13.11.2.General Features**

- Flexibility
- Duty Cycle Control
- Under voltage Lockout with Hysteresis
- On Chip Oscillator Switching Frequency 40, or 75kHz
- Secondary Control with Few External Components


**Protections**

- Maximum Duty Cycle Limitation
- Cycle by Cycle Current Limitation
- Demagnetization (Zero Current Detection) Protection
- “Over Vcc Protection” Against Open Loop
- Programmable Low Inertia Over Voltage Protection Against Open Loop
- Internal Thermal Protection

**GreenLine™ Controller**

- Pulsed Mode Techniques for a Very High Efficiency Low Power Mode
- Lossless Start-up
- Low dV/dT for Low EMI Radiations

**13.11.3.Pin Connections**



AWL = Manufacturing Code  
YYWW = Date Code

**13.11.4.Pin Function description**

Pin	Name	Description
1	Demag	The Demag pin offers 3 different functions: Zero voltage crossing detection (50mV), 24mA current detection and 120mA current detection. The 24mA level is used to detect the secondary reconfiguration status and the 120mA level to detect an Over Voltage status called Quick OVP.
2	ISENSE	The Current Sense pin senses the voltage developed on the series resistor inserted in the source of the power MOSFET. When I sense reaches 1V, the Driver output (pin 5) is disabled. This is known as the Over Current Protection function. A 200mA current source is flowing out of the pin 3 during the start-up phase and during the switching phase in case of the Pulsed Mode of operation. A resistor can be inserted between the sense resistor and the pin 3; thus a programmable peak current detection can be performed during the SMPS stand-by mode.
3	Control Input	A feedback current from the secondary side of the SMPS via the opto-coupler is injected into this pin. A resistor can be connected between this pin and GND to allow the programming of the Burst duty cycle during the Stand-by mode.
4	Ground	This pin is the ground of the primary side of the SMPS.
5	Driver	The current and slew rate capability of this pin are suited to drive Power MOSFETs.
6	VCC	This pin is the positive supply of the IC. The driver output gets disabled when the voltage becomes higher than 15V and the operating range is between 6.6V and 13V. An intermediate voltage level of 10V creates a disabling condition called Latched Off phase.
7		This pin is to provide isolation between the Vi pin 8 and the VCC pin 6.
8	Vi	This pin can be directly connected to a 500V voltage source for start-up function of the IC. During the Start-up phase a 9 mA current source is internally delivered to the VCC pin 6 allowing a rapid charge of the VCC capacitor. As soon as the IC starts-up, this current source is disabled.

## 13.12.TCET1102G

### 13.12.1.Description

The TCET110/ TCET2100/ TCET4100 consists of a phototransistor optically coupled to a gallium arsenide infrared-emitting diode in a 4-lead up to 16-lead plastic dual inline package. The elements are mounted on one lead frame using a **coplanar technique**, providing a fixed distance between input and output for highest safety requirements.

### 13.12.2.Applications

Circuits for safe protective separation against electrical shock according to safety class II (reinforced isolation):

For appl. class I – IV at mains voltage  $\leq 300$  V

For appl. class I – III at mains voltage  $\leq 600$  V

According to VDE 0884, table 2, suitable for: **Switch-mode power supplies, line receiver, computer peripheral interface, and microprocessor system interface.**

### 13.12.3.Features

#### VDE 0884 related features:

Rated impulse voltage (transient overvoltage)  $V_{IOTM} = 8$  kV peak

Isolation test voltage (partial discharge test voltage)  $V_{pd} = 1.6$  kV

Rated isolation voltage (RMS includes DC)  $V_{IOWM} = 600$  V RMS (848 V peak)

Rated recurring peak voltage (repetitive)  $V_{IORM} = 600$  V RMS

#### General features:

CTR offered in 9 groups

Isolation materials according to UL94-VO

Pollution degree 2 (DIN/VDE 0110 / resp. IEC 664)

Climatic classification 55/100/21 (IEC 68 part 1)

Special construction: Therefore, extra low coupling capacity of typical 0.2pF, high **Common Mode Rejection**

Low temperature coefficient of CTR

G = Leadform 10.16 mm; provides creepage distance > 8 mm, for TCET2100/ TCET4100 optional; suffix letter 'G' is not marked on the optocoupler

Coupling System U

## 13.13.TDA9885T

### 13.13.1.General Description

The TDA9885 is an alignment-free single standard (without positive modulation) vision and sound IF signal PLL.

### 13.13.2.Features

5 V supply voltage

Gain controlled wide-band Vision Intermediate Frequency (VIF) amplifier (AC-coupled)

Multistandard true synchronous demodulation with active carrier regeneration (very linear demodulation, good intermodulation figures, reduced harmonics, excellent pulse response)

Gated phase detector for L/L accent standard

Fully integrated VIF Voltage Controlled Oscillator (VCO), alignment-free; frequencies switchable for all negative and positive modulated standards via I<sup>2</sup>C-bus

Digital acquisition help, VIF frequencies of 33.4, 33.9, 38.0, 38.9, 45.75 and 58.75 MHz

4 MHz reference frequency input [signal from Phase-Locked Loop (PLL) tuning system] or operating as crystal oscillator

VIF Automatic Gain Control (AGC) detector for gain control, operating as peak sync detector for negative modulated signals and as a peak white detector for positive modulated signals

Precise fully digital Automatic Frequency Control (AFC) detector with 4-bit digital-to-analog converter; AFC bits via I<sup>2</sup>C -bus readable

TakeOver Point (TOP) adjustable via I<sup>2</sup>C-bus or alternatively with potentiometer

Fully integrated sound carrier trap for 4.5, 5.5, 6.0 and 6.5 MHz, controlled by FM-PLL oscillator

Sound IF (SIF) input for single reference Quasi Split Sound (QSS) mode (PLL controlled)

SIF AGC for gain controlled SIF amplifier; single reference QSS mixer able to operate in high performance single reference QSS mode and in intercarrier mode, switchable via I<sup>2</sup>C-bus  
 AM demodulator without extra reference circuit  
 Alignment-free selective FM-PLL demodulator with high linearity and low noise  
 I<sup>2</sup>C-bus control for all functions  
 I<sup>2</sup>C-bus transceiver with pin programmable Module Address (MAD).

### 13.13.3.Pinning

<b>SYMBOL</b>	<b>PIN</b>	<b>DESCRIPTION</b>
VIF1	1	VIF differential input 1
VIF2	2	VIF differential input 2
OP1	3	output 1 (open-collector)
FMPLL	4	FM-PLL for loop filter
DEEM	5	de-emphasis output for capacitor
AFD	6	AF decoupling input for capacitor
DGND	7	digital ground
AUD	8	audio output
TOP	9	tuner AGC TakeOver Point (TOP)
SDA	10	I <sup>2</sup> C-bus data input/output
SCL	11	I <sup>2</sup> C-bus clock input
SIOMA	12	sound intercarrier output and MAD select
n.c.	13	not connected
TAGC	14	tuner AGC output
REF	15	4 MHz crystal or reference input
VAGC	16	VIF-AGC for capacitor; note 1
CVBS	17	video output
AGND	18	analog ground
VPLL	19	VIF-PLL for loop filter
V <sub>p</sub>	20	supply voltage (+5 V)
AFC	21	AFC output
OP2	22	output 2 (open-collector)
SIF1	23	SIF differential input 1
SIF2	24	SIF differential input 2

### 13.14.PI5V330


#### 13.14.1.General Description

The PI5V330 is well suited for video applications when switching composite or RGB analog.

## 14.AK45 CHASSIS PRODUCTION SERVICE MODE ADJUSTMENTS

### 14.1.SERVICE MENU


All system, geometry and white balance alignments are performed in production service mode. Before starting the production mode alignments, make sure that all manual adjustments are done correctly. To start production mode alignments enter the MAIN MENU and then press the digits 4, 7, 2 and 5 respectively or press **MUTE** and **INFO** buttons at the same time. The following first menu appears on the screen.

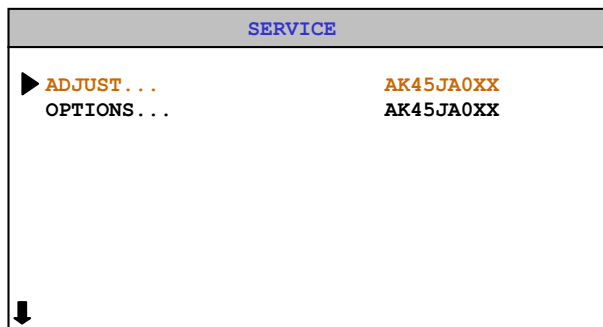

You can select Adjust or Options items by pressing Up/Down buttons. Selected parameter will be highlighted. In order to enter the selected parameter, press Left or Right button. To exit the service menu press MENU button. Entire service menu parameters of AK45 CHASSIS are listed below.

### 14.2.ADJUST MENU

Select the parameter by pressing up/down buttons. Adjust the parameter by pressing Left/Right buttons. In ADJUST menu, changed values are stored automatically.

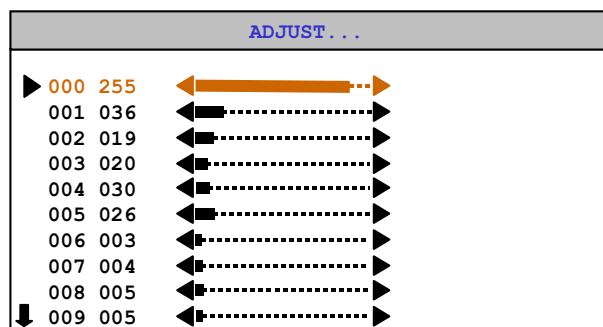

#### White Point Red, White Point Green, White Point Blue:

Not used.

#### AGC

Apply PAL BG signal, VHF-3 Channel-12 and 60dB $\mu$ V signal level. Adjust AGC (Automatic Gain Control) item by pressing Left/Right buttons till the voltage at AGC point (pin1 of the tuner) becomes 3.0 volts.

#### If PLL negative

Not used.

#### If PLL positive

Not used.

#### Y-Delay

Enter a PAL B/G colour and black-white bar test pattern via RF. Adjust Y-Delay for PAL till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible.



#### **Y-Delay SECAM**

Enter a SECAM B/G colour and black-white bar test pattern via RF. Adjust Y-Delay SECAM till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible.

#### **Y-Delay NTSC**

Enter an NTSC colour and black-white bar test pattern via RF. Adjust Y-Delay NTSC till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible.

#### **Y-Delay other**

Not used.

#### **Vertical Position Offset**

This value is fixed (127)

#### **Vertical Position Offset**

This value is fixed (127)

#### **Horizontal Position Offset**

This value is fixed (127)

#### **Horizontal Position Offset**

This value is fixed (127)

#### **Vertical Blank Start**

This register will be used only at 4:3 tubes for 16:9 mode adjustment. It adjusts the vertical blank start position.

#### **Vertical Blank Stop**

This register will be used only at 4:3 tubes for 16:9 mode adjustment. It adjusts the vertical blank stop position.

#### **Angle**

Change Angle by pressing Left/Right buttons till the vertical lines of the crosshatch pattern become completely perpendicular to horizontal lines without any angle of vertical deviation. Check and readjust ANGLE item if the adjustment becomes improper after some other geometric adjustments are done.

#### **Bow**

Change Bow by pressing Left/Right buttons till the vertical lines especially ones close to the left and right sides will of equal and symmetrical bending, i.e. they together will neither be towards left side nor right side. Check and readjust BOW item if the adjustment becomes improper after some other geometric adjustments are done.

#### **4:3 Horizontal Blank Start**

This register will be used only at 16:9 tube for 4:3 mode adjustment. It adjusts the horizontal blank start position.

#### **4:3 Horizontal Blank Stop**

This register will be used only at 16:9 tube for 4:3 mode adjustment. It adjusts the horizontal blank stop position.

#### **EHTV Compensation**

It's used to adjust the EHT compensation vertical gain coefficient.

#### **EHTTM Compensation**

It's used to adjust the EHT compensation time constant.

#### **EHTEW Compensation**

It's used to adjust the EHT compensation east/west gain coefficient.

**WDR**

The amplitude of R of RGB output can be adjusted with the drive parameter WDR.

**WDG**

The amplitude of G of RGB output can be adjusted with the drive parameter WDG.

**WDB**

The amplitude of B of RGB output can be adjusted with the drive parameter WDB.

**CR**

The DC offset values of R of RGB output can be adjusted with the cutoff parameter CR.

**CG**

The DC offset values of G of RGB output can be adjusted with the cutoff parameter CG.

**CB**

The DC offset values of B of RGB output can be adjusted with the cutoff parameter CB.

**COR coring level**

The amplitude of the correction signal is adjustable. Small noise amplitudes in the correction signal are suppressed by an adjustable coring circuit.

**REGULAR VERT\_POS (Regular mode Vertical Position)**

Enter a PAL B/G circle test pattern via RF. Change Vertical Position till the test pattern is vertically centered. Horizontal line at the center pattern is in equal distance both to upper and lower side of the picture tube. Check and readjust Vertical Position item if the adjustment becomes improper after some other geometric adjustments are done.

It's used to adjust the vertical position of regular mode.

**REGULAR VERT\_AMPL (Regular mode Vertical Amplitude)**

It's used to adjust the vertical amplitude of regular mode.

**REGULAR VERT\_SCOR (Regular mode Vertical S-Correction)**

It's used to adjust the vertical s-correction of regular mode.

**REGULAR VERT\_SSYM(Regular mode Vertical S Symmetry)**

It's used to adjust the vertical s-symmetry of regular mode.

**REGULAR TRAPEZE (Regular mode Trapeze)**

Change Trapezium by pressing Left/Right buttons till vertical lines, especially lines at the sides of the picture frame became parallel to the both sides of picture tube as close as possible. Check and readjust TRPEZ item if the adjustment becomes improper after some other geometric adjustments are done.

It's used to adjust the trapeze of regular mode.

**REGULAR CUSHION (Regular mode Cushion)**

It's used to adjust the cushion of regular mode.

**REGULAR HOR\_COR\_SYM (Regular mode Horizontal Corner Symmetry)**

It's used to adjust the horizontal corners symmetry of regular mode.

**REGULAR HOR\_CORNER (Regular mode Horizontal Corner)**

It's used to adjust the horizontal corners of regular mode.

**REGULAR HORZ\_POS (Regular mode Horizontal Position)**

Enter a PAL B/G circle test pattern via RF. Change Horizontal Position until the picture is horizontally centered. Check and readjust Horizontal Position item if the adjustment becomes improper after some other geometric adjustments are done.

It's used to adjust the horizontal position of regular mode.

**REGULAR HORZ\_AMPL (Regular mode Horizontal Amplitude)**

It's used to adjust the horizontal amplitude of regular mode.

**PANORAMIC VERT\_POS (Panoramic mode Vertical Position)**

It's used to adjust the vertical position of panoramic mode.

**PANORAMIC VERT\_AMPL (Panoramic mode Vertical Amplitude)**

It's used to adjust the vertical amplitude of panoramic mode.

**PANORAMIC VERT\_SCOR (Panoramic mode Vertical S-Correction)**

It's used to adjust the vertical s-correction of panoramic mode.

**PANORAMIC VERT\_SSYM (Panoramic mode Vertical S-Symmetry)**

It's used to adjust the vertical s-symmetry of panoramic mode.

**PANORAMIC TRAPEZE (Panoramic mode Trapeze)**

It's used to adjust the trapeze of panoramic mode.

**PANORAMIC CUSHION (Panoramic mode Cushion)**

It's used to adjust the cushion of panoramic mode.

**PANORAMIC HOR\_COR\_SYM (Panoramic mode Horizontal corner symmetry)**

It's used to adjust the horizontal corners symmetry of panoramic mode.

**PANORAMIC HOR\_CORNER (Panoramic mode Horizontal corner)**

It's used to adjust the horizontal corners of panoramic mode.

**PANORAMIC HORZ\_POS (Panoramic mode Horizontal position)**

It's used to adjust the horizontal position of panoramic mode.

**PANORAMIC HORZ\_AMPL (Panoramic mode Horizontal amplitude)**

It's used to adjust the horizontal amplitude of panoramic mode.

**14:9 ZOOM VERT\_POS (14:9 Zoom mode Vertical Position)**

It's used to adjust the vertical position of 14:9 zoom mode.

**14:9 ZOOM VERT\_AMPL (14:9 Zoom mode Vertical Amplitude)**

It's used to adjust the vertical amplitude of 14:9 zoom mode.

**14:9 ZOOM VERT\_SCOR (14:9 Zoom mode Vertical S-Correction)**

It's used to adjust the vertical s-correction of 14:9 zoom mode.

**14:9 ZOOM VERT\_SSYM (14:9 Zoom mode Vertical S-Symmetry)**

It's used to adjust the vertical s-symmetry of 14:9 zoom mode.

**14:9 ZOOM TRAPEZE (14:9 Zoom mode Trapeze)**

It's used to adjust the trapeze of 14:9 zoom mode.

**14:9 ZOOM CUSHION (14:9 Zoom mode Cushion)**

It's used to adjust the cushion of 14:9 zoom mode.

**14:9 ZOOM HOR\_COR\_SYM (14:9 Zoom mode Corner Symmetry)**

It's used to adjust the horizontal corners symmetry of 14:9 zoom mode.

**14:9 ZOOM HOR\_CORNER (14:9 Zoom mode Horizontal Corner)**

It's used to adjust the horizontal corners of 14:9 zoom mode.

**14:9 ZOOM HORZ\_POS (14:9 Zoom mode Horizontal Position)**

It's used to adjust the horizontal position of 14:9 zoom mode.

**14:9 ZOOM HORZ\_AMPL (14:9 Zoom mode Horizontal Amplitude)**

It's used to adjust the horizontal amplitude of 14:9 zoom mode.

**16:9 ZOOM VERT\_POS (16:9 Zoom mode Vertical Position)**

It's used to adjust the vertical position of 16:9 zoom mode.

**16:9 ZOOM VERT\_AMPL (16:9 Zoom mode Vertical Amplitude)**

It's used to adjust the vertical amplitude of 16:9 zoom mode.

**16:9 ZOOM VERT\_SCOR (16:9 Zoom mode Vertical S-Correction)**

It's used to adjust the vertical s-correction of 16:9 zoom mode.

**16:9 ZOOM VERT\_SSYM (16:9 Zoom mode Vertical S-Symmetry)**

It's used to adjust the vertical s-symmetry of 16:9 zoom mode.

**16:9 ZOOM TRAPEZE (16:9 Zoom mode Trapeze)**

It's used to adjust the trapeze of 16:9 zoom mode.

**16:9 ZOOM CUSHION (16:9 Zoom mode Cushion)**

It's used to adjust the cushion of 16:9 zoom mode.

**16:9 ZOOM HOR\_COR\_SYM (16:9 Zoom mode Horizontal corner symmetry)**

It's used to adjust the horizontal corners symmetry of 16:9 zoom mode.

**16:9 ZOOM HOR\_CORNER (16:9 Zoom mode Horizontal corner)**

It's used to adjust the horizontal corners of 16:9 zoom mode.

**16:9 ZOOM HORZ\_POS (16:9 Zoom mode Horizontal position)**

It's used to adjust the horizontal position of 16:9 zoom mode.

**16:9 ZOOM HORZ\_AMPL (16:9 Zoom mode Horizontal amplitude)**

It's used to adjust the horizontal amplitude of 16:9 zoom mode.

**16:9 ZOOM SUBTITLE VERT\_POS (16:9 Zoom Subtitle mode Vertical position)**

It's used to adjust the vertical position of 16:9 zoom subtitle mode.

**16:9 ZOOM SUBTITLE VERT\_AMPL (16:9 Zoom Subtitle mode Vertical amplitude)**

It's used to adjust the vertical amplitude of 16:9 zoom subtitle mode.

**16:9 ZOOM SUBTITLE VERT\_SCOR (16:9 Zoom Subtitle mode Vertical S-Correction)**

It's used to adjust the vertical s-correction of 16:9 zoom subtitle mode.

**16:9 ZOOM SUBTITLE VERT\_SSYM (16:9 Zoom Subtitle mode Vertical S-Symmetry)**

It's used to adjust the vertical s-symmetry of 16:9 zoom subtitle mode.

**16:9 ZOOM SUBTITLE TRAPEZE (16:9 Zoom Subtitle mode Trapeze)**

It's used to adjust the trapeze of 16:9 zoom subtitle mode.

**16:9 ZOOM SUBTITLE CUSHION (16:9 Zoom Subtitle mode Cushion)**

It's used to adjust the cushion of 16:9 zoom subtitle mode.

**16:9 ZOOM SUBTITLE HOR\_COR\_SYM (16:9 Zoom Subtitle mode Horizontal Corner Symmetry)**

It's used to adjust the horizontal corners symmetry of 16:9 zoom subtitle mode.

**16:9 ZOOM SUBTITLE HOR\_CORNER (16:9 Zoom Subtitle mode Horizontal corner)**

It's used to adjust the horizontal corners of 16:9 zoom subtitle mode.

**16:9 ZOOM SUBTITLE HORZ\_POS (16:9 Zoom Subtitle mode Horizontal position)**

It's used to adjust the horizontal position of 16:9 zoom subtitle mode.

**16:9 ZOOM SUBTITLE HORZ\_AMPL (16:9 Zoom Subtitle mode Horizontal amplitude)**

It's used to adjust the horizontal amplitude of 16:9 zoom subtitle mode.

### **OSD Position**

It's used to adjust the horizontal position of the OSD.

### **BCLTHR**

Beam current threshold

### **BCLG**

Beam current loop gain

### **ROTATION (TILT)**

This adjustment only works when the TV has rotation option. Change TILT by pressing Left/Right buttons to rotate the complete raster clock-wise and counter clock-wise depending on the CRT. Check and readjust TRPEZ item if the adjustment becomes improper after some other geometric adjustments are done.

### **LSLSA, LSLSB, LSL2, LSLTA, LSLTB (Luma soft limiter)**

LSLSA: Luma soft limiter slope A (fixed)

LSLSB: Luma soft limiter slope B (fixed)

LSL2: Luma soft limiter absolute limit (fixed)

LSLTA: Luma soft limiter segment A tilt point (fixed)

LSLTB: Luma soft limiter segment A tilt point (fixed)

### **REFERENCE WDR RED (NORMAL)**

The amplitude of R of RGB output can be adjusted with the drive parameter WDR for the colour temperature of normal mode.

### **REFERENCE WDR GREEN (NORMAL)**

The amplitude of G of RGB output can be adjusted with the drive parameter WDR for the colour temperature of normal mode.

### **REFERENCE WDR BLUE (NORMAL)**

The amplitude of B of RGB output can be adjusted with the drive parameter WDR for the colour temperature of normal mode.

### **REFERENCE CUTOFF RED**

It's fixed.

### **REFERENCE CUTOFF GREEN**

It's fixed.

### **REFERENCE CUTOFF BLUE**

It's fixed.

### **IBRM**

Internal Brightness, the brightness for measurement can be set to measure at higher cutoff current. The measurement brightness is independent of the drive values. It's used to adjust the maximum brightness level.

### **WDRV**

White drive measurement control. It is used to adjust the maximum contrast level.

### **ACC\_SAT (COLOUR OFFSET)**

It's used to adjust the max. colour level.

### **G2 CUTOFF REFERENCE**

It's fixed.

### **G2 WDR REFERENCE**

It's fixed.

**POFS2 (RGB HORIZONTAL SHIFT)**

It's used to adjust the horizontal position of RGB signal.

**REFERENCE WDR RED COOL**

The amplitude of R of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

**REFERENCE WDR GREEN COOL**

The amplitude of G of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

**REFERENCE WDR BLUE COOL**

The amplitude of B of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

**REFERENCE WDR RED WARM**

The amplitude of R of RGB output can be adjusted with the drive parameter WDR for the colour temp of warm mode.

**REFERENCE WDR GREEN WARM**

The amplitude of G of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

**REFERENCE WDR BLUE WARM**

The amplitude of B of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

**STANDARD MODE BRIGHTNESS**

It's used to adjust the brightness value of standard mode.

**STANDARD MODE COLOUR**

It's used to adjust the colour value of standard mode.

**STANDARD MODE CONTRAST**

It's used to adjust the contrast value of standard mode.

**FULL VERT\_POS (16:9 MODE)**

It's used to adjust the vertical position of 16:9 mode (full mode).

**FULL VERT\_AMPL**

It's used to adjust the vertical amplitude of 16:9 mode (full mode).

**FULL VERT\_SCOR**

It's used to adjust the vertical s-correction of 16:9 mode (full mode).

**FULL VERT\_SSYM**

It's used to adjust the vertical s-symmetry of 16:9 mode (full mode).

**FULL TRAPEZE**

It's used to adjust the trapeze of 16:9 mode (full mode).

**FULL CUSHION**

It's used to adjust the cushion of 16:9 mode (full mode).

**FULL HOR\_COR\_SYM**

It's used to adjust the horizontal corners symmetry of 16:9 mode (full mode).

**FULL HOR\_CORNER**

It's used to adjust the horizontal corners of 16:9 mode (full mode).



**FULL HORZ\_POS**

It's used to adjust the horizontal position of 16:9 mode (full mode).

**FULL HORZ\_AMPL**

It's used to adjust the horizontal amplitude of 16:9 mode (full mode).

**BRIGHT MODE BRIGHTNESS**

It's used to adjust the brightness value of bright mode.

**BRIGHT MODE COLOUR**

It's used to adjust the colour value of bright mode.

**BRIGHT MODE CONTRAST**

It's used to adjust the contrast value of bright mode.

**SOFT MODE BRIGHTNESS**

It's used to adjust the brightness value of soft mode.

**SOFT MODE COLOUR**

It's used to adjust the colour value of soft mode.

**SOFT MODE CONTRAST**

It's used to adjust the contrast value of soft mode.

**PERSONAL MODE FACTORY SETTING BRIGHTNESS**

It's fixed.

**PERSONAL MODE FACTORY SETTING COLOUR**

It's fixed.

**PERSONAL MODE FACTORY SETTING CONTRAST**

It's fixed.

**SCINC FOR PANORAMIC MODE**

scaler1 coefficient, this scaler is compressing the signal.

**SCINC1 FOR PANORAMIC MODE**

scaler2 coefficient, this scaler is expanding the signal.

**VOLUME AFTER APS**

It's used to adjust the volume level after APS.

**VERTICAL SCROLL**

It's used to adjust the step width for scroll function.

**14:9 HORIZONTAL START**

It's used to adjust the horizontal blank start position for 14:9 mode.

**14:9 HORIZONTAL STOP**

It's used to adjust the horizontal blank stop position for 14:9 mode.

**4:3 RGB HORIZONTAL AMPLITUDE**

It's used to adjust the horizontal amplitude in 4:3 mode for RGB signals.

**4:3 RGB CUSHION**

It's used to adjust the cushion in 4:3 mode for RGB signals.

**14:9 RGB HORIZONTAL AMPLITUDE**

It's used to adjust the horizontal amplitude in 14:9 mode for RGB signals.

**14:9 RGB CUSHION**

It's used to adjust the cushion in 14:9 mode for RGB signals.

**PANORAMIC RGB HORIZONTAL AMPLITUDE**

It's used to adjust the horizontal amplitude in panoramic mode for RGB signals.

**16:9 RGB HORIZONTAL AMPLITUDE**

It's used to adjust the horizontal amplitude in 16:9 mode for RGB signals.

**16:9 SUBTITLE RGB HORIZONTAL AMPLITUDE**

It's used to adjust the horizontal amplitude in 16:9 subtitle mode for RGB signals.

**FULL RGB HORIZONTAL AMPLITUDE**

It's used to adjust the horizontal amplitude in full mode for RGB signals.

**TELETEXT HORZ\_POS**

It's used to adjust the horizontal position of teletext signal.

SHARP 11AK45 TVs ADJUST VALUES				
ADJUST NO	EXPLANATION	SETTING VALUES		
		THOMSON 28" 16:9 SF TV W66EJU023X215	THOMSON 28" 4:3 SF A66EHJ13X01	THOMSON 32" 16:9 SF W7EGV023X215
ADJUST 0	Not used	255	255	255
ADJUST 1	Not used	36	36	36
ADJUST 2	Not used	19	19	19
ADJUST 3	AGC (Automatic Gain Control)	It will be adjusted to below 1V of max. AGC for each TV		
ADJUST 4	Not used	30	30	30
ADJUST 5	Not used	26	26	26
ADJUST 6	Y-Delay	2	2	2
ADJUST 7	Y-Delay SECAM	3	3	3
ADJUST 8	Y-Delay NTSC	5	5	5
ADJUST 9	Y-Delay OTHER	5	5	5
ADJUST 10	Vertical Position Offset	127	127	127
ADJUST 11	Vertical Amplitude Offset	127	127	127
ADJUST 12	Horizontal Position Offset	127	127	127
ADJUST 13	Horizontal Amplitude Offset	127	127	127
ADJUST 14	Vertical Blank Start (It will be used only at 4.3 tube for 16:9 mode adjustment)	No use	150	119
ADJUST 15	Vertical Blank Stop (It will be used only at 4.3 tube for 16:9 mode adjustment)	No use	12	34
ADJUST 16	Angle	129	124	139
ADJUST 17	Bow	131	127	127
ADJUST 18	Horz. Blank Start (It will be used only at 16:9 tube for 4:3 and 14:9 mode adjustments)	19	No use	19
ADJUST 19	Horz. Blank Stop (It will be used only at 16:9 tube for 4:3 and 14:9 mode adjustments)	201	No use	201
ADJUST 20	EHTV compensation	66	55	66
ADJUST 21	EHTM compensation	2	2	5
ADJUST 22	EHTEW compensation	160	219	160
ADJUST 23	WDR	VDP ADJUSTS ITSELF		
ADJUST 24	WDG	VDP ADJUSTS ITSELF		
ADJUST 25	WDB	VDP ADJUSTS ITSELF		
ADJUST 26	CR	VDP ADJUSTS ITSELF		
ADJUST 27	CG	VDP ADJUSTS ITSELF		
ADJUST 28	CB	VDP ADJUSTS ITSELF		
ADJUST 29	COR coring level	15		
ADJUST 30	NORMAL VERT_POS	127	128	127
ADJUST 31	NORMAL VERT_AMPL	53	81	53
ADJUST 32	NORMAL VERT_SCOR	129	132	133
ADJUST 33	NORMAL VERT_SSYM	136	136	131
ADJUST 34	NORMAL TRAPEZE	129	129	131
ADJUST 35	NORMAL CUSHION	149	155	141
ADJUST 36	NORMAL HOR_COR_SYM	128	123	118
ADJUST 37	NORMAL HOR_CORNER	113	107	137
ADJUST 38	NORMAL HORZ_POS	50	54	45
ADJUST 39	NORMAL HORZ_AMPL	98	16	107
ADJUST 40	PANORAMIC VERT_POS	127		127
ADJUST 41	PANORAMIC VERT_AMPL	52		48
ADJUST 42	PANORAMIC VERT_SCOR	134		133
ADJUST 43	PANORAMIC VERT_SSYM	139		131
ADJUST 44	PANORAMIC TRAPEZE	129		131
ADJUST 45	PANORAMIC CUSHION	150		146
ADJUST 46	PANORAMIC HOR_COR_SYM	134		121
ADJUST 47	PANORAMIC HOR_CORNER	113		134
ADJUST 48	PANORAMIC HORZ_POS	48		48
ADJUST 49	PANORAMIC HORZ_AMPL	36		44
ADJUST 50	ZOOM 14:9 VERT_POS	128		125
ADJUST 51	ZOOM 14:9 VERT_AMPL	41		42
ADJUST 52	ZOOM 14:9 VERT_SCOR	134		133
ADJUST 53	ZOOM 14:9VERT_SSYM	140		131
ADJUST 54	ZOOM 14:9 TRAPEZE	128		131
ADJUST 55	ZOOM 14:9 CUSHION	156		148
ADJUST 56	ZOOM 14:9 HOR_COR_SYM	145		123
ADJUST 57	ZOOM 14:9 HOR_CORNER	113		135
ADJUST 58	ZOOM 14:9 HORZ_POS	49		47

SHARP 11AK45 TVs ADJUST VALUES				
ADJUST NO	EXPLANATION	SETTING VALUES		
		THOMSON 28" 16:9 SF TV W66EJU023X215	THOMSON 28" 4:3 SF A66EHJ13X01	THOMSON 32" 16:9 SF W7EGV023X215
ADJUST 59	ZOOM 14:9 HORZ_AMPL	59		63
ADJUST 60	CINEMA VERT_POS	128		127
ADJUST 61	CINEMA VERT_AMPL	28		32
ADJUST 62	CINEMA VERT_SCOR	129		126
ADJUST 63	CINEMA VERT_SSYM	146		131
ADJUST 64	CINEMA TRAPEZE	128		130
ADJUST 65	CINEMA CUSHION	164		154
ADJUST 66	CINEMA HOR_COR_SYM	135		128
ADJUST 67	CINEMA HOR_CORNER	117		131
ADJUST 68	CINEMA HORZ_POS	48		48
ADJUST 69	CINEMA HORZ_AMPL	36		44
ADJUST 70	16:9 ZOOM SUBTITLE VERT_POS	147		145
ADJUST 71	16:9 ZOOM SUBTITLE VERT_AMPL	33		39
ADJUST 72	16:9 ZOOM SUBTITLE VERT_SCOR	123		133
ADJUST 73	16:9 ZOOM SUBTITLE VERT_SSYM	156		129
ADJUST 74	16:9 ZOOM SUBTITLE TRAPEZE	121		122
ADJUST 75	16:9 ZOOM SUBTITLE CUSHION	162		152
ADJUST 76	16:9 ZOOM SUBTITLE HOR_COR_SYM	125		128
ADJUST 77	16:9 ZOOM SUBTITLE HOR_CORNER	114		125
ADJUST 78	16:9 ZOOM SUBTITLE HORZ_POS	48		44
ADJUST 79	16:9 ZOOM SUBTITLE HORZ_AMPL	36		43
ADJUST 80	OSD Position	205	217	205
ADJUST 81	BCLTHR beam current threshold	30	39	74
ADJUST 82	BCLG beam current loop gain	6	7	7
ADJUST 83	ROTATION (TILT)	2	2	2
ADJUST 84	LSLSA luma soft limiter	2	2	2
ADJUST 85	LSLSB	0	0	0
ADJUST 86	LSL2	255	255	255
ADJUST 87	LSLTA	0	0	0
ADJUST 88	LSLTB	1	1	0
ADJUST 89	REFERENCE WDR RED (NORMAL)	X	X	X
ADJUST 90	REFERENCE WDR GREEN (NORMAL)	X	X	X
ADJUST 91	REFERENCE WDR BLUE (NORMAL)	X	X	X
ADJUST 92	REFERENCE CUTOFF RED	55	65	55
ADJUST 93	REFERENCE CUTOFF GREEN	69	68	69
ADJUST 94	REFERENCE CUTOFF BLUE	69	77	69
ADJUST 95	IBRM	215	200	215
ADJUST 96	WDRV	68	75	68
ADJUST 97	ACC_SAT (COLOR OFFSET)	130	154	130
ADJUST 98	G2 CUTOFF REFERENCE	220	200	220
ADJUST 99	G2 WDR REFERENCE	90	90	90
ADJUST 100	ADJUST POF2 (RGB HORIZONTAL SHIFT)	60	50	60
ADJUST 101	REFERENCE WDR RED COOL	X	X	X
ADJUST 102	REFERENCE WDR GREEN COOL	X	X	X
ADJUST 103	REFERENCE WDR BLUE COOL	X	X	X
ADJUST 104	REFERENCE WDR RED WARM	X	X	X
ADJUST 105	REFERENCE WDR GREEN WARM	X	X	X
ADJUST 106	REFERENCE WDR BLUE WARM	X	X	X
ADJUST 107	STANDARD MODE BRIGHTNESS	32	32	32
ADJUST 108	STANDARD MODE COLOR	47	47	47
ADJUST 109	STANDARD MODE CONTRAST	32	32	32
ADJUST 110	FULL VERT_POS	128	126	126
ADJUST 111	FULL VERT_AMPL	51	94	53
ADJUST 112	FULL VERT_SCOR	132	132	133
ADJUST 113	FULL VERT_SSYM	139	131	131
ADJUST 114	FULL TRAPEZE	128	129	129
ADJUST 115	FULL CUSHION	151	143	144
ADJUST 116	FULL HOR_COR_SYM	134	129	128
ADJUST 117	FULL HOR_CORNER	49	114	135
ADJUST 118	FULL HORZ_POS	35	54	46
ADJUST 119	FULL HORZ_AMPL	30	16	46
ADJUST 120	BRIGHT MODE BRIGHTNESS	43	43	43
ADJUST 121	BRIGHT MODE COLOR	50	50	50
ADJUST 122	BRIGHT MODE CONTRAST	32	32	32
ADJUST 123	SOFT MODE BRIGHTNESS	43	43	43
ADJUST 124	SOFT MODE COLOR	58	58	58
ADJUST 125	SOFT MODE CONTRAST	20	20	20

SHARP 11AK45 TVs ADJUST VALUES				
ADJUST NO	EXPLANATION	SETTING VALUES		
		THOMSON 28" 16:9 SF TV W66EJU023X215	THOMSON 28" 4:3 SF A66EHJ13X01	THOMSON 32" 16:9 SF W7EGV023X215
ADJUST 126	PERSONAL MODE FACTORY SETTING BRIGHTNESS	32	32	32
ADJUST 127	PERSONAL MODE FACTORY SETTING COLOR	47	47	47
ADJUST 128	PERSONAL MODE FACTORY SETTING CONTRAST	32	32	32
ADJUST 129	SCINC FOR PANORAMIC MODE	56	56	56
ADJUST 130	SCINC1 FOR PANORAMIC MODE	125	125	125
ADJUST 131	VOLUME AFTER APS	5		
ADJUST 132	VERTICAL SCROLL	11	11	11
ADJUST 133	14:9 HORIZONTAL START (It will be used only at 4.3 tube for 16:9 mode adjustment)	19	No use	19
ADJUST 134	14:9 HORIZONTAL STOP (It will be used only at 4.3 tube for 16:9 mode adjustment)	201	No use	201
ADJUST 135	NORMAL RGB HORIZONTAL AMPLITUDE	99	19	98
ADJUST 136	NORMAL RGB CUSHION	151	159	142
ADJUST 137	14:9 RGB HORIZONTAL AMPLITUDE	70	No use	71
ADJUST 138	14:9 RGB CUSHION	156	No use	149
ADJUST 139	PANORAMIC RGB HORIZONTAL AMPLITUDE	40	No use	49
ADJUST 140	CINEMA RGB HORIZONTAL AMPLITUDE	40	No use	48
ADJUST 141	ZOOM 16:9 SUBTITLE RGB HORIZONTAL AMPLITUDE	40	No use	48
ADJUST 142	FULL RGB HORIZONTAL AMPLITUDE	40	18	48
ADJUST 143	TELETEXT HORZ_POS	95	104	98
ADJUST 144	RGB BRIGHTNESS OFFSET	0	80	0
ADJUST 145	RGB CONTRAST OFFSET	0	75	0
ADJUST 146	TELETEXT BRIGHTNESS	100	150	100
ADJUST 147	TELETEXT CONTRAST	120	135	120
ADJUST 148	SVG1	3	3	3
ADJUST 149	SVD1	7	7	7
ADJUST 150	SVLIM	127	127	127
ADJUST 151	SVDEL	4	4	4
ADJUST 152	SVCOR	0	0	0
ADJUST 153	RASTER Horz. Blank Start (It will be used only at 16:9 tube for 4:3 and 14:9 mode adjustments)	117	No use	115
ADJUST 154	RASTER Horz. Blank Stop (It will be used only at 16:9 tube for 4:3 and 14:9 mode adjustments)	178	No use	176
ADJUST 155	RASTER RGB Horz. Blank Start (It will be used only at 16:9 tube for 4:3 and 14:9 mode adjustments)	116	No use	116
ADJUST 156	RASTER RGB Horz. Blank Stop (It will be used only at 16:9 tube for 4:3 and 14:9 mode adjustments)	177	No use	176
ADJUST 157	PIP BRIGHTNESS	5	5	5
ADJUST 158	PIP CONTRAST	15	15	15

**X: WILL BE ADJUSTED AUTOMATICALLY ACCORDING TO THE SHARP SPECIFICATION.**  
COLOR TEMPERATURE SHOULD BE (SHARP SPECIFICATION);

	WESTERN EUROPE	EASTERN EUROPE	UK
<b>FOR NORMAL (x, y)</b>	(290, 300)	(304, 306)	(290, 284)
<b>FOR COOL (x, y)</b>	(274, 273)	(288, 269)	(274, 257)
<b>FOR WARM (x, y)</b>	(310, 294)	(324, 300)	(310, 278)

### 14.3.OPTIONS MENU

Select the parameter by pressing up/down buttons. Adjust the parameter by pressing Left/Right buttons. . In OPTIONS menu, some of the changed parameters are not stored automatically. To store the adjusted parameters, you should turn off and on TV.

OPTIONS...		
▶	000 02	00000010
	001 00	00000000
	002 22	00100010
	003 08	00001000
	004 00	00000000
	005 10	00010000
	006 00	00000000
	007 56	01010110
	008 39	00111001
↓	009 0F	00001111

#### Option 0. Video Processor Crystal Indication

B7: x = x  
 B6: x = x  
 B5: x = x  
 B4: x = x  
 B3: x = x  
 B2: x = x  
 B1: Xa = note1 (Crystal indication)  
 B0: Xb = note1 (Crystal indication)

#### note 1:

Xa,Xb

0,1 : Pal M, Pal N, NTSC M

Pin 34 : 3.58 (1, 2 or 3 crystals)  
 Pin 35 : No crystal

1,0 : Pal BG, Pal DK, Pal I/I+, Secam BG, Secam DK, Secam L/L', Secam K1

Pin 34 : No crystal  
 Pin 35 : 4.43 (1 crystal)

1,1 : Pal BG, Pal DK, Pal I/I+, Secam BG, Secam DK, Secam L/L', Secam K1, Pal M, Pal N, Ntsc M

Pin 34 : 3.58 (1, 2 or 3 crystals)  
 Pin 35 : 4.43 (1 crystal)

#### Option 1. (0x01) Video Processor Decoder Mode Register

B7: x = x  
 B6: x = x  
 B5: x = x  
 B4: x = x  
 B3: x = x  
 B2: x = x  
 B1: x = x  
 B0: x = x

#### Option 2. (0x18) Video Processor Blanking Control

B7: SWF = 1 (Subwoofer item at menu)  
 B6: Vsd = 0 (Vertical scan disable)  
 B5: x = x



B4: x = x  
 B3: x = x  
 B2: x = x  
 B1: LUMA = 1 Luma Soft Limiter Enabled  
 B0: BB = 1 Blue Background Option

**Option 3. (0x19) Video Processor Cathode Drive Level**

B7: x = x  
 B6: x = x  
 B5: x = x  
 B4: x = x  
 B3: x = x  
 B2: x = x  
 B1: x = x  
 B0: country = note 0

**Note 0:** choice for others country option

1 : BG  
 0 : DK

**Option 4.**

B7: x = x  
 B6: x = x  
 B5: x = x  
 B4: x = x  
 B3: x = x  
 B2: x = x  
 B1: x = x  
 B0: x = x

**Option 5. CTI Available, Mono AVL**

B7: x = x  
 B6: x = x  
 B5: x = x  
 B4: x = x  
 B3: x = x  
 B2: x = x  
 B1: x = x  
 B0: x = x

**Option 6.**

B7: = TEXT LANGUAGE 3  
 B6: = TEXT LANGUAGE 2  
 B5: = TEXT LANGUAGE 1  
 B4: x = x  
 B3: x = x  
 B2: x = x  
 B1: x = x  
 B0: x = x

**Option 7. OPTIONHOTELACTIVE, PLL\_VST, PIP Zoom Mode, PIP Position**

B7: x = x  
 B6: x = x  
 B5: F = note 1  
 B4: x = x  
 B3: x = x  
 B2: PZM= x  
 B1: AV2 = 1 AV2 Output enabled  
 B0: x = x

**Note 1:**

F :Frequency Mode

1: = Frequency Menu Item available

0: = Frequency Menu Item not available

**Option 8. IF Frequency**

B7: x = x

B6: x = x

B5: IfI = 0 note 3

B4: IfD = 0 note 4

B3: IfM = note 5

B2: Aps = note 6

B1: Hp = note 7

B0: Hue = note 8

**Note 3:**

IfI

1 = IF I 39.5 MHz Great Britain I , Only UHF Tuner

0 = IF I 38.9 MHz Ireland I+, Standard Tuner

**Note 4:**

IfD

1 = IF DK 38.0 MHz

0 = IF DK 38.9 MHz

**Note 5:**

IfM

1 = IF M,N 45.75 MHz S&amp;N American Models , Tuner UV1336 (Only Pal M/N, Ntsc M)

0 = IF M,N 38.9 MHz Euro M,N Models , Standard Tuner

**Note 6:**

Aps ( Only for PLL )

0 = A.P.S. done

1 = A.P.S. set

**Note 7:**

Hp : Headphone available

0 = No headphone

1 = Headphone available

**Note 8:**

Hue : Hue Available

0 = No Hue

1 = Hue available

**Option 9. Standard Available**

B7: NM = note 1

B6: PN = note 1

B5: PM = note 1

B4: K1 = note 1

B3: L = note 1

B2: I = note 1

B1: DK = note 1

B0: BG = note 1

**Note 1:**

0 = Standard not supported

1 = Standard available

**Option 10. Scart, Combfilter, Teletext, Language**

B7: x = x  
 B6: RGB = note 2  
 B5: FAV =  
 B4: AV2S =  
 B3: FSVHS = note 3  
 B2: BAV = note 4  
 B1: Sc2 = note 5  
 B0: BSVHS = note 6

**Note 2 :**

RGB = RGB Menu Item active/inactive

0 = RGB Menu Item inactive  
 1 = RGB Menu Item active

**Note 3:**

0 = Front S-VHS not supported  
 1 = Front S-VHS available

**Note 4:**

0 = Back AV (AV-3) not supported  
 1 = Back AV (AV-3) available

**Note 5:**

0 = Scart 2 not supported  
 1 = Scart 2 available

**Note 6:**

0 = Back SVHS not supported  
 1 = Back SVHS available

**Option 11. PLL Tuner Control 1 Byte**

PLL tuner control 1 byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	1	0	0	0	1	1	1	0
Philips	UV1316MK2	1	0	0	0	1	1	1	0
Alps	TELE9X062A	1	0	0	0	1	1	1	0
Samsung	TEXX2949PG28A	1	0	0	0	1	1	1	0
Siel	PT060	1	0	0	0	1	1	1	0
Temic	5001PH5-3X0003	1	0	0	0	1	1	1	0
Thomson	CTT5020	1	0	0	0	1	1	1	0

**Option 12. PLL Tuner Control 2 Low Byte**

PLL tuner control 2 low byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	0	0	0	0	0	1
Philips	UV1316MK2	1	0	1	0	0	0	0	1
Alps	TELE9X062A	0	0	0	0	0	0	0	1
Samsung	TEXX2949PG28A	0	0	0	0	0	0	0	1
Siel	PT060	0	1	1	0	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	0	1	0
Thomson	CTT5020	0	0	0	0	0	0	1	1

**Option 13. PLL Tuner Control 2 Mid Byte**

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	0	0	0	0	1	0
Philips	UV1316MK2	1	0	0	1	0	0	1	0
Alps	TELE9X062A	0	0	0	0	0	0	1	0
Samsung	TEXX2949PG28A	0	0	0	0	0	0	1	0
Siel	PT060	1	1	0	1	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	1	0	0
Thomson	CTT5020	0	0	0	0	0	1	1	0

**Option 14. PLL Tuner Control 2 High Byte**

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	0	0	0	1	0	0
Philips	UV1316MK2	0	0	1	1	0	1	0	0
Alps	TELE9X062A	0	0	0	0	1	0	0	0
Samsung	TEXX2949PG28A	0	0	0	0	1	0	0	0
Siel	PT060	0	0	1	1	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	1
Thomson	CTT5020	1	0	0	0	0	1	0	1

**Option 15. PLL Tuner VHF LOW – VHF HIGH Crossover Low Byte**

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	1	0	0	0	0	0
Philips	UV1316MK2	0	0	0	0	1	0	1	0
Alps	TELE9X062A	0	0	0	0	0	0	0	0
Samsung	TEXX2949PG28A	0	0	0	0	1	0	0	0
Siel	PT060	0	0	0	0	1	0	1	0
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0
Thomson	CTT5020	1	0	1	0	1	0	1	0

(0A hex)

(AA hex)

**Option 16. PLL Tuner VHF LOW – VHF HIGH Crossover High Byte**

PLL tuner VHF LOW - VHF HIGH crossover high byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	0	0	1	1	0	0
Philips	UV1316MK2	0	0	0	0	1	1	0	0
Alps	TELE9X062A	0	0	0	0	0	0	0	0
Samsung	TEXX2949PG28A	0	0	0	0	1	1	0	1
Siel	PT060	0	0	0	0	1	1	0	1
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0
Thomson	CTT5020	0	0	0	0	1	0	0	1

(0C hex)

(09 hex)

**Option 17. PLL Tuner VHF HIGH – UHF Crossover Low Byte**

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	0	0	0	0	1	0
Philips	UV1316MK2	1	1	1	0	0	0	1	0
Alps	TELE9X062A	0	0	0	0	0	0	0	0
Samsung	TEXX2949PG28A	1	0	1	0	0	0	1	0
Siel	PT060	1	0	1	0	0	1	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0
Thomson	CTT5020	1	0	1	0	0	0	1	0

(E2 hex)

(A2 hex)

**Option 18. PLL Tuner VHF HIGH – UHF Crossover High Byte**

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	0	1	1	1	1	0
Philips	UV1316MK2	0	0	0	1	1	1	1	0
Alps	TELE9X062A	0	0	0	0	0	0	0	0
Samsung	TEXX2949PG28A	0	0	0	1	1	1	1	0
Siel	PT060	0	0	0	1	1	1	1	0

(1D hex)

Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	0	0	0	1	1	0	1	1	(1B hex)

**Option 19. PIP PLL Tuner Control 1 Byte**

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	1	0	0	0	1	1	1	0	
Alps	TELE9X062A	1	0	0	0	1	1	1	0	
Samsung	TEXX2949PG28A	1	0	0	0	1	1	1	0	
Siel	PT060	1	0	0	0	1	1	1	0	
Temic	5001PH5-3X0003	1	0	0	0	1	1	1	0	
Thomson	CTT5020	1	0	0	0	1	1	1	0	

**Option 20. PIP PLL Tuner Control 2 Low Byte**

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	1	0	1	0	0	0	0	1	
Alps	TELE9X062A	0	0	0	0	0	0	0	1	
Samsung	TEXX2949PG28A	0	0	0	0	0	0	0	1	
Siel	PT060	0	1	1	0	0	0	0	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	1	0	
Thomson	CTT5020	0	0	0	0	0	0	1	1	

**Option 21. PIP PLL Tuner Control 2 Mid Byte**

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	1	0	0	1	0	0	1	0	
Alps	TELE9X062A	0	0	0	0	0	0	1	0	
Samsung	TEXX2949PG28A	0	0	0	0	0	0	1	0	
Siel	PT060	1	1	0	1	0	0	0	0	
Temic	5001PH5-3X0003	0	0	0	0	0	1	0	0	
Thomson	CTT5020	0	0	0	0	0	1	1	0	

**Option 22. PIP PLL Tuner Control 2 High Byte**

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	0	0	1	1	0	1	0	0	
Alps	TELE9X062A	0	0	0	0	1	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	0	1	0	0	0	
Siel	PT060	0	0	1	1	0	0	0	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	1	
Thomson	CTT5020	1	0	0	0	0	1	0	1	

**Option 23. PIP PLL Tuner VHF LOW – VHF HIGH Crossover Low Byte**

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	0	0	0	0	1	0	1	0	(0A hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	0	1	0	0	0	
Siel	PT060	0	0	0	0	1	0	1	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	1	0	1	0	1	0	1	0	(AA hex)

**Option 24. PIP PLL Tuner VHF LOW – VHF HIGH Crossover High Byte**

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	0	0	0	0	1	1	0	0	(0C hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	0	1	1	0	1	
Siel	PT060	0	0	0	0	1	1	0	1	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	0	0	0	0	1	0	0	1	(09 hex)

**Option 25. PIP PLL Tuner VHF HIGH – UHF Crossover Low Byte**

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	1	1	1	0	0	0	1	0	(E2 hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	1	0	1	0	0	0	1	0	
Siel	PT060	1	0	1	0	0	1	0	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	1	0	1	0	0	0	1	0	(A2 hex)

**Option 26. PIP PLL Tuner VHF HIGH – UHF Crossover High Byte**

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	0	0	0	1	1	1	1	0	(1D hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	1	1	1	1	0	
Siel	PT060	0	0	0	1	1	1	1	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	0	0	0	1	1	0	1	1	(1B hex)

**Option 27. Language Available 1**

B7: L7 = DANISH  
 B6: L6 = SWEDISH  
 B5: L5 = ITALIAN  
 B4: L4 = PORTUGUESE  
 B3: L3 = SPANISH  
 B2: L2 = FRENCH  
 B1: L1 = GERMAN  
 B0: L0 = ENGLISH

1: Language available

0: Language not available

**Option 28. Language Available 2**

B7: L15 = CROATIC  
 B6: L14 = POLISH  
 B5: L13 = SLOVAK  
 B4: L12 = CZECH  
 B3: L11 = HUNGARY  
 B2: L10 = GREEK  
 B1: L9 = TURKEY  
 B0: L8 = NORWEGIAN

1: Language available

0: Language not available

**Option 29. Language Available 3 and Zoom Mode Available**

B7: ZSP = 16:9 ZOOM SUBTITLE MODE  
 B6: ZSB = 16:9 ZOOM MODE  
 B5: ZCN = 14:9 ZOOM MODE  
 B4: PNM = 1 (Panoramic zoom mode)  
 B3: Tub = note 2  
 B2: Z.Def = note 3  
 B1: PMK = note 1  
 B0:

1: Available

0: Not available

**Note 1 :**

PMK : Picture mode key

0 : Not available picture mode key from RC

1 : available picture mode key from RC

**Note 2:**

Tub : Tube size

- 0 = 16:9 Tube size
- 1 = 4:3 Tube size

**Note 3:**

Z.Def : Zoom Default Mode

- 0 = 16:9 mode default
- 1 = 4:3 mode default

**Option 30. Country**

- B7: C4 = note 1
- B6: C3 = note 1
- B5: C2 = note 1
- B4: C1 = note 1
- B3: C0 = note 1
- B2: x = x
- B1: x = x
- B0: x = x

**Note 1:**

C5,C4,C3,C2,C1,C0 = Country

- 0, 0, 0,0,0 = OTHER, Not allowed
- 0, 0, 0,0,1 = D, Germany
- 0, 0, 0,1,0 = A,
- 0, 0, 0,1,1 = CH,
- 0, 0, 1,0,0 = I,
- 0, 0, 1,0,1 = F,
- 0, 0, 1,1,0 = RSM,
- 0, 0, 1,1,1 = B,
- 0, 1, 0,0,0 = DK,
- 0, 1, 0,0,1 = S,
- 0, 1, 0,1,0 = N,
- 0, 1,0,1,1 = FIN,
- 0, 1,1,0,0 = GB,
- 0, 1,1,0,1 = IRL,
- 0, 1,1,1,0 = IS,
- 0, 1,1,1,1 = NL,
- 1, 0,0,0,0 = E,
- 1, 0,0,0,1 = P,
- 1, 0,0,1,0 = PL,
- 1, 0,0,1,1 = CZ,
- 1, 0,1,0,0 = H,
- 1, 0,1,0,1 = HR,
- 1, 0,1,1,0 = GR,
- 1, 0,1,1,1 = TR

**Option 31. Prescaler MSP FM (AVL=OFF)**

Prescaler MSP FM (AVL = OFF)      b7 b6 b5 b4 b3 b2 b1 b0  
 0 0 0 0 1 0 0 0

Prescaler MSP FM (AVL = OFF)      b7 b6 b5 b4 b3 b2 b1 b0  
 0 0 0 0 1 0 0 0 (if virtual Dolby option is available)

**Option 32. Prescaler MSP NICAM (AVL=OFF)**

Prescaler MSP NICAM (AVL = OFF)      b7 b6 b5 b4 b3 b2 b1 b0  
 0 0 0 1 1 1 1 1



Prescaler MSP NICAM (AVL = OFF)      b7 b6 b5 b4 b3 b2 b1 b0  
0 0 0 1 1 1 1 1 (if virtual Dolby option is available)

**Option 33. Prescaler MSP SCART (AVL=OFF)**

Prescaler MSP SCART (AVL = OFF)      b7 b6 b5 b4 b3 b2 b1 b0  
0 0 0 0 1 1 0 0

Prescaler MSP SCART (AVL = OFF)      b7 b6 b5 b4 b3 b2 b1 b0  
0 0 0 1 1 0 0 1 (if virtual Dolby option is available)

**Option 34. Prescaler MSP I2S (AVL=OFF)**

Prescaler MSP I2S (AVL = OFF)      b7 b6 b5 b4 b3 b2 b1 b0  
(if virtual Dolby option is available)      not defined yet

**Option 35. Not used**

- B7: x = note 7
- B6: x = note 6
- B5: x = note 5
- B4: x = note 4
- B3: AV2S = Scart2 SVHS
- B2: Macro = Macrovision
- B1: DP = Dolby Prologic
- B0: VD = Virtual Dolby

**Option 36. Not used**

- B7: x = note 7
- B6: TAT = 1 Tilt and trapeze enabled
- B5: SWF = 1 Subwoofer enabled
- B4: VLO = 1 Variable line out
- B3: VBUS = 1 Vestelbus enabled
- B2: x = x
- B1: DVD = 1 DVD enabled
- B0: DVB = 1 DVB enabled

**Option 37. Reserved for USA**

**Option 38. TV Teletext Mode Selection, Child Lock, Equalizer Country**

- B7: VCR = note 7
- B6: C = note 6
- B5: LM = note 5
- B4: EQ = note 4
- B3: x = x
- B2: CL = note 2
- B1: T1 = note 1
- B0: T0 = note 1

**Note 1:**

Teletext selection  
T1, T0:  
0,0 = No TV Text  
0,1 = Simple TV Text (One page)  
1,1 = Fasttext/Toptext TV Text (Eight pages)

**Note 2:**

CL = Child Lock  
0 = Off  
1 = On (Active)

**Note 3:**

RGB = RGB Menu Item active/inactive  
 0 = RGB Menu Item inactive  
 1 = RGB Menu Item active

**Note 4:**

EQ = Equalizer available  
 0 = Equalizer not available  
 1 = Equalizer available

**Note 5:**

LM = List Mode available  
 0 = List Mode not available  
 1 = List Mode available

**Note 6:**

C = Country Line available / Aps available or not  
 0 = Country Line not available / Aps not available  
 1 = Country Line available / Aps available

**Note 7:**

VCR = VCR Menu Item available / not available  
 0 = VCR Menu Item not available  
 1 = VCR Menu Item available

**Option 39. Personal Preference Equalizer Band 1**

EQUALIZER BAND 1                      b7 b6 b5 b4 b3 b2 b1 b0  
 0 0 0 0 0 1 1 0

**Option 40. Personal Preference Equalizer Band 2**

EQUALIZER BAND 2                      b7 b6 b5 b4 b3 b2 b1 b0  
 0 0 0 0 0 1 1 0

**Option 41. Personal Preference Equalizer Band 3**

EQUALIZER BAND 3                      b7 b6 b5 b4 b3 b2 b1 b0  
 0 0 0 0 0 1 1 0

**Option 42. Personal Preference Equalizer Band 4**

EQUALIZER BAND 4                      b7 b6 b5 b4 b3 b2 b1 b0  
 0 0 0 0 0 1 1 0

**Option 43. Personal Preference Equalizer Band 5**

EQUALIZER BAND 5                      b7 b6 b5 b4 b3 b2 b1 b0  
 0 0 0 0 0 1 1 0

**Option 44. Sound Effect (Standard; Music; Speech; Jazz; Pp)**

SOUND EFFECT                          b7 b6 b5 b4 b3 b2 b1 b0  
 0 0 0 0 0 1 1 0

**Option 45. Volume Offset Left**

VOLUME OFFSET LEFT                    b7 b6 b5 b4 b3 b2 b1 b0  
 0 0 0 0 0 1 1 0

**Option 46. Volume Offset Right**

VOLUME OFFSET RIGHT                    b7 b6 b5 b4 b3 b2 b1 b0  
 0 0 0 0 0 1 1 0

**Option 47. Volume Offset Center**

	b7 b6 b5 b4 b3 b2 b1 b0
VOLUME OFFSET CENTER	0 0 0 0 0 1 1 0

**Option 48. Volume Offset Rear**

	b7 b6 b5 b4 b3 b2 b1 b0
VOLUME OFFSET REAR	0 0 0 0 0 1 1 0

**Option 49. Surround Delay**

	b7 b6 b5 b4 b3 b2 b1 b0
SURROUND DELAY	0 0 0 0 0 0 0 1

**Option 50. FM Prescaler**

	b7 b6 b5 b4 b3 b2 b1 b0
FM PRESCALER for Stereo	0 0 0 0 1 1 0 0

	b7 b6 b5 b4 b3 b2 b1 b0
FM PRESCALER for Dolby	0 0 0 0 1 0 0 1

**Note:** if virtual Dolby is available, this option is not used.

**Option 51. NICAM Prescaler**

	b7 b6 b5 b4 b3 b2 b1 b0
NICAM Prescaler for Stereo	0 0 1 0 1 1 0 1

	b7 b6 b5 b4 b3 b2 b1 b0
3D Panorama	0 0 0 0 1 0 1 1

	b7 b6 b5 b4 b3 b2 b1 b0
NICAM Prescaler for Dolby	0 0 0 0 1 1 1 0

**Note:** if virtual Dolby is available, this option is not used.

**Option 52. Scart Input Prescaler**

	b7 b6 b5 b4 b3 b2 b1 b0
Scart Input Prescaler for Stereo	0 0 0 0 1 0 0 0

	b7 b6 b5 b4 b3 b2 b1 b0
Scart Input Prescaler for Dolby	0 0 0 0 1 1 1 1

	b7 b6 b5 b4 b3 b2 b1 b0
Prescaler MSP Scart (AVL = OFF)	0 0 0 1 1 0 0 1 (if virtual Dolby option is available)

**Note:** if virtual Dolby is available, this option is not used.

**Option 53. I2S Prescaler**

	b7 b6 b5 b4 b3 b2 b1 b0
I2S Prescaler for Stereo	0 0 0 0 0 1 1 0

	b7 b6 b5 b4 b3 b2 b1 b0
I2S Prescaler for Dolby	0 0 0 0 0 1 1 0

**Note:** if virtual Dolby is available, this option is not used.

**Option 54. Scart Output Prescaler**

	b7 b6 b5 b4 b3 b2 b1 b0
Scart Output Prescaler	0 1 1 1 1 1 1 1

**Option 55. Speaker Setup**

	b7 b6 b5 b4 b3 b2 b1 b0
Speaker Setup (L/R, L/C/R, L/R/S, L/C/R/S)	0 0 0 0 0 0 0 0

**Option 56. Audio Options Available Or Not**

Attention: All bits on the Option 56 must be the "0" for MONO TV SETS

B7: Nicam = note 7  
 B6: ASD = note 6  
 B5: VRS = note 5  
 B4: CRM = note 4  
 B3: ... = x  
 B2: LBE = note 2  
 B1: Spa = note 1  
 B0: Avl = note 0

**Note 7:**

Nicam = Nicam available  
 0 = Nicam not available  
 1 = Nicam available

**Note 6:**

ASD = Auto Sound Detection available/not available  
 0 = Auto Sound Detection not available  
 1 = Auto Sound Detection available

**Note 5:**

VRS = Virtual Surround  
 0 = VRS not available  
 1 = VRS available

**Note 4:**

CRM = CARRIER MUTE OFF/ON  
 0 = Sound carrier mute is ON in the Stereo Sound IC  
 1 = Sound carrier mute is OFF in the Stereo Sound IC (i.e. option available)

**Note 2:**

LBE = LBE (Dynamic Bass)  
 0 = LBE not available  
 1 = LBE available

**Note 1:**

Spa = Spatial Effect available  
 0 = Spatial Effect not available  
 1 = Spatial Effect available

**Note 0:**

Avl = Automatic volume level available on the Menu  
 0 = Automatic volume level not available  
 1 = Automatic volume level available

**Option 57. Stereo Threshold**

B7: b7 = note 1 Remark:  
 B6: b6 = note 1  
 B5: b5 = note 1 -Threshold for all FM A2 signals to switch from MONO to STEREO.  
 B4: b4 = note 1 -For first check after programme change half value is changed (0Ch) 19h/2  
 B3: b3 = note 1 -For switching from STEREO back to MONO: 19h/4 \*3  
 B2: b2 = note 1  
 B1: b1 = note 1  
 B0: b0 = note 1

**Note 1:**

MSP Stereo/Mono Threshold      b7 b6 b5 b4 b3 b2 b1 b0  
0 0 0 1 1 0 0 1

**Option 58. MSP Audio Flags**

B7: b7 = x  
B6: b6 = x  
B5: b5 = x  
B4: Trs = note 1  
B3: Trb = note 1  
B2: Bbe = note 1  
B1: Spa = note 1  
B0: Avl = note 1

**Note 1:**

Defines whether the feature is toggled ON or OFF in the menu and stored.

0 : OFF  
1 : ON

**Option 59. NICAM Threshold**

MSP NICAM Threshold      b7 b6 b5 b4 b3 b2 b1 b0  
0 1 1 0 0 1 0 0

**Option 60. Power Delay Time**

B7: NZ = x  
B6: HM = x  
B5: L5 = note 3  
B4: L4 = note 3  
B3: L3 = note 3  
B2: L2 = note 3  
B1: L1 = note 3  
B0: L0 = note 3

**Note 3:**

                                 L7 L6 L5 L4 L3 L2 L1 L0  
Default Value:      x x 1 1 0 0 0 0  
1000 MSEC = 1SN

Number	L7L6L5L4L3L2L1L0	Delay	Number	L7L6L5L4L3L2L1L0	Delay
0	00000000	= 4 Sec	32	00100000	= 12 Sec
1	00000001	= 4,25 Sec	33	00100001	= 12,25 Sec
2	00000010	= 4,5 Sec	34	00100010	= 12,5 Sec
3	00000011	= 4,75 Sec	35	00100011	= 12,75 Sec
4	00000100	= 5 Sec	36	00100100	= 13 Sec
5	00000101	= 5,25 Sec	37	00100101	= 13,25 Sec
6	00000110	= 5,5 Sec	38	00100110	= 13,5 Sec
7	00000111	= 5,75 Sec	39	00100111	= 13,75 Sec
8	00001000	= 6 Sec	40	00101000	= 14 Sec
9	00001001	= 6,25 Sec	41	00101001	= 14,25 Sec
10	00001010	= 6,5 Sec	42	00101010	= 14,5 Sec
11	00001011	= 6,75 Sec	43	00101011	= 14,75 Sec
12	00001100	= 7 Sec	44	00101100	= 15 Sec
13	00001101	= 7,25 Sec	45	00101101	= 15,25 Sec
14	00001110	= 7,5 Sec	46	00101110	= 15,5 Sec
15	00001111	= 7,75 Sec	47	00101111	= 15,75 Sec
16	00010000	= 8 Sec	48	00110000	= 16 Sec
17	00010001	= 8,25 Sec	49	00110001	= 16,25 Sec
18	00010010	= 8,5 Sec	50	00110010	= 16,5 Sec
19	00010011	= 8,75 Sec	51	00110011	= 16,75 Sec

20	00010100	=	9	Sec
21	00010101	=	9,25	Sec
22	00010110	=	9,5	Sec
23	00010111	=	9,75	Sec
24	00011000	=	10	Sec
25	00011001	=	10,25	Sec
26	00011010	=	10,5	Sec
27	00011011	=	10,75	Sec
28	00011100	=	12	Sec
29	00011101	=	12,25	Sec
30	00011110	=	12,5	Sec
31	00011111	=	12,75	Sec

52	00110100	=	17	Sec
53	00110101	=	17,25	Sec
54	00110110	=	17,5	Sec
55	00110111	=	17,75	Sec
56	00111000	=	18	Sec
57	00111001	=	18,25	Sec
58	00111010	=	18,5	Sec
59	00111011	=	18,75	Sec
60	00111100	=	19	Sec
61	00111101	=	19,25	Sec
62	00111110	=	19,5	Sec
63	00111111	=	19,75	Sec

Decimal - Binary Conversion Table

	76543210	Bit Position		76543210
0	00000000		32	00100000
1	00000001		33	00100001
2	00000010		34	00100010
3	00000011		35	00100011
4	00000100		36	00100100
5	00000101		37	00100101
6	00000110		38	00100110
7	00000111		39	00100111
8	00001000		40	00101000
9	00001001		41	00101001
10	00001010		42	00101010
11	00001011		43	00101011
12	00001100		44	00101100
13	00001101		45	00101101
14	00001110		46	00101110
15	00001111		47	00101111
16	00010000		48	00110000
17	00010001		49	00110001
18	00010010		50	00110010
19	00010011		51	00110011
20	00010100		52	00110100
21	00010101		53	00110101
22	00010110		54	00110110
23	00010111		55	00110111
24	00011000		56	00111000
25	00011001		57	00111001
26	00011010		58	00111010
27	00011011		59	00111011
28	00011100		60	00111100
29	00011101		61	00111101
30	00011110		62	00111110
31	00011111		63	00111111




**14.4.OPTION TABLE RECOMMENDED VALUES**

X listed in the option can be 0 or 1



<b>OPTION</b>	<b>28" 4:3 MULTI</b>	<b>28" 16:9 MULTI</b>	<b>28" 16:9 PAL I</b>
000	X2 XXXXXX10	X2 XXXXXX10	X2 XXXXXX10
001	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
002	23 001XXX11	23 001XXX11	23 001XXX11
003	XX XXXXXXXX0	XX XXXXXXXX0	XX XXXXXXXX0
004	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
005	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
006	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
007	XX XX0XXX1X	XX XX0XXX1X	XX XX0XXX1X
008	A1 11000001	01 00000001	01 00000001
009	0B 00001111	0B 00001111	04 00001111
010	X2 XXXXX011	X7 XXXXX111	X7 XXXXX111
011	8E 10001110	8E 10001110	8E 10001110
012	03 00000011	03 00000011	03 00000011
013	06 00000110	06 00000110	06 00000110
014	15 10000101	15 10000101	15 10000101
015	AA 10101010	AA 10101010	AA 10101010
016	09 00001001	09 00001001	09 00001001
017	A2 10100010	A2 10100010	A2 10100010
018	1B 00011011	1B 00011011	1B 00011011
019	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
020	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
021	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
022	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
023	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
024	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
025	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
026	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
027	FF 11111111	FF 11111111	FF 11111111
028	FF 11111111	FF 11111111	FF 11111111
029	FF 11111111	EF 11101111	EF 11101111
030	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
031	0F 00001111	0F 00001111	0F 00001111
032	23 00100011	23 00100011	23 00100011
033	0E 00001110	0E 00001110	0E 00001110
034	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
035	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
036	X4 XXXXX1XX	X4 XXXXX1XX	X4 XXXXX1XX
037	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
038	AF 11001111	AF 11001111	AF 11001111
039	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
040	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
041	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
042	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
043	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
044	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
045	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
046	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
047	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
048	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
049	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
050	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
051	41 01000001	41 01000001	41 01000001
052	1B 00011011	1B 00011011	1B 00011011
053	06 00000110	06 00000110	06 00000110

054	75 01110101	75 01110101	75 01110101
055	00 00000000	00 00000000	00 00000000
056	DE 11011110	DE 11011110	DE 11011110
057	19 00011001	19 00011001	19 00011001
058	00 00000000	00 00000000	00 00000000
059	64 01100100	64 01100100	64 01100100
060	10 00010000	10 00010000	10 00010000

#### 14.5.SCREEN ADJUSTMENT (FBT SCREEN)

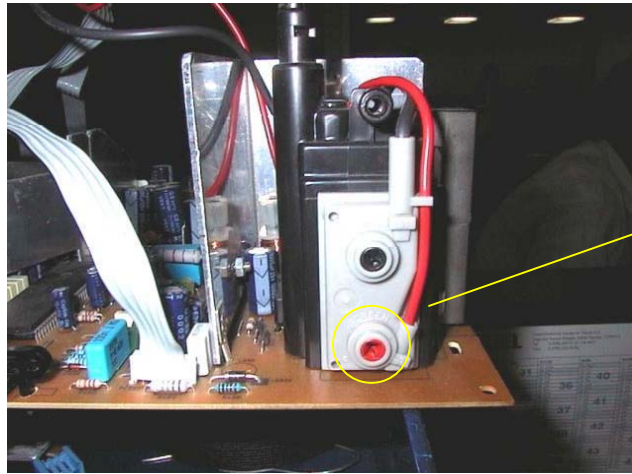

SCREEN  
ADJUST  
POT



From the option list change option 2 bit 6 from 0 to 1 for disabling vertical scan. Adjust horizontal line via screen adjust pot. as thin as possible. Then press 0 to leave service menu.


## 14.6.GEOMETRY ADJUSTMENT

### 4:3 FORMATS

#### 4:3 MODE




#### 16:9 MODE

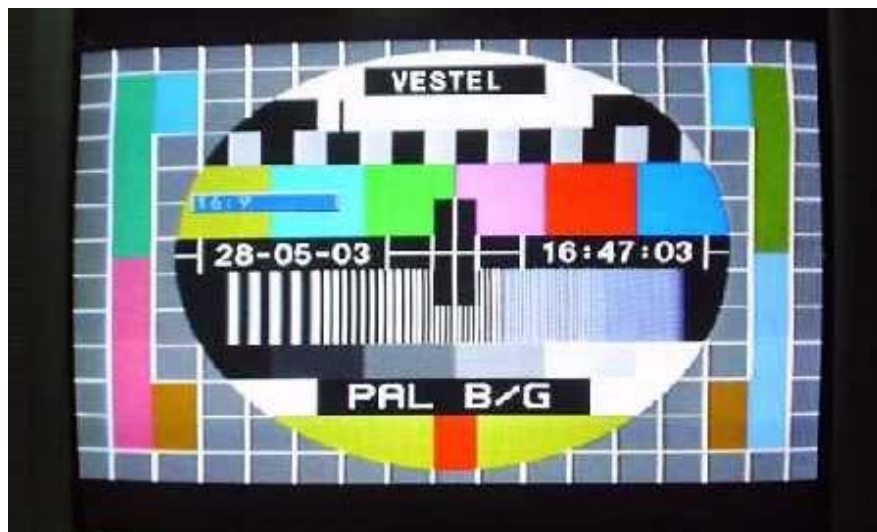


16:9 FORMATS

AUTO MODE

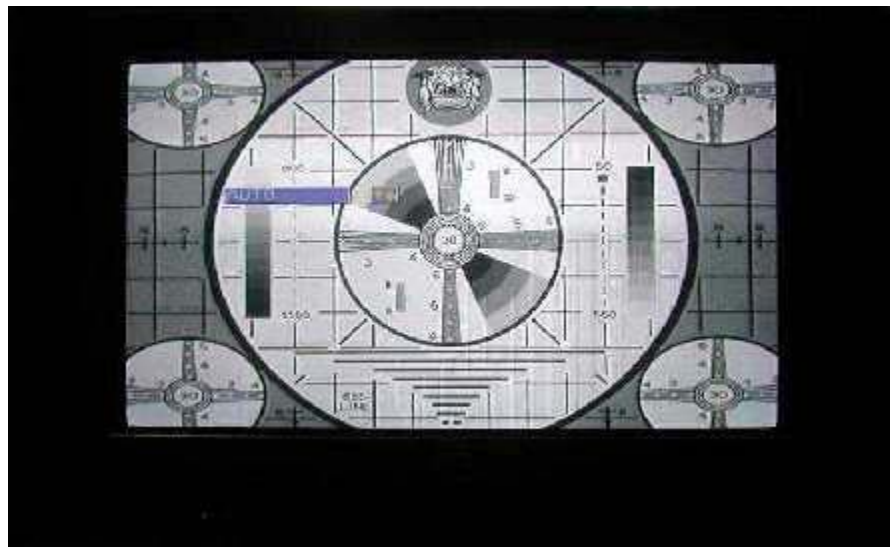

REGULAR MODE

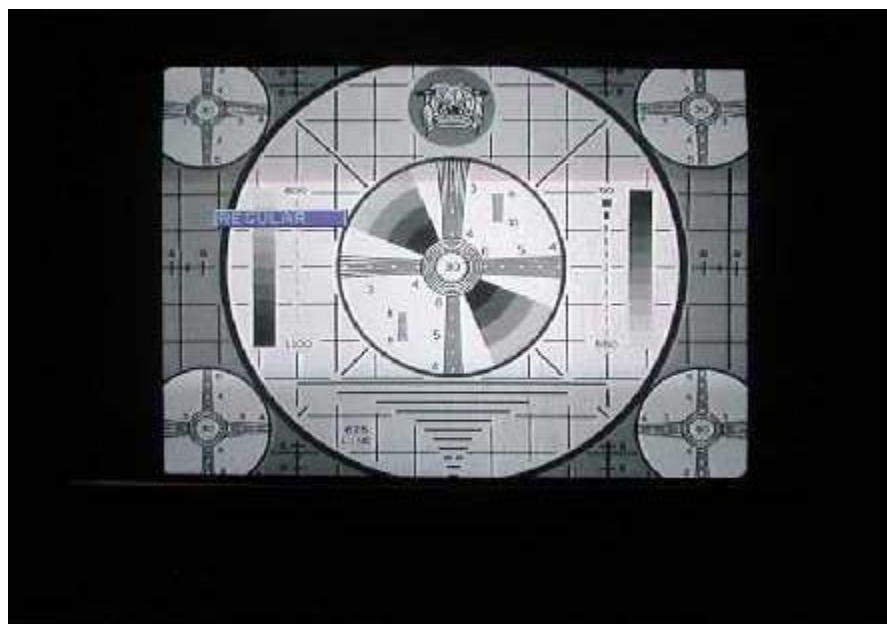


ZOOM 14:9 MODE







ZOOM 16:9 MODE

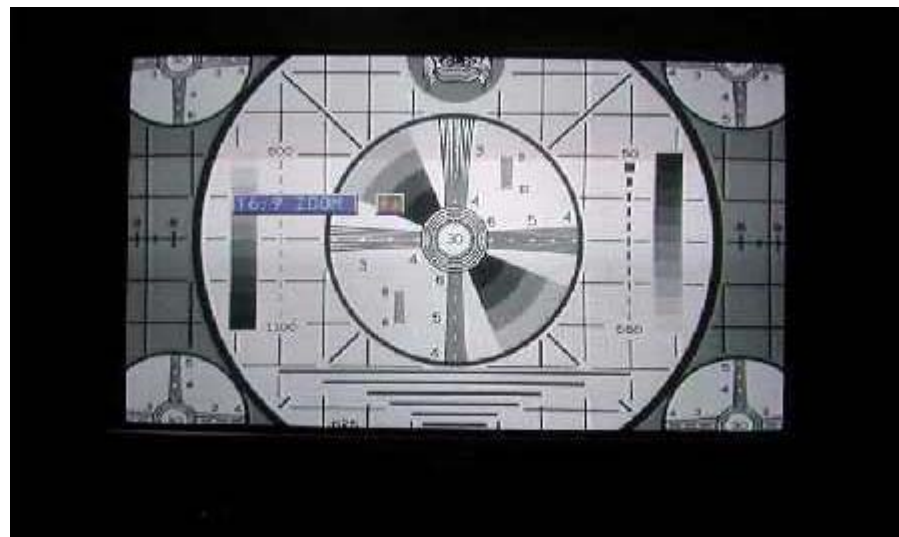


SUBTITLE ZOOM MODE

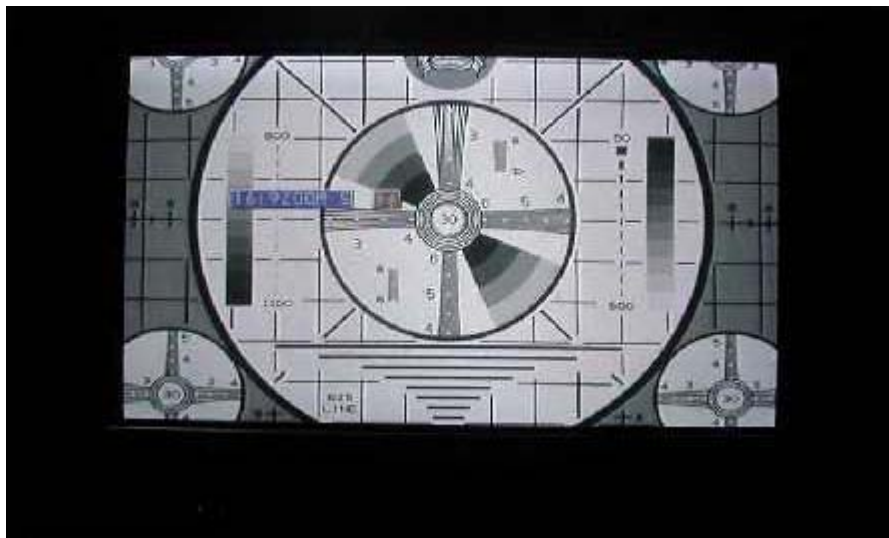

FULL MODE

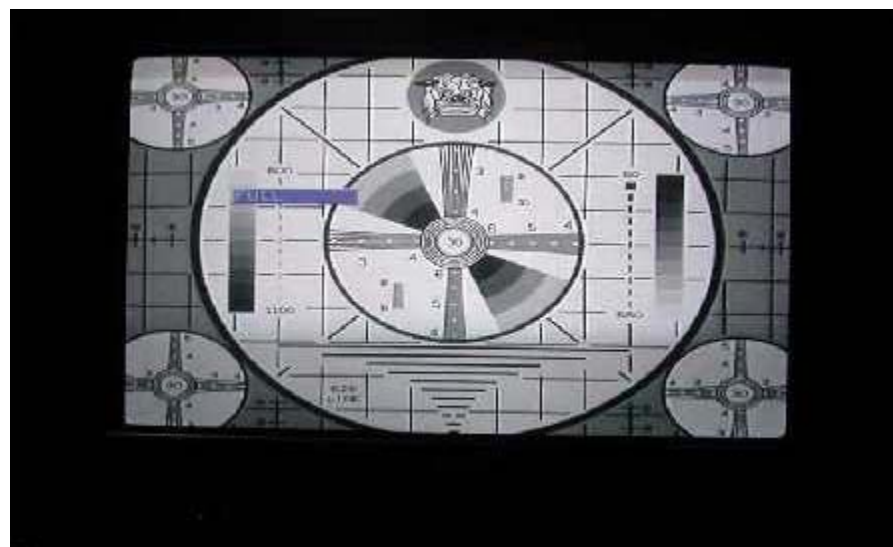


PANORAMIC MODE

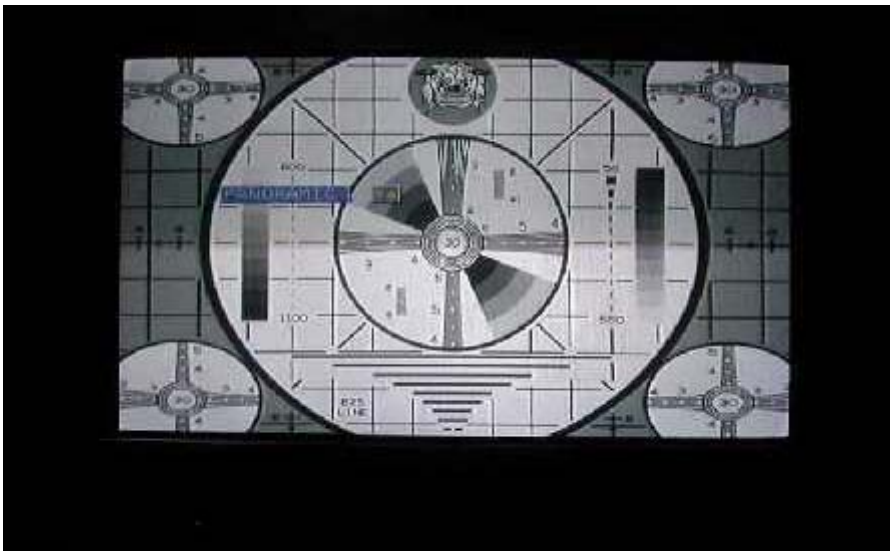


# 15. BLOCK DIAGRAM

## General Block Diagram of chassis 11AK45

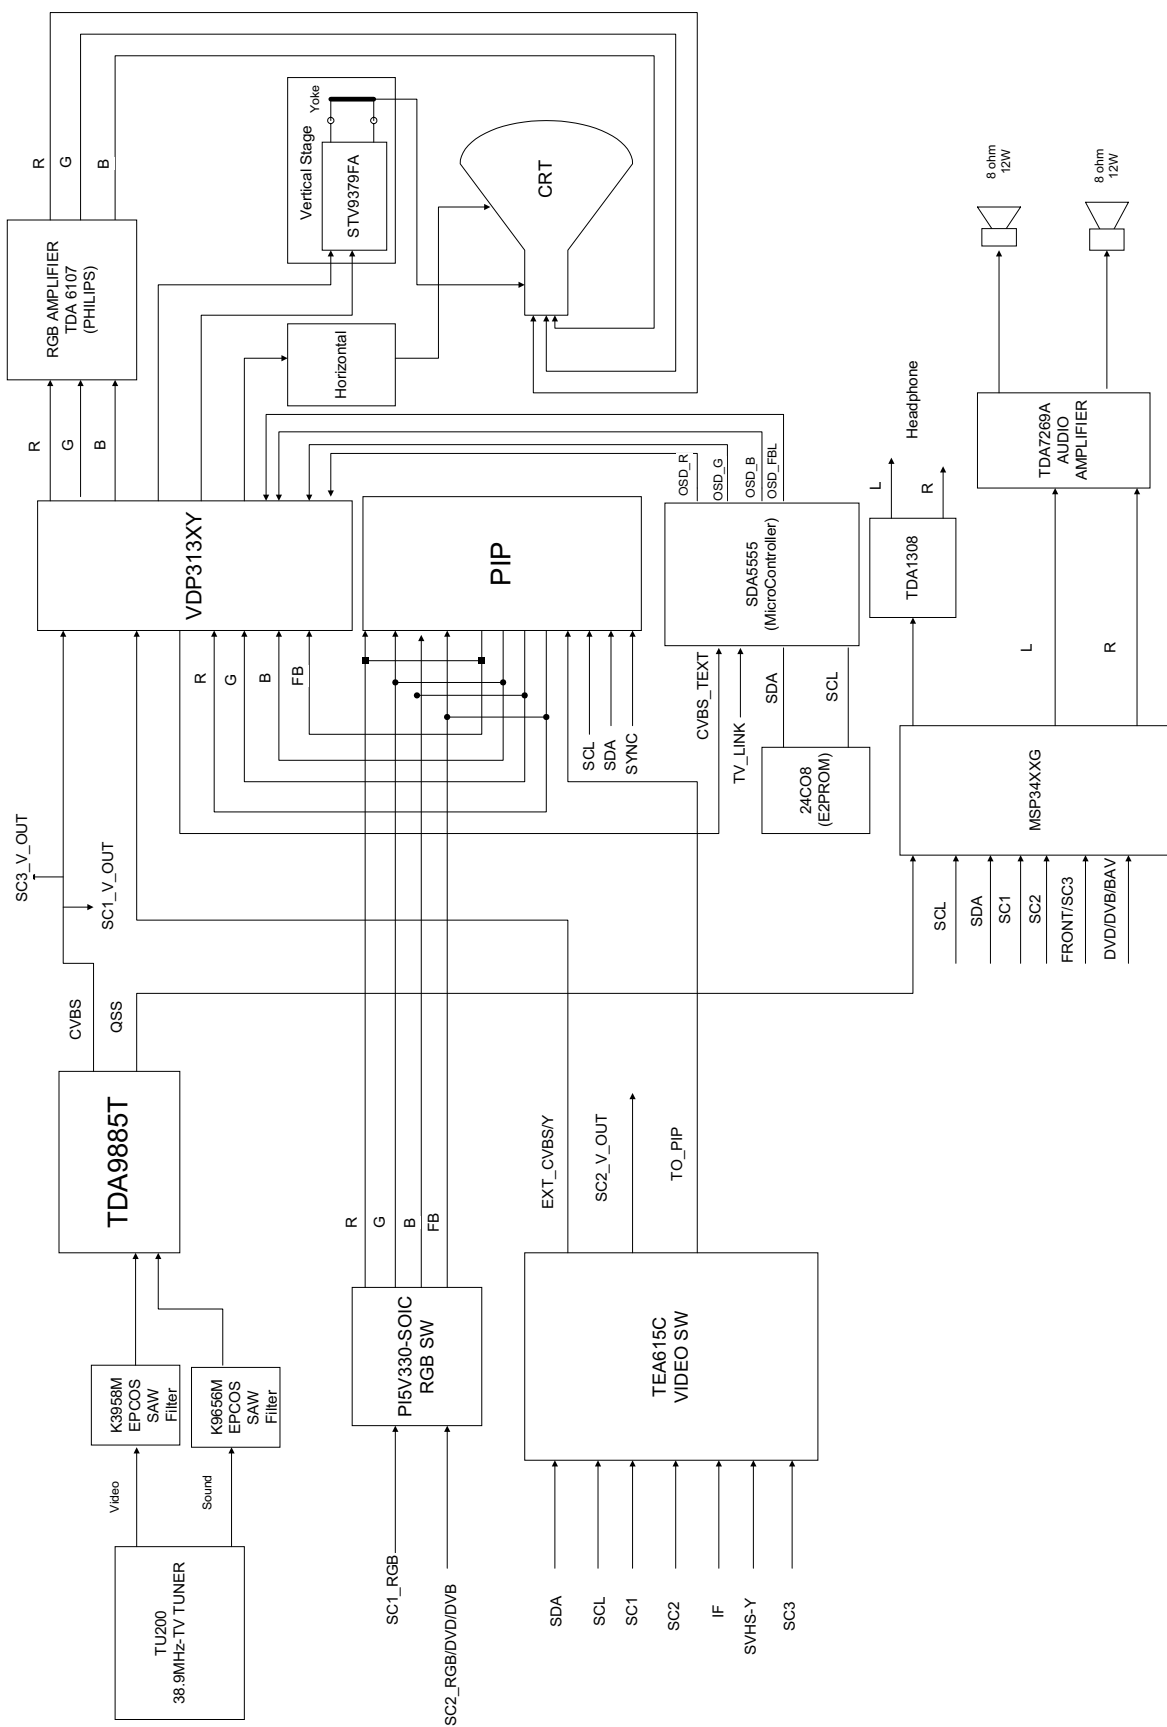


# 16. CIRCUIT DIAGRAMS

## 16.1 Schematic Diagram of Video-IF Circuit

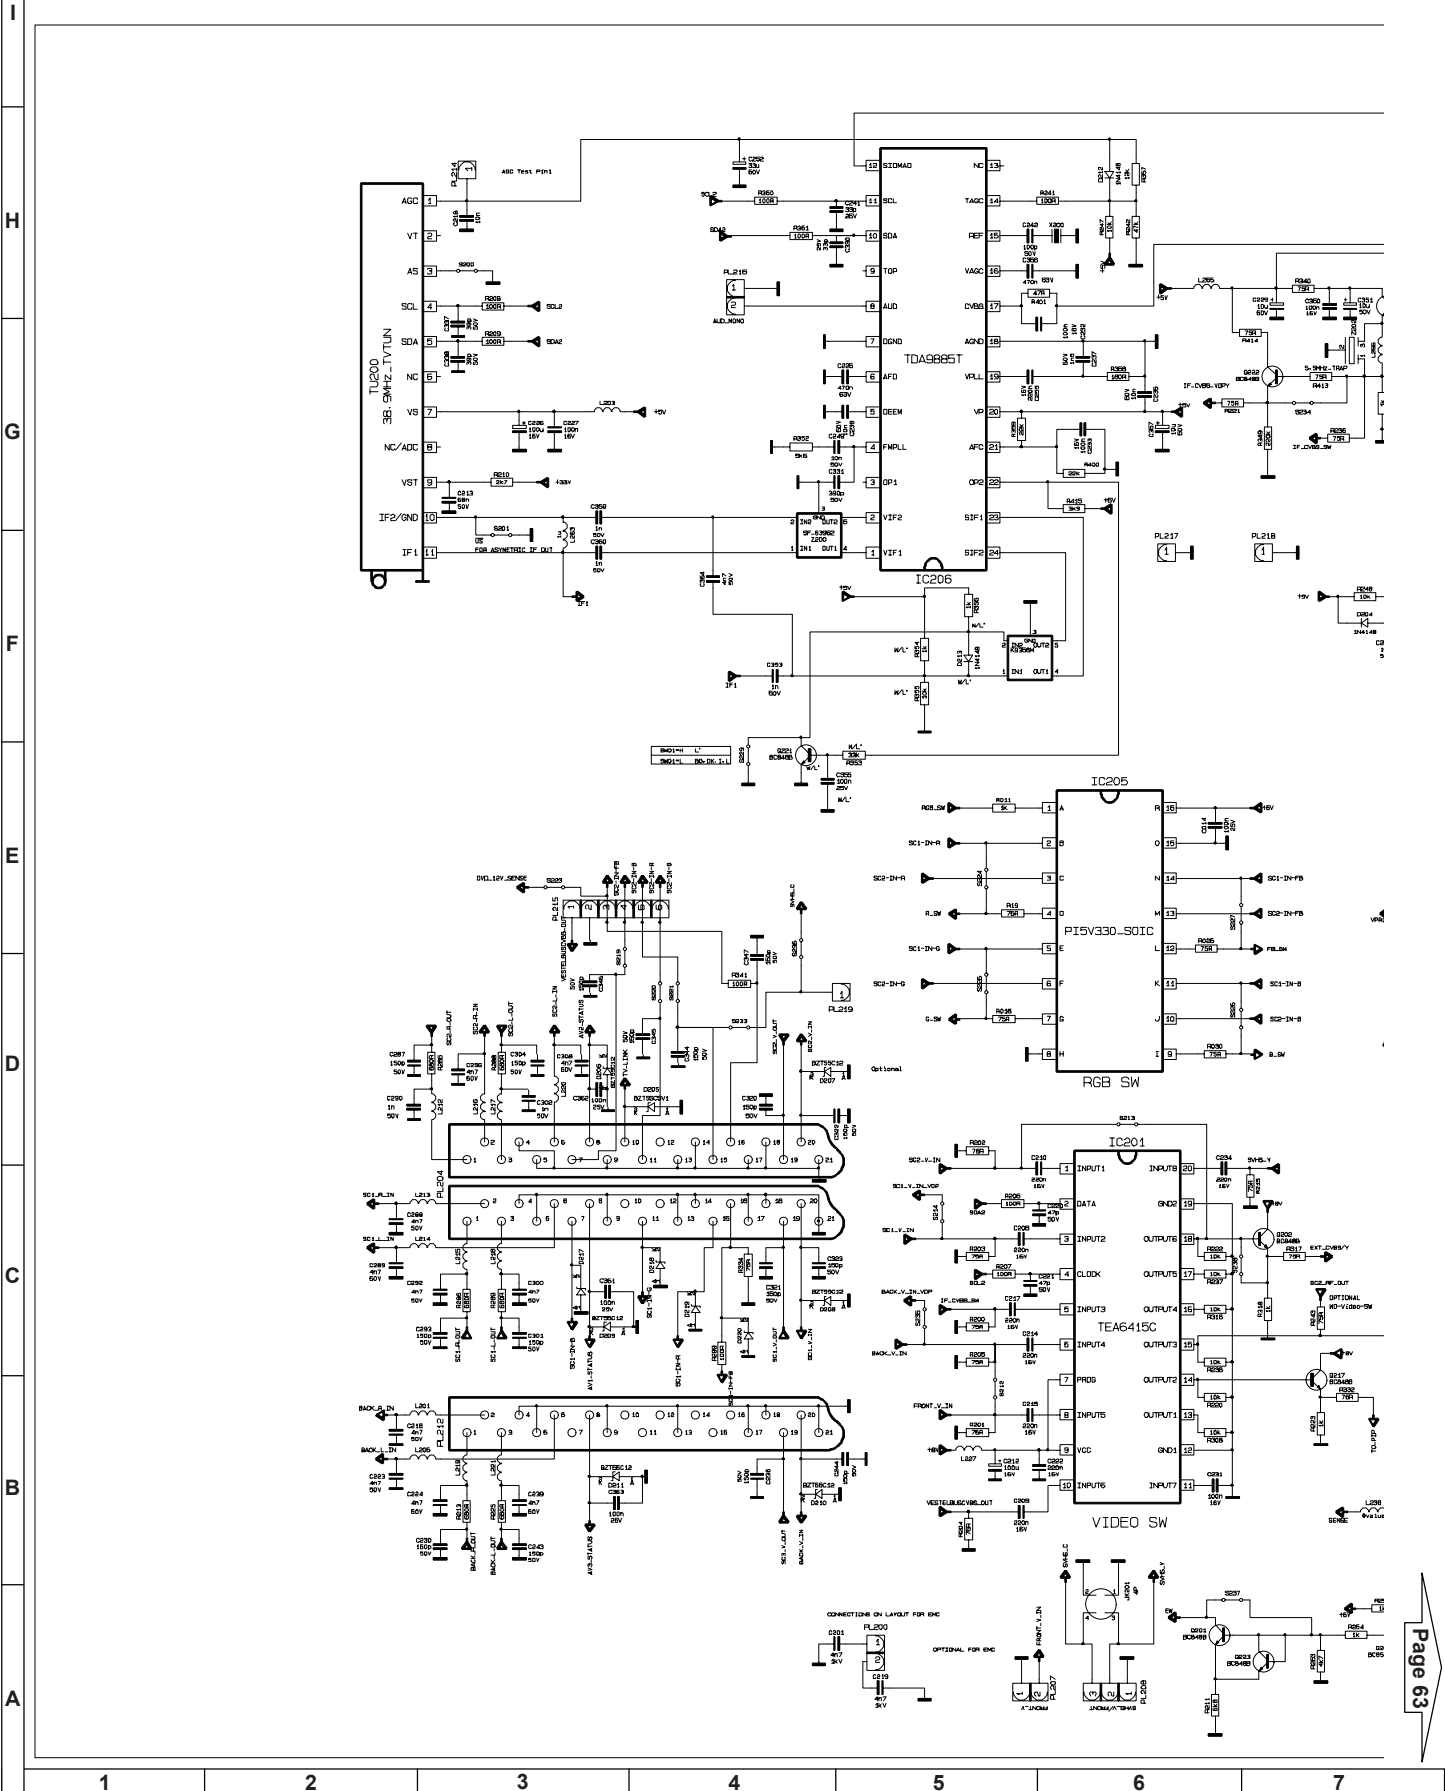

### 16.1 Schematic Diagram of Video-IF Circuit

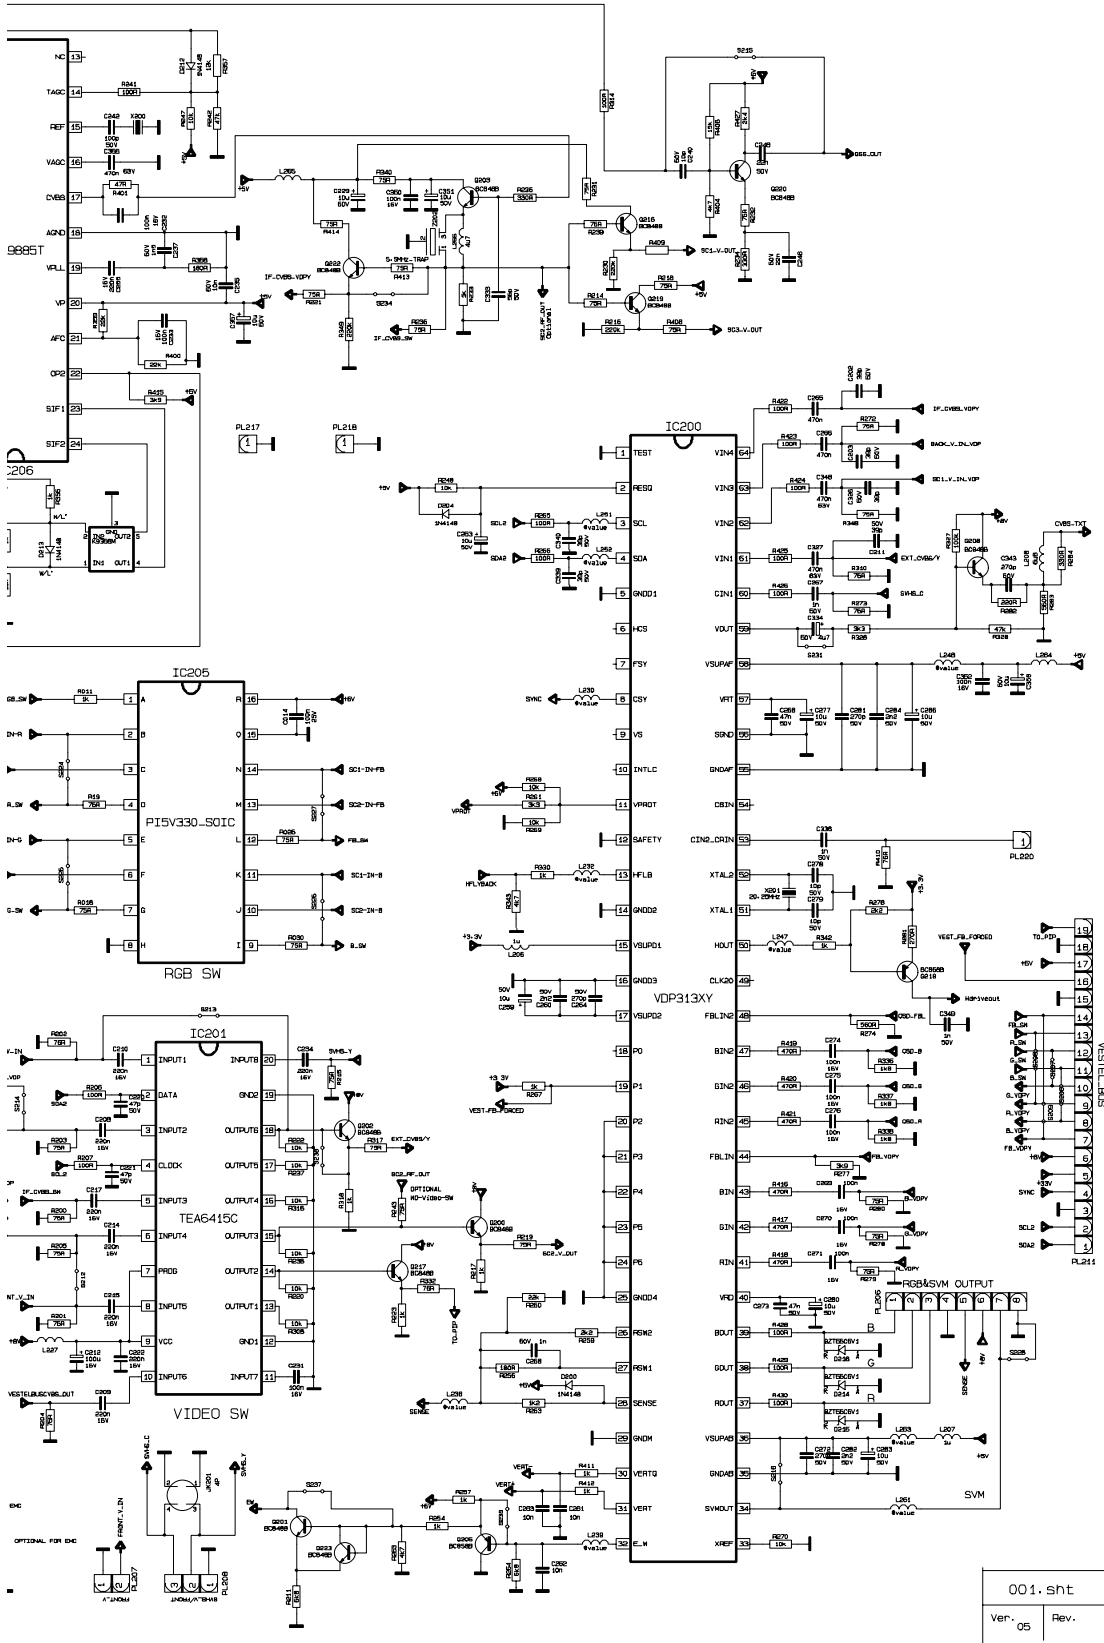


Page 62

001.sht	11AK45B5 VIDEO-IF
Ver. 05	Rev. DATE 24.09.2023
	Author Video-IF Group
	Sheet 01 of 05




### 16.2 Schematic Diagram of $\mu$ -Controller Circuit

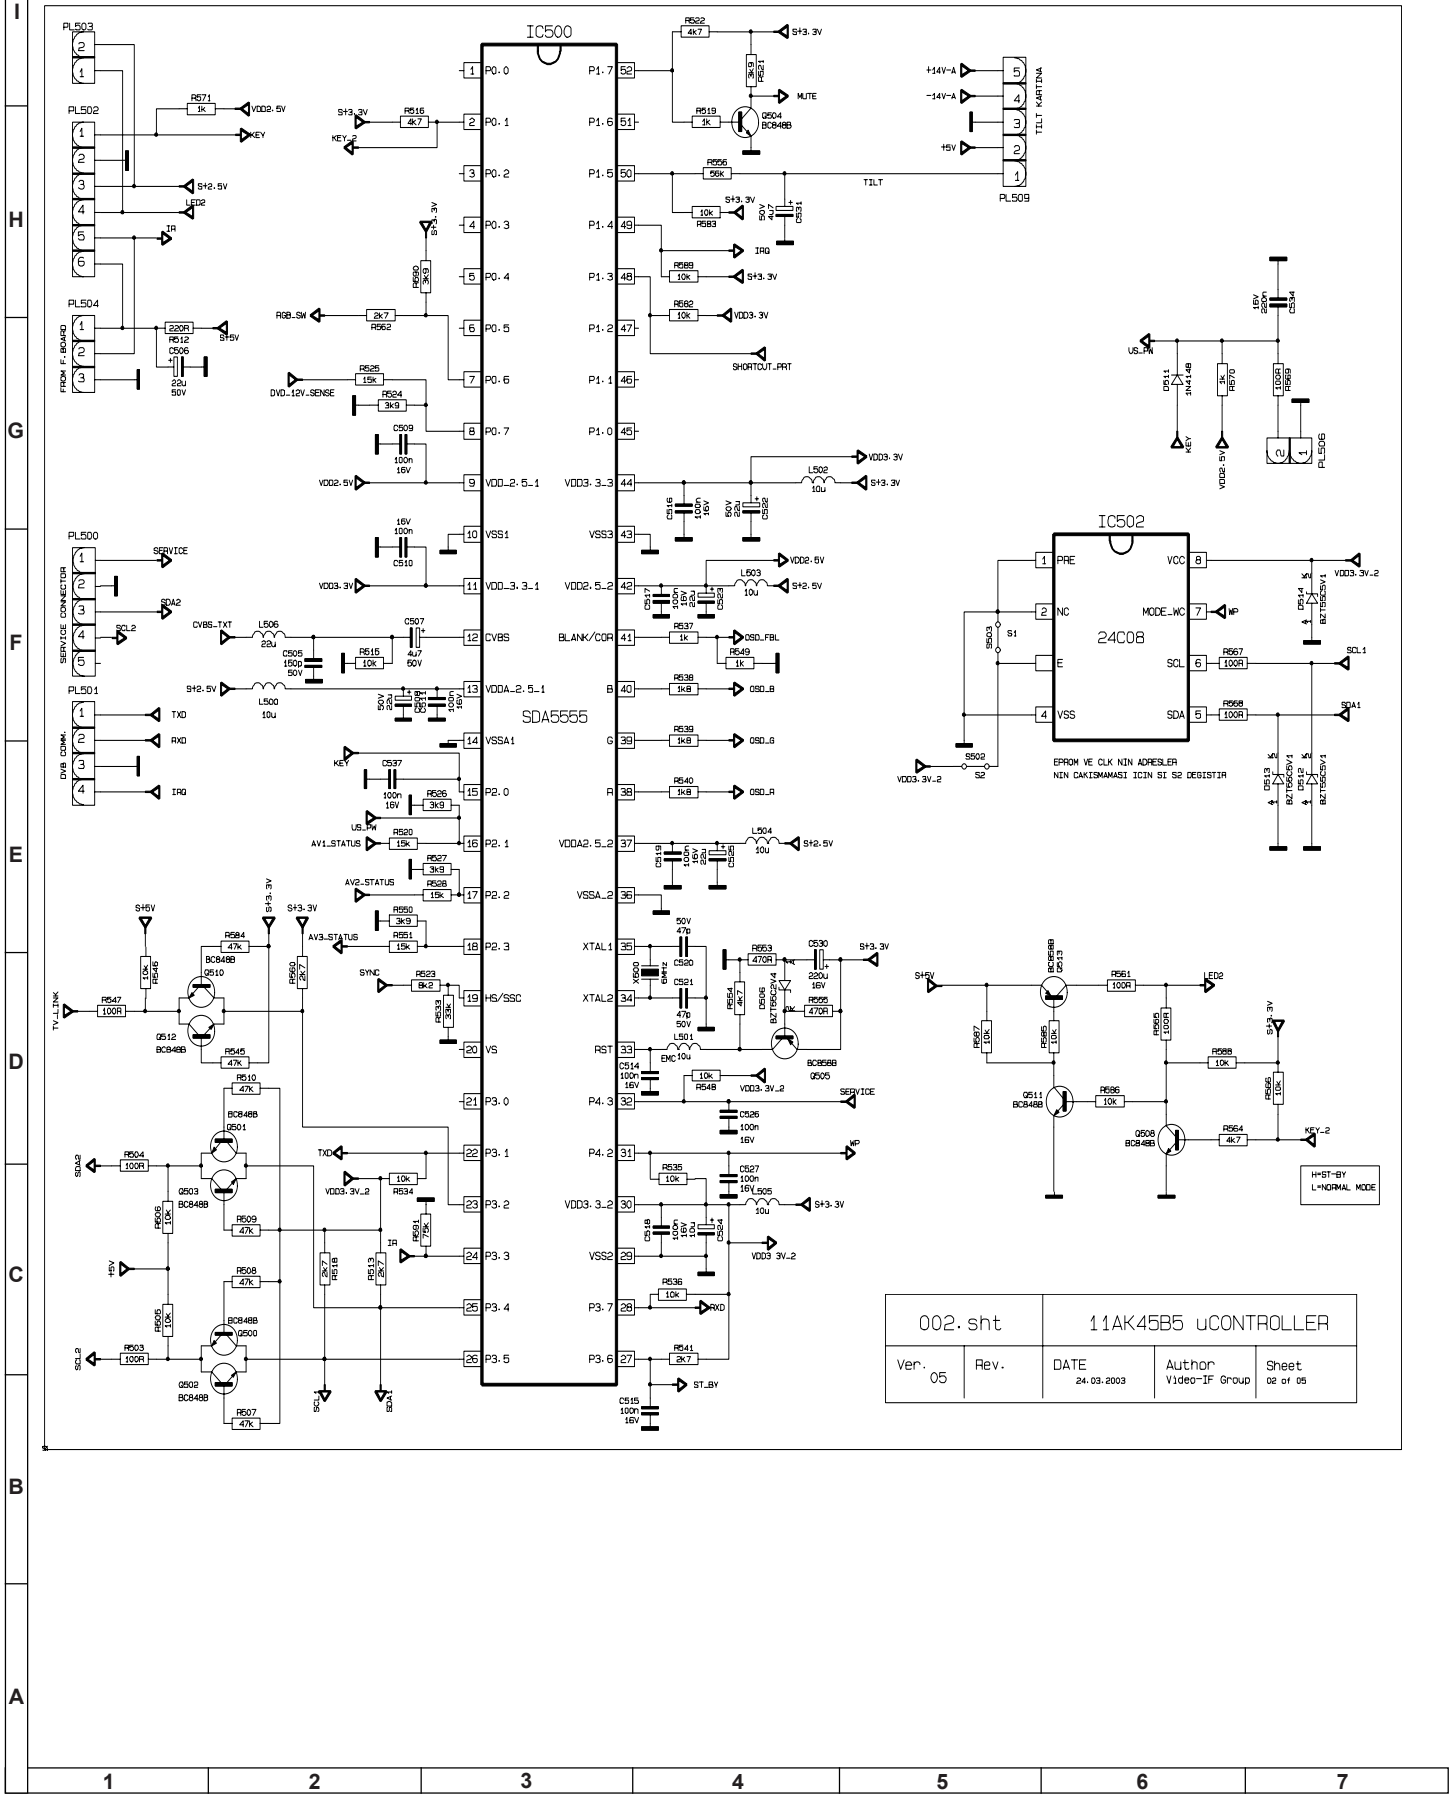


002. sht		11AK45B5 $\mu$ CONTROLLER		
Ver.	05	Rev.	DATE	24.03.2003
			Author	Vİdeo-İF Group
			Sheet	02 of 05


### 16.3 Schematic Diagram of Deflection Circuit

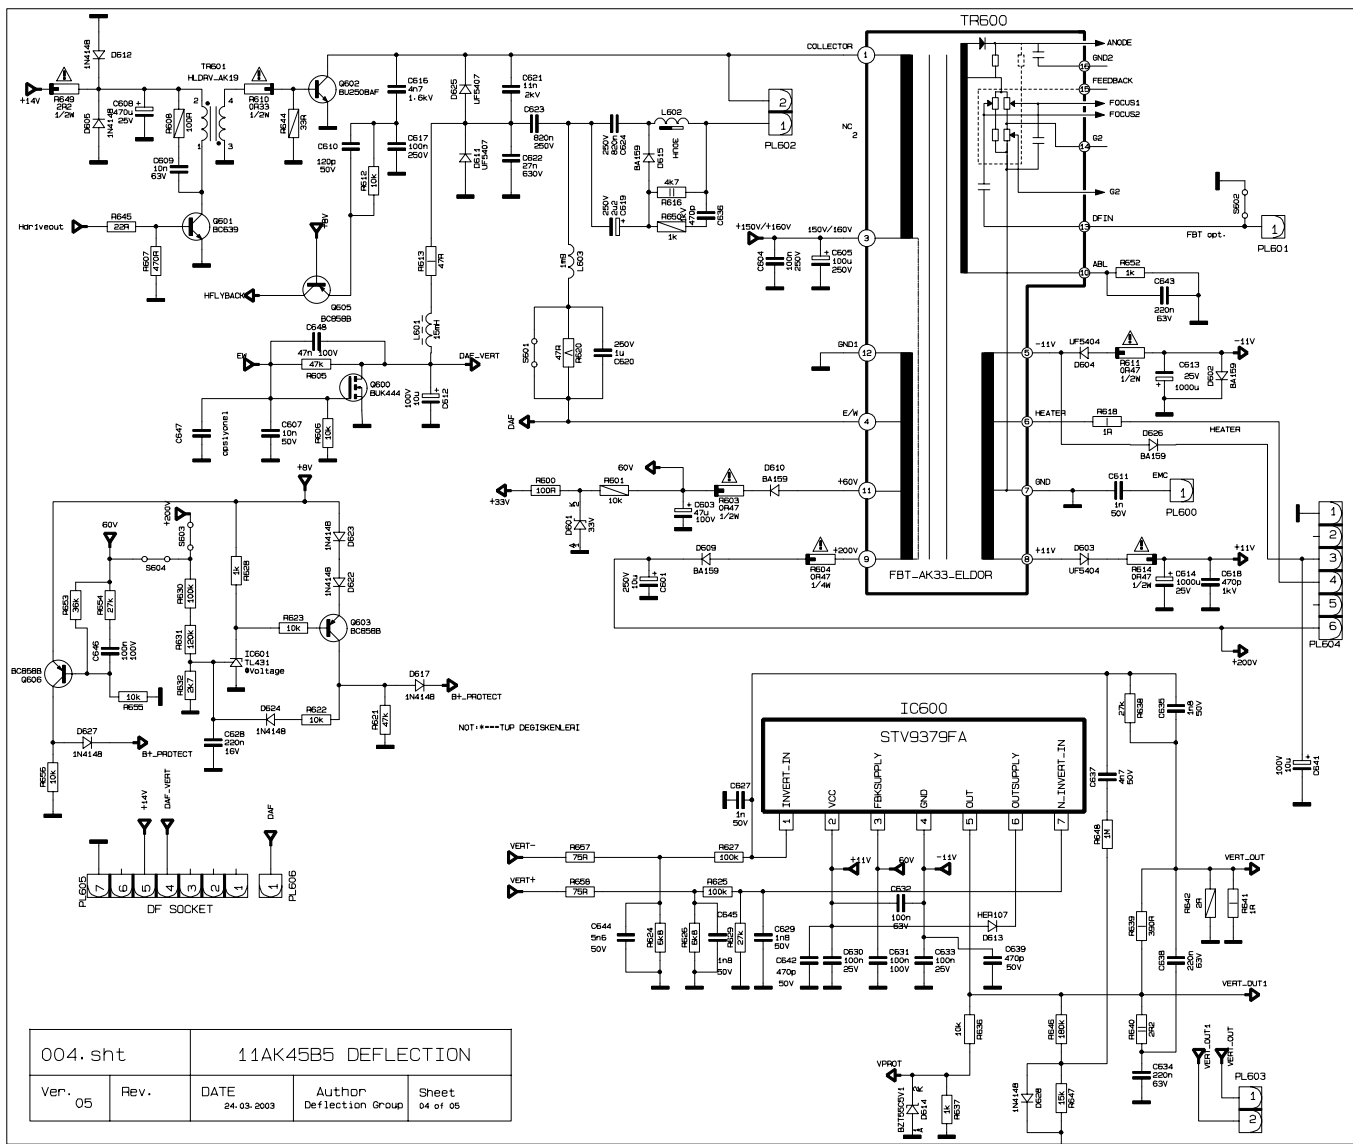

### 16.4 Schematic Diagram of Power Switch Circuit

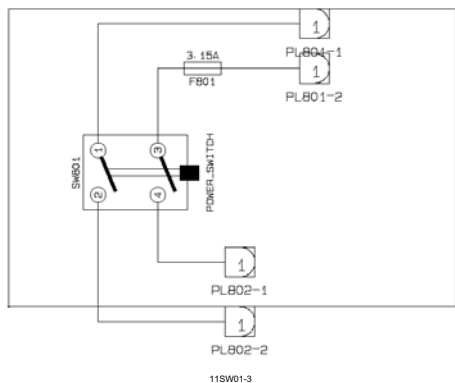


### 16.5 Schematic Diagram of SMPS Circuit

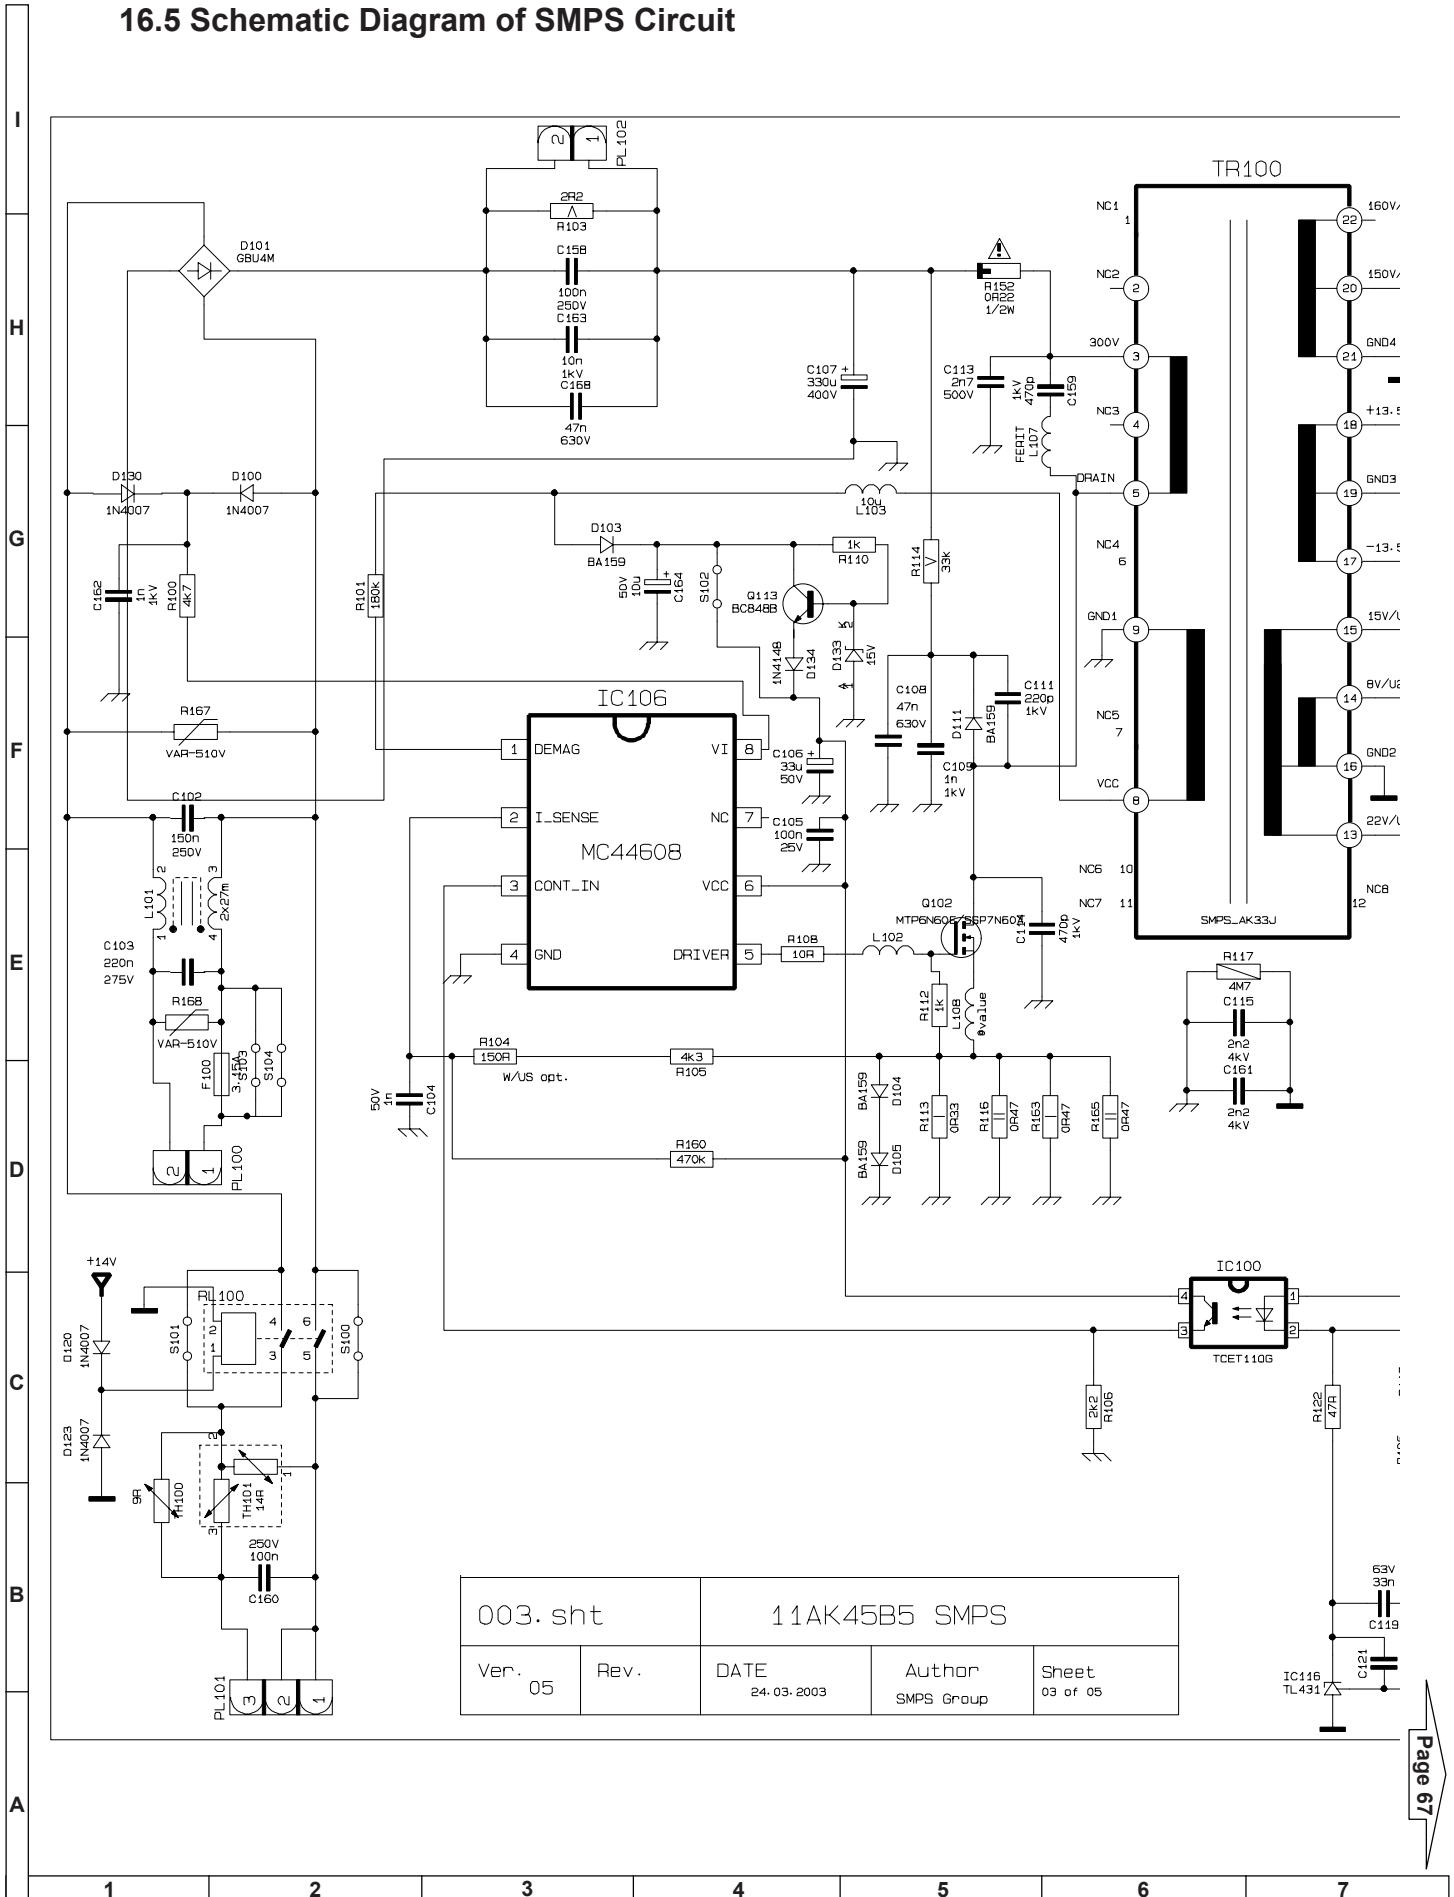


003. sht		11AK45B5 SMPS		
Ver. 05	Rev.	DATE 24-03-2003	Author SMPS Group	Sheet 03 of 05

### 16.5 Schematic Diagram of SMPS Circuit

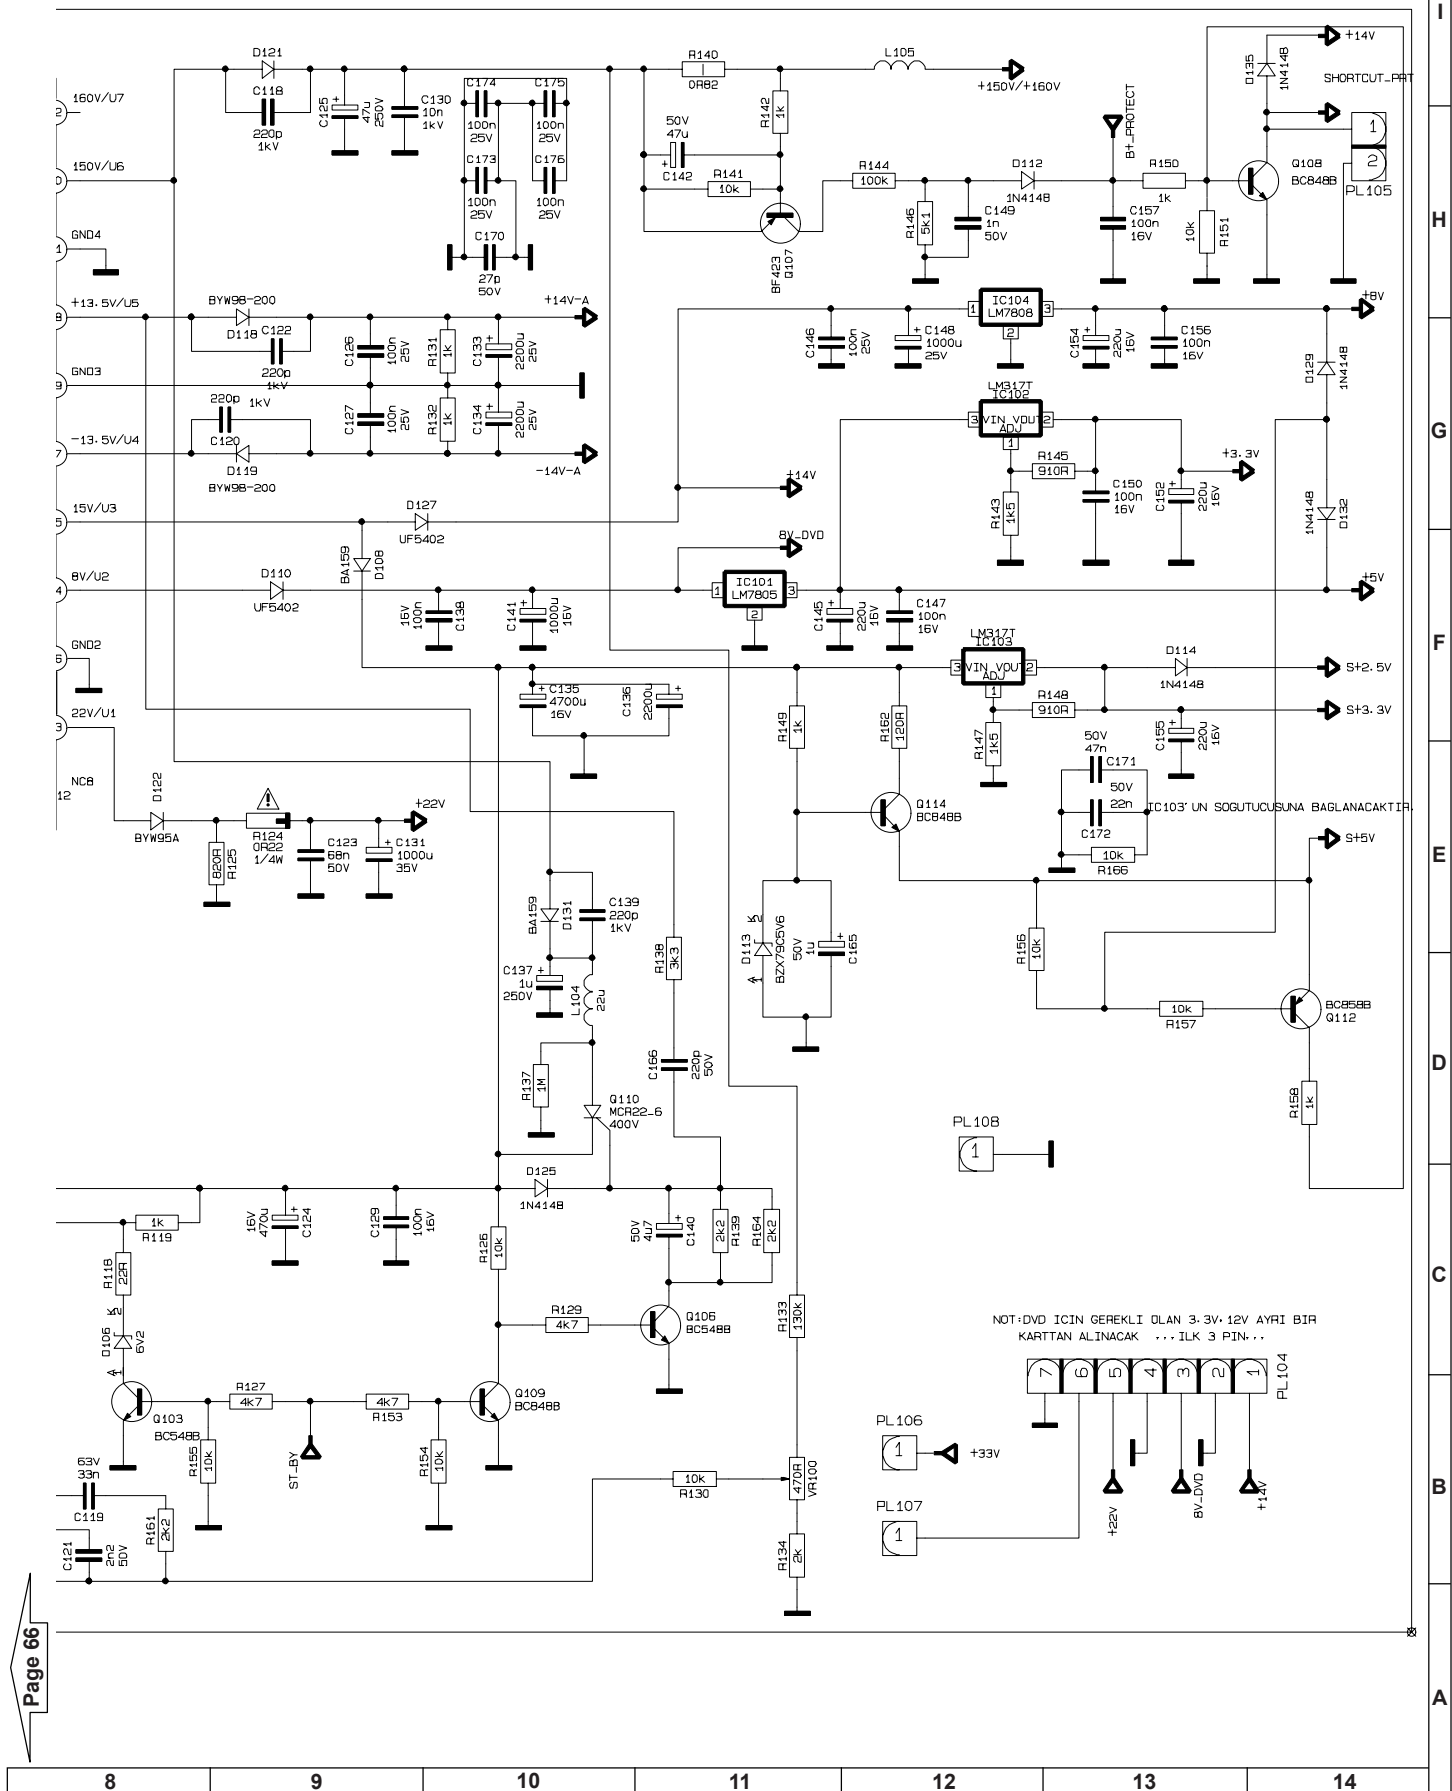


NOT-DVD ICIN GEREKLİ OLAN 3.3V, 12V AYRI BİR KARTTAN ALINACAK ... İLK 3 PIN ...

### 16.6 Schematic Diagram of Sound Circuit

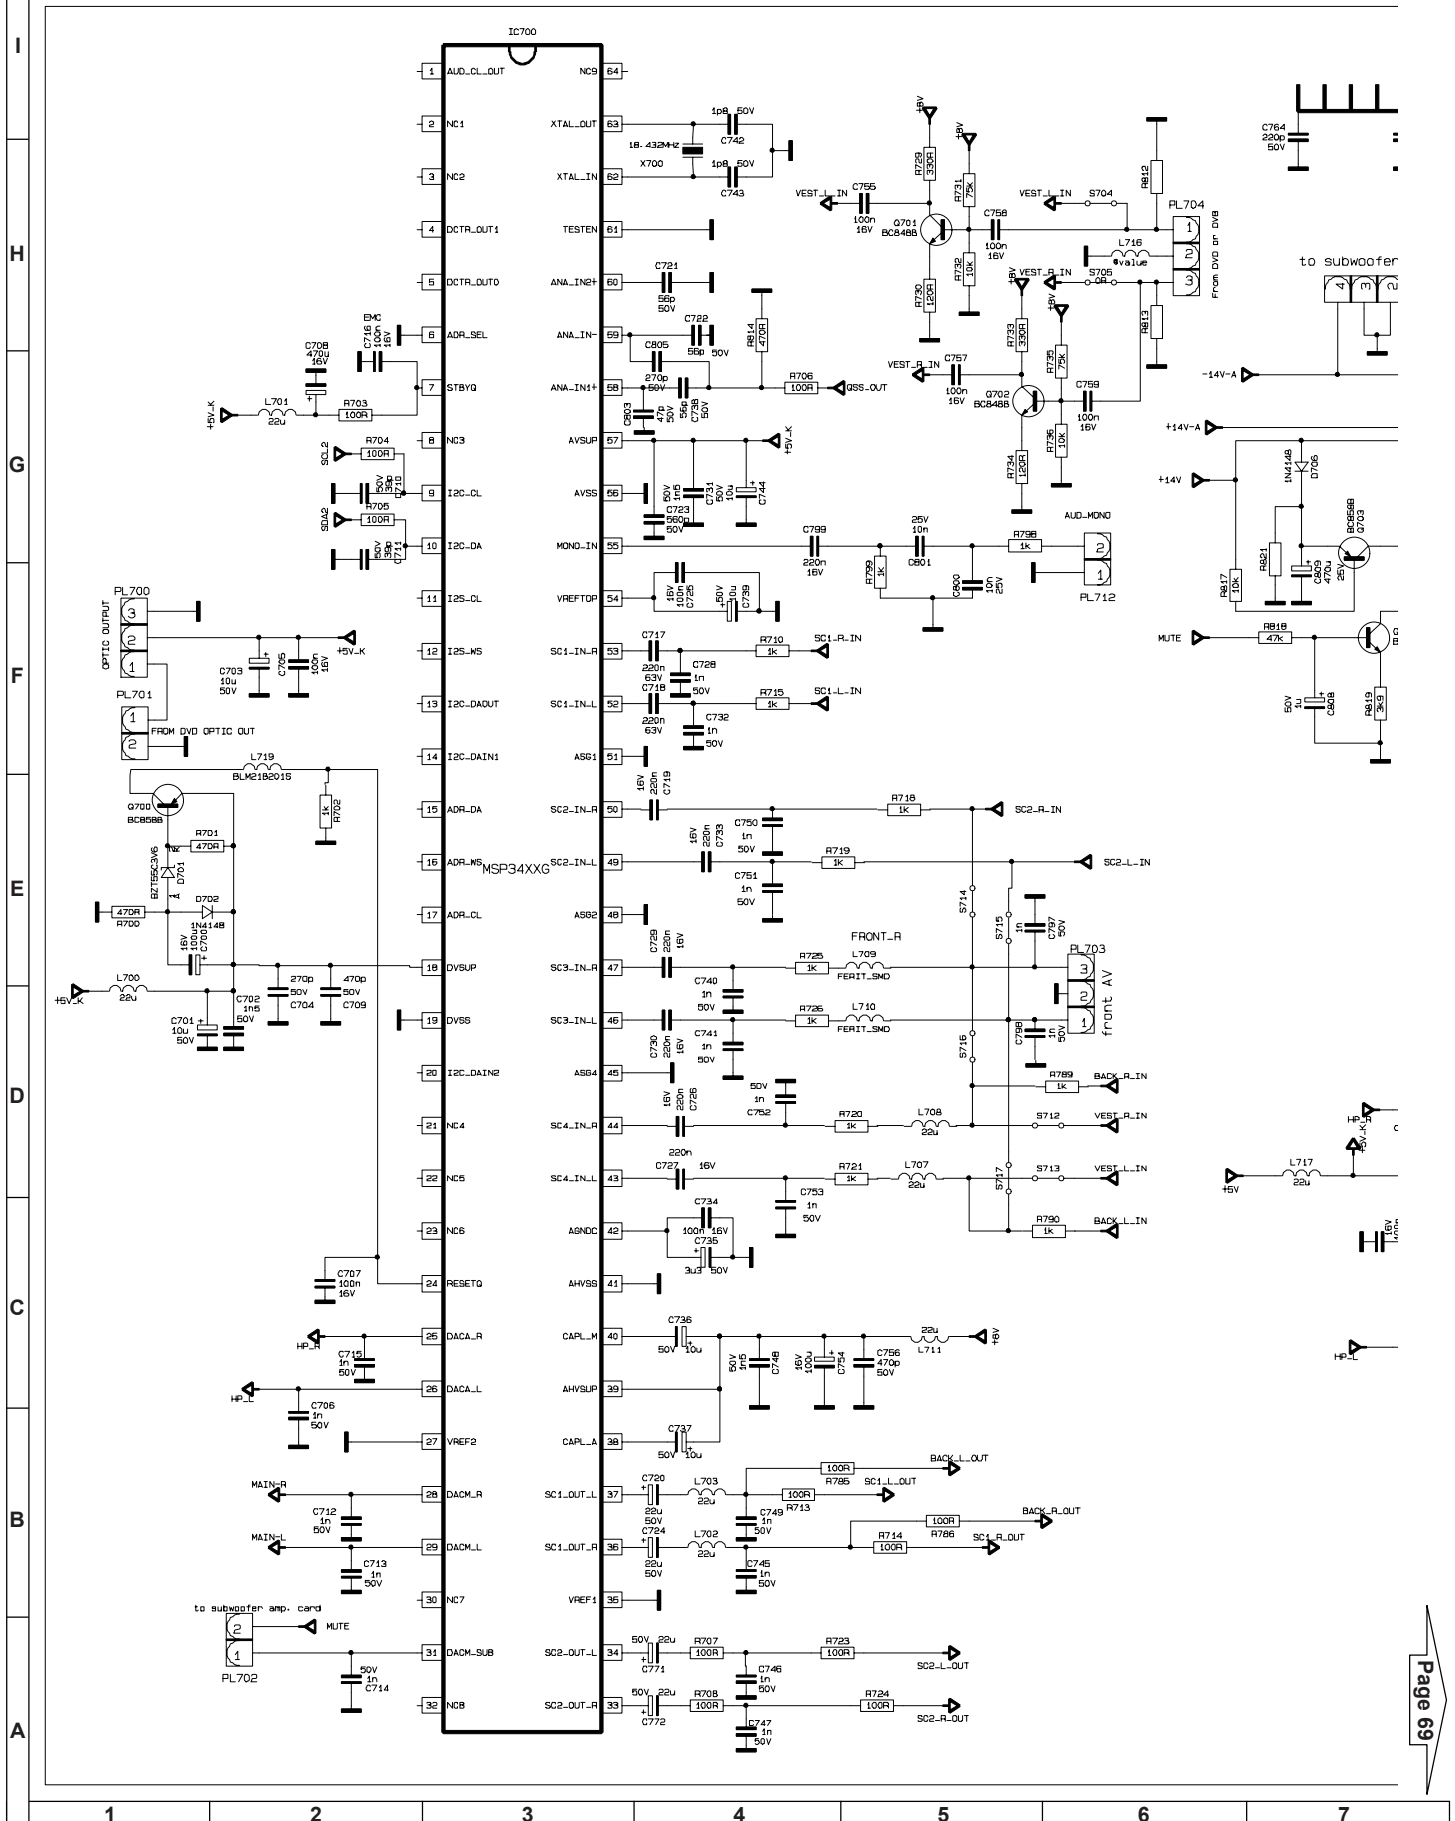


### 16.6 Schematic Diagram of Sound Circuit

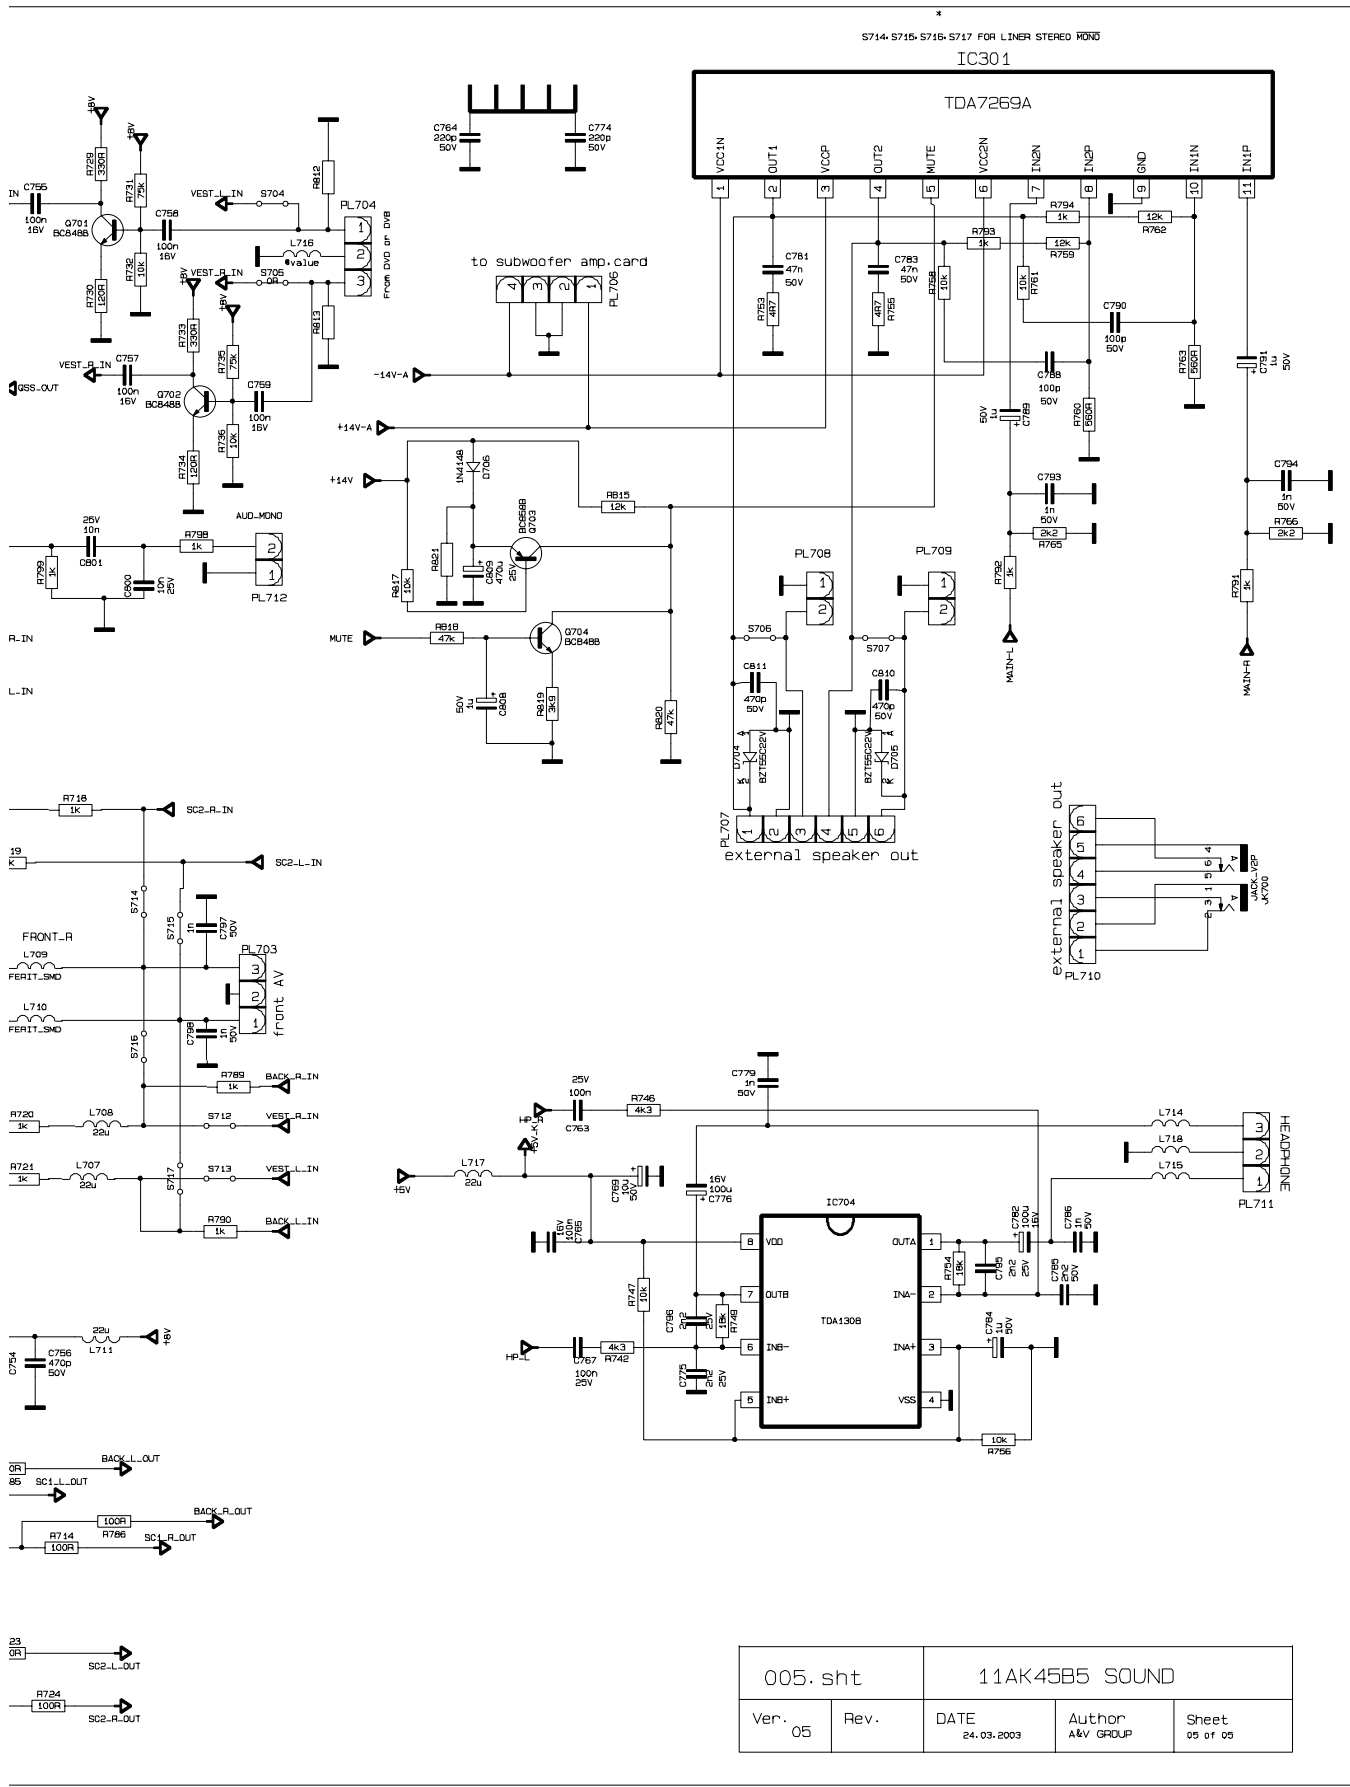

005. sht		11AK45B5 SOUND	
Ver. 05	Rev.	DATE 24.03.2003	Author A&V GROUP
		Sheet 05 of 05	


Page 68

16.7 Schematic Diagram of CRT Socket Circuit

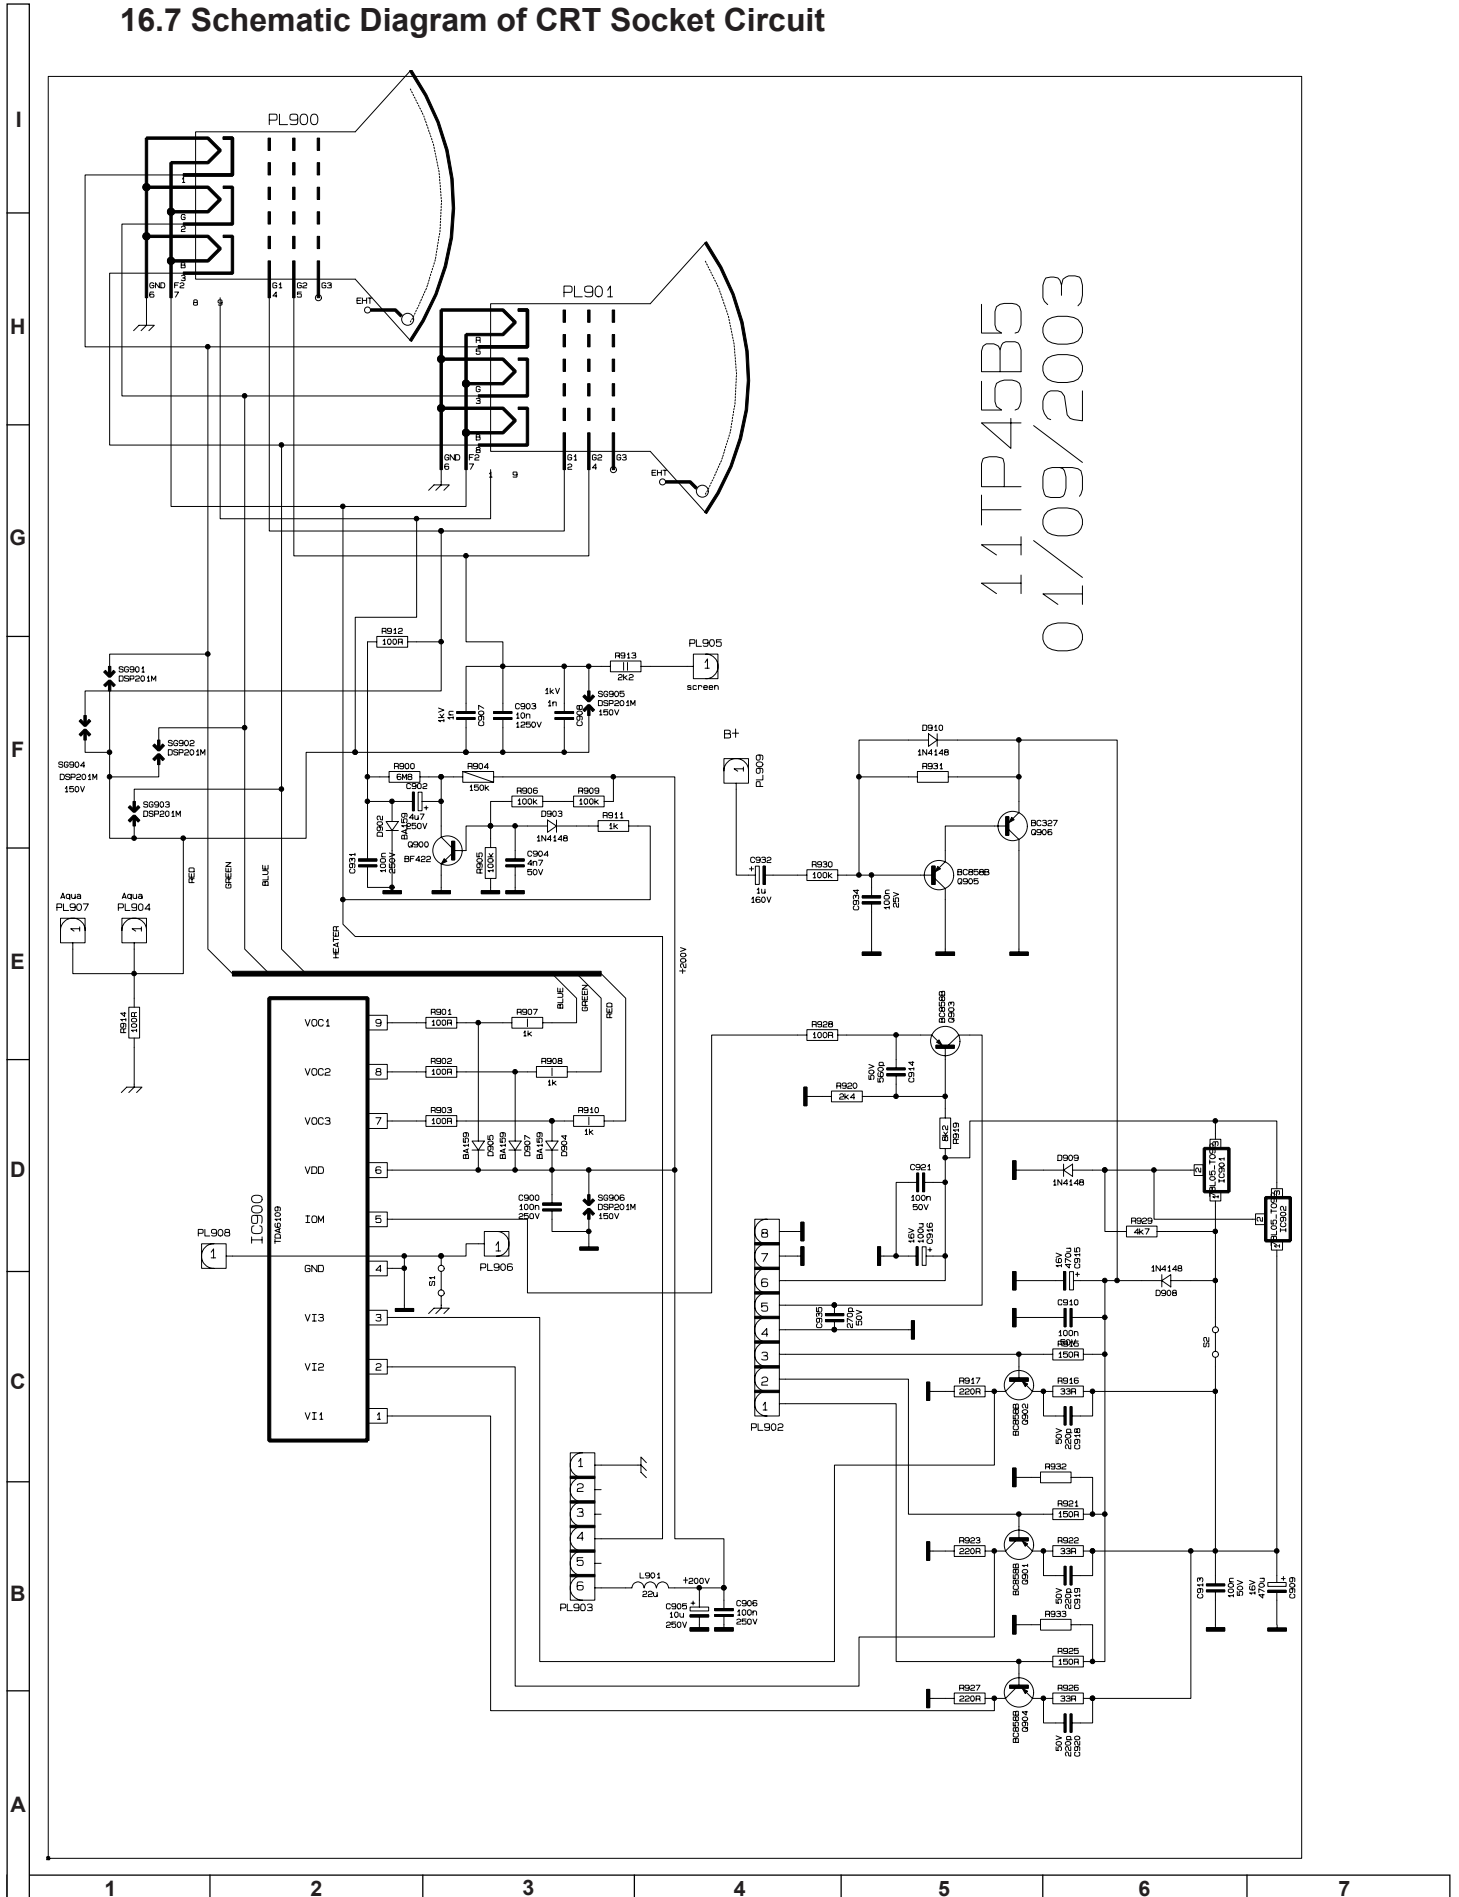




### 16.8 Schematic Diagrams of Control Panel Unit

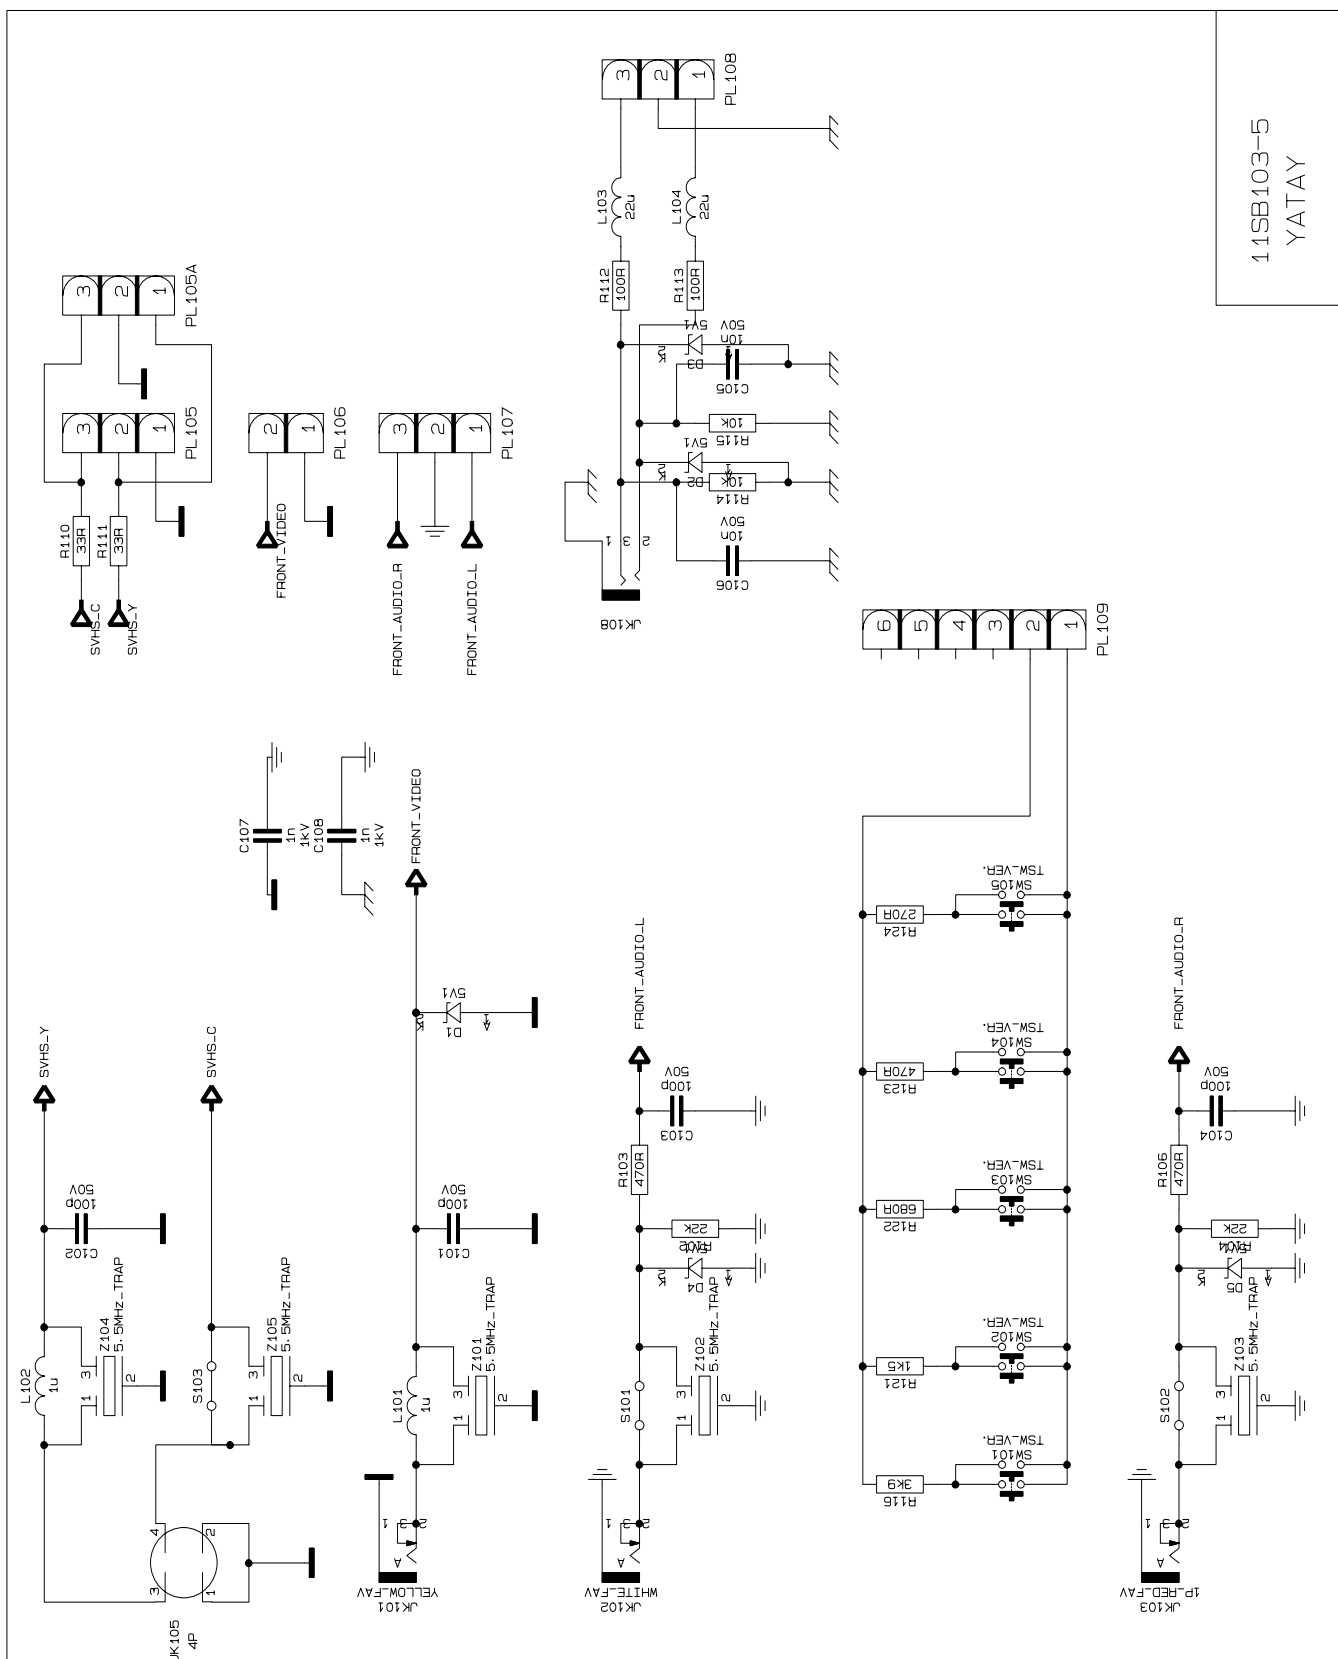

### 16.9 Schematic Diagram of Remote Control Circuit

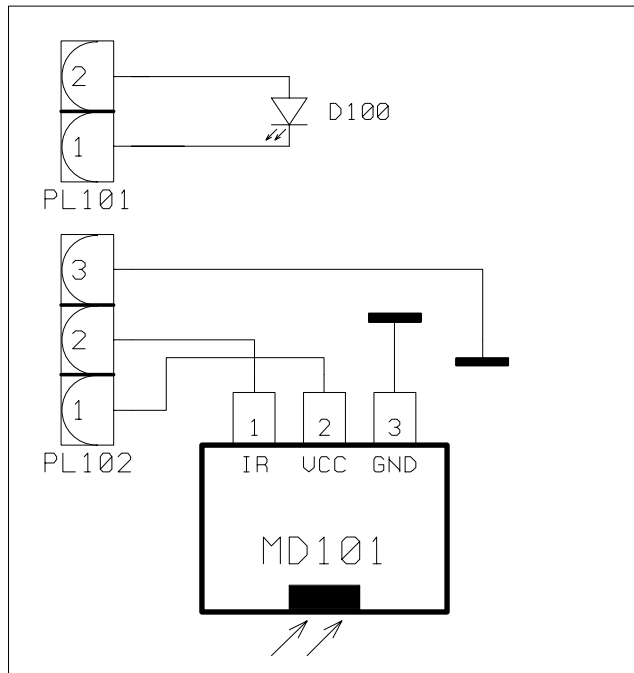

I  
H  
G  
F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7

## 17. HOW TO UPDATE THE TECHNICAL INFORMATION

### 17.1 How to update the Technical Information appeared on this Service Manual (and relatives)

17.1.1. Web site: <https://www.vestelservice.com>

17.1.2. Select: [Technical Support](#)

17.1.3. Login: [101278](#)

17.1.4. Password: [SHPII278](#)

By this access you can consult the latest schematic diagram or request the Parts Listing of a concrete Production Date / Serial Number.

By this way it can be also consulted the issued Technical Reports (Service Bulletins).

It can be found a Label in every chassis with additional information, i.e. the used EEPROM. See below. On the next page are given details about the Code Bar Label.

### 17.2 NVM / EEPROM recorder

There is available the NVM / EEPROM recorder as spare part:

Part Reference: [V20096887](#)

Description: [MD.ASY.PONYPROG](#)


Dom. Price Code: [AT](#)

Exp. Price Code: [BE](#)


This EEPROM recorder uses the free software "Pony" available at <http://www.lancos.com/ppwin95.html>

Note: In case of Windows platform it is recommended the PonyProg v1.17h version.

### 17.3 Chassis Label Information

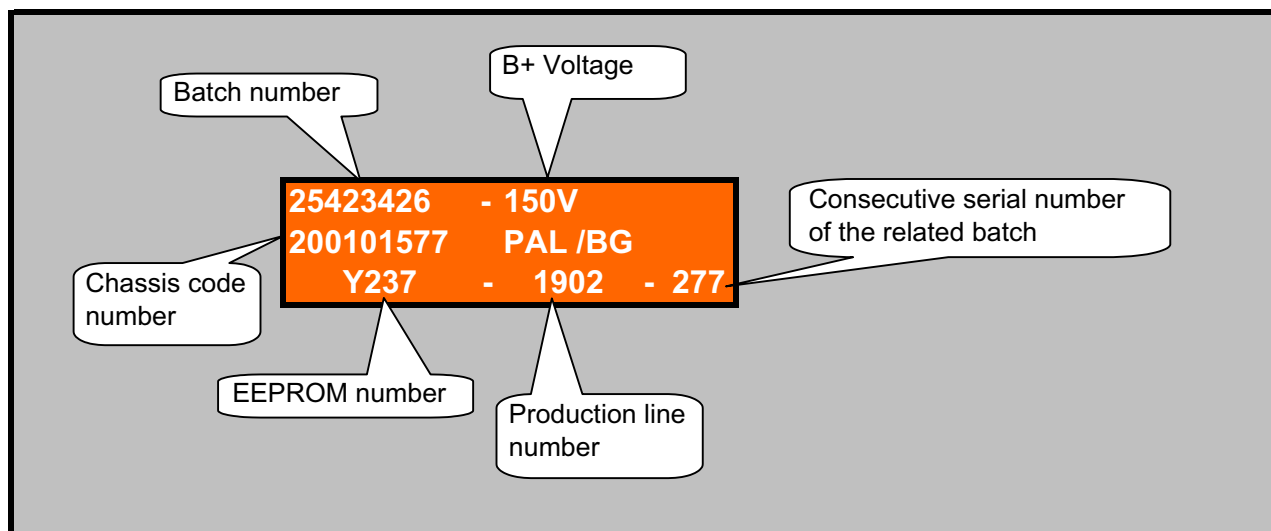

## 17.4 Code Bar Label Information

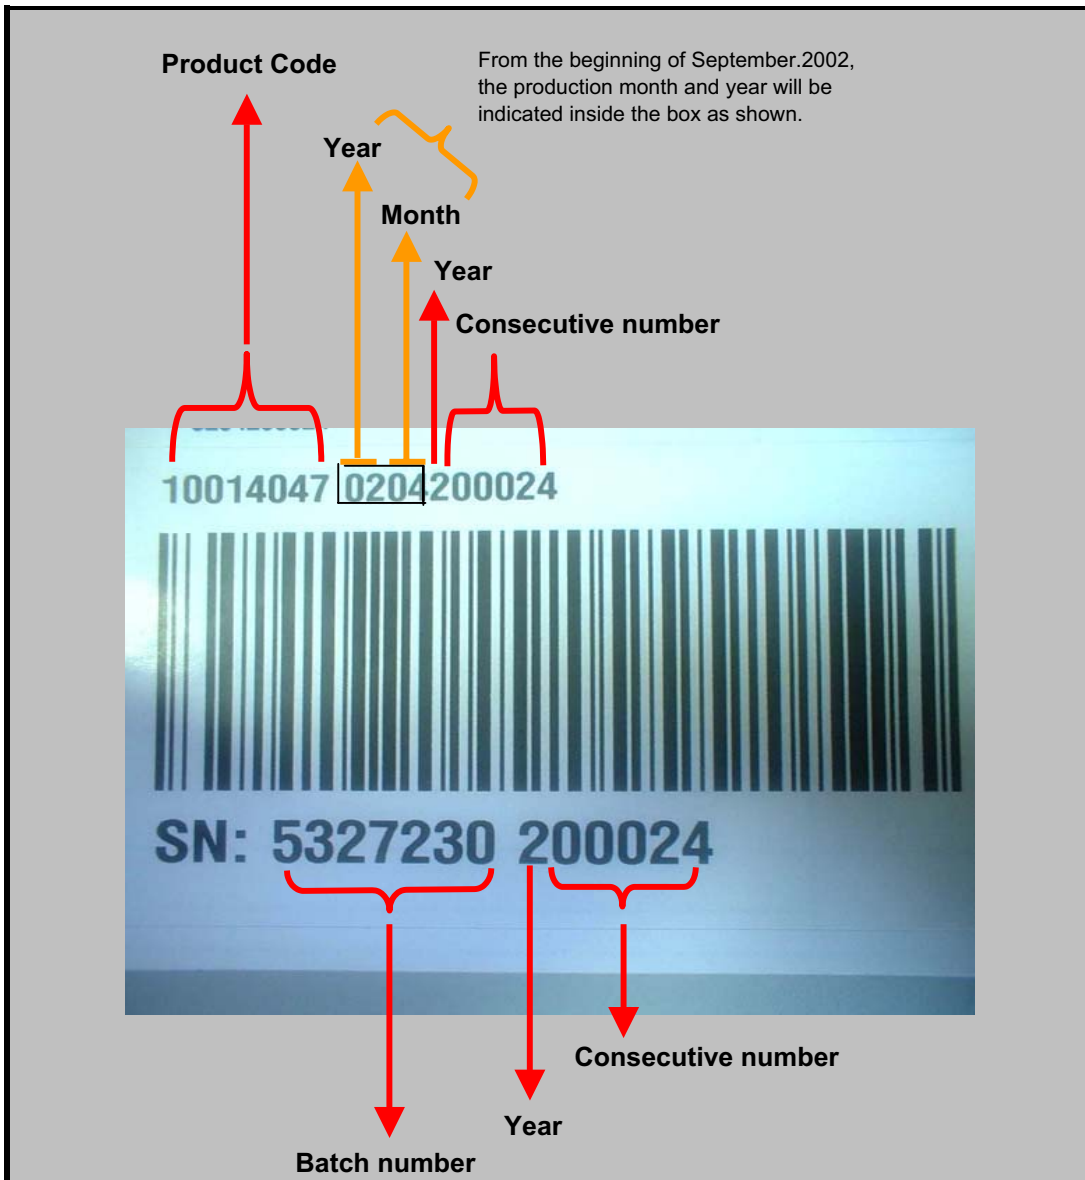

<b>Product code:</b>	It is the code that indicates Vestel internal identification number of the complete TV set.
<b>Year :</b>	Production year in two digits, e.g.: 02 for 2002
<b>Month :</b>	Production month in two digits; e.g.: 04 for April.
<b>Batch number :</b>	It is a Vestel number that is assigned by the Planning Dept. according to the customer orders. (For internal use by Vestel)
<b>Consecutive Number:</b>	The number that indicates the sequence of the product related to the same batch number.

**Notes:**

# SHARP®

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission of the publisher.

**Technical information and Production:**

**Vestel Electronik AS**

PRINTED BY:

ON:

**Technical information re-issued:**

**SHARP ELECTRONICA ESPAÑA S.A.**  
Service Manual Group  
Engineering Dept.  
Polígono Industrial Can Sant Joan  
08190 Sant Cugat del Vallès  
Barcelona  
Spain

Think Ecology, please use



**RECYCLED PAPER**