

INSTALLATION MANUAL

ZIPSYSTEM.COM



ATTENTION: This installation guide is intended to provide general information for the designer and end user. The following guidelines will help you safely and properly install the ZIP System® roof and wall wall sheathing. We urge you, and anyone installing this product, to read these guidelines in order to minimize any risk of safety hazards and to prevent voiding any applicable warranties. This manual is a general installation guide and does not cover every installation condition. Proper installation shall be deemed to mean the most restrictive requirement specified by Huber Engineered Woods (HEW), local building code, engineer or architect of record or other authority having jurisdiction. You are fully and solely responsible for all safety requirements and code compliance. For additional information contact Huber Engineered Woods LLC.



10925 David Taylor Drive, Suite 300

Charlotte, NC 28262

Phone: 800.933.9220 // Fax: 704.547.9228



SAFETY GUIDELINES: Follow all OSHA regulations and any other safety guidelines and safety practices during installation and construction.



Use approved safety belts and/or harnesses or other fall protection equipment.



Install ZIP System® panels and tape only in dry conditions and on dry surfaces. Do not install in rain, snow, frost or other slippery conditions.



Wear rubber-soled or other high-traction footwear while installing ZIP System[®] sheathing in a roof application. Do not wear footwear with worn soles or heels.



Ensure the roofing surface is free from oil, chemicals, sawdust, dirt, tools, electric cords, air hoses, clothing and anything else that might create a tripping hazard.



Install temporary toe boards along the ZIP System® sheathing roof surface.



CONTENTS

ZIP SYSTEM® SHEATHING AND TAPE	
OVERVIEW	7
NOTES & LIMITATIONS	8
STORAGE AND HANDLING	11
AVAILABLE PANEL SIZES	12
TAPE SIZES	13
FASTENING GUIDE	13
GENERAL INFORMATION AND COMPATIBILITY	14
ZIP SYSTEM® WALL SHEATHING	
GENERAL INSTALLATION - WALL	17
PANEL ORIENTATION AND EDGE SPACING	17
FASTENING	18
TAPING	19
COMMON DETAILS	20
PIPES	20
WINDOWS	26
DOORS	42
FOUNDATION TRANSITION	45
STRAPPING	47
CLADDING	48
DECK AND PORCHES	59



CONTENTS

ZIP SYSTEM® ROOF SHEATHING	
GENERAL INSTALLATION - ROOF	60
PANEL ORIENTATION AND EDGE SPACING	60
TAPING	61
COMMON DETAILS	
ROOF COVERINGS	62
ICE AND WATER MEMBRANES	69
H-CLIPS	70
ALTERNATIVE DETAILS	71



CONTENTS

COMMON FIXES

SMALL HOLES	80
LARGE HOLES	82
SAW KERFS	86
CHIPS IN THE OVERLAY	88
SIDING REMOVAL	90
CRANE HOLES	93
DIRTY PANELS	97



ZIP SYSTEM® SHEATHING // OVERVIEW

ZIP System[®] roof and wall sheathing panels are oriented strand board (OSB), wood structural panels with built-in protective overlays that eliminate the need for building wrap or roofing felt. Install the panels, tape the seams with ZIP System[™] tape, and the building is rough dried-in.

When used on a wall, ZIP System® sheathing functions as a combination wall sheathing and code-recognized water-resistive and air barrier. The sheathing panel seams are sealed with ZIP System™ tape, protecting the wall from water intrusion. When ZIP System® sheathing is utilized for roof applications, felt underlayment is not required. In wall and roof coverings system requiring multiple layers of water-resistive barriers or underlayment, ZIP System® sheathing and tape is intended to replace only the first layer.

ZIP System® sheathing can be used with a range of exterior claddings and roof coverings. Approved wall coverings include brick, vinyl, stone, wood fiber cement, wood and cedar shakes, traditional hard coat stucco and EIFS applications, however it is not recommended for use with adhesively attached EIFS. Approved roof coverings include asphalt-fiberglass shingles, metal tiles and panels, clay and concrete tiles, slate and slate-type shingles and wood shakes and shingles. Follow all cladding and roof covering manufacturer's installation instructions. ZIP System® sheathing may be used for roofs and walls in Type V construction, in Type III construction as roof sheathing only, and other construction permitted under the International Residential Code.




ZIP SYSTEM® SHEATHING // NOTES & LIMITATIONS

- Do not use on roofs with slopes less than 2/12.
- Do not use abutted against general stone or masonry without providing a minimum of a 1/2" gap.
- Do not install ZIP System[™] tape in temperatures less than 0° F
- ZIP System products are not recommended for manufactured housing applications that are built under a federal building code administered by the U.S. Department of Housing and Urban Development (HUD).
- Do not use ZIP System[™] tape to permanently seal around circular roof projections (plumbing vents, pipes, curved walls, etc.)
- ZIP System® sheathing should be covered with the finished roof covering or exterior cladding within 180 days of installation.
- Finished roof and exterior cladding products should be installed per the manufacturer's installation instructions.



ZIP SYSTEM® SHEATHING // NOTES & LIMITATIONS

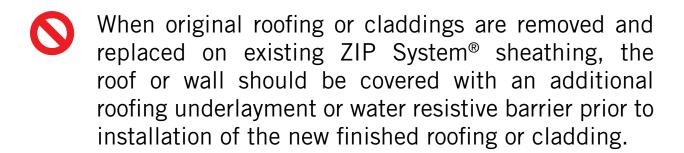

In cladding systems requiring multiple layers of water-resistive barriers, like traditional hard-coat stucco, ZIP System® sheathing is intended to replace only the first layer.



ZIP SYSTEM® SHEATHING // NOTES & LIMITATIONS

WET BLOWN CELLULOSE INSULATION

In addition to following manufacturer installation instructions, we recommend a maximum moisture content of the cellulose of less than 25% measured at the inside surface of the ZIP System® panel before closing the wall cavity.

SECONDARY COATINGS

Do not apply secondary coatings or treatments to ZIP System[®] sheathing panels with the exception of the following:

Field applied water-soluble borate insecticide or fungicide treatments applied to the non overlay side of the panel. See technical tip, "Termite Treatments on ZIP System® sheathing," on ZIPSystem.com for more information.

Permeable laminated radiant barrier foil or paint. For a radiant barrier foil or coating to be considered permeable, it must have an applied permeance of five perms or greater as tested by the ASTM E 96 wet cup standard. For a radiant foil, the permeance evaluation would include any adhesive and/or backer used to laminate a foil. For a radiant paint/coating, the permeance evaluation should be conducted at the applied thickness of the paint/coating.

2



ZIP SYSTEM® SHEATHING // STORAGE & HANDLING



Set panel stack on three supports (stickers) to keep off the ground.



Outdoors, cover panels loosely with waterproof protective material.



Anchor covers on top of the stack, but keep away from sides and bottom to assure good air circulation.



In high moisture environments, cut banding on the panel stack to prevent edge damage.





ZIP SYSTEM® SHEATHING // PANEL SIZES

ZIP System® sheathing panels are available in 4' x 8' sheets with self-spacing edge profiles and tongue and groove edge profile (5/8 only). ZIP System® panels are Exposure 1 rated and are available in the following span ratings and performance categories.

The green ZIP System sheathing denotes a 7/16-inch panel while the sienna ZIP System sheathing denotes either a 1/2-inch or 5/8-inch panel. Both the green and the sienna can be used interchangeably for the wall or roof.

24/16, Structural 1, 7/16 PERF CAT

NOTE: 4' x 8' 7/16-inch Structural 1 are not available in all areas of the country. Please check with your supplier for availability in your area. Available lengths in 7/16 thickness:

- 4' x 8'
- 4' x 9'
- 4' x 10'

32/16, Structural 1, 1/2 PERF CAT

Available lengths in 1/2 thickness:

- 4' x 8'

40/20, Structural 1, 5/8 PERF CAT

Available lengths in 5/8 thickness:

- 4' x 8'

Longer length panels are available for wall applications.



ZIP SYSTEM® SHEATHING // TAPE SIZES

ZIP System[™] tape rolls are available in 3-3/4 inch and 6 inch widths.

ZIP System[™] stretch tape rolls are available in 6 inch and 10 inch widths.








ZIP SYSTEM® SHEATHING // FASTENING

ZIP System® sheathing <u>circles</u> denote 16 inch o.c. framing and <u>squares</u> denote 24 inch o.c. framing.

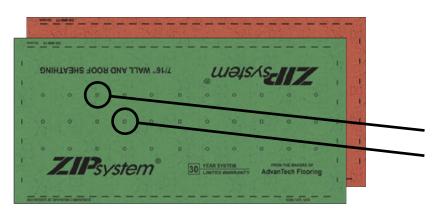

SQUARE = 24 inch o.c. framing

CIRCLES = 16 inch o.c. framing



ZIP SYSTEM® SHEATHING // GENERAL INFORMATION & COMPATIBILITY

FASTENERS

ZIP System® sheathing must be installed with code-approved fasteners and by code approved methods. Please note, fasteners used to install ZIP System® sheathing are not required to be ring-shank, galvanized, stainless steel unless otherwise stated by the local building code, designer of record or the engineer of record.

COMPATIBLE SUBSTRATES

ZIP System[™] tape is compatible with dimensional lumber (treated and untreated), OSB, plywood, house-wraps, PVC, vinyl and metal substrates. Please note, the ZIP System[®] panel substrate must be dry to the touch and free of any dirt or debris at the time of tape installation.

SEALANTS

ZIP System® sheathing and tape is compatible with butyl, polyurethane and 100% silicon sealants. When using 100% silicon sealants over ZIP System™ tape use a primer such as 3M Hi-Strength 90 or rub the tape with an acetone cleaner. Please note, when installing ZIP System™ tape over sealants the sealants must be completely cured before the tape is installed.



ZIP SYSTEM® SHEATHING // GENERAL INFORMATION & COMPATIBILITY

FLASHINGS - TAPES

ZIP System[™] tape must be used where two ZIP System[®] panels come together to create a seam at inside corners, outside corners and in the same plane; however, other code approved flashing tapes that satisfy AAMA-711 or AC-148 can be used to flash penetrations and fenestrations.

FLASHINGS - FLUID APPLIED

ZIP System[™] liquid flash can be used in lieu of ZIP System[™] tape where two ZIP System[®] panels come together to create a seam at inside corners, outside corners and in the same plane. Other code approved liquid applied flashing membranes that satisfy AAMA-714 can be used to flash penetrations and fenestrations. When using Liquid Flash or other fluid applied flashing products over ZIP System[™] tape, use a primer such as 3M Hi-Strength 90 or rub the tape with an acetone cleaner.

WRINKLES IN THE TAPE

Rolling the tape during installation will significantly reduce the chance of tape wrinkling occurring. If wrinkles occur in the ZIP System tape there are two options. First, try to roll the wrinkles out with the ZIP System™ tape roller. This should help eliminate any wrinkles or fish mouths (avenues for water to get to the seam). Secondly, if rolling the tape does not remove the fish mouths that section of tape can be removed and a new piece of tape must be applied that overlaps the existing tape by three inches or place another piece of tape over the fish mouth and roll the tape.



ZIP SYSTEM® SHEATHING // GENERAL INFORMATION & COMPATIBILITY

PARAPET WALL TERMINATION

ZIP System® sheathing used as parapet wall sheathing is compatible with TPO and EPDM built-up roofing membrane terminations. It is recommended to transition from the top of the built-up membrane to the surface of ZIP System® sheathing with a piece of ZIP System™ tape or ZIP System™ liquid flash. Refer to roofing membrane manufacturer's installation instructions to ensure the roofing membrane is firmly attached to the wall sheathing. Please note, a polyurethane or solvent based adhesive should be used when adhering the built-up membrane to ZIP System® sheathing, and that all panel seams should be taped prior to installing the built-up membrane over ZIP System® sheathing.

TOOLS

Common

- Pneumatic nail gun
- Framing hammer
- Air compressor
- Speed square
- Tape Roller
- PPE



Recommended

- Flush nail collars
- Air line regulators





ZIP SYSTEM® WALL SHEATHING // GENERAL INSTALLATION - WALL

The following installation steps are presented as a general outline of the installation process. These are manufacturer installation recommendations – please visit ZIPSystem.com for a library of flashing and installation details. You are fully and solely responsible for all safety requirements. Good construction and safety practices should be followed at all times.

ZIP SYSTEM® WALL SHEATHING // PANEL ORIENTATION AND SPACING

Install ZIP System® sheathing panels positioned with the water-resistive barrier facing outside. The panels may be installed with the long side of the panel oriented either horizontally or vertically to the framing members. Walls that are designed to resist lateral shear forces and sheathed with wood structural panels typically require solid framing or blocking behind all panel edges. If oriented horizontally, block horizontal joints if wall is designed for bracing or as a shear wall.



ZIP SYSTEM® WALL SHEATHING // PANEL ORIENTATION AND SPACING

- 1/8" spacing between square edges of all adjacent panels is recommended in accordance with industry standards for wood sheathing installation.
- The unique edge profile is designed to accommodate incremental panel expansion and does not require manual gapping along the 8' edges.
- Maintain 1/8" space where 8' panel edges meet 4' panel edges. Unique edge profile does not provide the full 1/8" recommended space in this situation.
- Maintain 1/8" space where 4' edges meet. Unique edge profile is on 8' edges only.
- For information on vertical panel installations, go <u>here</u> to learn more.

ZIP SYSTEM® WALL SHEATHING // FASTENING

Fasten the panels to the framing members with code approved fasteners. Space fasteners 6" o.c. along supported edges and 12" o.c. at intermediate supports, unless otherwise specified by local code or the designer of record. It's the responsibility of the general contractor to

verify proper fastener type and spacing prior to installation. Apply fasteners 3/8" from the ends and corners. ZIP System sheathing does not have proprietary shear values and have the same shear values of Structural 1* OSB or plywood of equivalent thickness.

*Note: 4' x 8' 7/16" ZIP System "Structural 1" panels are not available in all areas of the country. Please check with your local supplier for availability in your area.





ZIP SYSTEM® WALL SHEATHING // TAPING

Apply ZIP System[™] tape after all ZIP System[®] sheathing panels are fully fastened to wall-framing members. ZIP System[™] tape is a contact tape that requires pressure for an adequate seal.

REMEMBER TO ALWAYS:



Only ZIP System[™] tape should be used to seal the seams of ZIP System[®] panels, including inside and outside corners.



Ensure that the panel surface is dry and free of sawdust and dirt prior to taping.



Ensure that the tape is centered over the seam within +/- 1/2" to provide adequate coverage



Wherever tape splices occur at a horizontal or vertical seam, create an overlapping splice of at least 3".



At T-joints, tape pieces should overlap by at least 1".



Tape over any areas of the panel that are damaged during construction.



Use the ZIP System® tape gun or roller to apply pressure to the tape and smooth out any wrinkles.




ZIP SYSTEM® WALL SHEATHING // TAPING

Take special care to remove any voids and/or trapped air at splice areas and T-joints. When taping inside corner seams, it is helpful to cut a manageable length of ZIP System[™] tape and hold the ends in the middle using only your index fingers and thumbs. Slightly pulling both ends of the tape causes the tape edges to naturally curl inward. With the tape in tension, place it in the inside corner. Repeat as you go up the full height of the wall. For optimal air leakage reduction, all untaped edges of the panels can be caulked, gasketed or sealed with a weather stripping material.





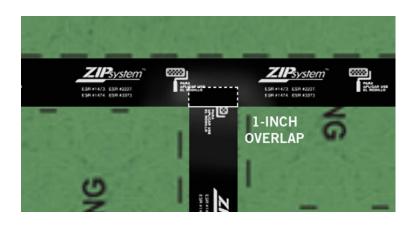







PIPES // ZIP SYSTEM™ TAPE AROUND BOOT

STEP 1: Insert the boot over the penetration




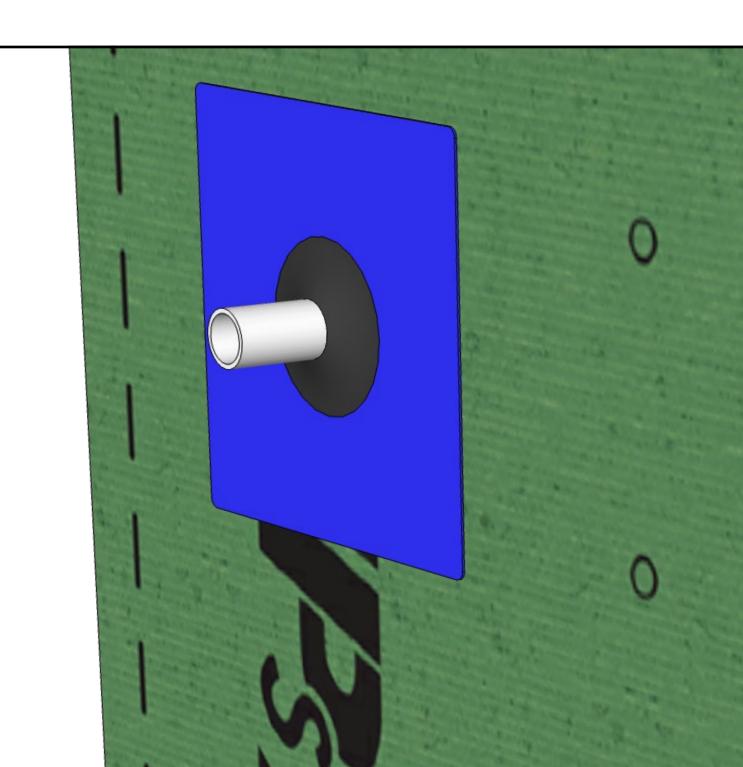




PIPES // ZIP SYSTEM™ TAPE AROUND BOOT

STEP 2: Place a piece of ZIP System[™] tape on the bottom of the boot




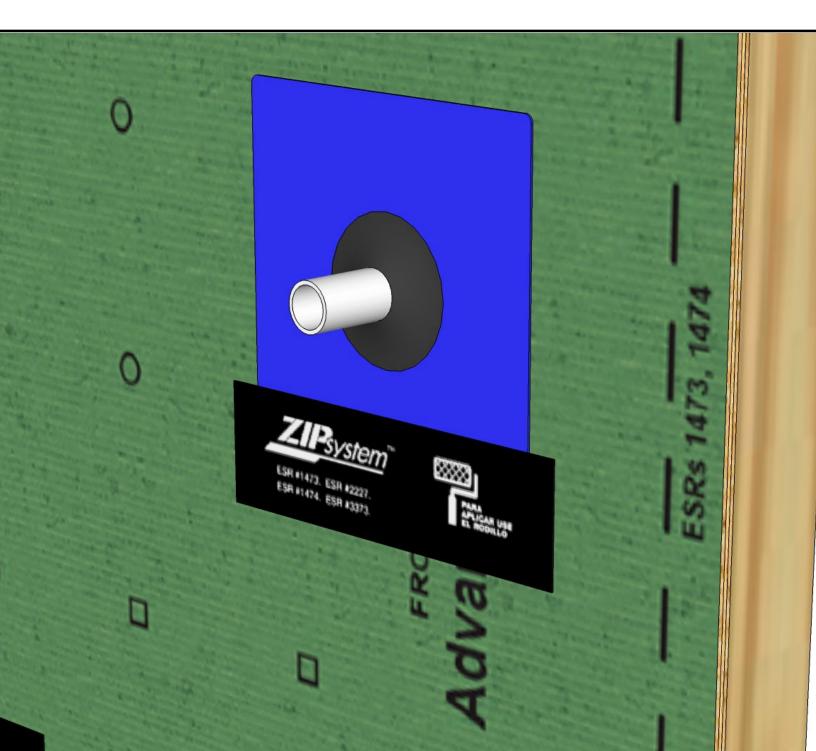




PIPES // ZIP SYSTEM™ TAPE AROUND BOOT

STEP 3: Place of piece of ZIP System[™] tape on each jamb of the boot




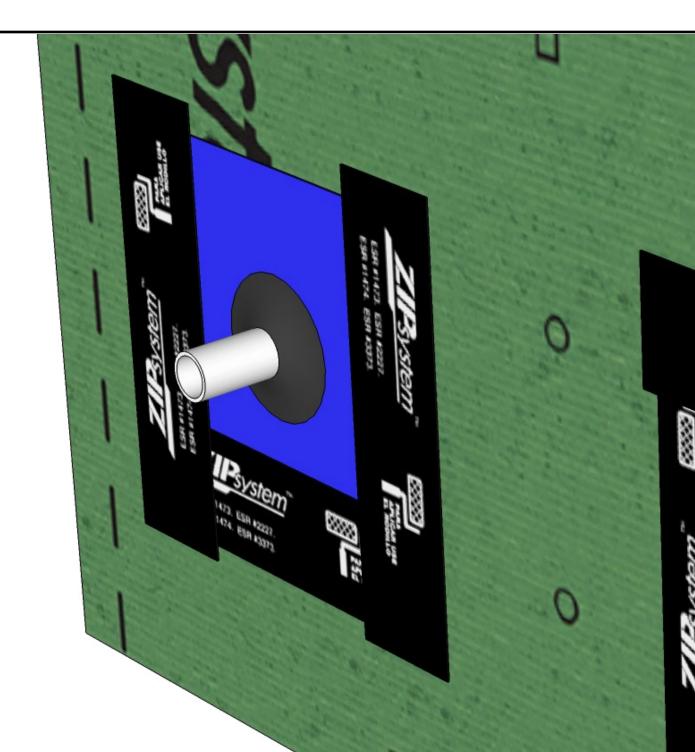




PIPES // ZIP SYSTEM™ TAPE AROUND BOOT

STEP 4: Place a piece of tape on the head of the boot and roll all pieces of tape



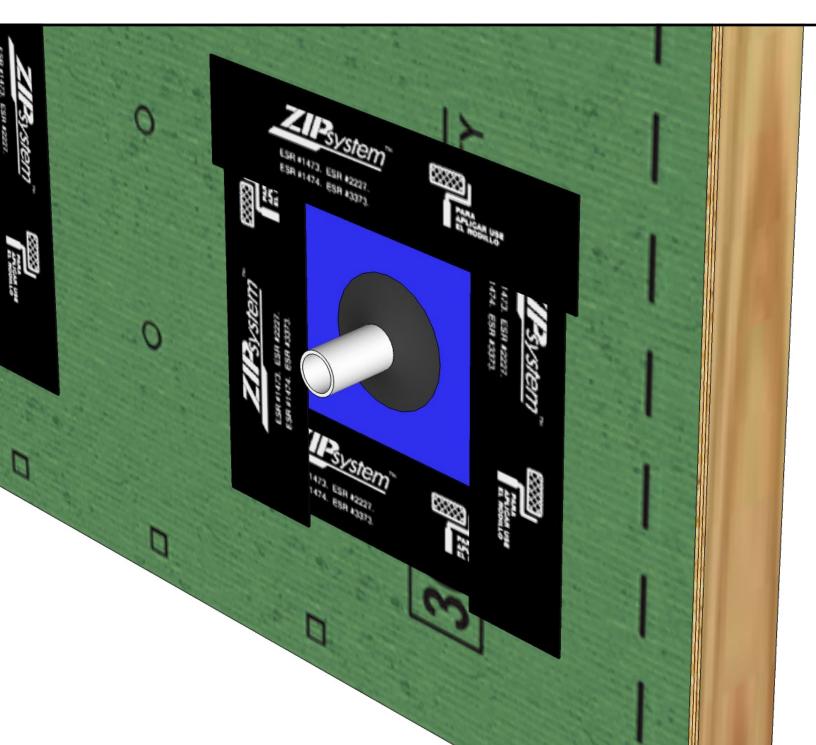


STRETCH TAPE



ZIP SYSTEM® WALL SHEATHING // COMMON DETAIL

PIPES // ZIP SYSTEM™ STRETCH TAPE


STEP 1: Starting from the top, center a piece of ZIP System[™] stretch tape so that the tape can be pulled down on either side of the pipe so the tape can meet together in the middle of the pipe.

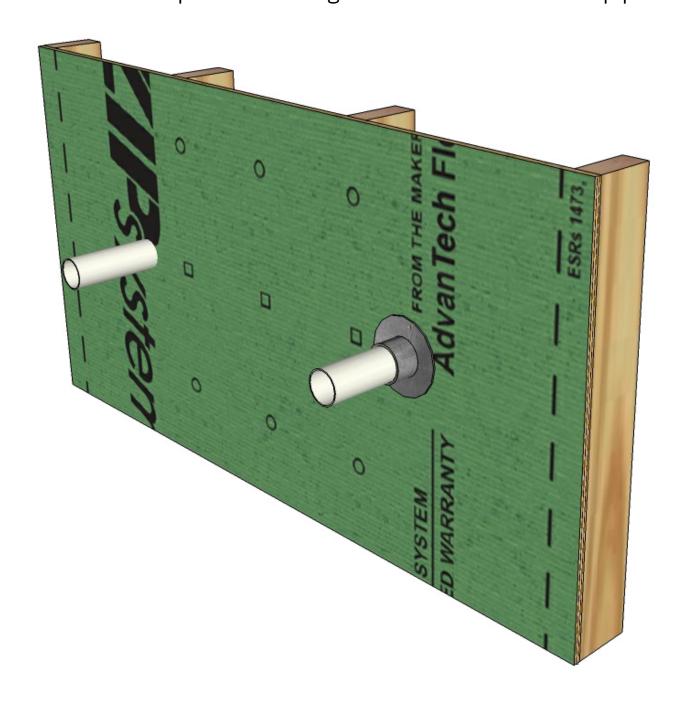



WINDOW // FLANGED WINDOW


STEP 1: Install a piece of ZIP System[™] stretch tape and install shims window per manufacturer's installation guidelines.

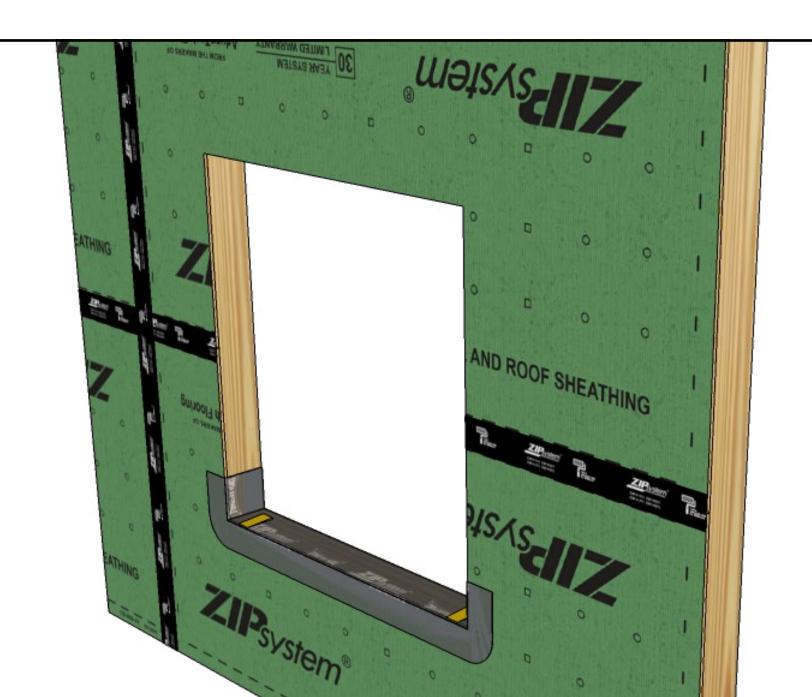



WINDOW // FLANGED WINDOW

STEP 2: Apply sealant on the back side of the window flange and set into the rough opening. Install ZIP System[™] tape on the window jambs.

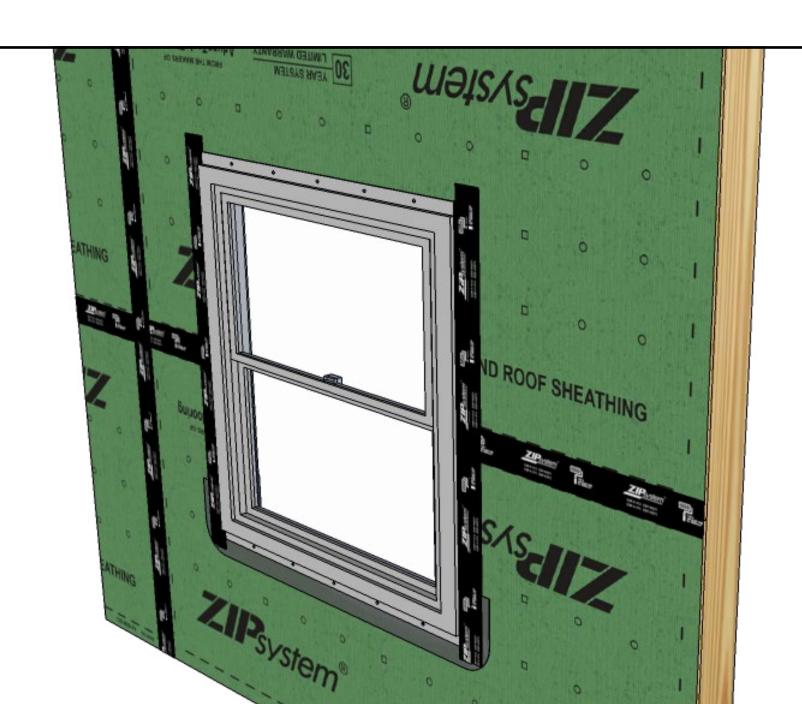




WINDOW // FLANGED WINDOW





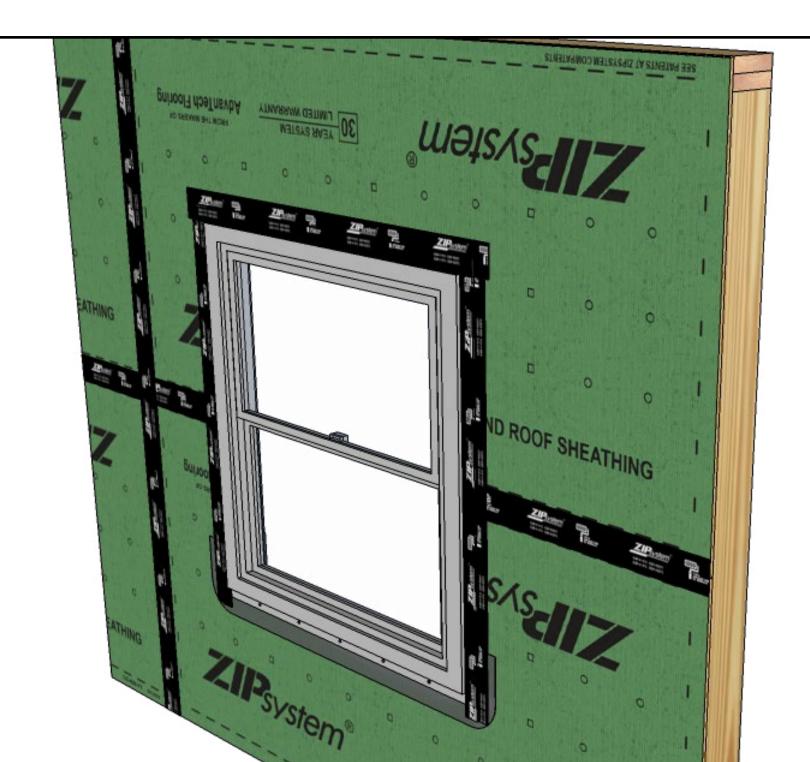



WINDOW // FLANGED WINDOW

STEP 4: Install head flashing above window.

Optional for self-flashed J-channel windows. Tape top head of flashing. From the back side of the window, install window/door foam per window manufacturer's installation guidelines.





WINDOW // FLANGED WINDOW

PRO TIP: From the interior, apply low-pressure polyurethane foam (for windows) between the rough opening and the window frame. (Caulk sealant compatible with the sill flashing may be used at the sill if the opening between the sill flashing and window is too narrow to allow the use of low-pressure polyurethane foam.)





WINDOW // STORE FRONT WINDOW

STEP 1: Install a piece of ZIP System[™] stretch tape in the window sill and then install ZIP System[™] tape in the jambs of the rough opening.





WINDOW // STORE FRONT WINDOW

STEP 2: Install a piece of ZIP System[™] stretch tape in the head of the rough opening overlapping the jamb flashing.





WINDOW // STORE FRONT WINDOW

STEP 3: Secure window in accordance to manufacturer's written instructions and insert a backer rod in between the gap of the rough opening and the window.






WINDOW // STORE FRONT WINDOW


SEALANT

STEP 4: Using ZIP System[™] liquid flash flash from the window frame on to the panel side.

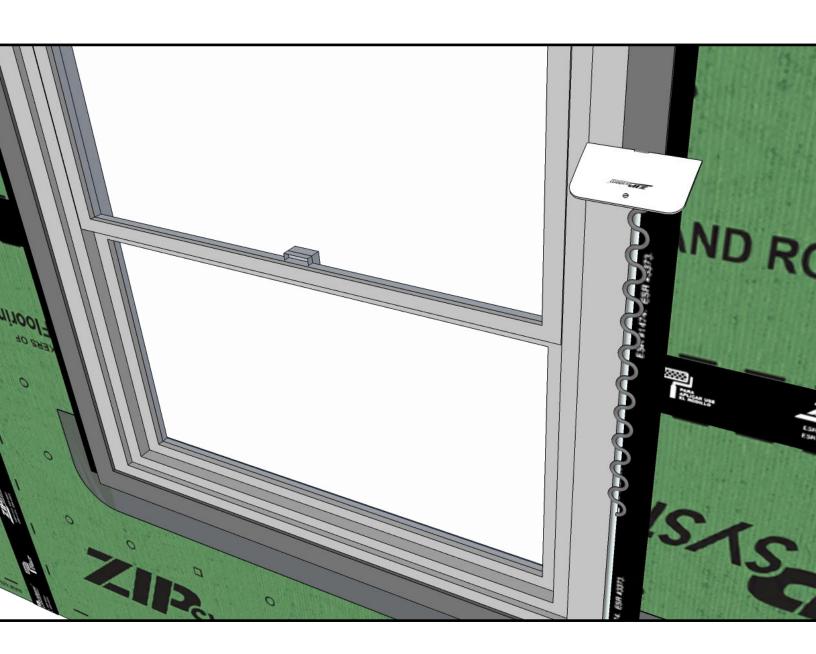



WINDOW // PICTURE FRAME WINDOW









WINDOW // PICTURE FRAME WINDOW

STEP 2: Install a piece of ZIP System[™] tape over the buck and minimum of 2 inches of the surface of ZIP System[®] sheathing. Install a piece of ZIP System[™] stretch tape into the rough opening. Next, apply sealant on the back side of the window flange and set the window into the rough opening.




TAPE



ZIP SYSTEM® WALL SHEATHING // COMMON DETAIL

WINDOW // PICTURE FRAME WINDOW


STEP 3: Install a piece of ZIP System[™] tape over the window flange jamband a minimum of 2 inches of the surface of ZIP System[®] sheathing.

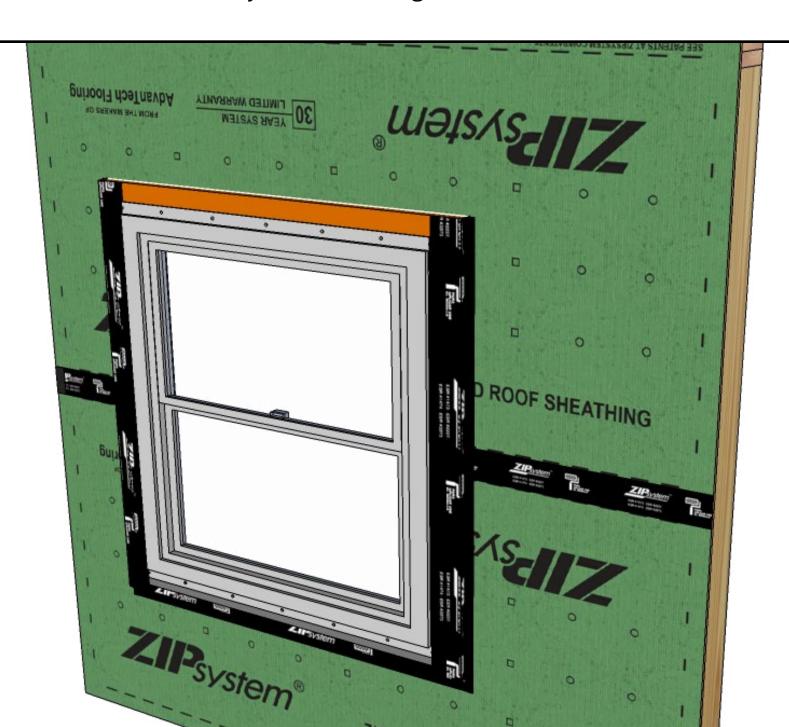



WINDOW // PICTURE FRAME WINDOW

STEP 4: Install a piece of ZIP System[™] tape over the head of the window flange and over a minimum of 2 inches of the surface of ZIP System[®] sheathing. At the top corners of the picutre frame window install a piece of ZIP System[™] stretch tape.

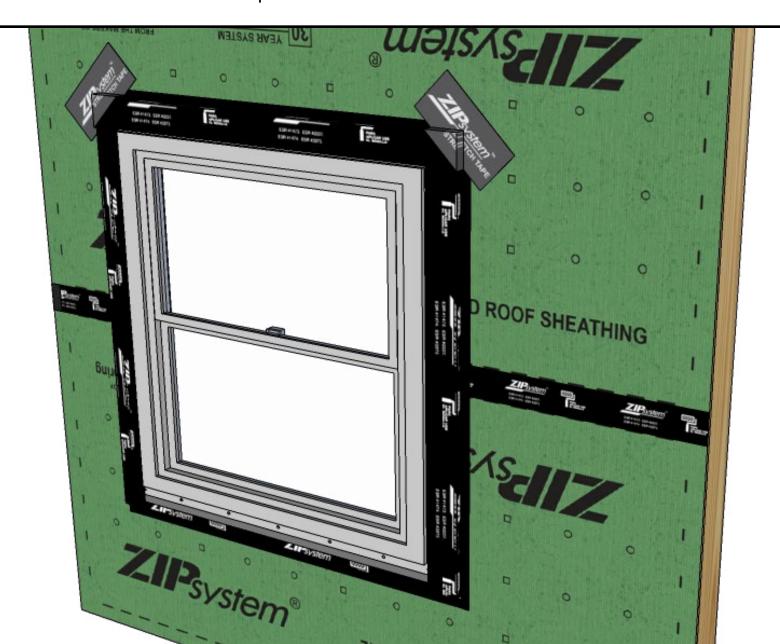



WINDOW // RECESSED WINDOW


STEP 1: Install ZIP System[™] liquid flash into the rough opening.








WINDOW // RECESSED WINDOW





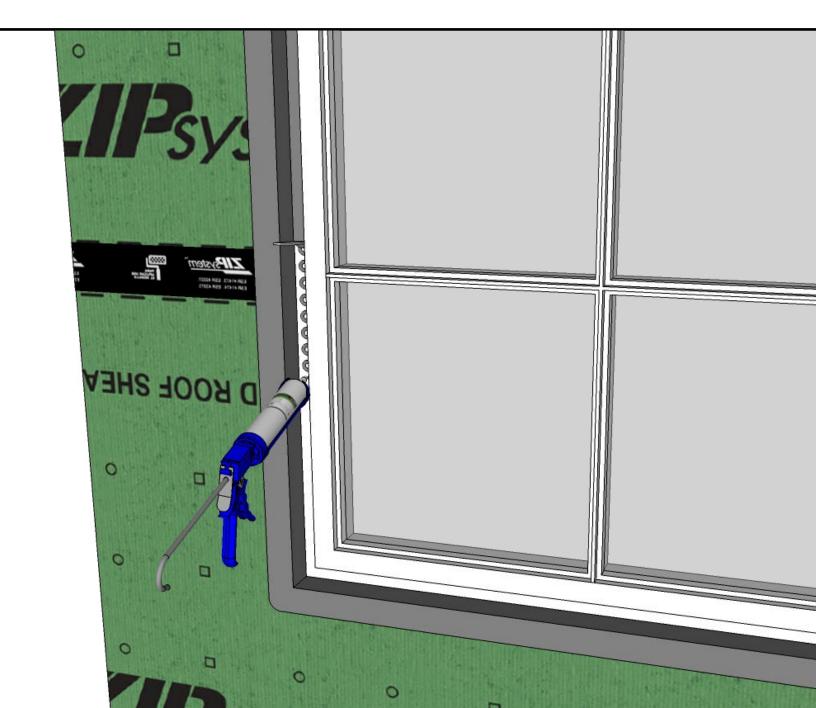



WINDOW // RECESSED WINDOW


STEP 3: Secure window to manufacturer written instructions, install ZIP System™ liquid flash on to the flange of the window on to the existing liquid flash a minimum of 1 inch.





DOOR // TYPICAL BRICK MOULD DOOR


STEP 1: Install ZIP System[™] tape in the jambs of the rough opening. Install sealant as three separate beads in the threshold and minimum of 6-inch up the jambs.

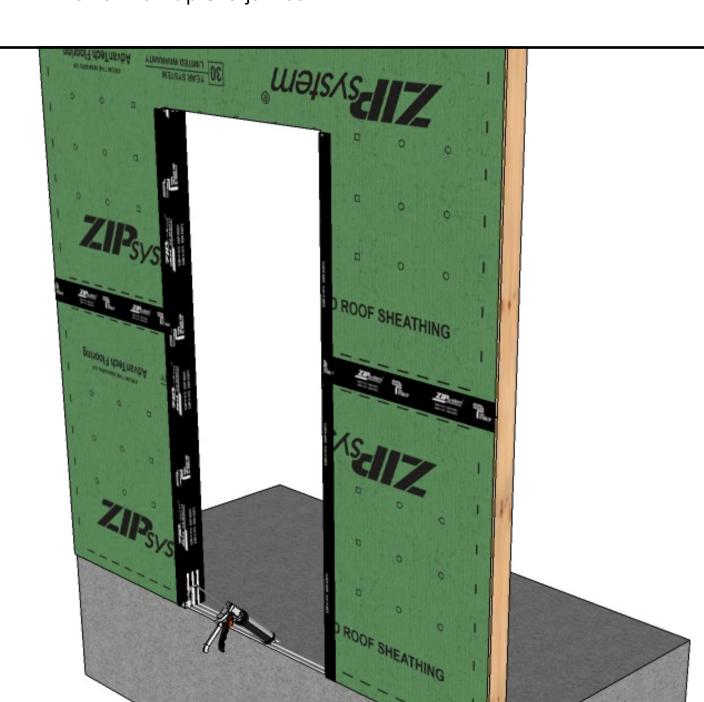



DOOR // TYPICAL BRICK MOULD DOOR


STEP 2: Once the door has been installed into the rough opening in accordance to the manufacturer's installation guidance, apply a bead of sealant at molding/ZIP System® sheathing intersection.

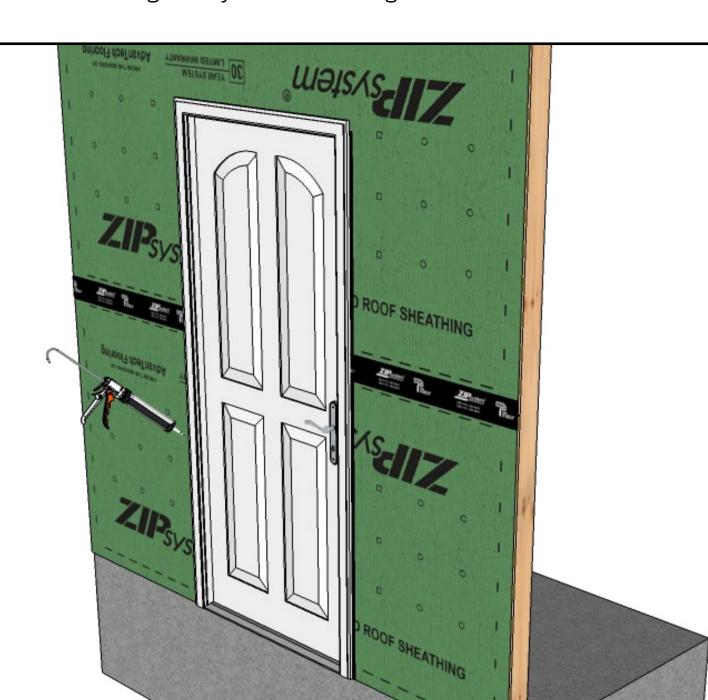




DOOR // TYPICAL BRICK MOULD DOOR

STEP 3: Install head flashing above door and then tape top of head flashing.



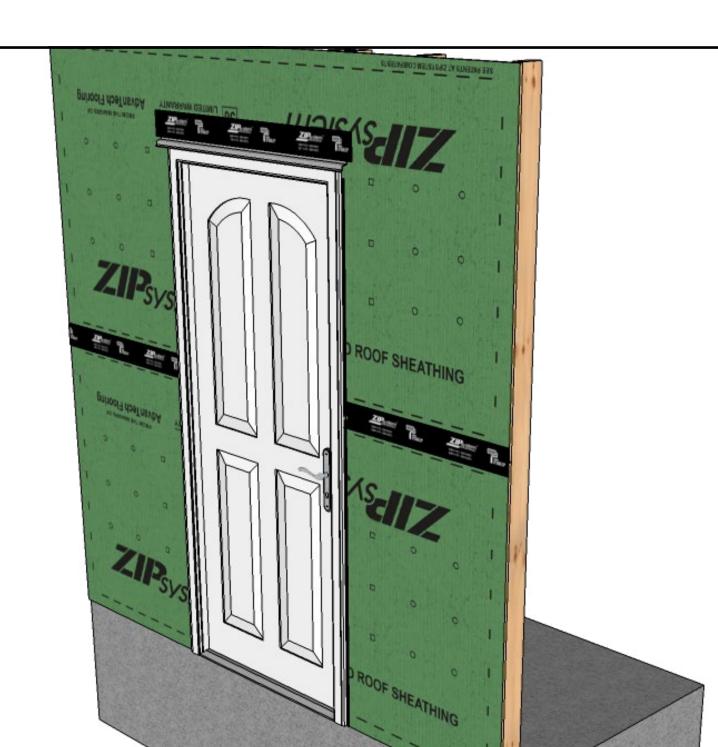




TRANSITIONS // FOUNDATION TRANSITION

SHEATHING IN PLANE WITH FOUNDATION WALL:

Hold the bottom edge of ZIP System® sheathing a minimum of ½ inch from the foundation wall.

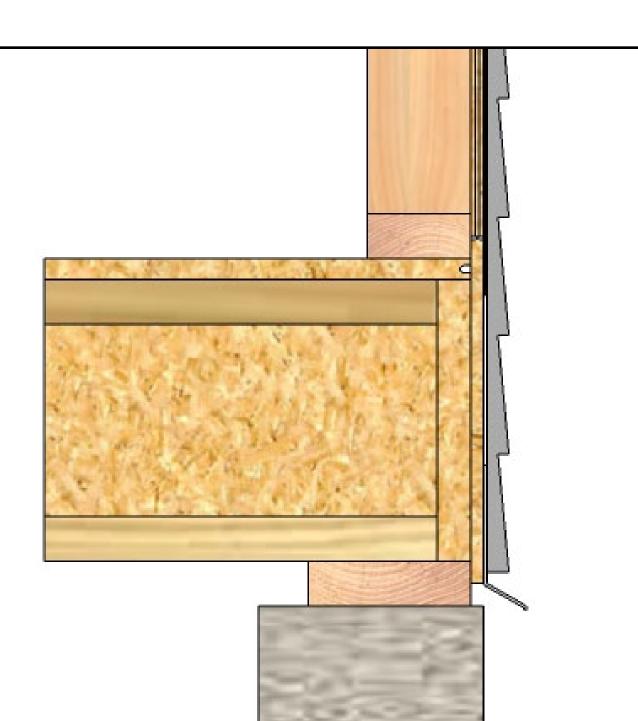




TRANSITIONS // FOUNDATION TRANSITION

SHEATHING OUT OF PLANE WITH FOUNDATION WALL:


Install ZIP System® sheathing in line with the bottom of the sill plate.

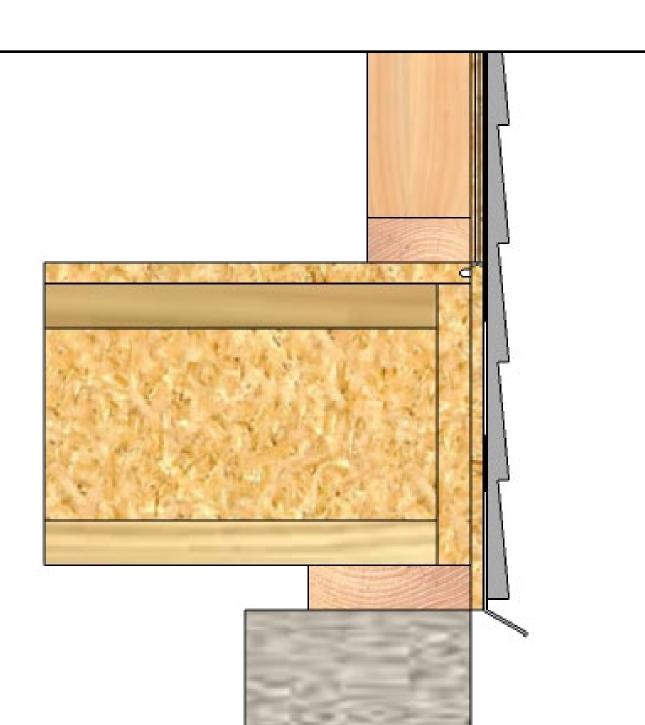




STRAPPING

Tape the ZIP System® sheathing panel edges prior to installing strapping.




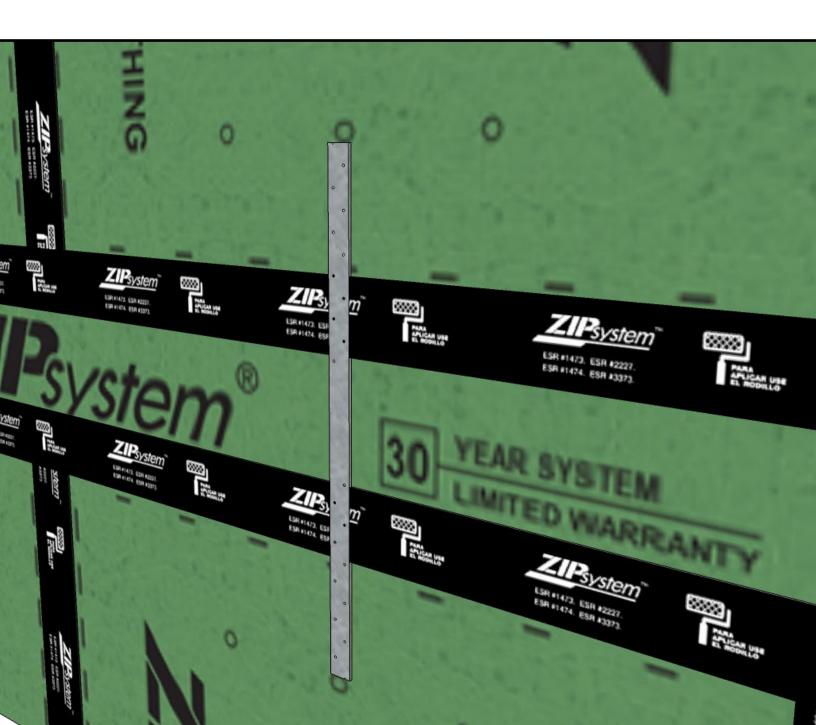




CLADDING // LAPPED

STEP 1: Tape top edge of drip edge back to the surface of ZIP System® sheathing.

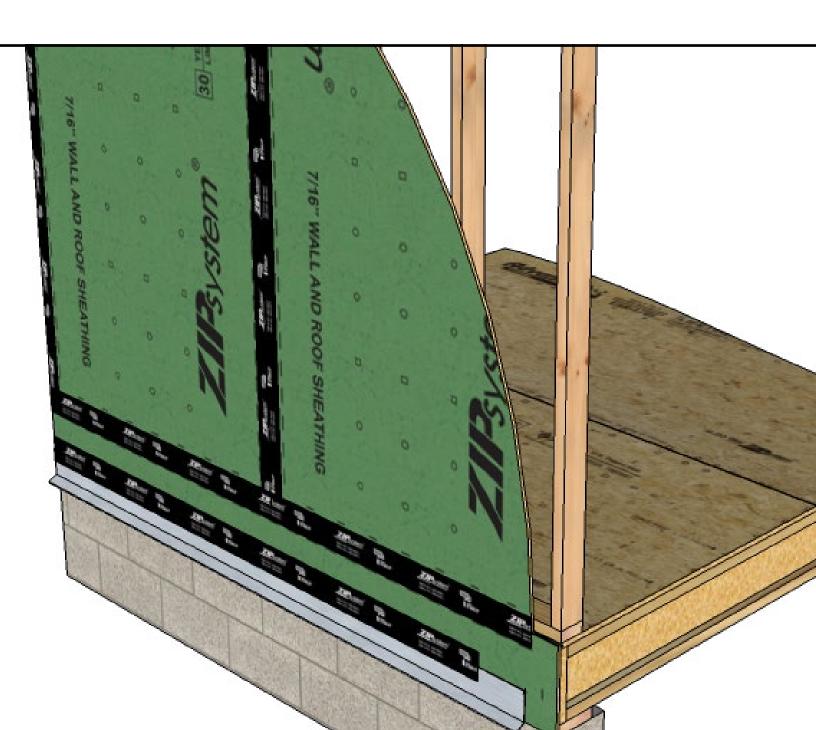

CLADDING // LAPPED


STEP 2: Install lapped siding in accordance to siding manufacturer's written instructions.

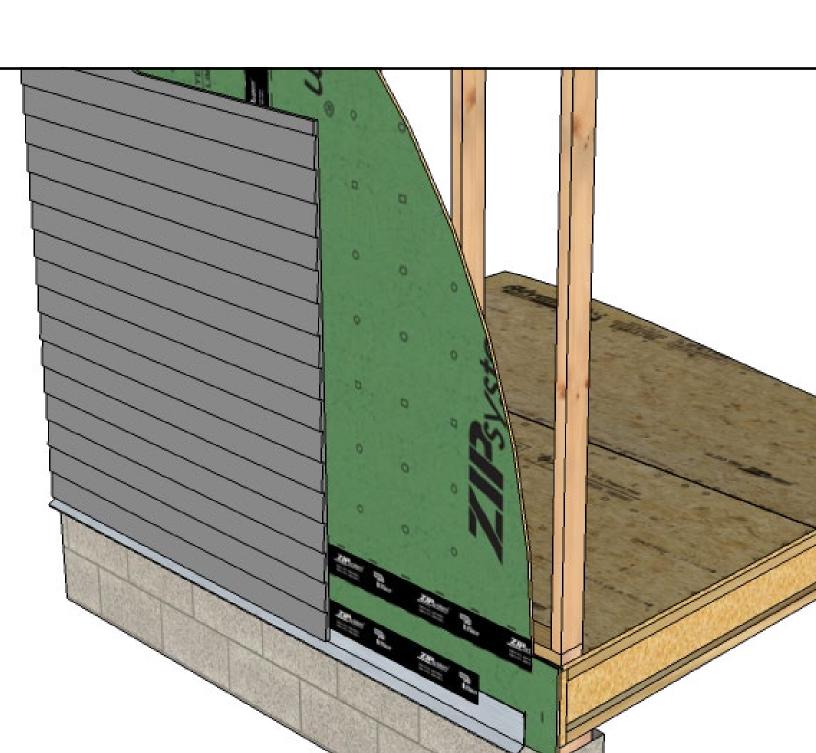



CLADDING // BRICK


STEP 1: Tape the top edge of the masonry flashing back to the ZIP System® sheathing. Install brick ties in accordance to local building code and brick tie manufacturer's written instructions.

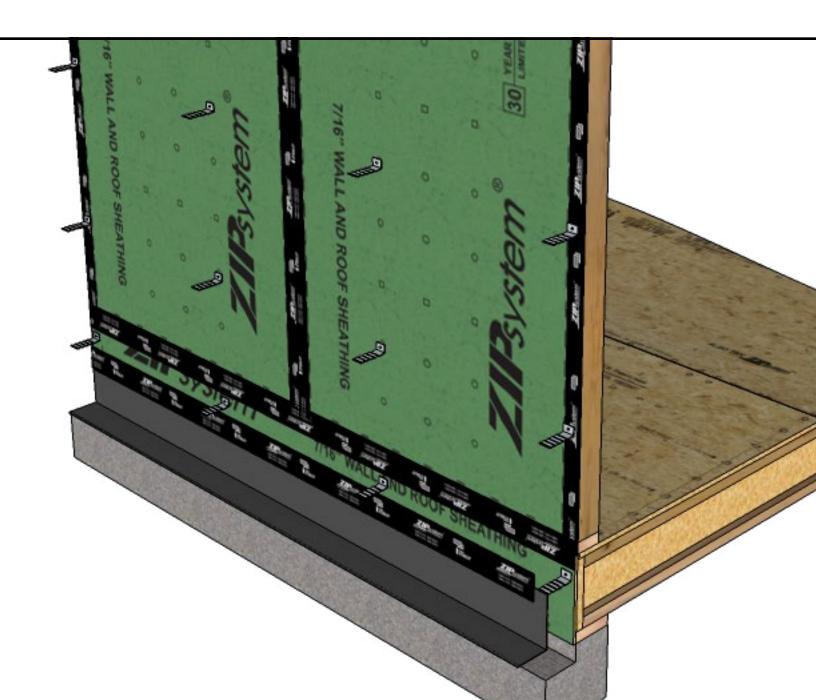



CLADDING // BRICK


STEP 2: Install brick veneer with a minimum of a 1 inch air space per the local building code.

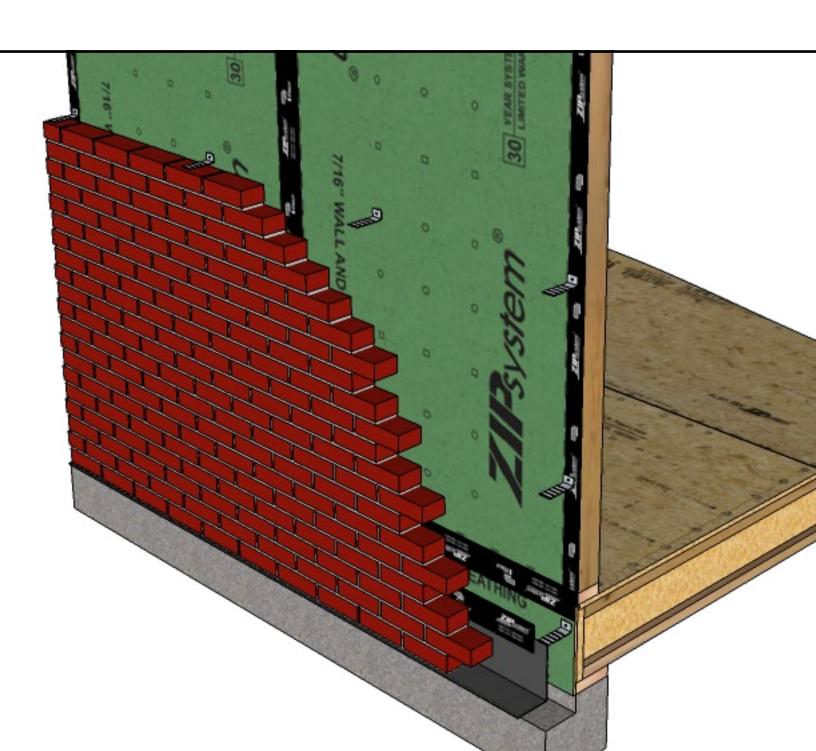



CLADDING // STUCCO


STEP 1: Tape the top edge of the weep screen flashing back to the ZIP System® sheathing. Install a mechanically fastened water resistive barrier equivalent to a Grade D felt paper after all ZIP System® sheathing panel seams have been taped.

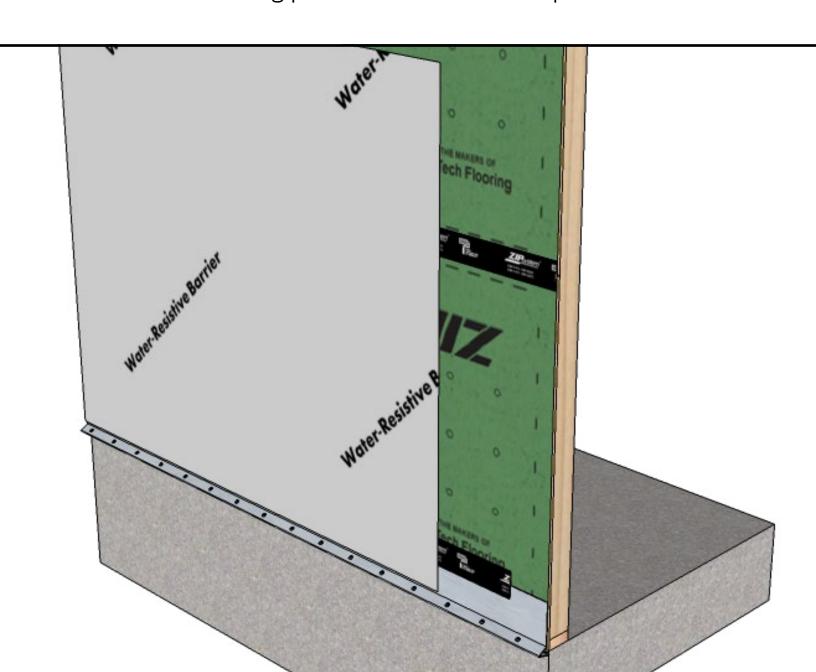



CLADDING // STUCCO


STEP 2: Install wire mess, scratch coat, brown and finish in accordance to stucco manufacturer's written instructions. Install expansion joints as needed.

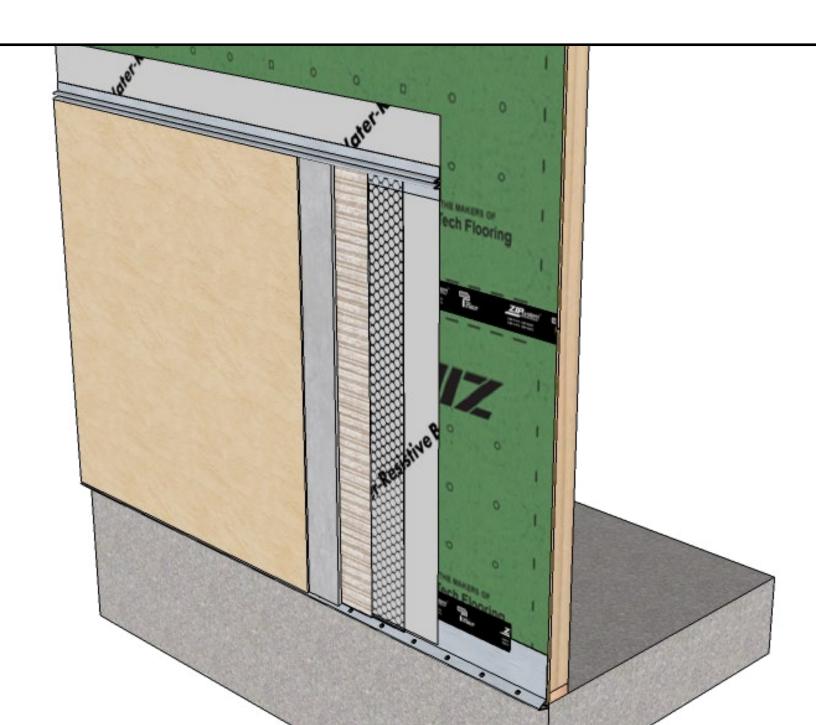



CLADDING // STONE


STEP 1: Tape the top edge of the drip edge/weep screen flashing back to the ZIP System® sheathing. Install a mechanically fastened water resistive barrier equivalent to a Grade D felt paper after all ZIP System® sheathing panel seams have been taped.

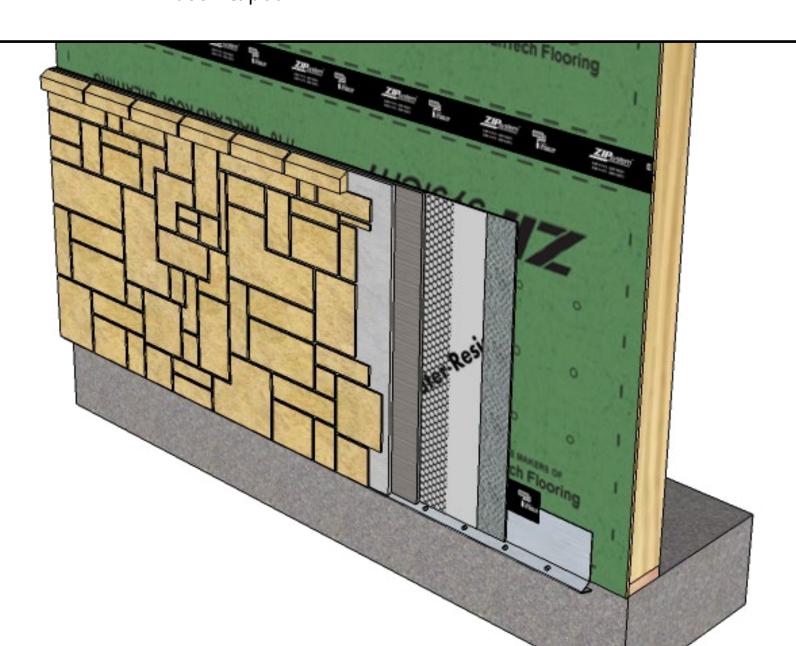



CLADDING // STONE


STEP 2: Install wire mesh, scratch coat, brown and finish in accordance to stone manufacturer's written instructions.

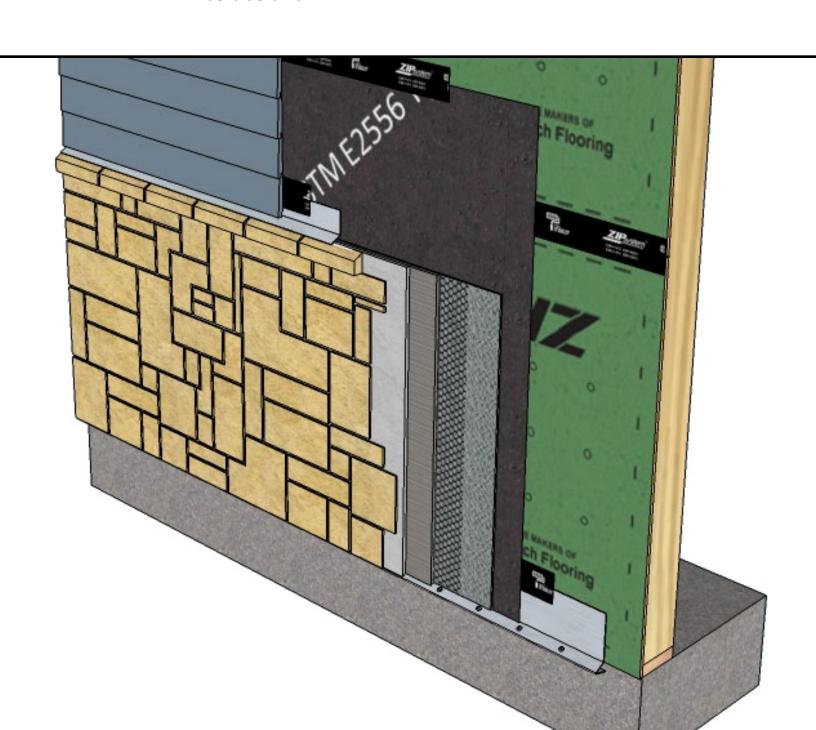



CLADDING // EIFS


STEP 1: Tape the top edge of the drip edge back to the ZIP System® sheathing. Install foam layer using mechanical fasteners.

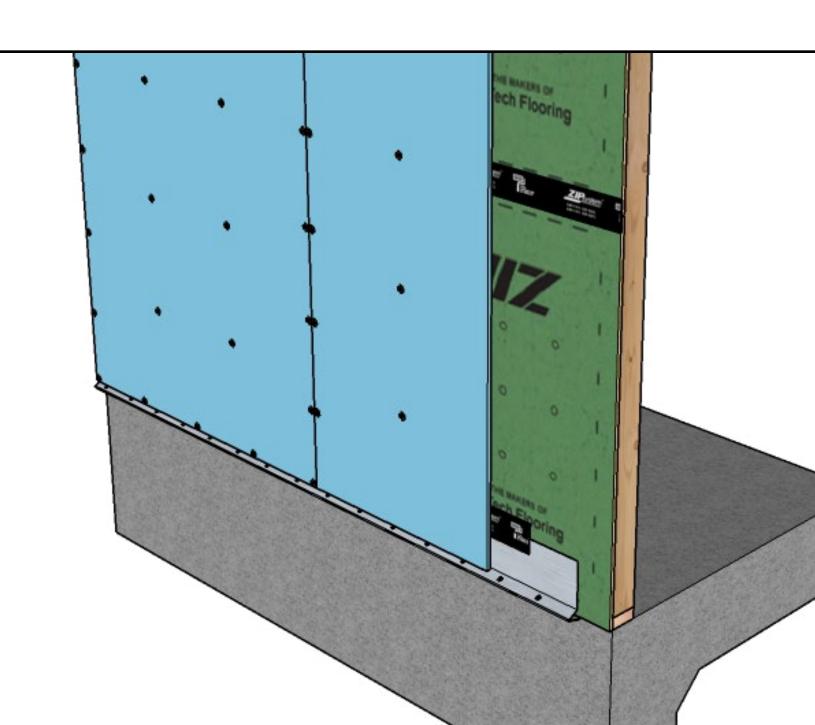



CLADDING // EIFS


STEP 2: Install wire mesh, scratch coat, brown and finish in accordance to EIFS written instructions. Install expansion joints as needed.

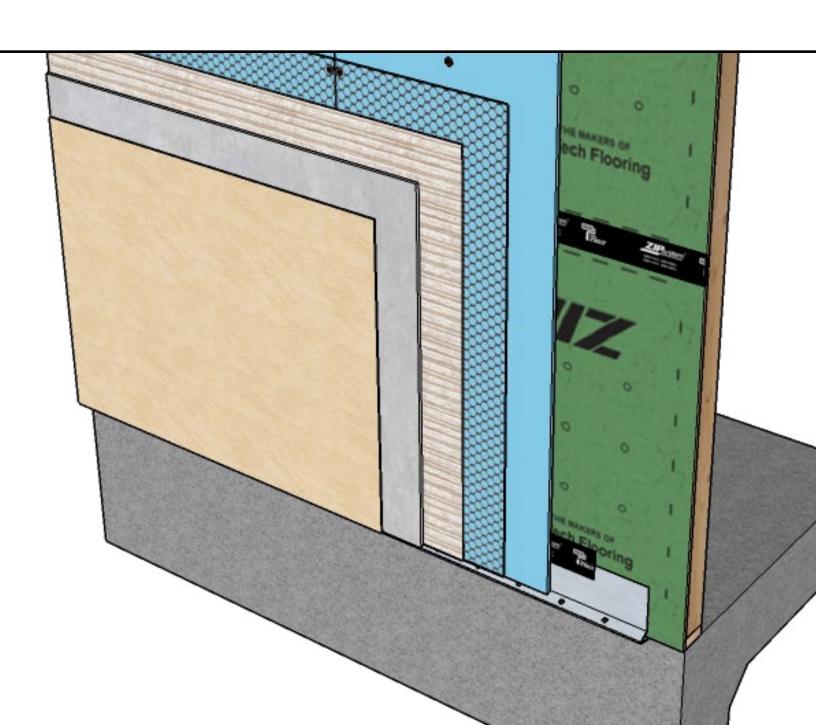



DECKS & PORCHES


STEP 1: Install ledger board in accordance to designer of record.

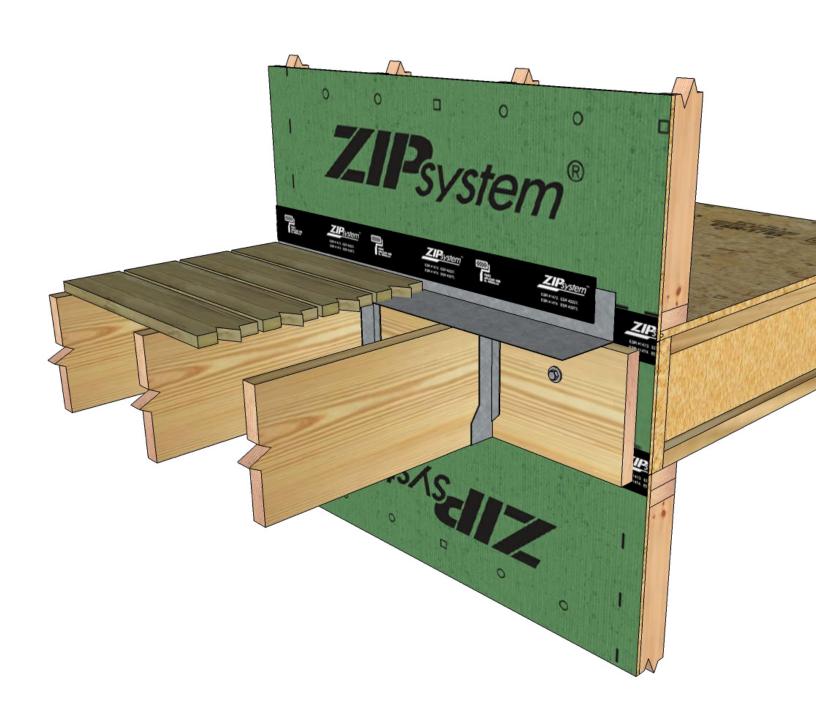



DECKS & PORCHES

STEP 2: Tape the top edge of the drip edge back to the ZIP System® sheathing.

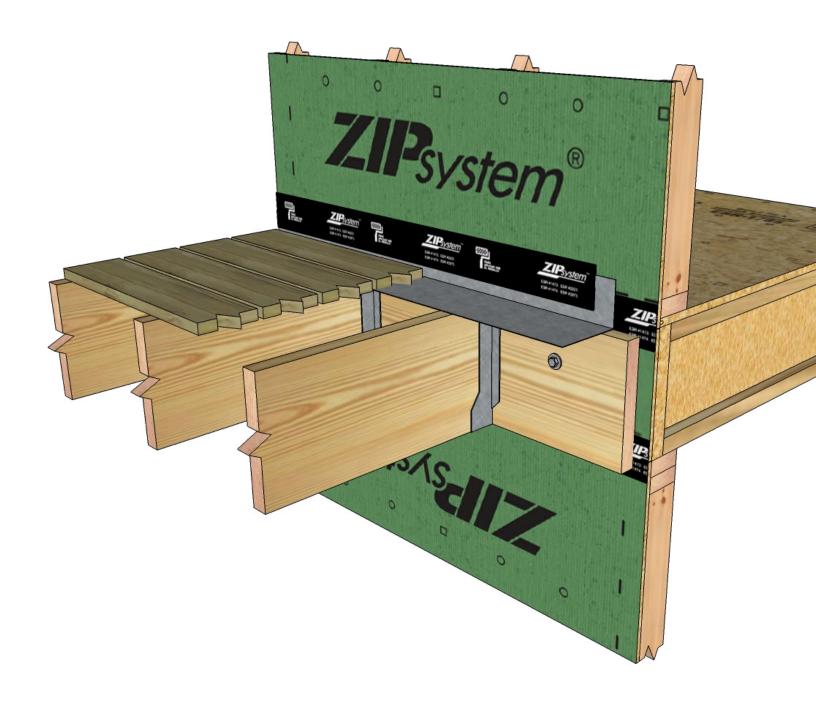




ZIP SYSTEM® ROOF SHEATHING // GENERAL INSTALLATION - ROOF

The following installation steps are presented as a general outline of the installation process. These are manufacturer installation recommendations – please visit ZIPSystem.com for a library of flashing and installation details. You are fully and solely responsible for all safety requirements. Good construction and safety practices should be followed at all times.

ZIP SYSTEM® ROOF SHEATHING // PANEL ORIENTATION AND SPACING

Ensure that the panel surface is dry and clean of any nails, sawdust, or other debris or protrusions prior to installing or walking on the panels.


After ensuring compliance OSHA with all and local safety guidelines, install code ZIP System® sheathing panels moisture with the barrier surface facing outside. The long edge (8') should be oriented perpendicular to the framing members, and panels should be installed with the 4' edge seams staggered a minimum of 24"





ZIP SYSTEM® ROOF SHEATHING // PANEL ORIENTATION AND SPACING

1/8" spacing between square edges of all adjacent panels is recommended, in accordance with industry standards for wood sheathing. The unique edge profile is designed to accommodate incremental panel expansion and does not require manual gapping along the 8' edges.



Maintain 1/8" space wherever the tongue and tongue profile does not exist. Unique edge profile is on 8' edges only. Ensure that ZIP System® panels span at least three

4' edge meets 4' edge

framing members and a framing member supports the entire 4' edge of the panels.

Fasten the ZIP System® sheathing panel to framing members with code approved fasteners spaced at the appropriate edge and intermediate spacing. It's the responsibility of the general contractor to verify proper fastener type and spacing prior to installation. Apply the fasteners 3/8" from the panel ends and corners.

We recommend the use of code recognized fasteners with the head of the fastener driven flush to the surface of the ZIP System® panel. Flush fastener placement is best achieved by properly setting the nail gun air compressor to the manufacturer's recommended setting or using in-line pressure regulators. Many nail guns have depth control adjustments to ensure fasteners are driven flush. For tools that do not have a depth control adjustment feature, we recommend fitting a flush drive attachment collar on the end of the gun to help limit fastener embedment depth.



ZIP SYSTEM® ROOF SHEATHING // TAPING

Apply ZIP System[™] tape after all ZIP System[®] sheathing panels are fully fastened to roof-framing members. Only ZIP System[™] tape should be used to seal the seams of ZIP System[®] panels. Ensure that the panel surfaces are dry and free of any nails, sawdust and other debris, or protrusions. Avoid stepping on tape in high temperature environments. ZIP System[™] tape is a contact tape that requires pressure for an adequate seal.

NOTE: For optimal air leakage reduction, all untaped edges of the panels can be caulked, gasketed or sealed with a weather stripping material.

Use the ZIP System® tape gun or roller to apply pressure to the tape and smooth out any wrinkles.



ROOF COVERINGS

ZIP System® sheathing is code recognized sheathing and underlayment and is approved for use with following roof coverings:

Asphalt-fiberglass Shingles Metal Roofs (shingles and panels) Clay, Concrete Tile Slate and Slate-type Shingles Wood Shingles and Wood Shakes

When installing roof coverings follow applicable codes and manufacturer's suggested instructions. Some roof coverings require a slip-sheet in additional to conventional underlayment. Where slip-sheets are required, they should be installed over ZIP System® sheathing panels after all seams are taped with ZIP System $^{\mathbb{M}}$ tape. Visit ZIPSystem.com for updates and installation details.

ZIP System® sheathing is intended to replace the first layer of underlayment required by the IBC and/or IRC. Additional layers of underlayment may be required by code depending on the local climate. ZIP System® sheathing is not be construed as a replacement for interlayment. Apply wood shakes on roofs with slopes 4/12 or greater. Install wood shakes according to applicable codes and manufacturer's instructions.




ZIP SYSTEM® ROOF SHEATHING // COMMON DETAIL ROOF COVERINGS // ASPHALT-FIBERGLASS SHINGLES





ZIP SYSTEM® ROOF SHEATHING // COMMON DETAIL ROOF COVERINGS // METAL ROOFS

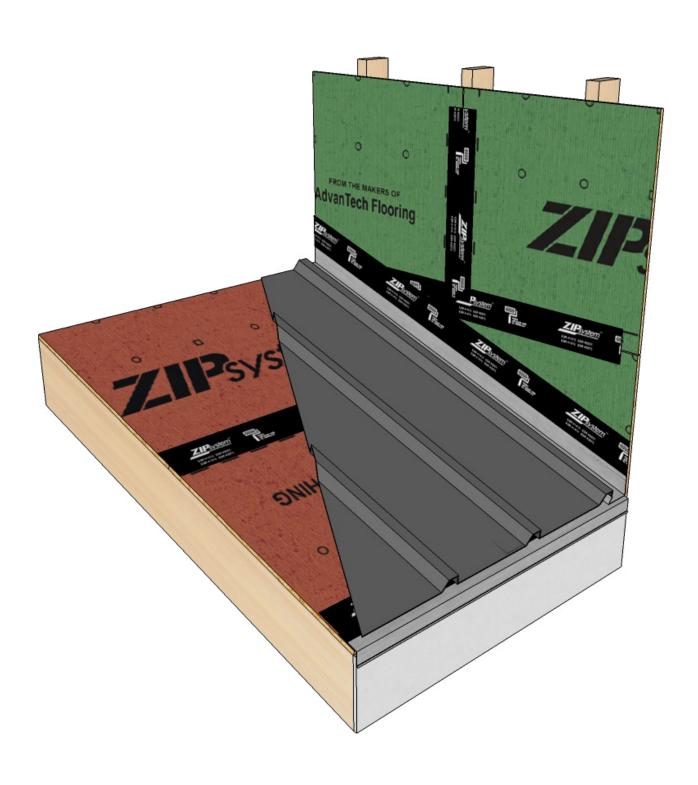




ZIP SYSTEM® ROOF SHEATHING // COMMON DETAIL ROOF COVERINGS // CLAY, CONCRETE TILE






ZIP SYSTEM® ROOF SHEATHING // COMMON DETAIL ROOF COVERINGS // SLATE

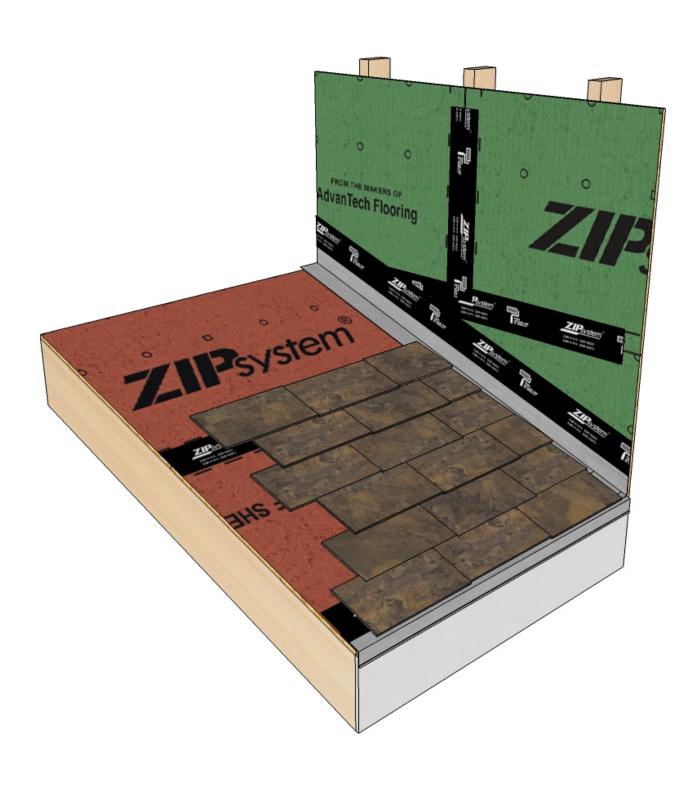



ZIP SYSTEM® ROOF SHEATHING // COMMON DETAIL ROOF COVERINGS // WOOD SHINGLES

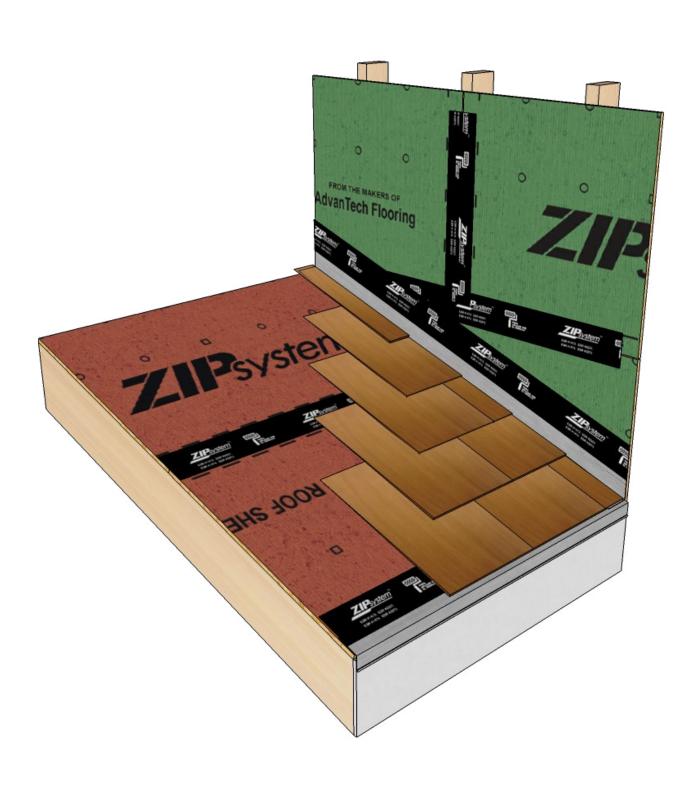




ICE AND WATER MEMBRANES

Self-adhering ice and water barriers may be required by local building code, the authority having jurisdiction or the designer of record. ZIP System $^{\text{m}}$ tape is not considered a replacement for self-adhering ice and water barriers. Therefore, when self-

adhering ice and water barriers are required, they should be installed in addition to ZIP System[™] tape. If desired, install a piece of ZIP System[™] tape over the top edge of the ice and water membrane.

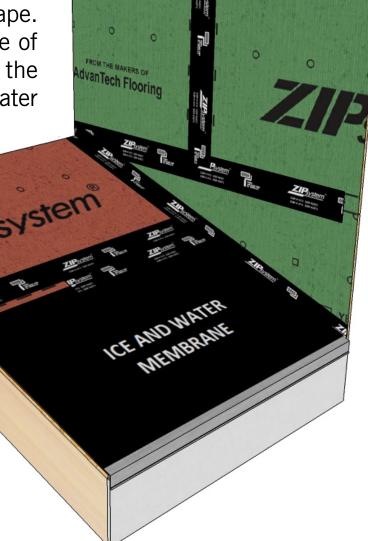




ZIP SYSTEM® ROOF SHEATHING // COMMON DETAIL H-CLIPS

Huber Engineered Woods requires panel edge support for 7/16" ZIP System® sheathing installed on roof supports spaced more than 16" on center. Panel Edge support might be blocking, tongue-and-groove edges or panel edge clips (H-clips).

When taping over H-clips, it is important to make sure that the tape is centered and adequate pressure is applied on all sides of the clip to ensure a proper seal. It should be noted that the use of edge support (H-clips, blocking, tongue-and-groove edges, etc.) does not increase the maximum allowable load on a roof for a given truss or rafter spacing.

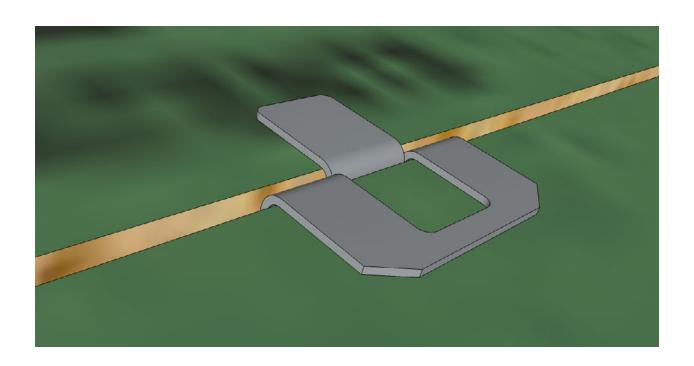




ALTERNATIVE DETAILS // PIPE BOOTS


STEP 1: Starting from each of the jambs, apply ZIP System[™] tape.




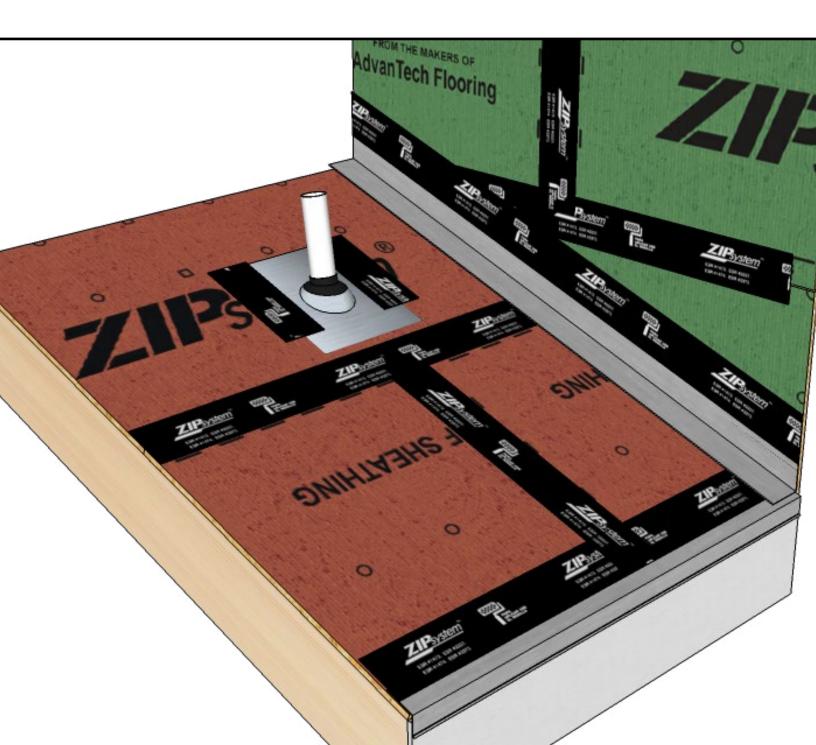




ALTERNATIVE DETAILS // PIPE BOOTS






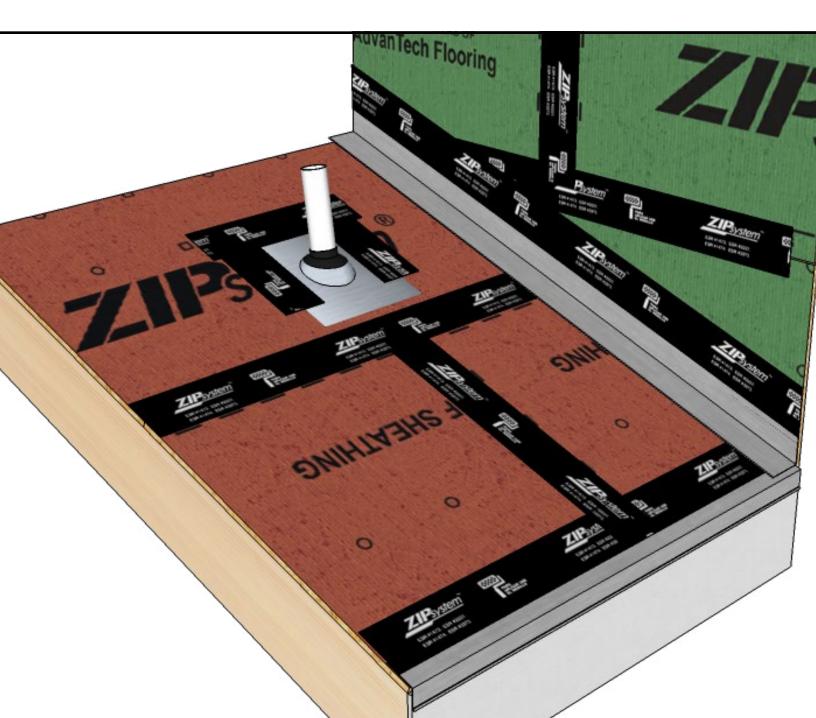



ALTERNATIVE DETAILS // DRIP EDGE


STEP 1: Install the drip edge per manufacturer recommendations

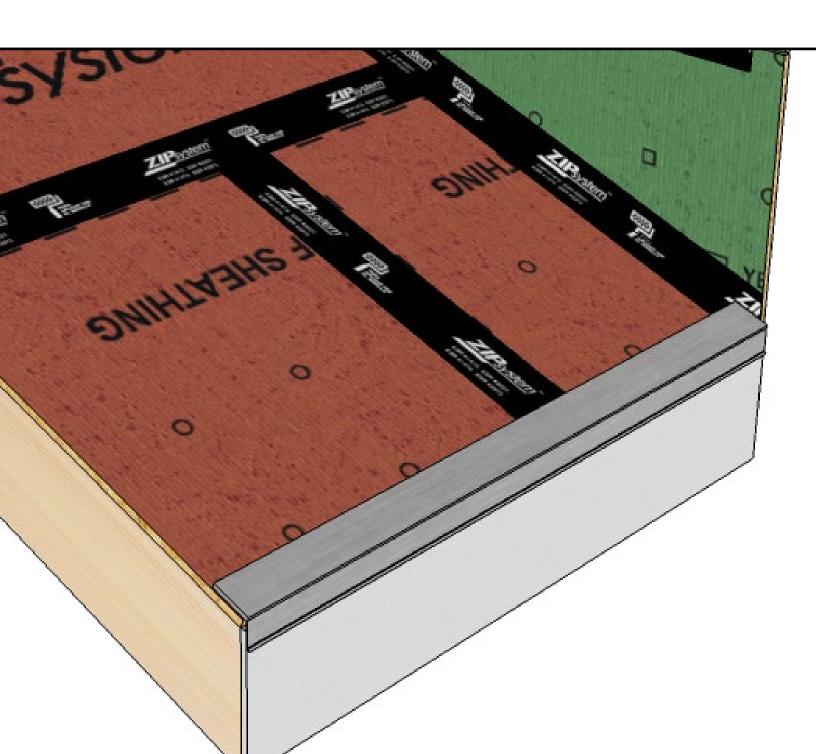



ALTERNATIVE DETAILS // DRIP EDGE


STEP 2: Tape the top edge of the drip edge back to the surface of ZIP System sheathing with ZIP System[™] tape.

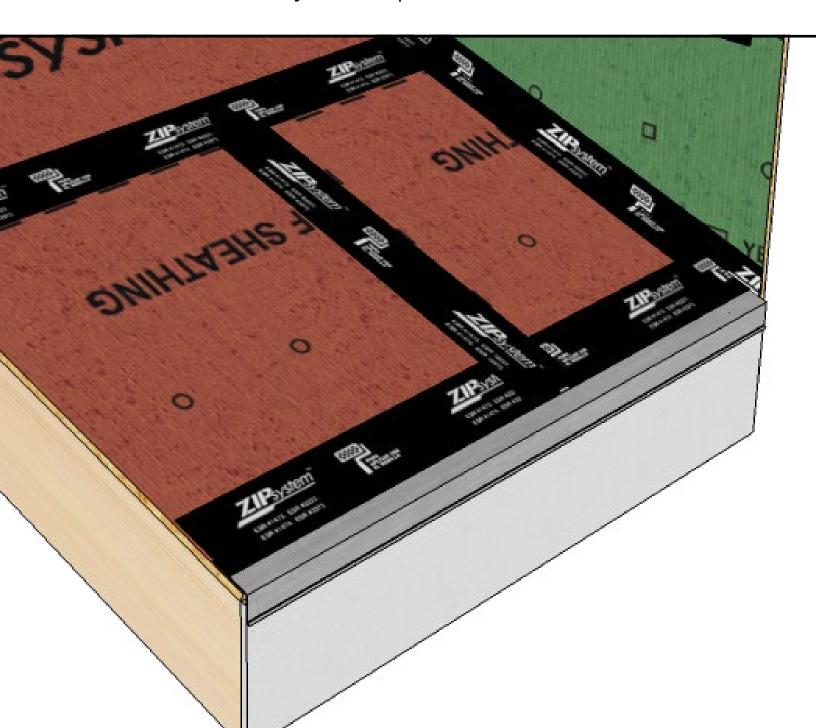



ALTERNATIVE DETAILS // TOE BOARD


STEP 1: Often times toes boards are used to assist the installer during the installation of the panels.

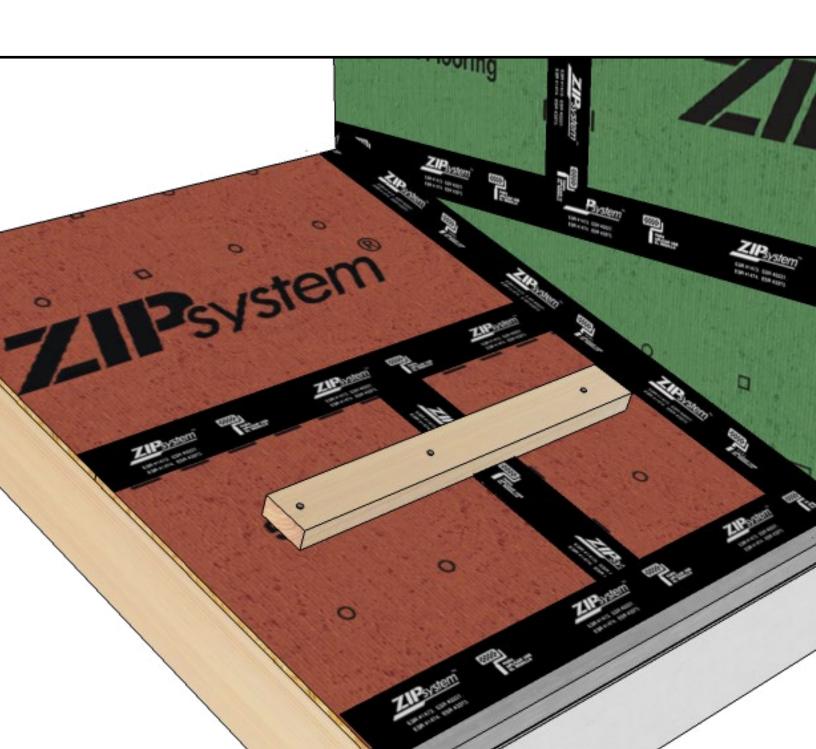



ALTERNATIVE DETAILS // TOE BOARD


STEP 2: For fastener holes from toe boards or other temporary nailing, install ZIP System[™] tape or ZIP System[™] liquid flash a minimum of 1" around the fastener hole.

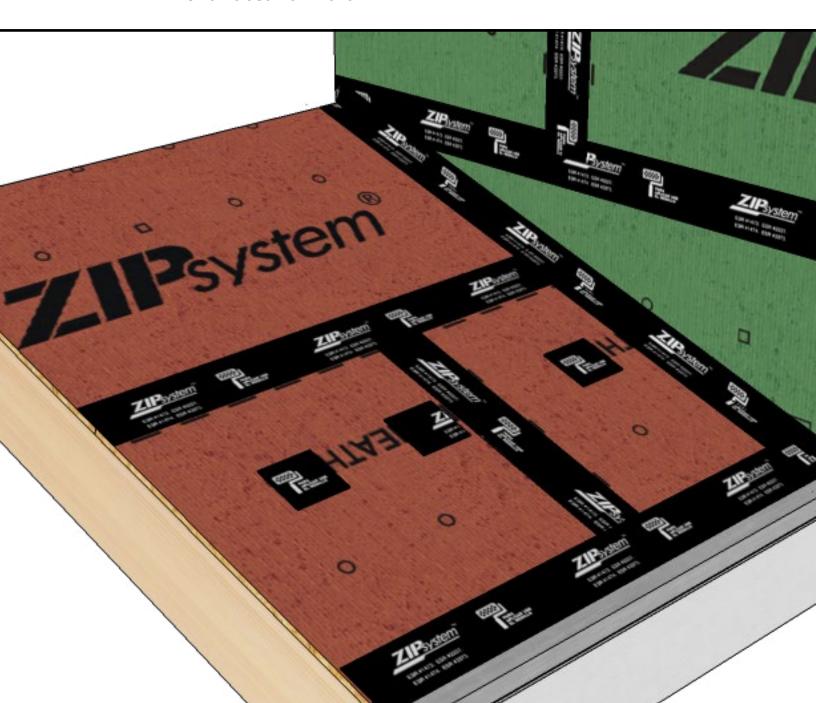



ALTERNATIVE DETAILS // TAPING ROOF VALLEYS


For valley areas of framing, we recommend you use 6" wide ZIP System™ tape. This tape is wider than panel seam tape and is designed to give you optimal protection in valley areas. Starting from the bottom and working your way up, apply one continuous piece of 6" tape so that the center of the tape is over the valley seam. Roll the tape to apply pressure to the tape to ensure proper contact with the panel and to eliminate any wrinkles that might have occurred in the tape. Take special care to seat tape completely into the valley. It is important to pay extra attention to valley taping as water is directed toward the valleys during rain events.

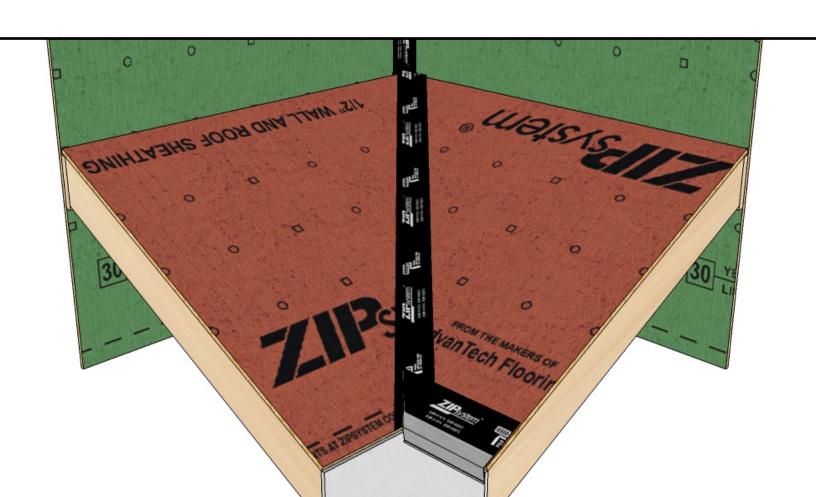



ALTERNATIVE DETAILS // TAPING ROOF VALLEYS

If 6" ZIP System™ tape is not available, use two continuous pieces of 3-3/4" ZIP System™ tape over the entire length of the valley seam, overlapping the pieces on the valley seam by at least 1". Starting from the bottom, install the first piece of tape overlapping the valley seam by at least 1". Roll the tape to apply pressure to the tape to ensure proper contact with the panel and to eliminate any wrinkles that might have occurred in the tape. Apply the second piece of tape, overlapping the first piece in the valley seam by 1". Roll the tape to apply pressure and the tape is adequately adhered and tightly pressed into the valley seam. It is important to pay extra attention to valley taping as water is directed toward the valleys during rain events.

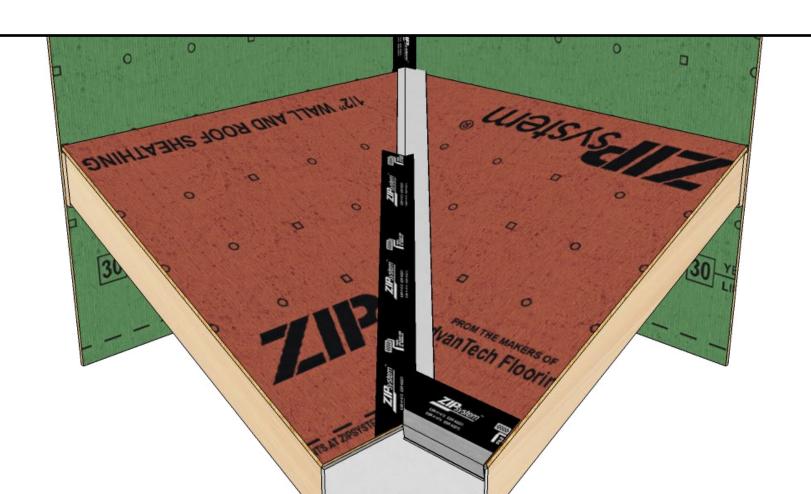




ALTERNATIVE DETAILS // TAPING ROOF VALLEYS

To provide temporary weather protection to roof/wall intersections of dormers or other wood-sheathed projections, apply 2" of the tape width up the vertical projection from where it intersects with the roof. The remaining tape width can be adhered to the ZIP System® roof sheathing panels. Roll the tape to to apply pressure to the tape and smooth out any wrinkles.

Install ZIP System[™] tape over hips and ridges by centering the tape over the peak seam. Apply tape in sufficient length to completely extend the length of the hip or ridge. Starting from the lowest point of the hip and working up, press tape into place keeping tape centered over the hip. Apply pressure onto the surface of the tape to ensure a secure bond between the panel and the tape. Cut ridge tape as required for ventilation prior to installing ridge vent.

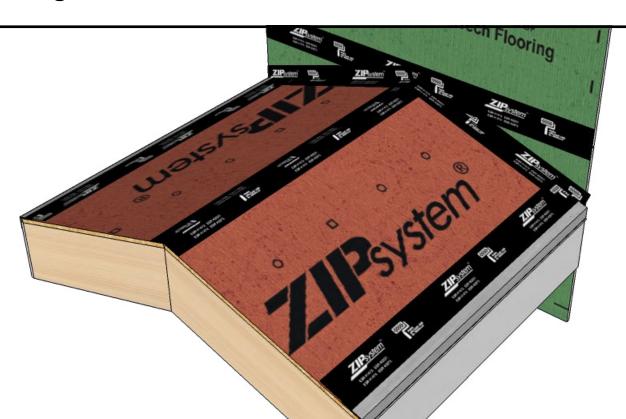




SMALL HOLES

STEP 1: A small hole is a opening that is less than 2-inches in diameter.





SMALL HOLES




STEP 2: Install 1 to 2 layers of ZIP System[™] tape over the hole. The tape should have a minimum of 1 inch overlap on all sides of the hole.





LARGE HOLES




STEP 1: Large holes in the ZIP System® sheathing can affect the water resistive and air barrier properties of the panel, as well as, the structural component.





LARGE HOLES




STEP 2: Cut out of the section of panel around the large hole by cutting from vertical stud to vertical stud. In shear wall applications horizontal blocking must be installed in between the vertical studs to provide lateral support to satisfy structural requirements.






LARGE HOLES

STEP 3: A new piece of ZIP System® sheathing should be cut to fit the hole.

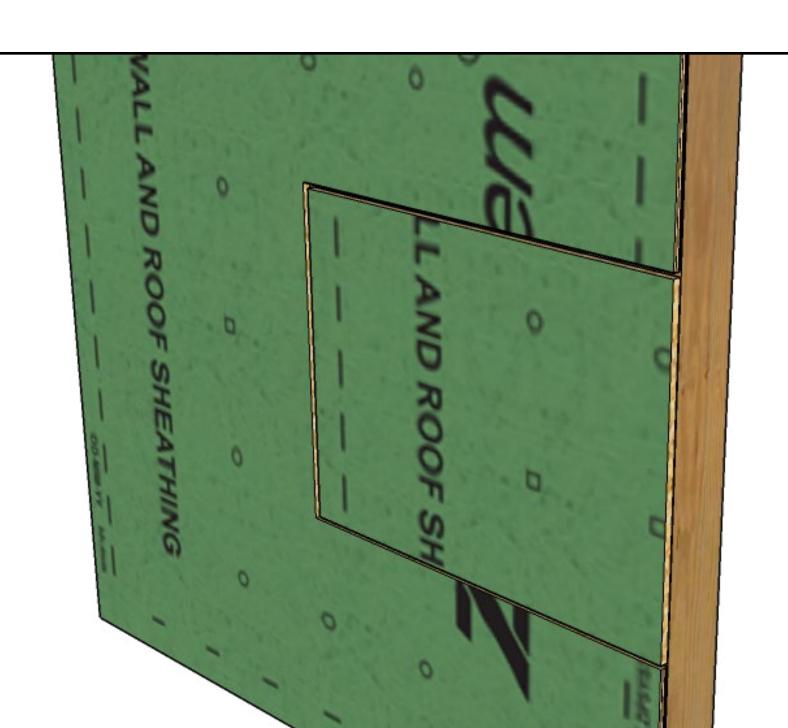




LARGE HOLES




STEP 4: Tape all newly created panel seems with ZIP System[™] tape and roll the tape.

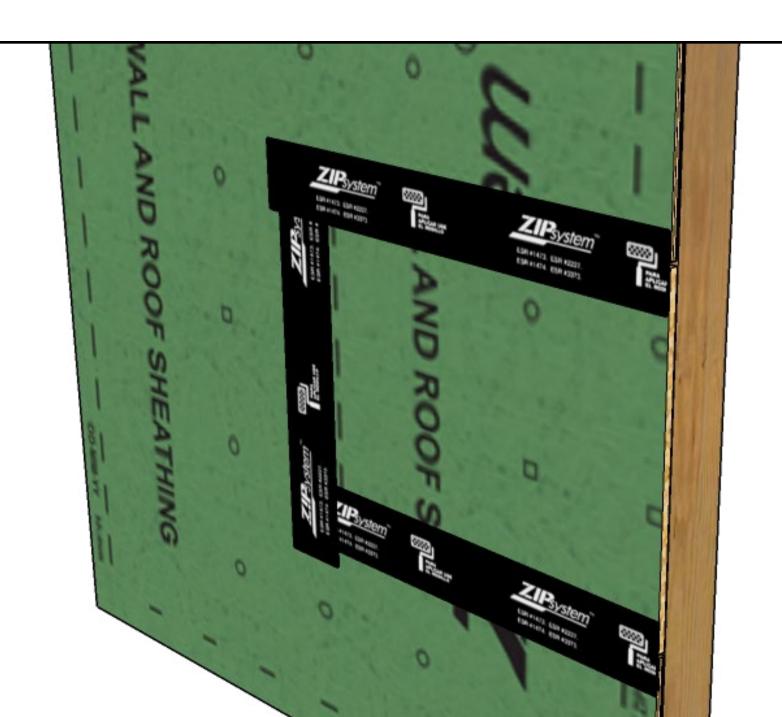



SAW KERFS




STEP 1: A saw kerf is damage to the overlay created by a circular saw, but should not penetrate in the wood portion of the panel as this may affect the structural integrity of wood structural panels.






SAW KERFS




STEP 2: A saw kerf can be remedied by placing a piece of ZIP System[™] tape over the saw kerf and rolling the tape into place.

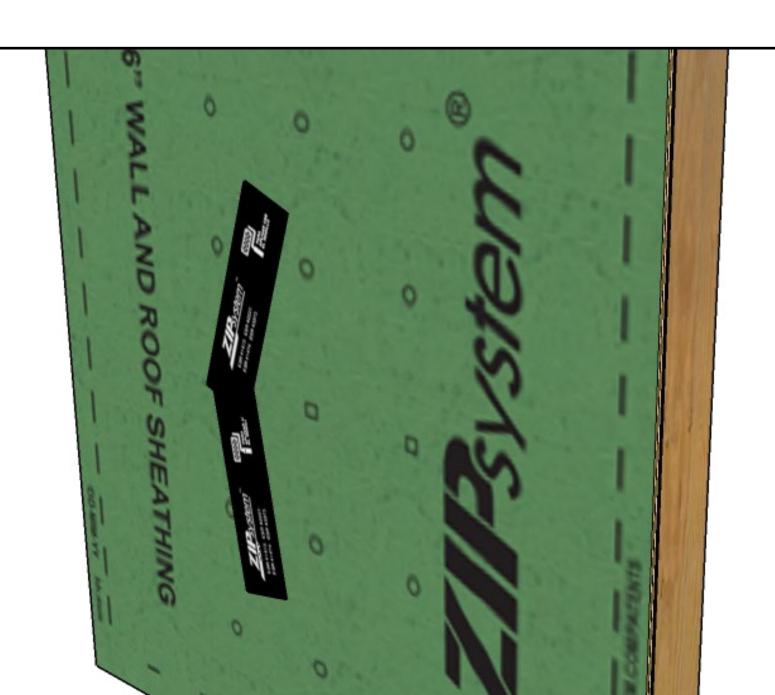




CHIPS IN THE OVERLAY

STEP 1: Chips in the overlay can be created numerous different ways, but the most common is by impacts from hard edge objects.

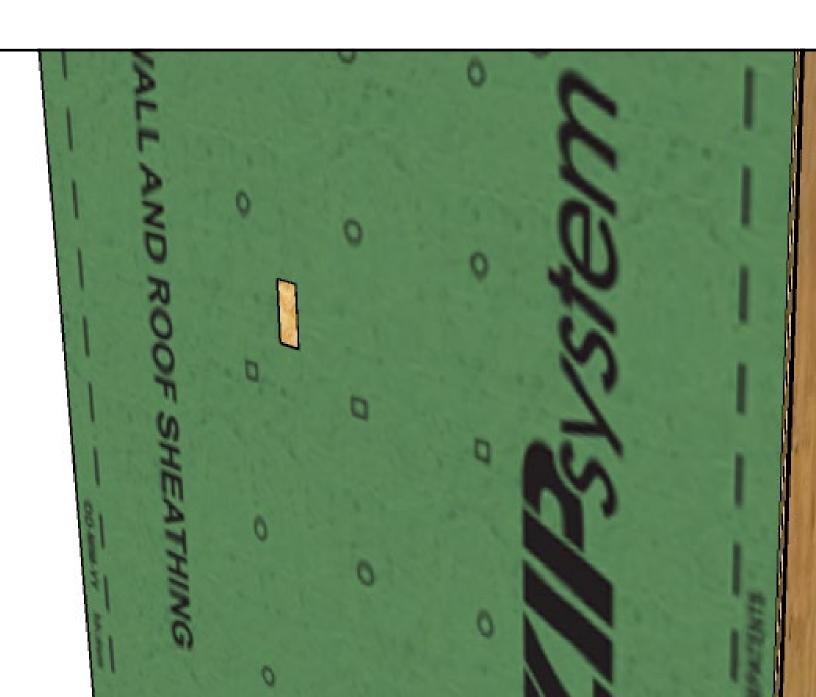




CHIPS IN THE OVERLAY




STEP 2: A chip in the overlay can be remedied by placing a piece of ZIP System[™] tape over the chip and rolling the tape into place.

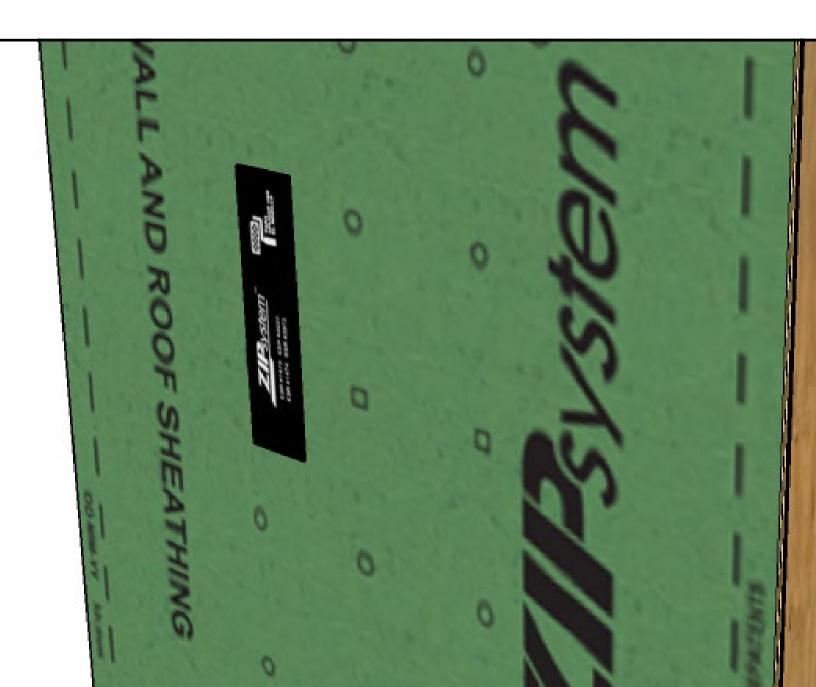



SIDING REMOVAL


STEP 1: Siding can get damage during the construction phase or throughout the life of the structure requiring the siding to be removed.

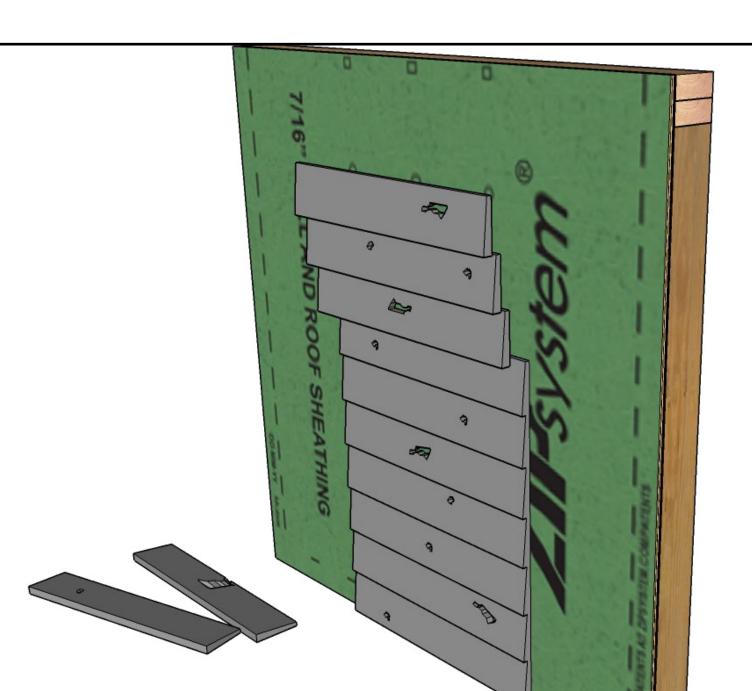




SIDING REMOVAL

STEP 2: When siding is removed from ZIP System® sheathing a new code recognized water resistive barrier should be installed over the areas where the siding was removed.

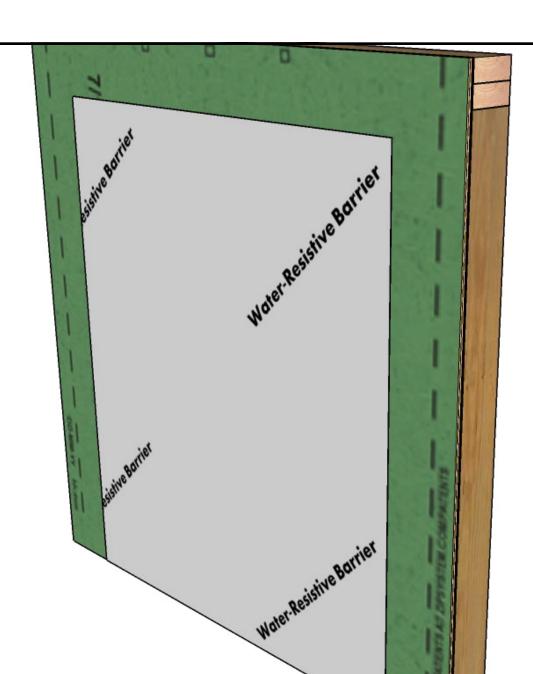




SIDING REMOVAL




STEP 3: When the water resistive barrier is a loose laid wrap or felt paper that is terminated in the middle of the plane install ZIP System[™] tape along the edges and roll the tape.

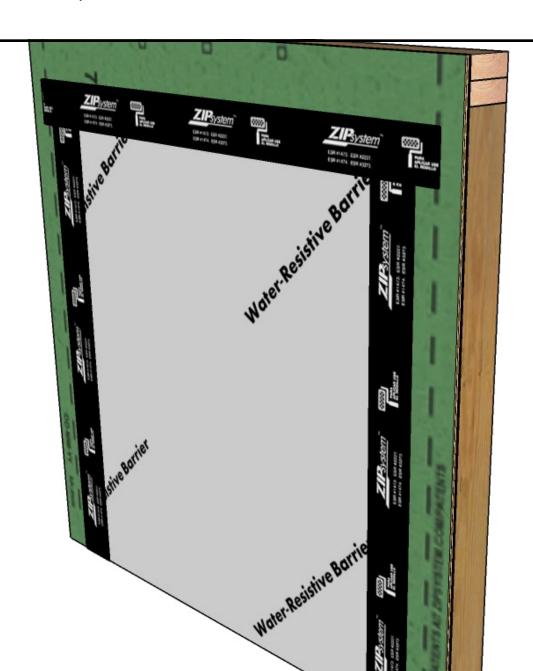



CRANE HOLES


STEP 1: Crane holes are often created in prefabricated wall sections in order to lift the sections into place. Crane holes in the ZIP System® sheathing can affect the water resistive and air barrier properties of the panel, as well as, the structural component.

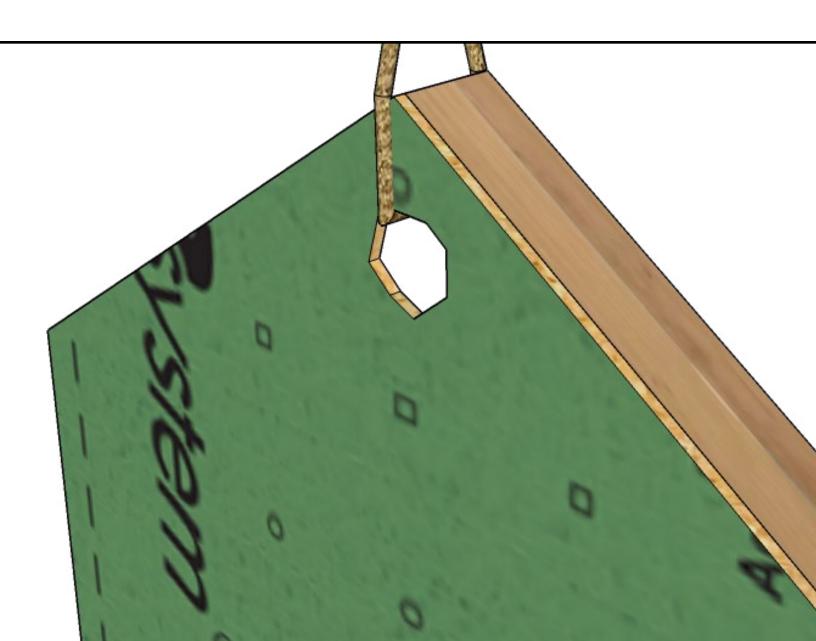



CRANE HOLES


STEP 2: It may be necessary to add horizontal blocking between the vertical studs to provide lateral support.

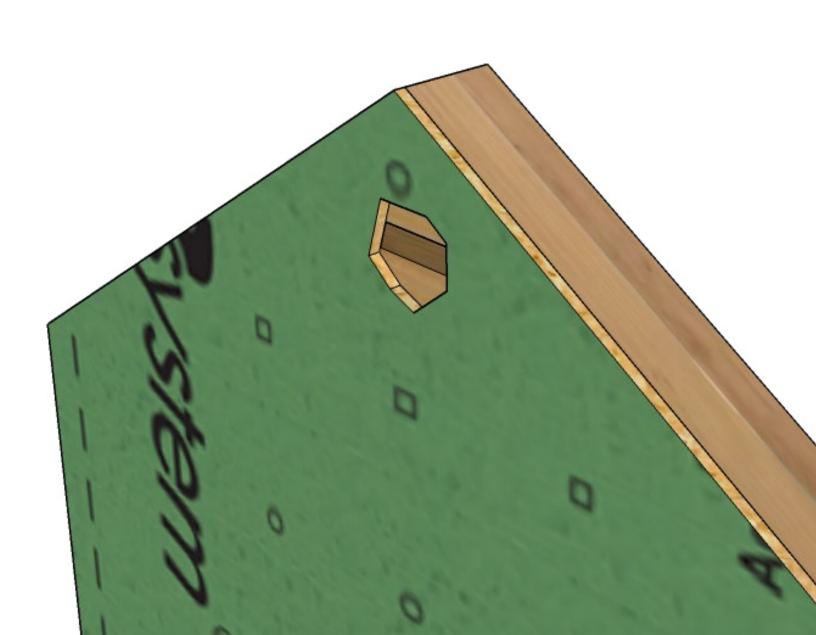




CRANE HOLES

STEP 3: A new piece of ZIP System® sheathing should be cut to fit.

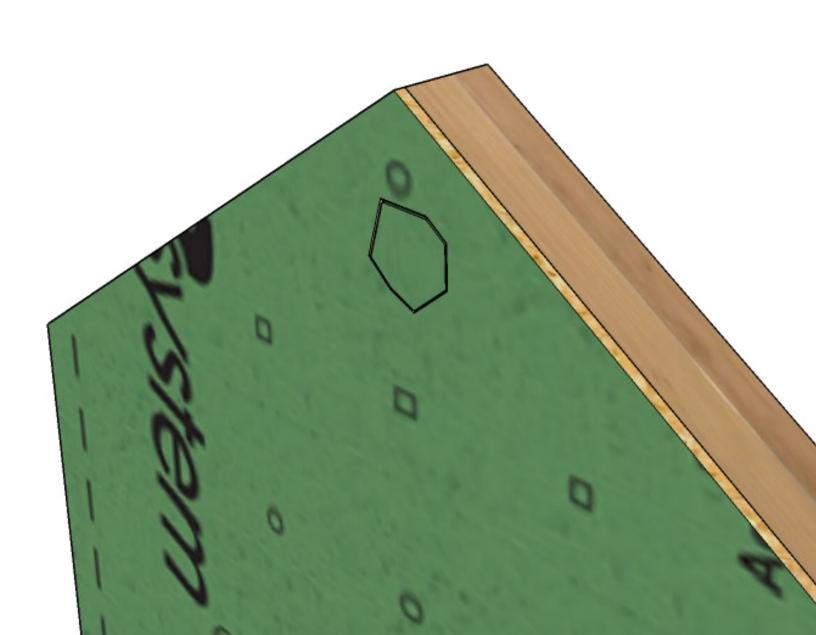



CRANE HOLES




STEP 4: Tape all newly created panel seems with ZIP System[™] tape and roll the tape.





DIRTY PANELS


STEP 1: It is important that panels are free of any dirt or debris prior to installing ZIP System[™] tape to the panels.

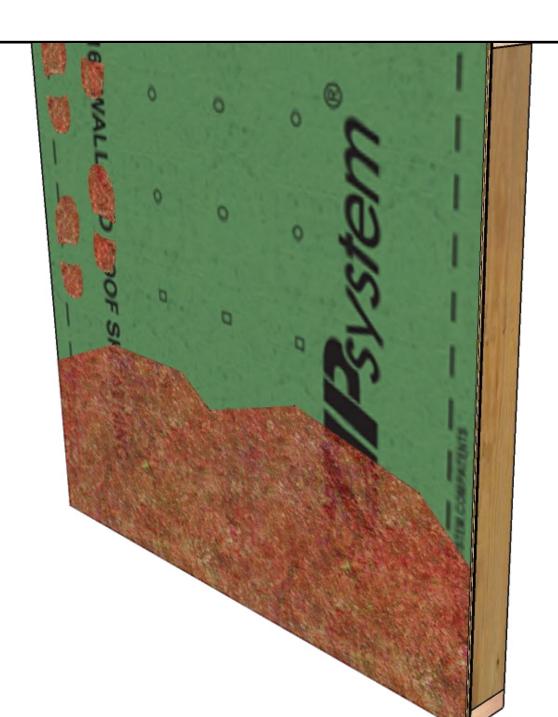



DIRTY PANELS

STEP 2: If dirt or debris occurs on the panel it is recommended to remove the dirt with water and a towel.

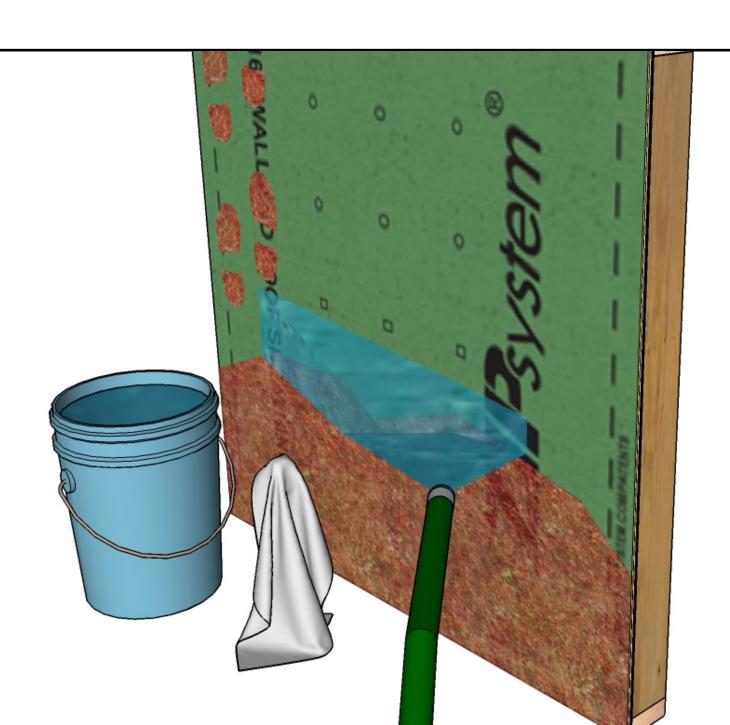



DIRTY PANELS

STEP 3: Before installing ZIP System[™] tape to the panel after removing any dirt or debris ensure the panels are dry to the touch.

