

Order Your Bendix® Trailer ABS Universal 2S/1M Service Replacement Kit


✱ Intended for Universal Service Replacement of Any Brand ✱

With Bendix, Replacing ABS is as Easy as ABC

A. Removal. Inspect the vehicle for damage, chafing, etc. to current ABS unit, hoses or wiring and adjust routing of replacement installation as necessary. Disconnect original harness from the wheel speed sensors, trailer power cord and warning lamp. Remove the current ABS unit and harness.


B. Pneumatic Installation. Install the replacement ABS ECU and modulator assembly. Reconnect the supply air hose for the service brake, if not tank-mounted. Reconnect the control air hose to the control port of the modulator. Reconnect the delivery air hoses to the modulator and plug any unused ports.

C. Electrical Installation. Reconnect the wheel speed sensor leads, the indicator light, and ECU to the trailer power harness. Attach identification label near the ABS indicator lamp (remove original label). Run system checks.

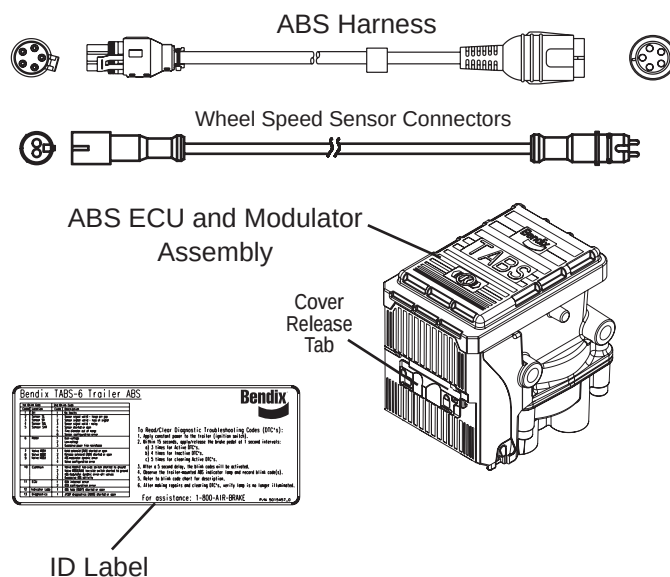

Trailer ABS kit Piece No. 802997 consists of an ABS harness, trailer ABS assembly, identification label, installation instructions and a Service Data sheet.

The kit instructions and Service Data sheet contain full details of all the system checks and precautions needed for this installation.

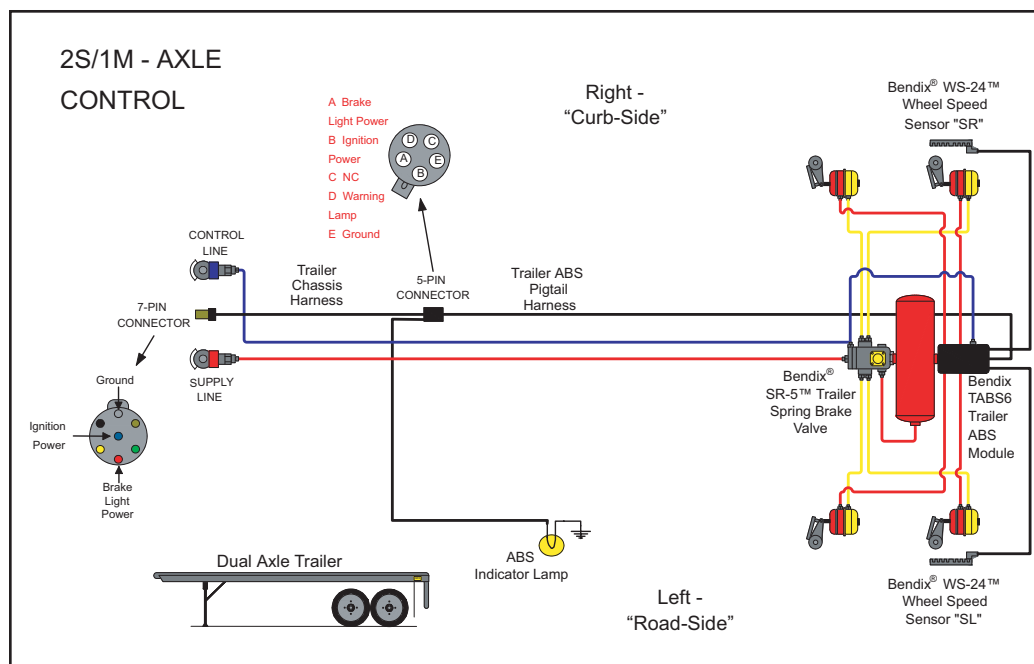

Order kit 802997 today.
Use the best. Use Bendix.
Look for the familiar
Bendix name and logo
on the box. To find your
nearby authorized Bendix
outlet, talk to your Bendix
Account Manager, call
1-800-AIR-BRAKE
(1-800-247-2725) or visit
www.bendix.com today.

