

Bluetooth® SDK 3.1.2.0 GA Gecko SDK Suite 3.1 April 7, 2021

Silicon Labs is a leading vendor in Bluetooth hardware and software technologies, used in products such as sports and fitness, consumer electronics, beacons, and smart home applications. The core SDK is an advanced Bluetooth 5.1-compliant stack that provides all of the core functionality along with multiple API to simplify development. The core functionality offers both standalone mode allowing a developer to create and run their application directly on the SoC, or in NCP mode allowing for the use of an external host MCU.

These updated release notes cover SDK version(s):

3.1.2.0 released April 7, 2021 3.1.1.0 released January 27, 2021 3.1.0.0 released December 9, 2020



KEY FEATURES

- · Angle of Arrival General Availability
- LE Power Control
- Support for CMSIS-RTOS2
- New NCP tool Bluetooth NCP Commander
- · Secure Vault integration

Compatibility and Use Notices

This Gecko SDK Suite release has a known security compatibility issue with one Gecko Platform component. For more information about this, as well as other updates and notices, see the Security chapter of the Gecko Platform Release notes installed with this SDK or on the Silicon Labs Release Notes page. Silicon Labs also strongly recommends that you subscribe to Security Advisories for up-to-date information. For instructions as well as notes on using Secure Vault features, or if you are new to the Silicon Labs Bluetooth SDK, see Using This Release.

Compatible Compilers:

Note: The supported compilers will be upgraded to ARM GCC-10-2020-q4-update and IAR 8.50.9 in the next major release.

IAR Embedded Workbench for ARM (IAR-EWARM) version 8.30.1

- Using wine to build with the IarBuild.exe command line utility or IAR Embedded Workbench GUI on macOS or Linux could result in incorrect files being used due to collisions in wine's hashing algorithm for generating short file names.
- Customers on macOS or Linux are advised not to build with IAR outside of Simplicity Studio. Customers who do should carefully
 verify that the correct files are being used.

GCC (The GNU Compiler Collection) version 7.2.1, provided with Simplicity Studio.

Contents

1	New	/ Items	2
	1.1	New Features	2
	1.2	New APIs	
2		rovements	
_			
	2.1	Changed APIs	4
3	Fixe	d Issues	6
4	Knov	wn Issues in the Current Release	8
5	Dep	recated Items	10
6	Rem	noved Items	11
7	Spec	cial Notices	12
8	Usin	g This Release	13
	8.1	Installation and Use	13
	8.2	Security Information	13
	8.3	Support	14
9	Lega	al	15
	9.1	Disclaimer	15
	9.2	Trademark Information	15

1 New Items

1.1 New Features

Added in release 3.1.2.0

Secure Vault Integration

When deployed to Secure Vault High devices, sensitive keys such as the Long Term Key (LTK) are protected using the Secure Vault Key Management functionality.

The Bluetooth stack Security Manager component and Mbed TLS configurations are changed significantly for the Secure Vault integration in this release. It is recommended to create a new sample application and use it to assist migrating applications from earlier v3.x Bluetooth SDKs. See UG434 section 4.2.3 for how Bluetooth applications use the Mbed TLS and how it can be configured.

Added in release 3.1.1.0

Bluetooth on-demand start

With the Bluetooth on-demand start feature, the application can start and stop the Bluetooth stack at run time. The feature is enabled by including the bluetooth_on_demand_start component. When this feature is enabled, the Bluetooth stack does not run until sl_bt_system_start_bluetooth() is called. The Bluetooth stack can be stopped with sl_bt_system_stop_bluetooth(). When the Bluetooth stack is not running, all BGAPI classes other than System become unavailable. The main use case of this feature is for DMP applications where Bluetooth is not need all the time.

If this feature is not enabled, the Bluetooth stack is started automatically.

Added in release 3.1.0.0

Angle of Arrival (AoA) and Angle of Departure (AoD)

Beginning with this release, the Bluetooth stack supports Bluetooth 5.1 AoA and AoD features. The SDK provides soc_aoa_asset_tag and ncp_aoa_locator example applications for evaluating the AoA functionality. The AoD is supported only at the Bluetooth stack level and the SDK does not provide any sample application in this release. For more information see the examples, API reference, and AN1296: Application Development with Silicon Labs' RTL Library in the SDK.

LE Power Control

The Bluetooth stack now supports the Bluetooth 5.2 LE Power Control feature. Both procedures, Power Control Request and Power Change Indication, are supported. In order to use these procedures, the connection peer entity must support the same procedures.

At the receiver side, the user can specify so-called 'Golden RSSI range' for each PHY. Based on the configuration the receiver side requests the transmitter to adjust transmit power such that the received signal level would be within the configured range.

At the transmitter side, the user is allowed to configure the transmit power range. The transmitter shall not use a transmit power out of the configured range even if the connection peer entity sends such a request.

The power control feature can be used seamlessly with or without adaptive frequency hopping.

The Golden RSSI range and the transmit power range can be configured in the bluetooth_feature_power_control software component.

The global minimum and maximum TX power are also configurable in the Bluetooth stack component.

FreeRTOS Support

The Bluetooth stack can also run on FreeRTOS in this release. This is achieved by using the CMSIS-RTOS2 in the RTOS adaptation software component of the Bluetooth stack. User application can choose to run the stack either on Micrium OS or FreeRTOS. The Bluetooth SDK provides soc_thermometer_micrium and soc_thermometer_freertos examples.

Additionally, the Bluetooth stack RTOS adaptation is now in its own software component and it supports configuring the Bluetooth RTOS task priorities.

1.2 New APIs

For additional documentation and command descriptions please refer to the Bluetooth API reference in the SDK installation or the online API reference specific to the SDK version you are using. The most up-to-date version is at https://docs.silabs.com/bluetooth/latest/.

Added in release 3.1.2.0

sl_bt_gatt_server_send_user_prepare_write_response command: Sends the response to a prepare-write request from a remote GATT client for a user-type characteristic value.

Bluetooth RTOS task stack size configuration: In the Bluetooth_rtos_adaptation component (sl_bt_rtos_config.h).

Added in release 3.1.0.0

Minimum and maximum TX power configuration: In the Bluetooth stack component (sl_bluetooth_config.h), including items SL_BT_CONFIG_MIN_TX_POWER and SL_BT_CONFIG_MAX_TX_POWER.

LE Power Control configuration: In the bluetooth_feature_power_control component (sl_bt_power_control_config.h).

Bluetooth RTOS task priority configuration: In the Bluetooth_rtos_adaptation component (sl_bt_rtos_config.h).

- sl_bt_system_get_version command: Returns the firmware version information, the same as the sl_bt_evt_system_boot event returns.
- sl bt system set tx power command: Sets the global minimum and maximum radiated TX power levels for Bluetooth.
- sl bt system get tx power setting command: Returns the global minimum and maximum radiated TX power levels for Bluetooth.
- sl_bt_connection_set_power_reporting command: Enables or disables the transmit power reporting for the local device on a Bluetooth connection.
- sl_bt_connection_set_remote_power_reporting command: Enables or disables the transmit power reporting for the remote device on a Bluetooth connection.
- sl_bt_connection_get_tx_power command: Returns the transmit power of the local device on a Bluetooth connection.
- sl bt connection get remote tx power command: Reads the transmit power of the remote device on a Bluetooth connection.
- sl_bt_evt_connection_get_remote_tx_power_completed event: Indicates that reading remote transmit power operation has completed.
- sl bt evt connection tx power event: Reports a transmit power change of the local device on a Bluetooth connection.
- sl bt evt connection remote tx power event: Reports a transmit power change of the remote device on a Bluetooth connection.
- sl_bt_gatt_server_send_notification command: Sends a characteristic value notification to a remote GATT client.
- sl_bt_gatt_server_send_indication command: Sends a characteristic value indication to a remote GATT client.
- sl_bt_gatt_server_notify_all command: Sends a characteristic value notifications or indications to all connected remote GATT clients.
- sl_bt_gatt_server_read_client_configuration command: Reads a remote GATT client's current value of the client characteristic configuration of a characteristic.
- sl bt evt gatt server indication timeout event: Indicates the indication to a remote GATT client has timed out.
- sl_bt_test_dtm_tx_v4 command: Supports setting the TX power level in DTM transmitter test v4 of the Bluetooth specification.
- sl bt user manager event filter command: Used for managing the API event filter over the NCP.

2 Improvements

2.1 Changed APIs

Changed in release 3.1.2.0

New format for storing Bluetooth bonding keys

Series 2 devices use a new format for storing bonding keys as a result of the Secure Vault integration. The stack will automatically import existing bonding keys to the new format when the Bluetooth stack initialization is run for the first time after upgrading to this version. Note that the importing functionality will be removed from the stack in a future SDK release.

PA selection in Bluetooth applications

The default PA configurations in Bluetooth applications are set to the values in the rail_util_pa component, if the component presents in the application project.

Decide EM2 permission based on Bluetooth feature configurations

The Bluetooth stack now enables EM2 deep sleep mode with an inaccurate LF clock i.e., LFCRO, when neither the Bluetooth connection, periodic advertising, nor periodic advertising synchronization feature is used by the application. Previously the Bluetooth stack always required an accurate LF clock for EM2 regardless of the features used by the application.

Behavior change of the sl_bt_evt_gatt_server_user_write_request event

When this event is generated for responding to a prepare-write request, the sl_bt_gatt_server_send_user_prepare_write_response command must be used for sending the response message. This change improves the conformance to the Bluetooth GATT reliable-write procedure.

Thread-safe Bluetooth API commands

Beginning with this release, Bluetooth API command functions have automatic locking to make them thread-safe. Using the explicit locking functions sl_bt_bluetooth_pend() and sl_bt_bluetooth_post() is therefore no longer required for individual calls to the BGAPI. See the documentation of sl_bt_bluetooth_pend() for examples of cases where an application would still need to use the explicit locking to ensure that multiple calls to the API are handled atomically.

Asynchronous Bluetooth on-demand start

The Bluetooth command sl_bt_system_start_bluetooth() is now an asynchronous command. A success return value means that the request to start was accepted, but the actual result is delivered later as a system boot event (in case of success), or as a system error event (in case of failure).

Changed in release 3.1.0.0

Behavior change in TX power setting command

The new command sl_bt_system_set_tx_power replaces the sl_bt_system_set_max_tx_power command,with the change that the set TX powers are the radiated values from the antenna, i.e., without the TX RF path gain. Previously,, the TX powers in sl_bt_system_set_max_tx_power command had the TX RF path gain applied.

RSSI value in sl_bt_connection_get_rssi event

The RSSI value in this event is the median of the last seven measured RSSI values. Previously the last RSSI value was returned.

PA auto-mode

The Bluetooth stack now uses PA auto-mode for power level handling to optimizing the operation processing time.

Simultaneous scanning on LE 1M and Coded PHYs

The command sl_bt_scanner_start() now supports simultaneous scanning on LE 1M and Coded PHYs. The stack alternates the scanning on two PHYs by switching the PHY at every scan interval.

Bluetooth component ID and name change

The Bluetooth component 'bluetooth' is changed to 'bluetooth_feature_default'. The feature selection in this component remains unchanged.

Maximum number of advertisers in ncp_empty application

The maximum number of advertisers for user is increased to 4 in the ncp_empty application.

Separate headers for common BGAPI protocol types and generated types

Common types of the BGAPI protocol are separated into their own header file sl_bgapi.h, which is automatically included from sl_bt_api.h. No change is required in applications.

Prefix of Bluetooth API types

Bluetooth types and defines that do not have the "sl_bt_" prefix are deprecated and replaced by types and defines that include the "sl_bt_" prefix to the name. A compatibility header, sl_bt_api_compatibility.h, is automatically included from sl_bt_api.h to maintain source code compatibility to existing code until it has migrated to use the new names.

3 Fixed Issues

Fixed in release 3.1.2.0

ID#	Description	
633758	Fix the issue that the first advertising packet transmission is sometimes delayed.	
656470 Fix the PA curves on BGM220P and BGM220S modules.		
656549		
Fix angle accuracy issues caused by Silabs CTE being always transmitted on channel 0 and IQ samples fro tags occasionally getting mixed.		
Fix an issue in the Bluetooth on-demand start feature that the device freezes when stopping Bluetooth during Bluetooth connections.		
670079	Update the sl_bt_init() function to catch the Bluetooth stack initialization status returned from sl_bt_init_stack().	
670129	29 Fix hardware incompatibility issues in some demos and examples. The filter has been improved such that demos and samples that are incompatible with the hardware are filtered out.	
671164	Update part numbers of BGM210PB22JIA and BGM210PB32JIA in the radio adaptation to prevent the parts getting stuck at BT stack initialization.	
675134	Fix the issue where a locator device reports IQ samples from the wrong tags.	
675508	Fix the maximum limit of periodic advertising synchronizations in the Bluetooth core configuration.	
676757	Fix the issue where an extended advertising packet is always transmitted on channel 0.	
677378 Fix the EM2 wake up issue on EFR32[B M]G22 devices.		
678682		
688242	Fix the issue where using the debug key in both devices causes Bluetooth pairing to fail because of the reflected public key protection. The debug key is now treated as an exception in the reflected public key protection.	

Fixed in release 3.1.1.0

ID#	Description	
644088	The aoa_locator example application exposes RTL library's azimuth constraint API via an optional configuration file.	
Previously, in the the RF regulatory mode of the NCP commander, changing the transmit power when TX is alrest enabled didn't change the output power even though the API command is accepted. This has been fixed such the power can be changed when the TX is enabled.		
651999	Fix the issue that characteristic extended property descriptors are not generated into the GATT database when a characteristic in the GATT XML file has an extended property.	
652908	Added an empty GATT database if the application does not provide one. This enables the application to exclude the GATT configurator component when the GATT server feature is not used.	
Add a -c command line option that points to a JSON configuration file. It can contain a list of accepted tags. If u location of other tags will not be reported to the MQTT. Sample configuration file looks like this:		
	{	
	"tag_whitelist": [
	"ble-pd-aaaaaaaaaa",	
	"ble-pd-bbbbbbbbbbb"	
]	
	}	
654946	Return the correct address type in the sl_bt_evt_connection_opened event when the remote device uses a random resolvable address but the Bluetooth stack cannot resolve it due to no existing bonding.	
655455	Fix build errors caused by missing include path in the aoa_compass host example.	
656118	Fix the issue that sl_bt_system_set_max_tx_power when the requested maximum TX power is less than -30 dBm.	
658852	Previously, commands sl_bt_cte_receiver_enable_connectionless_cte() and sl_bt_cte_receiver_enable_silabs_cte() returned an "invalid command parameters" error if cte_count value 0 was used. This has been fixed now. The only supported value is 0. Other values still return an "unsupported parameter" error.	
660489	Fix an issue in the LE Power Control feature that the reported TX power level is out of range in certain minimum and maximum TX power level configurations.	

ID#	Description
666980	Fix an issue that may cause the LE power control initialization to fail due to the fixed size array reserved for supported power levels being too small in certain devices.

Fixed in release 3.1.0.0

ID#	Description
457227	Optimize the use case where an advertisement task was delayed if the scanning task was running at the same time.
485334	Fix an issue that caused the Bluetooth connection to drop when setting a breakpoint
465088 BGTool now works on MacOS 10.13 (High Sierra) and older Mac versions.	
The Bluetooth stack performs a version exchange before doing feature exchange to improve interoperability with that do not properly handle the control packets from the device in slave role.	
489436	Update the slave feature request handling to improve the interoperability. Previously, the Bluetooth stack sent the slave feature request automatically when connected as the peripheral role. However, some existing master Bluetooth 4.0 implementations freeze. In order to be compliant with those master implementations, the Bluetooth stack executes the version information exchange procedure before executing the slave feature request. If the peer master is version 4.1 or newer, the slave executes the feature request procedure. For older peer implementations the slave feature request is not executed. Instead, the slave assumes the master will support the encryption feature until the master indicates otherwise.
622436	Fix the issue that timers started using Bluetooth APIs are not fired at the correct time.
628916	Fix duplicate whitelist address issue.
631755	Set Bluetooth stack component to always require HFXO.
635058	Fix an invalid packet transmission issue where the Bluetooth link layer may transmit invalid packet content if radio interrupts are delayed.
635417	Fix an issue that causes hanging during CTE reception if a corrupted packet header length was read.
637232	Fix a case where the connection might be dropped with "unspecified error" code.
645453	Fix an issue on EFR32BG22 where receiving after a transmit from EM2 sleep based on RAIL state transitions would result in dropped packets.
648010	Fix an issue in the Bluetooth stack that causes the TX RF path gain to be applied twice.
649592	Update the maximum connection to 32 in the Bluetooth configuration.

Known Issues in the Current Release

Issues in bold were added since the previous release. If you have missed a release, recent release notes are available on https://www.si- labs.com/products/software.

ID#	Description	Workaround	
337467 MGM12P has poor signal strength when doing OTA with Apploader.		None	
361592	The sync_data event does not report TX power.	None	
368403	If setting CTE interval to 1, a CTE request should be sent in every connection interval. But it is sent only in every second connection interval.	None	
641122	The Bluetooth stack component does not provide a configuration for RF antenna path.	This is an issue specifically for BGM210P. One workaround is to manually update the configuration in sl_bluetooth_config.h in text edit mode. If the OTA with Apploader is used, include the bluetooth_feature_ota_config component in application project. Call command sl_bt_ota_set_rf_path() to set the RF path for OTA mode.	
650079	LE 2M PHY on EFR32[B M]G12 and EFR32[B M]G13 doesn't work with smartphones using the Mediatek Helio chip due to an interoperability issue.	No workaround exists. For application development and testing, the disconnection can be avoided by disabling 2M PHY with sl_bt_connection_set_preferred_phy() or sl_bt_connection_set_default_preferred_phy().	
651247	The Bluetooth stack on EFR32MG21 occasionally does not recognize a disconnection. This is a very rare case and the probability may increase with more RF noise in the environment.	None	
675546	The Bluetooth stack hangs after some time. This was reported on a use case of multiple simultaneous connections on the LE Coded PHY.	None	
679431	The DEBUG_EFM assert is triggered in Series 2 devices when creating a Bluetooth application from an empty project.	Delete the DEBUG_EFM define from the application.	
682198	The Bluetooth stack has an interoperability issue on the 2M PHY with a Windows PC.	No workaround exists. For application development and testing, the disconnection can be avoided by disabling 2M PHY with sl_bt_connection_set_preferred_phy() or sl_bt_connection_set_default_preferred_phy().	
683223	The TX power value passed to the sl_bt_test_dtm_tx_v4() command has no effect when testing the unmodulated carrier mode. The maximum TX power in the global setting is used instead.	Use the sl_bt_system_set_tx_power() command to set the maximum TX power before the testing starts.	
686213	The Bluetooth stack occasionally gest stuck in an eternal loop. Assume an application has multiple GATT client connections performing simultaneous GATT procedures from both the sleep-timer interrupt context and the application main loop. In this case, a rare race condition might cause a stack memory corruption, which in turn causes a GATT procedure to fail to start. The issue does not exist if Bluetooth APIs are only called from the main loop (in bare metal mode) or an OS task (in RTOS mode). Note that Bluetooth API commands cannot be called from interrupt contexts. Doing this might result in other unknown problems. This is described in UG434: Silicon Labs Bluetooth® C Application Developers Guide for SDK v3.x.	The application cannot call Bluetooth API commands in interrupt contexts. For this use case, raise a flag from the sleep-timer callback and handle the timer task in the main loop.	

ID#	Description	Workaround
688272	NVM3 repack during connection interval could break the Bluetooth link layer task in Micrium OS. Once this happens the link layer task no longer gets run thus all radio activities are stopped.	None

5 Deprecated Items

Deprecated in release 3.1.0.0

BGTool

BGTool has been deprecated and it will be removed in the next major release. A new tool, Bluetooth NCP Commander, has been introduced as the replacement. It includes a modern, intuitive, web-based user interface as well as a smart console with IntelliSense and built-in API documentation.

API command sl_bt_system_set_max_tx_power

This command is replaced by the command sl_bt_system_set_tx_power, which supports setting the minimum and maximum TX powers.

API command sl_bt_gatt_server_ send_characteristic_notification

This command is replaced by sl_bt_gatt_server_send_notification, sl_bt_gatt_server_send_indication, and sl_bt_gatt_server_notify_all commands.

API command sl_bt_test_dtm_tx

This command is replaced by sl_bt_test_dtm_tx_v4, which supports setting the TX power level.

6 Removed Items

Removed in release 3.1.0.0

The sl_bt_wait_event() function has been removed from this release. This function is the blocking mode of receiving Bluetooth events and it became incompatible with the application software architecture beginning with the v3.0 SDK. Applications can still receive events in blocking mode by calling the sl_bt_pop_event() function in a loop until a valid event is returned by the function.

7 Special Notices

Silicon Labs Apple® HomeKit®

Silicon Labs implementation of Apple HomeKit is not currently available in GSDK 3. Silicon Labs is committed to providing an Apple HomeKit solution and is investigating ways to add support for it in a future release. Customers developing products targeting HomeKit applications may continue development using GSDK 2.7.x releases and upgrade to GSDK 3 when HomeKit is available.

8 Using This Release

This release contains the following

- Silicon Labs Bluetooth stack library
- Bluetooth sample applications

For more information about the Bluetooth SDK see QSG169: Bluetooth® SDK v3.x Quick Start Guide. If you are new to Bluetooth see UG103.14: Bluetooth LE Fundamentals.

8.1 Installation and Use

A registered account at Silicon Labs is required in order to download the Silicon Labs Bluetooth SDK. You can register at https://siliconlabs.force.com/apex/SL_CommunitiesSelfReg?form=short.

Stack installation instruction are covered in the Simplicity Studio 5 online User's Guide.

Use the Bluetooth SDK v3.x with the Silicon Labs Simplicity Studio 5 development platform. Simplicity Studio ensures that most software and tool compatibilities are managed correctly. Install software and board firmware updates promptly when you are notified. Only use Simplicity Studio 4 with Bluetooth SDK v2.13.x and lower.

Documentation specific to the SDK version is installed with the SDK. Additional information can often be found in the knowledge base articles (KBAs). API references and other information about this and earlier releases is available on https://docs.silabs.com/.

8.2 Security Information

Secure Vault Integration

When deployed to Secure Vault High devices, sensitive keys such as the Long Term Key (LTK) are protected using the Secure Vault Key Management functionality. The table below shows the protected keys and their storage protection characteristics.

Wrapped Key	Exportable / Non-Exportable	Notes
Remote Long Term Key (LTK)	Non-Exportable	
Local Long Term Key (legacy only)	Non-Exportable	
Remote Identity Resolving Key (IRK)	Exportable	Must be Exportable for future compatibility reasons
Local Identity Resolving Key	Exportable	Must be Exportable because the key is shared with other devices.


Wrapped keys that are marked as "Non-Exportable" can be used but cannot be viewed or shared at runtime.

Wrapped keys that are marked as "Exportable" can be used or shared at runtime but remain encrypted while stored in flash.

For more information on Secure Vault Key Management functionality, see AN1271: Secure Key Storage.

Security Advisories

To subscribe to Security Advisories, log in to the Silicon Labs customer portal, then select **Account Home**. Click **HOME** to go to the portal home page and then click the **Manage Notifications** tile. Make sure that 'Software/Security Advisory Notices & Product Change Notices (PCNs)' is checked, and that you are subscribed at minimum for your platform and protocol. Click **Save** to save any changes.

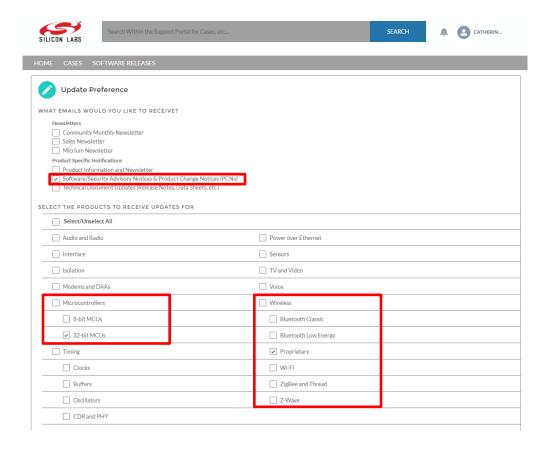

8.3 Support

Development Kit customers are eligible for training and technical support. Use the Silicon Labs Bluetooth LE web page to obtain information about all Silicon Labs Bluetooth products and services, and to sign up for product support.

You can contact Silicon Laboratories support at http://www.silabs.com/support.

9 Legal

9.1 Disclaimer

Silicon Labs intends to provide customers with the latest, accurate, and in-depth documentation of all peripherals and modules available for system and software implementers using or intending to use the Silicon Labs products. Characterization data, available modules and peripherals, memory sizes and memory addresses refer to each specific device, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. Silicon Labs reserves the right to make changes without further notice to the product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. Without prior notification, Silicon Labs may update product firmware during the manufacturing process for security or reliability reasons. Such changes will not alter the specifications or the performance of the product. Silicon Labs shall have no liability for the consequences of use of the information supplied in this document. This document does not imply or expressly grant any license to design or fabricate any integrated circuits. The products are not designed or authorized to be used within any FDA Class III devices, applications for which FDA premarket approval is required, or Life Support Systems without the specific written consent of Silicon Labs. A "Life Support System" is any product or system intended to support or sustain life and/or health, which, if it fails, can be reasonably expected to result in significant personal injury or death. Silicon Labs products are not designed or authorized for military applications. Silicon Labs products shall under no circumstances be used in weapons of mass destruction including (but not limited to) nuclear, biological or chemical weapons, or missiles capable of delivering such weapons. Silicon Labs disclaims all express and implied warranties and shall not be responsible or liable for any injuries or damages related to use of a Silicon Labs product in such unauthorized applications. Note: This content may contain offensive terminology that is now obsolete. Silicon Labs is replacing these terms with inclusive language wherever possible. For more information, visit www.silabs.com/about-us/inclusive-lexicon-project

9.2 Trademark Information

Silicon Laboratories Inc.®, Silicon Laboratories®, Silicon Labs®, SiLabs® and the Silicon Labs logo®, Bluegiga®, Bluegiga Logo®, ClockBuilder®, CMEMS®, DSPLL®, EFM®, EFM32®, EFR, Ember®, Energy Micro, Energy Micro logo and combinations thereof, "the world's most energy friendly microcontrollers", Ember®, EZLink®, EZRadio®, EZRadioPRO®, Gecko®, Gecko OS, Gecko OS Studio, ISOmodem®, Precision32®, ProSLIC®, Simplicity Studio®, SiPHY®, Telegesis, the Telegesis Logo®, USBXpress®, Zentri, the Zentri logo and Zentri DMS, Z-Wave®, and others are trademarks or registered trademarks of Silicon Labs. ARM, CORTEX, Cortex-M3 and THUMB are trademarks or registered trademarks of ARM Holdings. Keil is a registered trademark of the Wi-Fi Alliance. All other products or brand names mentioned herein are trademarks of their respective holders.