



Happiness • Sharing • Technology

BL-R7601MU2

Product Specification

WLAN 11b/g/n USB MODULE

Version: 2.0

Contents

Contents.....	1
1:General Description.....	2
2: The range of applying.....	2
3:Features.....	2
4: Electrical Characteristics.....	3
5: The main performance of product..	3
6: DC/RF characteristics.....	4
7: The block diagram of product principle.....	5
8: The supported platform.....	5
9: The definition of product Pin.....	5
10: The Structure and Size of product.....	6
11: The 6 th Pin connect to antenna, please refer to design demand.....	7
12:Typical Solder Reflow Profil	8

1. General Description

BL-R7601MU2 product Accord with FCC CE is a highly integrated Wi-Fi single chip which supports 150 Mbps PHY rate. It fully complies with IEEE802.11n and IEEE802.11b/g stands, offering feature-rich wireless connectivity at high standards, and delivering reliable, cost-effective throughput from an extended distance.

Optimized RF architecture and baseband algorithms provide superb performance and lower power consumption. Intelligent MAC design deploys a high efficient DMA engine and hardware data processing accelerators which offloads the host processor.

BL-R7601MU2 is designed to support standard based features in the areas of security quality of service and international regulations, giving end users the greatest performance anytime and in any circumstance.

2. The range of applying

Desk-Top PC; TV; Blue-ray Disk; Set-top box

3. Features

Feature	Implementation
Power supply	VCC_3.3V +-0.2V
Clock source	40MHz
Temperature range	Work temperature: -20°C---70°C Storage temperature -55°C ~ +125°C
Package	SMT 6 pins
<ul style="list-style-type: none"> ■ IEEE 802.11b/g/n client ■ Embedded high-performance 32-bit RISC microprocessor ■ Highly integrated RF with 55nm COMS technology ■ 1T1R mode with support of 150Mbps PHY rate ■ Integrate high efficiency switching regulator ■ Best-in-class power consumption performance ■ IEEE 802.11d/h/k compliant ■ Security support for WFA WPA/WPA2 personal, WPS2.0 ,WAPI ■ Support 802.11w protected managed frames ■ QOS support of WFA,WMM,WMM PS ■ Support Wi-Fi Direct ■ Fully compliance with USB v2.0 High-Speed mode ■ Per packet transmit power control ■ Antenna diversity ■ Auto-calibration 	

4. Electrical Characteristics

Symbol	Rating	MIN	TYP	MAX	Unit
VDD33	3.3V Supply Voltage	2.97	3.3	3.63	V
VDD12	1.2V Supply Voltage	1.14	1.2	1.26	V
VDD15	1.5V Supply Voltage	1.425	1.5	1.575	V
T _{AMBIENT}	Ambient Temperature	-10	-	70	°C

Recommended operating range

Symbol	Parameter	Conditions	MIN	MAX	Unit
V _{IL}	Input Low Voltage	LVTTTL	-0.28	0.6	V
V _{IH}	Input High Voltage		2.0	3.63	V
V _{T-}	Schmitt Trigger Negative Going Threshold Voltage	LVTTTL	0.68	1.36	V
V _{T+}	Schmitt Trigger Positive Going Threshold Voltage		1.36	1.7	V
V _{OL}	Output Low Voltage	I _{OL} = 1.6~14 mA	-0.28	0.4	V
V _{OH}	Output High Voltage	I _{OH} = 1.6~14 mA	2.4	VDD33+0.33	V
R _{PU}	Input Pull-Up Resistance	PU=high, PD=low	40	190	KΩ
R _{PD}	Input Pull-Down Resistance	PU=low, PD=high	40	190	KΩ

DC Characteristics

5. The main performance of product

Item	Description
The supported protocol and standard	IEEE 802.11n, IEEE 802.11g, IEEE802.11b
Interface type	USB2.0
The range of frequency	2412 ~ 2462MHz
The amount of working Channel	1-11
Data Modulation	OFDM/DBPSK/DQPSK/CCK
Working Mode	Infrastructure, Ad-Hoc
The transmitting rate	135/54/48/36/24/18/12/9/6 /1M (self-adapting)
Spread spectrum	DSSS
Sensitivity @PER	54/135M:-75dBm@10%PER, 11M:-85dBm@8%PER 6M: -88dBm@10%PER , 1M: -90dBm@8%PER
RF Power	135M:15dBm, 54M:15dBm, 11M:19dBm
Throughput	90Mbps

Type of Antenna	Integral Antenna
LED indicator	status indicator
The transmit distance	Indoor 100M, Outdoor 300M, according the local environment
Working Power consumption	455MW
MENS(L*W*H)	12.3MM*13MM*1.6MM
The chipset model	MT7601

6. DC/RF characteristics

Terms	Contents			
Specification : IEEE802.11b				
Mode	DSSS / CCK			
Frequency	2412 – 2462MHz			
Data rate	1, 2, 5.5, 11Mbps			
DC Characteristics	min	Typ.	max.	unit
TX mode	239	245	249	mA
Rx mode	91	92	93	mA
Sleep mode	47	48	48	mA
Specification : IEEE802.11g				
Mode	OFDM			
Frequency	2412 - 2462MHz			
Data rate	6, 9, 12, 18, 24, 36, 48, 54Mbps			
DC Characteristics	min	Typ.	max.	unit
TX mode	149	150	153	mA
Rx mode	92	93	100	mA
Sleep mode	46	48	49	mA
Specification : IEEE802.11n				
Mode	OFDM			
Frequency	2412 - 2462MHz			
Data rate	6.5, 13, 19.5, 26, 39, 52, 58.5, 65Mbps			
DC Characteristics	min	Typ.	max.	unit
TX mode	151	152	153	mA
Rx mode	91	92	93	mA
Sleep mode	47	48	49	mA

7.The block diagram of product principle


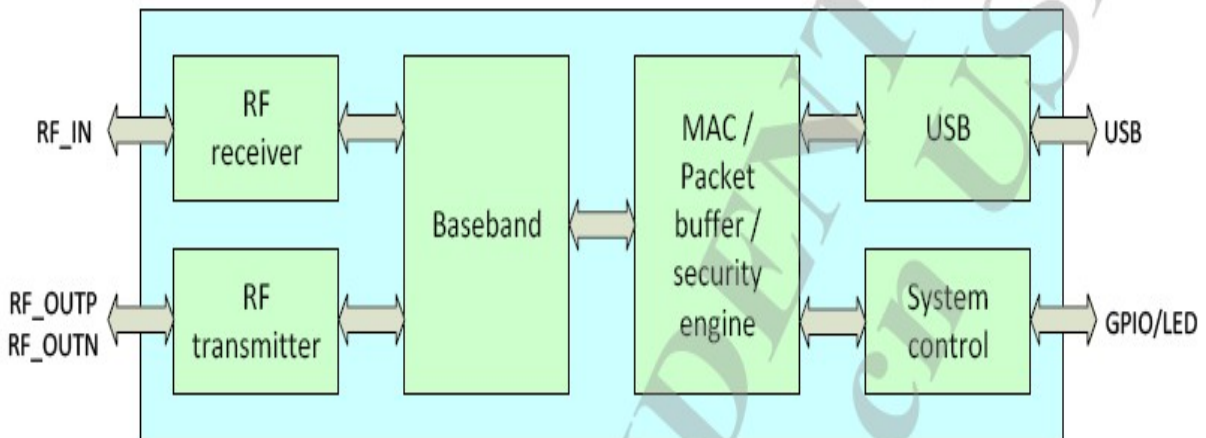


Figure 1 MT7601 block diagram

8. The supported platform

Operating System	CPU Framework	Driver
WIN2000/XP/VISTA/WIN7	X86 Platform	Enable
LINUX2.4/2.6	ARM, MIPSII	Enable
WINCE5.0/6.0	ARM ,MIPSII	Enable

9.The definition of product Pin

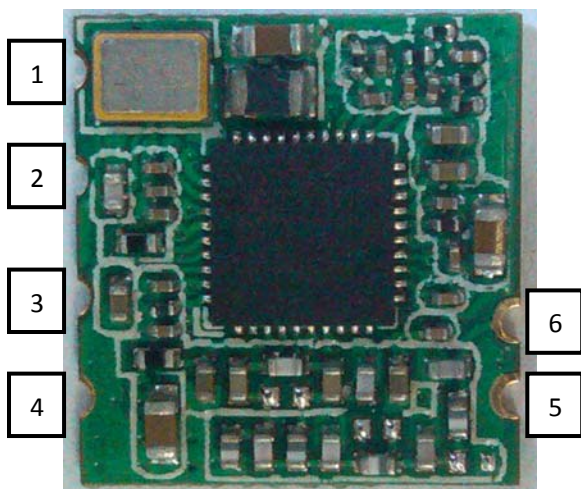

the front side




the back side

Top and bottom view of BL-R7601MU2 Ver1.0


Pin No:	TYPE	Description
---------	------	-------------

1	P	DC :3.3V
2	I/O	UDM-
3	I/O	UDP+
4	P	GND
5	P	GND
6	O	ANT

10.The Structure and Size of product

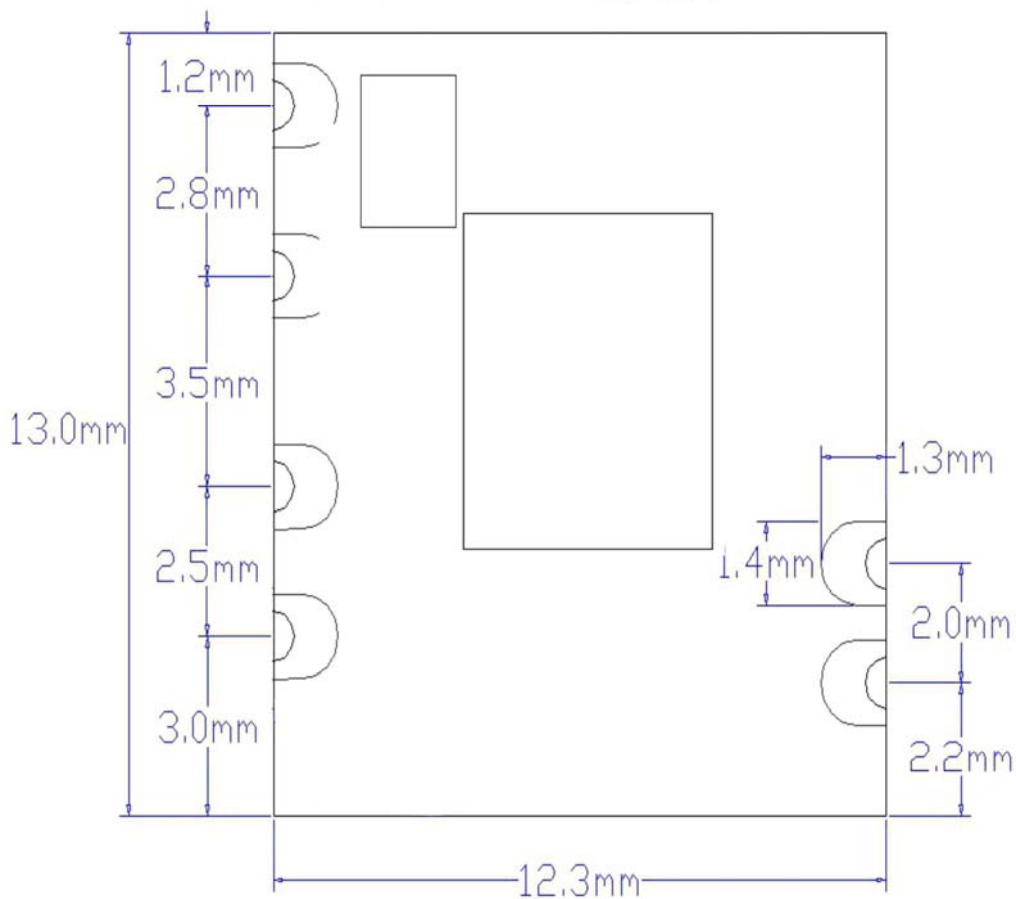


11: The 6th Pin connect to antenna, please refer to design demand

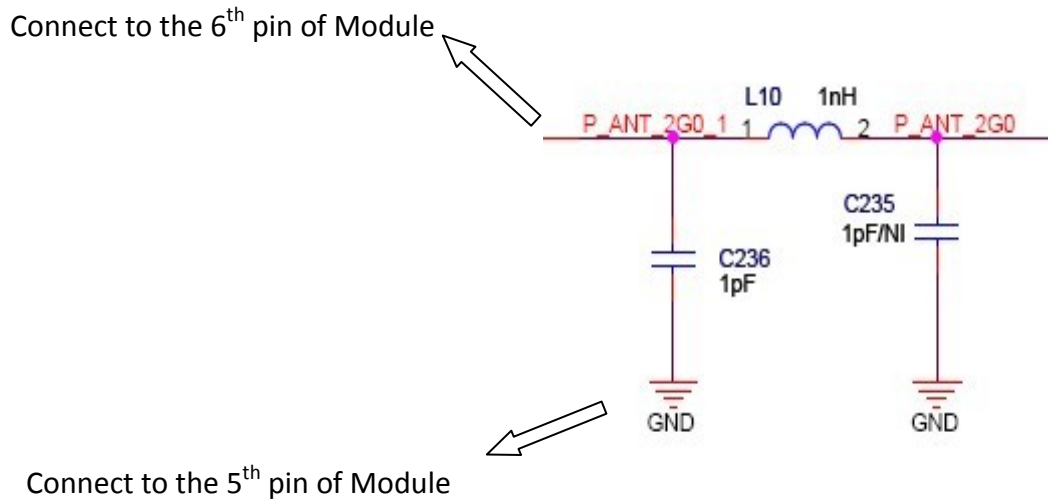

- The current of 3.3V power supply must be >300mA, its ripple wave must be <30mV. The GND pins of module and external antenna need to be an incorporated part. The ground plane should be larger, module and antenna should keep far away from interference source.
- The sixth pin is 2.4G high frequency output, coplanar impedance of layout line between this pin to antenna interface should be 50Ω, we suggest use arc line or straight line, and beside the line there will be ground plane that its length as shout as possible, the longest length is no more than 50mm.
- L10, C235, C236 constitute a π -type network that we preset, please make it close to antenna interface, this π -type network is used to match the antenna parameters and control the radiation. It should be adjusted according to the real condition when being used. Normally you can only mount L1 that its parameters are: 1NH. No need C235 .

12.Tpical Solder Reflow Profile

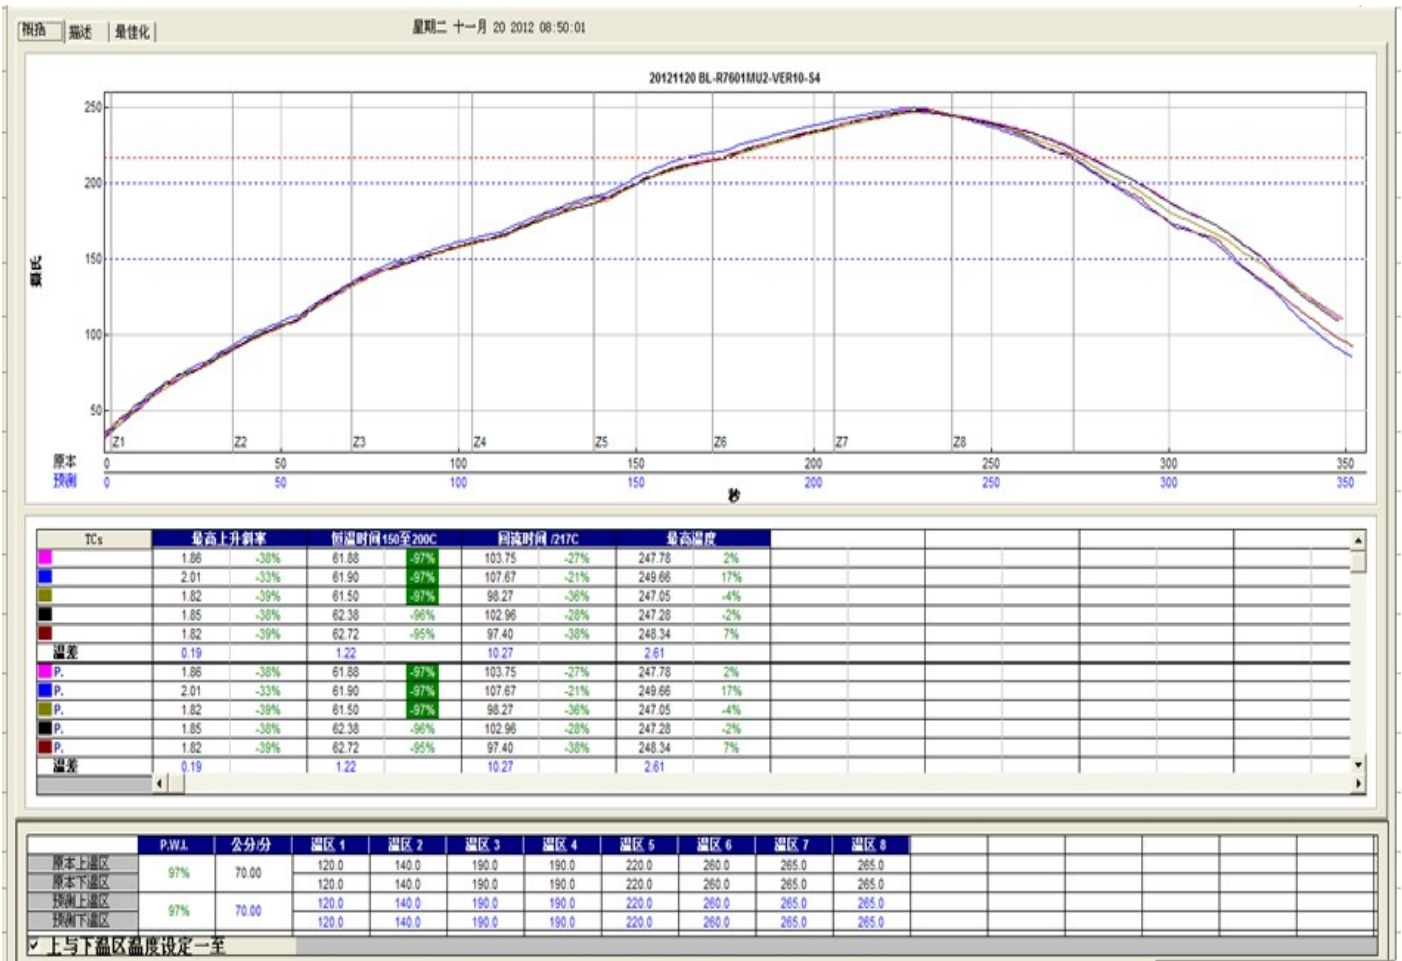

FCC Warning

The devices must be installed and used in strict accordance with the instructions as described in the user documentation that comes with the product.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

If the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module.

This exterior label can use wording such as the following:

“Contains Transmitter Module FCC ID: S8JBLR7601MU2”

When the module is installed inside another device, the user manual of this device must contain below warning statements:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This modular could be installed in the fix or mobile devices only, installed in the portable device, like USB dongle is forbidden. This modular complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This modular must be installed and operated with a minimum distance of 20 cm between the radiator and user body.

For manufacturer:

The end product into which the module will be installed should be the fix or mobile devices only, the portable device, like USB dongle is forbidden.

The end product into which the module will be installed should be installed and operated with a minimum distance of 20 cm between the radiator and user body.