

AV RECEIVER RX-V2065/HTR-6295

SERVICE MANUAL

Note:

When IC513 of GUI P.C.B. or GUI P.C.B. is replaced, the network function of this unit will not operate properly without additional setting.

In such case, report the serial number of this unit to the following e-mail address.

Yamaha Corporation will reply providing the setting procedure to make the network function of this unit operate properly.

E-mail: ycav-ysiss@gmx.yamaha.com

IMPORTANT NOTICE

This manual has been provided for the use of authorized YAMAHA Retailers and their service personnel.

It has been assumed that basic service procedures inherent to the industry, and more specifically YAMAHA Products, are already known and understood by the users, and have therefore not been restated.

WARNING: Failure to follow appropriate service and safety procedures when servicing this product may result in personal injury, destruction of expensive components, and failure of the product to perform as specified. For these reasons, we advise all YAMAHA product owners that any service required should be performed by an authorized YAMAHA Retailer or the appointed service representative.

IMPORTANT: The presentation or sale of this manual to any individual or firm does not constitute authorization, certification or recognition of any applicable technical capabilities, or establish a principle-agent relationship of any form.

The data provided is believed to be accurate and applicable to the unit(s) indicated on the cover. The research, engineering, and service departments of YAMAHA are continually striving to improve YAMAHA products. Modifications are, therefore, inevitable and specifications are subject to change without notice or obligation to retrofit. Should any discrepancy appear to exist, please contact the distributor's Service Division.

WARNING: Static discharges can destroy expensive components. Discharge any static electricity your body may have accumulated by grounding yourself to the ground buss in the unit (heavy gauge black wires connect to this buss).

IMPORTANT: Turn the unit OFF during disassembly and part replacement. Recheck all work before you apply power to the unit.

CONTENTS

| | | | |
|--|-------|-------------------------------|---------|
| TO SERVICE PERSONNEL | 2-3 | DISPLAY DATA | 68-69 |
| FRONT PANELS | 3-4 | IC DATA | 70-93 |
| REAR PANELS | 5-7 | PIN CONNECTION DIAGRAMS | 94-97 |
| REMOTE CONTROL PANELS | 8 | BLOCK DIAGRAMS | 98-101 |
| SPECIFICATIONS | 9-15 | PRINTED CIRCUIT BOARDS | 102-122 |
| INTERNAL VIEW | 16 | SCHEMATIC DIAGRAMS | 123-139 |
| SERVICE PRECAUTIONS | 16 | REPLACEMENT PARTS LIST | 141-156 |
| DISASSEMBLY PROCEDURES | 17-19 | REMOTE CONTROL | 157-160 |
| UPDATING FIRMWARE | 20-29 | ADVANCED SETUP | 161-162 |
| SELF-DIAGNOSTIC FUNCTION | 30-66 | | |
| CONFIRMATION OF IDLING CURRENT OF AMP UNIT | 67 | | |



このサービスマニュアルは、エコマーク認定の再生紙を使用しています。
This Service Manual uses recycled paper.

■ TO SERVICE PERSONNEL


1. Critical Components Information

Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.

2. Leakage Current Measurement (For 120V Models Only)

When service has been completed, it is imperative to verify that all exposed conductive surfaces are properly insulated from supply circuits.

- Meter impedance should be equivalent to 1500 ohms shunted by 0.15 μ F.

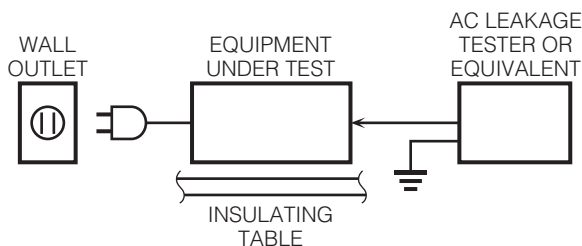

- Leakage current must not exceed 0.5mA.
- Be sure to test for leakage with the AC plug in both polarities.



For U model "CAUTION"

"F6002: FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY WITH SAME TYPE 10A, 125V FUSE."

For C model CAUTION

F6002: REPLACE WITH SAME TYPE 10A, 125V FUSE.

ATTENTION

F6002: UTILISER UN FUSIBLE DE RECHANGE DE MÊME TYPE DE 10A, 125V.

WARNING: CHEMICAL CONTENT NOTICE!

This product contains chemicals known to the State of California to cause cancer, or birth defects or other reproductive harm.

DO NOT PLACE SOLDER, ELECTRICAL/ELECTRONIC OR PLASTIC COMPONENTS IN YOUR MOUTH FOR ANY REASON WHATSOEVER!

Avoid prolonged, unprotected contact between solder and your skin! When soldering, do not inhale solder fumes or expose eyes to solder/flux vapor!

If you come in contact with solder or components located inside the enclosure of this product, wash your hands before handling food.

About lead free solder

All of the P.C.B.s installed in this unit and solder joints are soldered using the lead free solder.

Among some types of lead free solder currently available, it is recommended to use one of the following types for the repair work.

- Sn + Ag + Cu (tin + silver + copper)
- Sn + Cu (tin + copper)
- Sn + Zn + Bi (tin + zinc + bismuth)

Caution:

As the melting point temperature of the lead free solder is about 30°C to 40°C (50°F to 70°F) higher than that of the lead solder, be sure to use a soldering iron suitable to each solder.

WARNING: Lithium batteries

CAUTION

Danger of explosion if battery is incorrectly replaced.
Replace only with the same or equivalent type.

WARNING: Lithium batteries are dangerous because they can be exploded by improper handling. Observe the following precautions when handling or replacing lithium batteries.

- Leave lithium battery replacement to qualified service personnel.
- Always replace with batteries of the same type.
- When installing on the PC board by soldering, solder using the connection terminals provided on the battery cells. Never solder directly to the cells. Perform the soldering as quickly as possible.
- Never reverse the battery polarities when installing.
- Do not short the batteries.
- Do not attempt to recharge these batteries.
- Do not disassemble the batteries.
- Never heat batteries or throw them into fire.

ADVARSEL!

Lithiumbatteri –Eksplussionsfare ved fejlagtig håndtering.
Udskiftning må kun ske med batteri af samme fabrikat og type. Levér det brugte batteri tilbage til leverandøren.

VARNING

Explosionsfara vid felaktigt batteribyte. Använd samma batterityp eller en ekvivalent typ som rekommenderas av apparattillverkaren. Kassera använt batteri enligt fabrikantens instruktion.


VAROITUS

Paristo voi räjähtää, jos se on virheellisesti asennettu.
Vaihda paristo ainoastaan laitevalmistajan suosittelemaan tyyppiin. Hävitä käytetty paristo valmistajan ohjeiden mukaisesti.


FRONT PANELS

Top view

U model




C, R, T, K, A, B, G, E, F, L models




Front view


RX-V2065 (U model)

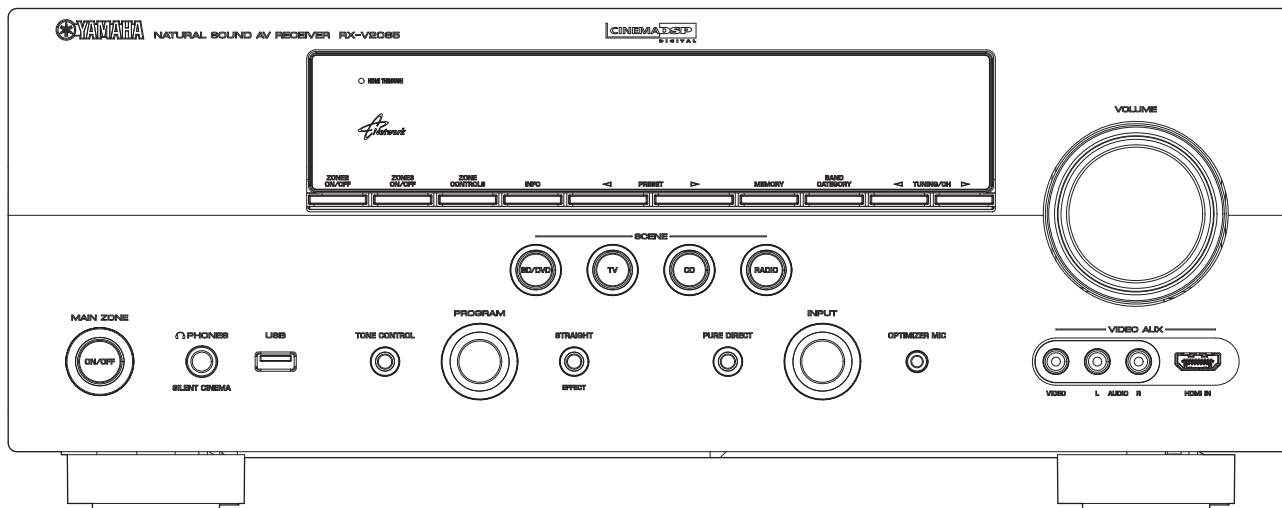


RX-V2065 (C, R, K, A, B, G, E, F, L models)

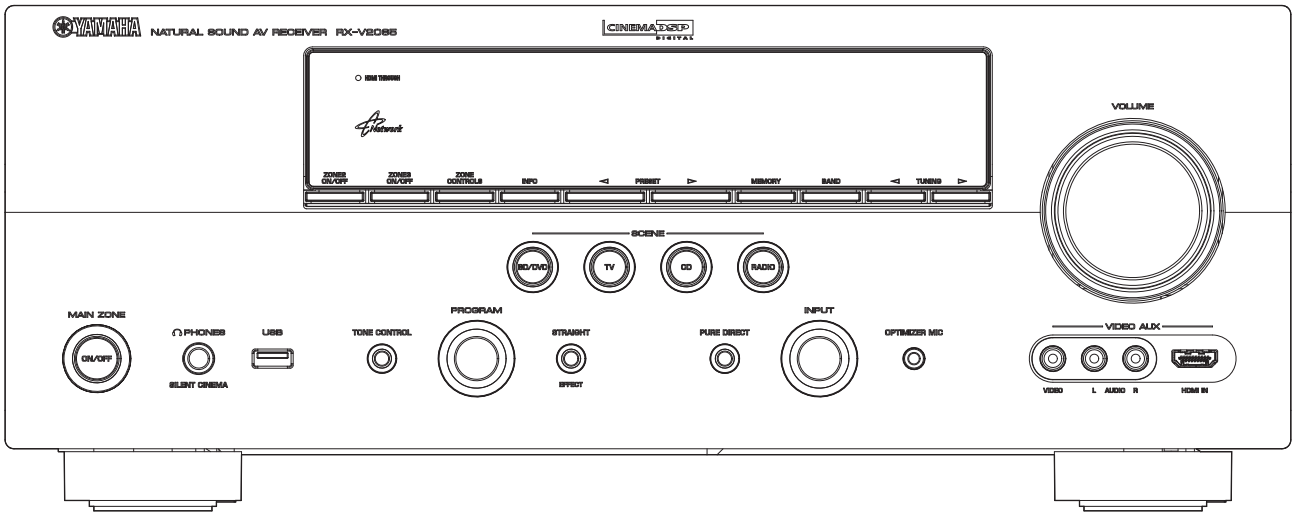

RX-V2065 (T model)

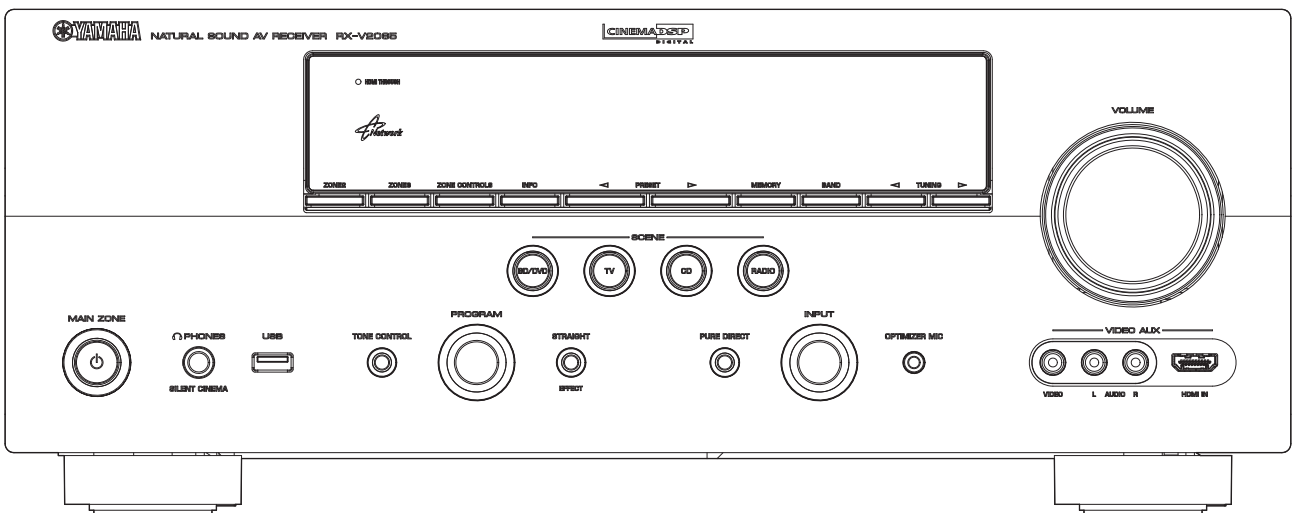


HTR-6295 (C model)

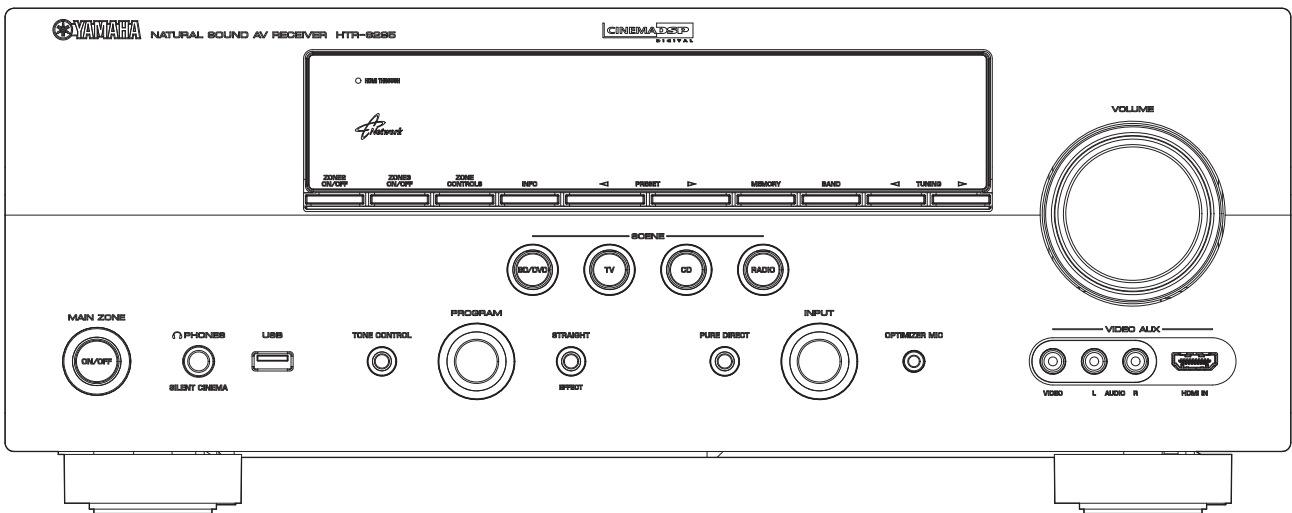


RX-V2065/HTR-6295

REAR PANELS


RX-V2065 (U model)

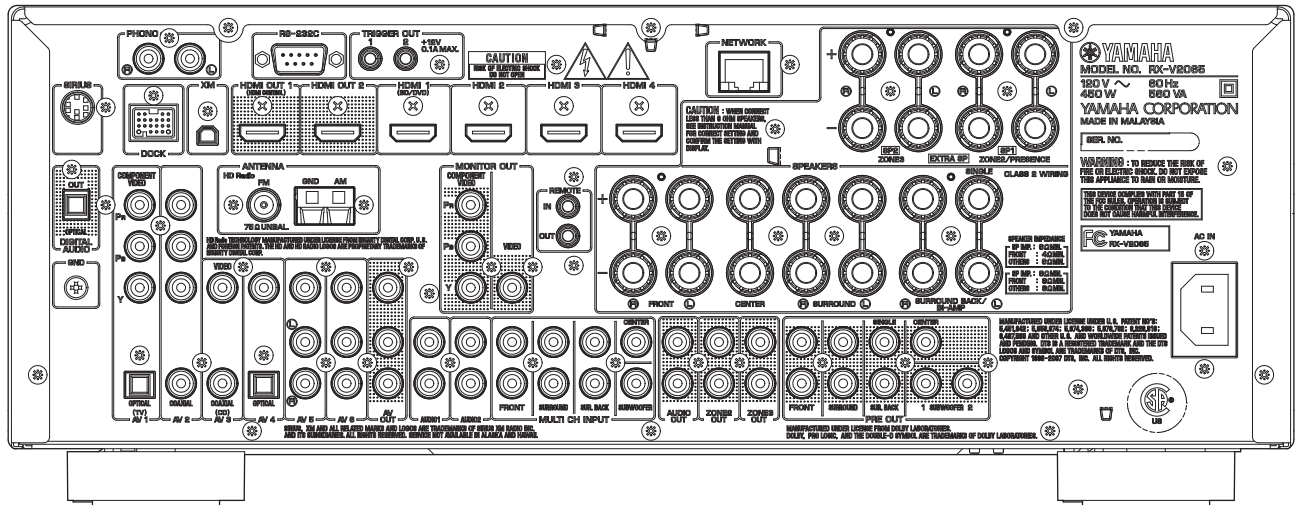

RX-V2065 (C model)

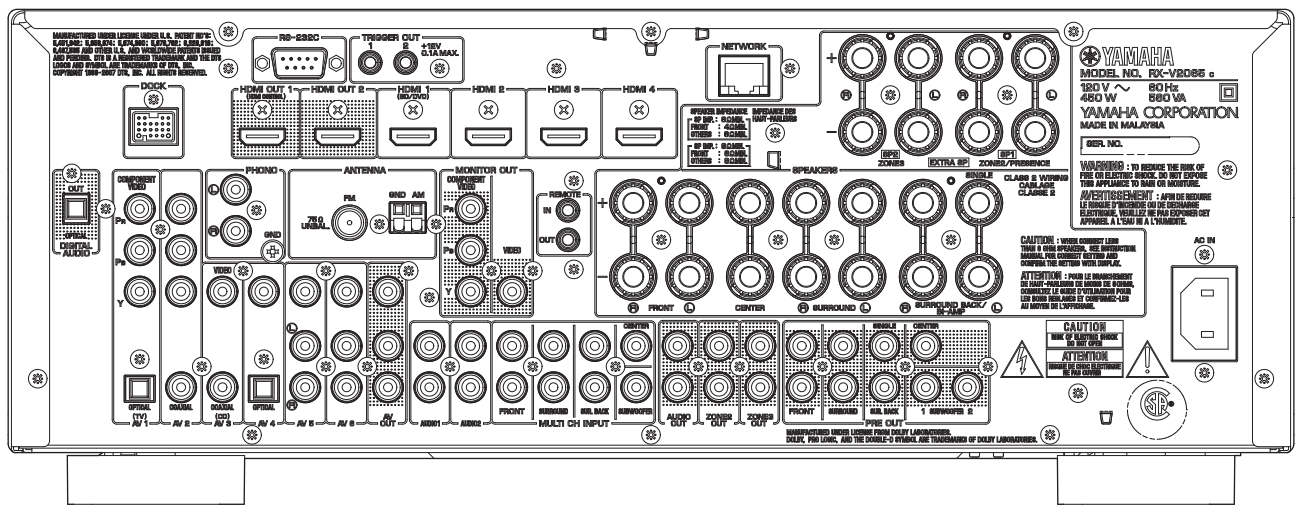


RX-V2065 (R model)

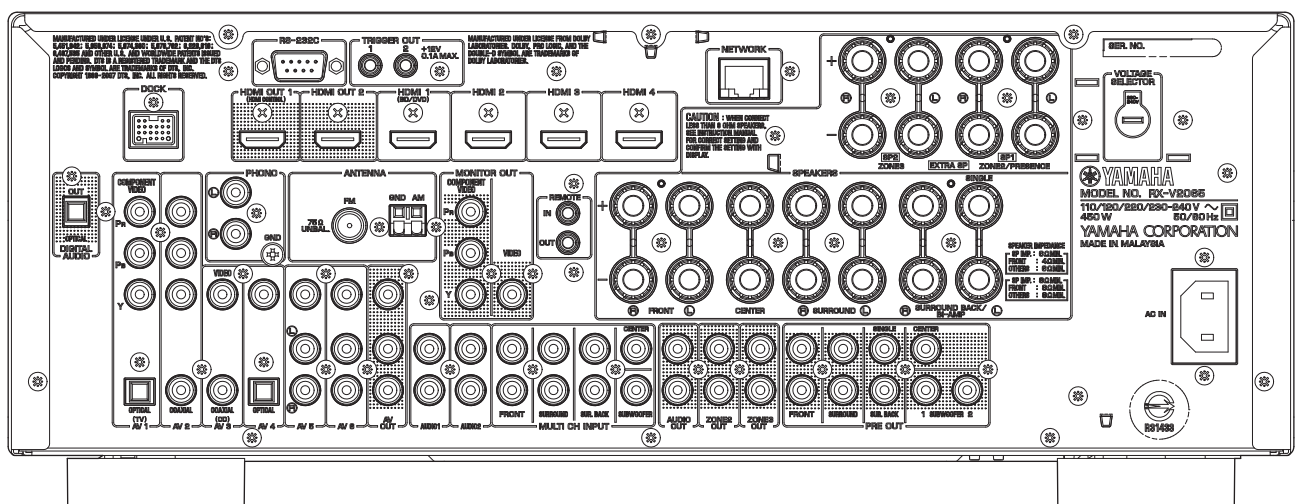


RX-V2065/HTR-6295


RX-V2065 (T model)

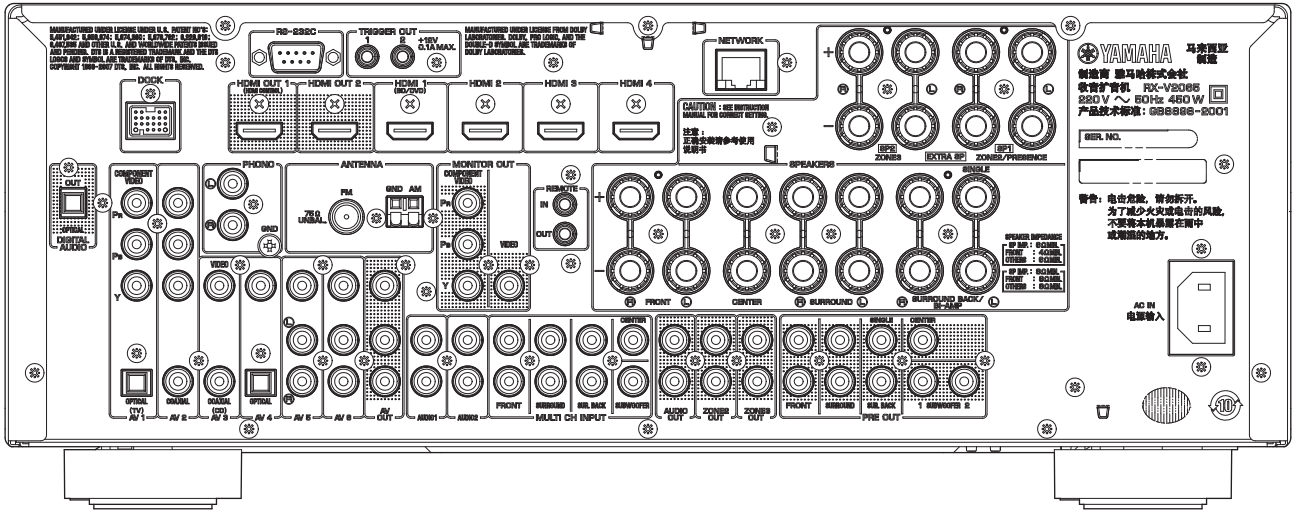

RX-V2065 (K model)

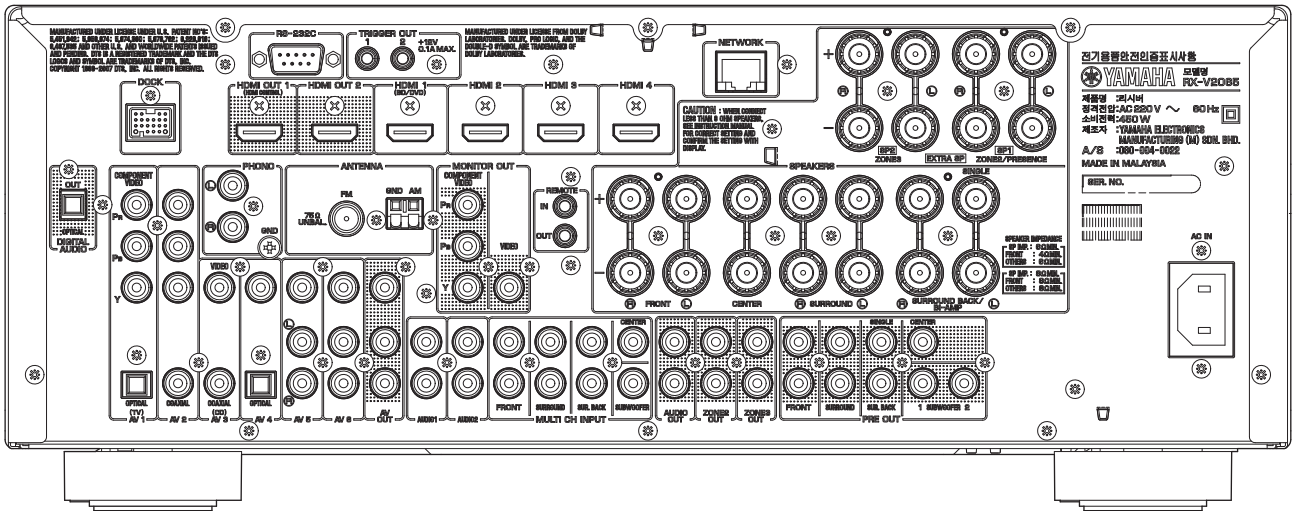

RX-V2065 (A model)

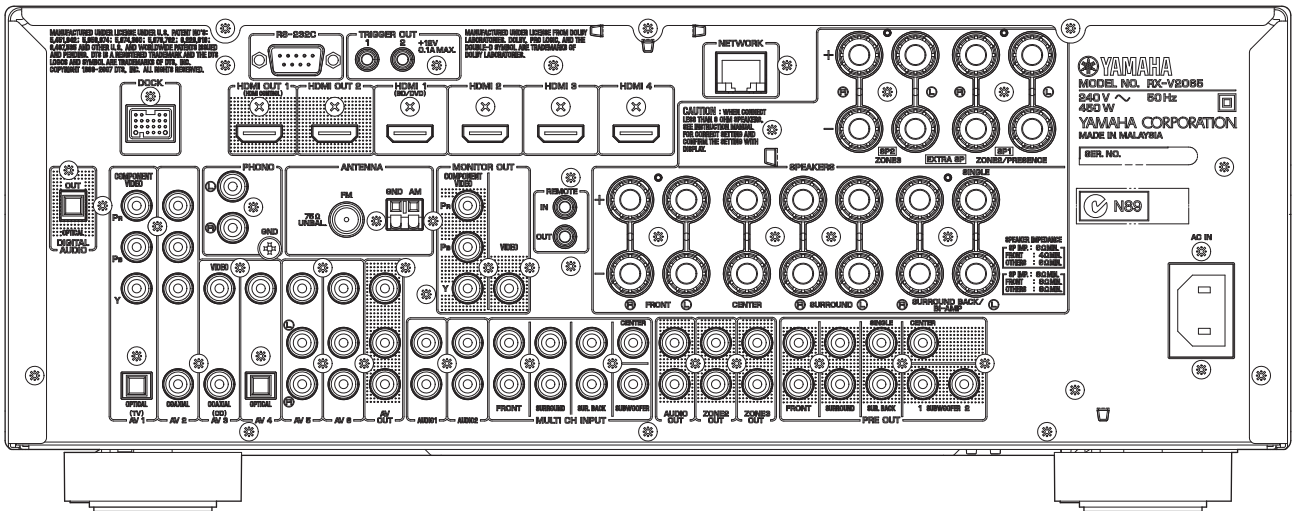


RX-V2065/HTR-6295

■ REMOTE CONTROL PANELS


RAV296

(U model)

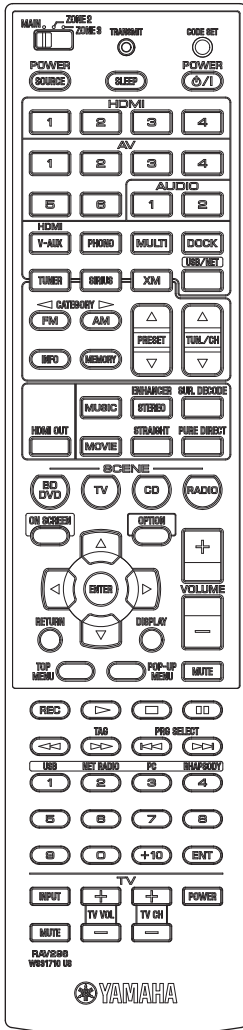


RAV297

(C, R, A, L models)

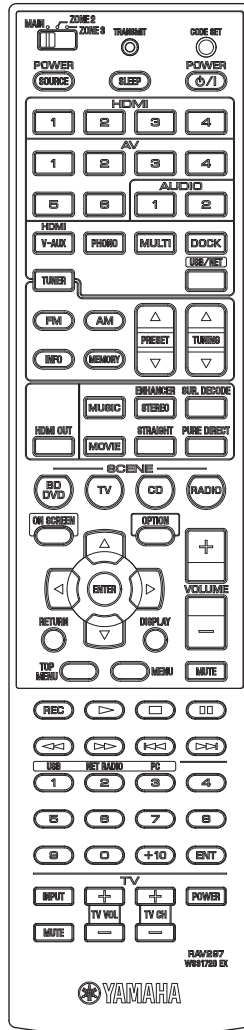


RAV298

(T, K, B, G, E, F models)

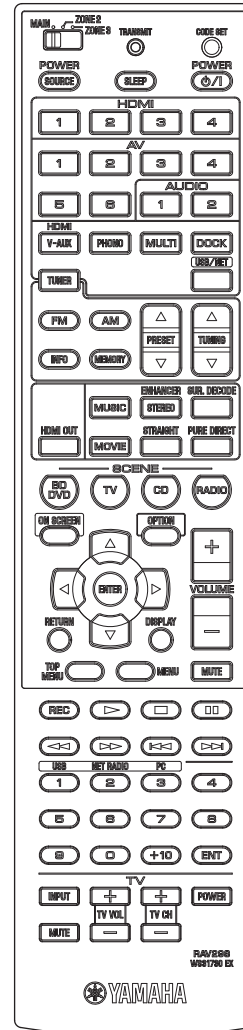

RAV38

(U, C, R, T, K, A, B, G, E, F, L models)

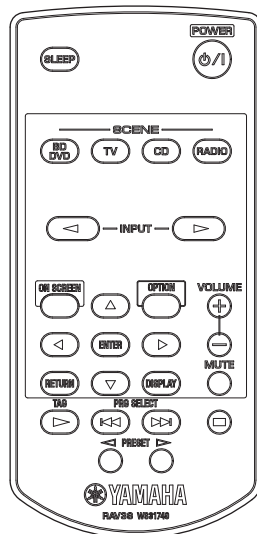

■ SPECIFICATIONS

■ Audio Section

Minimum RMS Output Power (Power Amp. Section)

(20 Hz to 20 kHz, 0.08 % THD, 8 ohms)

| | |
|-------------------------|---------------|
| FRONT L/R | 130 W + 130 W |
| CENTER | 130 W |
| SURROUND L/R | 130 W + 130 W |
| SURROUND BACK L/R | 130 W + 130 W |

Maximum Power (JEITA) (1 kHz, 10 % THD, 8 ohms)

[R, T, K, A, L models]

| | |
|-------------------------|---------------|
| FRONT L/R | 175 W + 175 W |
| CENTER | 175 W |
| SURROUND L/R | 175 W + 175 W |
| SURROUND BACK L/R | 175 W + 175 W |

MAX. Power Per Channel (1 kHz, 0.7 % THD, 4 ohms)

[B, G, E, F models]

| | |
|-------------------------|---------------|
| FRONT L/R | 180 W + 180 W |
| CENTER | 180 W |
| SURROUND L/R | 180 W + 180 W |
| SURROUND BACK L/R | 180 W + 180 W |

IEC Power (1 kHz, 0.08 % THD, 8 ohms)

[B, G, E, F models]

| | |
|-----------------|---------------|
| FRONT L/R | 130 W + 130 W |
|-----------------|---------------|

Dynamic Power Per Channel (IHF)

FRONT L/R drive

| | |
|----------------------------|-------------------------|
| (8 / 6 / 4 / 2 ohms) | 160 / 200 / 260 / 330 W |
|----------------------------|-------------------------|

Dynamic Headroom [U, C models]

| | |
|--------------|--------|
| 8 ohms | 0.9 dB |
|--------------|--------|

Damping Factor

(20 Hz to 20 kHz, 8 ohms, SPEAKER-A)

| | |
|-----------------|-------------|
| FRONT L/R | 100 or more |
|-----------------|-------------|

Input Sensitivity/Input Impedance

(1 kHz, 100 W/8 ohms)

| | |
|---|--------------------|
| PHONO (MM) | 3.5 mV / 47 k-ohms |
| AV5 etc. | 200 mV / 47 k-ohms |
| MULTI CH INPUT | |
| FRONT L/R, CENTER, SURROUND L/R, SURROUND BACK L/R, SUBWOOFER | |
| | 200 mV / 47 k-ohms |

Maximum Input Signal (1 kHz)

| | |
|--|---------------|
| PHONO (MM) (0.1 % THD) | 60 mV or more |
| AV5 etc. (Effect ON) (0.5 % THD) | 2.3 V or more |

Output Level/Output Impedance

| | |
|---|-------------------|
| REC OUT | 200 mV/1.2 k-ohms |
| PRE OUT | 1 V/1.2 k-ohms |
| SUBWOOFER (2 ch stereo and FRONT SP: small) | |
| | 1 V/1.2 k-ohms |
| ZONE2, 3 OUT | 200 mV/1.4 k-ohms |

Headphone Jack Rated Output/Output Impedance

| | |
|---|-----------------|
| AV5 etc. input (1 kHz, 50 mV, 8 ohms) | 100 mV/470 ohms |
|---|-----------------|

Frequency Response

| | |
|--|----------|
| AV5 etc., FRONT (10 Hz to 100 kHz) | +0/-3 dB |
|--|----------|

RIAA Equalization Deviation

| | |
|------------------|-----------|
| PHONO (MM) | 0 ±0.5 dB |
|------------------|-----------|

Total Harmonic Distortion

| | |
|--|----------------|
| PHONO (MM) to REC OUT (20 Hz to 20 kHz, 1 V) | |
| | 0.02 % or less |
| AV5 etc. (PURE DIRECT) to FRONT SP OUT (20 Hz to 20 kHz, 50 W) | |
| 8 ohms | 0.06 % or less |

Signal to Noise Ratio (IHF-A network)

| | |
|--|----------------|
| PHONO (MM) to REC OUT (Input shorted 5 mV) | |
| U, C, R, T models | 86 dB or more |
| K, A, B, G, E, F, L models | 81 dB or more |
| AV5, etc. (PURE DIRECT) to SP OUT (Input shorted 250 mV) | |
| | 100 dB or more |

Residual Noise (IHF-A network)

| | |
|---------------------------|----------------|
| FRONT L/R to SP OUT | 150 μV or less |
|---------------------------|----------------|

Channel Separation (1 kHz / 10 kHz)

| | |
|--------------------------------------|-------------------------------|
| PHONO (Input shorted) | |
| | 60 dB or more / 55 dB or more |
| AV5, etc. (Input 5.1 k-ohms shorted) | |
| | 60 dB or more / 45 dB or more |

Volume Control

| | |
|-------|---|
| | MUTE / -80 dB to +16.5 dB / 0.5 dB step |
|-------|---|

Tone Control Characteristics

| | |
|--------------------------|--------------------------|
| FRONT L/R | |
| Bass | |
| Boost/Cut | ±10 dB/2 dB, step 50 Hz |
| Turnover frequency | 350 Hz |
| Treble | |
| Boost/Cut | ±10 dB/2 dB, step 20 kHz |
| Turnover frequency | 3.5 kHz |

Filter Characteristics

| | |
|--|--|
| FRONT, CENTER, SURROUND, SURROUND BACK small (H.P.F.) | |
|fc=40/60/80/90/100/110/120/160/200 Hz, 12 dB/oct. | |
| SUBWOOFER small (L.P.F.) | |
|fc=40/60/80/90/100/110/120/160/200 Hz, 24 dB/oct. | |

■ Video Section

Video Signal Type (Gray back)

| | |
|----------------------------------|----------|
| Gray back | |
| U, C, R, K models | NTSC |
| T, A, B, G, E, F, L models | PAL |
| Video conversion | |
| | NTSC/PAL |

Composite Video Signal Level

| | |
|-------|------------------|
| | 1 Vp-p / 75 ohms |
|-------|------------------|

S-Video Signal Level [B, G, E, F models]

| | |
|---------|----------------------|
| Y | 1 Vp-p / 75 ohms |
| C | 0.286 Vp-p / 75 ohms |

Component Video Signal Level

| | |
|-------------|--------------------|
| Y | 1 Vp-p / 75 ohms |
| Cb/Cr | 0.7 Vp-p / 75 ohms |

Video Maximum Input Level

| | |
|----------------------------|------------------|
| VIDEO CONVERSION OFF | 1.5 Vp-p or more |
|----------------------------|------------------|

Video Signal to Noise Ratio

| | |
|-------|---------------|
| | 50 dB or more |
|-------|---------------|

Monitor Out Frequency Response

(VIDEO CONVERSION OFF)

| | |
|------------------------------------|-----------------------|
| Component video signal level | 5 Hz to 60 MHz, -3 dB |
|------------------------------------|-----------------------|

■ FM Section

Tuning Range

| | |
|----------------------------------|---|
| U, C models | 87.5 to 107.9 MHz |
| R, L models | 87.5 to 108.0 MHz / 87.50 to 108.00 MHz |
| T, K, A, B, G, E, F models | 87.50 to 108.00 MHz |

50 dB Quieting Sensitivity (IHF) (1 kHz, 100 % MOD.)

| | |
|------------|-----------------|
| Mono | 3 μV (20.8 dBf) |
|------------|-----------------|

Signal to Noise Ratio (IHF)

| | |
|--------------------|-------|
| Mono | 74 dB |
| Stereo | 70 dB |
| HD (U model) | 80 dB |

Harmonic Distortion (1 kHz)

| | |
|--------------------|--------|
| Mono | 0.3 % |
| Stereo | 0.3 % |
| HD (U model) | 0.03 % |

Antenna Input

..... 75 ohms unbalanced

AM Section

Tuning Range

| | |
|----------------------------------|-------------------------------------|
| U, C models | 530 to 1,710 kHz |
| R, L models | 530 to 1,710 kHz / 531 to 1,611 kHz |
| T, K, A, B, G, E, F models | 531 to 1,611 kHz |

Antenna Loop antenna

General

Power Supply

| | |
|-------------------------|------------------------------------|
| U, C models | AC 120 V, 60 Hz |
| R model | AC 110/120/220/230–240 V, 50/60 Hz |
| T model | AC 220 V, 50 Hz |
| K model | AC 220 V, 60 Hz |
| A model | AC 240 V, 50 Hz |
| B, G, E, F models | AC 230 V, 50 Hz |
| L model | AC 220/230–240 V, 50/60 Hz |

Power Consumption

| | |
|--|----------------|
| U, C models | 450 W / 560 VA |
| R, T, K, A, B, G, E, F, L models | 450 W |

Standby Power Consumption (reference data)

| | |
|---|----------------|
| HDMI control: OFF / Standby through: OFF / RS-232C: OFF | 0.2 W or less |
| HDMI control: ON / Standby through: ON / Network Standby: ON | 5.6 W or less |
| HDMI control: ON / Standby through: ON / Network Standby: ON / Repeat | 10.6 W or less |

Maximum Power Consumption [R, L models]

..... 680 W

Dimensions (W x H x D)

..... 435 x 171 x 365 mm (17-1/8" x 6-3/4" x 14-3/8")

Weight

..... 12.4 kg (27.4 lbs.)

Finish

| | |
|----------------------|--|
| [RX-V2065] | |
| Black color | U, C, R, T, K, A, B, G, E, F, L models |
| Titanium color | R, G, E, F, L models |

| | |
|-------------------|---------|
| [HTR-6295] | |
| Black color | C model |

Accessories

| | |
|---|-----|
| Remote control | x 1 |
| Simplified remote control | x 1 |
| Battery (R03, AAA, UM-4) | x 2 |
| Lithium battery (CR2025) | x 1 |
| Indoor FM antenna (1.4 m) | x 1 |
| AM loop antenna | |
| (1.2 m) (U model) | x 1 |
| (1.0 m) (C, R, T, K, A, B, G, E, F, L models) | x 1 |
| Optimizer microphone (6.0 m) | x 1 |
| VIDEO AUX input cover | x 1 |
| Power cable (2.0 m) | x 1 |

* Specifications are subject to change without notice due to product improvements.

| | | | |
|----------------|-------------------------|----------------|-----------------------------|
| U | U.S.A. model | B | British model |
| C | Canadian model | G | European model |
| R | General model | E | South European model |
| T | Chinese model | F | Russian model |
| K | Korean model | L | Singapore model |
| A | Australian model | | |



Manufactured under license from Dolby Laboratories. Dolby, Pro Logic and the double-D symbol are trademarks of Dolby Laboratories.



DTS is a registered trademark and the DTS logos, Symbol, DTS-HD and DTS-HD Master Audio are trademark of DTS, Inc. © 1996-2007 DTS, Inc. All Rights Reserved.



Neural Surround™ name and related logos are trademarks owned by Neural Audio Corporation.

iPod™

"iPod" is a trademark of Apple Inc., registered in the U.S. and other countries.



Fraunhofer Institut Integrierte Schaltungen

MPEG Layer-3 audio coding technology licensed from Fraunhofer IIS and Thomson.



This receiver supports network connections.

Bluetooth™

Bluetooth is a registered trademark of Bluetooth SIG and is used by Yamaha in accordance with a license agreement.



"HDMI," the "HDMI" logo and "High-Definition Multimedia Interface" are trademarks, or registered trademarks of HDMI Licensing LLC.

x.v.Color

"x.v.Color" is a trademark of Sony Corporation.

SILENT™
CINEMA

“SILENT CINEMA” is a trademark of Yamaha Corporation.



SIRIUS, XM and all related marks and logos are trademarks of Sirius XM Radio Inc. and its subsidiaries. All rights reserved. **Service not available in Alaska and Hawaii.**




HD Radio™ Technology Manufactured Under License From iBiquity Digital Corp. U.S. and Foreign Patents. HD Radio™ and the HD Radio logo are proprietary trademarks of iBiquity Digital Corp.



Rhapsody and the Rhapsody logo are registered trademarks of RealNetworks, Inc.

Windows XP, Windows Vista, Windows Media Audio, Windows Media Connect and Windows Media Player are either registered trademarks or trademarks of Microsoft corporation in the United States and/or other countries.

• DIMENSIONS

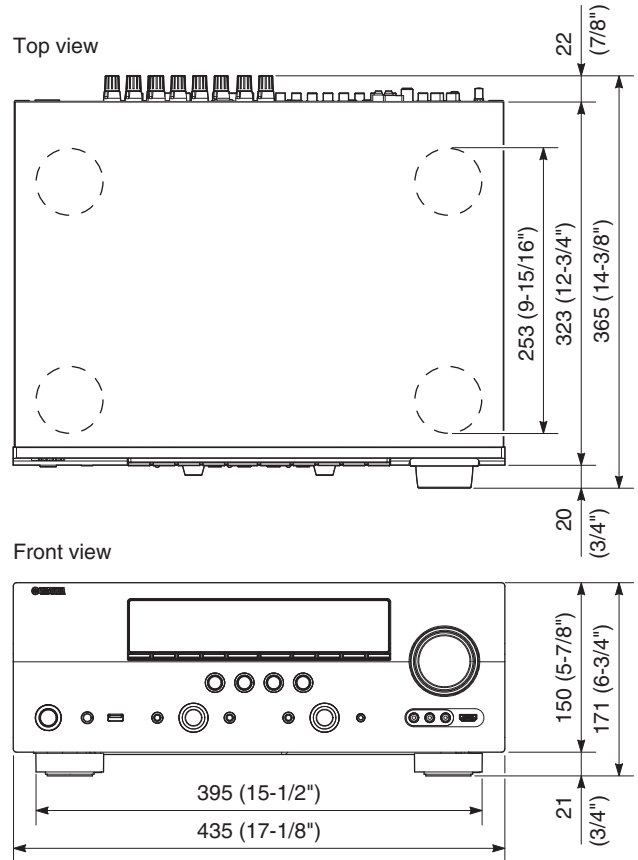

Unit: mm (inch)

• SCENE TEMPLATE

| Name | BD/DVD | TV | CD | RADIO |
|------------------|----------|-------------------------------|---------------------------|--------------------------------|
| INPUT | HDMI1 | AV-1 (Component / Optical) | AV-3 (Video / Coaxial) | TUNER |
| Sound field mode | STRAIGHT | STRAIGHT | STRAIGHT | MUSIC ENHANCER 7ch Enhancer |
| IR code output | DVD Play | None | CD Power On / Play | None |

• SOUND FIELD PARAMETERS

| Category | Program | Parameter | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------|-------------------|-------------|----------------|-------------------------|------------------------|-----------------------|-------------------|-----------------------------|----------------------------|------------------------|----------------------------|---------------------------|-----------------------|------------------------|------------------------|-----------------------|-----------------------|-------------------------|-----------------------------|-----------------------------|---------------------------|-----------------------------|-----------------------------|------------------|------------------------|------------------|----------------------|---------------------|--------------------------|---------------|-----------------|------------|
| | | Decode Type | 3D DSP: ON/OFF | DSP Level: -6dB to +3dB | Init. Delay: 1 to 99ms | Room Size: 0.1 to 2.0 | Liveness: 0 to 10 | Sur. Init. Delay: 1 to 49ms | Sur. Room Size: 0.1 to 2.0 | Sur. Liveness: 0 to 10 | SB. Init. Delay: 1 to 49ms | SB. Room Size: 0.1 to 2.0 | SB. Liveness: 0 to 10 | Rev. Time: 1.0 to 5.0s | Rev. Delay: 0 to 250ms | Rev. Level: 0 to 100% | Dialogue Lift: 0 to 5 | Center Level: 0 to 100% | Surround L Level: 0 to 100% | Surround R Level: 0 to 100% | Sur.Back Level: 0 to 100% | Presence L Level: 0 to 100% | Presence R Level: 0 to 100% | Direct: Auto/Off | Effect Level: High/Low | Panorama: On/Off | Center Width: 0 to 7 | Dimension: -3 to +3 | Center Image: 0.0 to 1.0 | FOCUS: 0 to 8 | TruBass: 0 to 8 | Initialize |
| MOVIE | Standard | ● *1 | ● | ● | | | ● | ● | ● | ● | ● | ● | | | | ● | | | | | | | | | | | | | | | | ● |
| | Spectacle | ● *1 | ● | ● | ● | | ● | ● | | ● | ● | | | | | ● | | | | | | | | | | | | | | | ● | |
| | Sci-Fi | ● *1 | ● | ● | ● | | ● | ● | | ● | ● | | | | | ● | | | | | | | | | | | | | | | ● | |
| | Adventure | ● *1 | ● | ● | ● | | ● | ● | | ● | ● | | | | | ● | | | | | | | | | | | | | | | ● | |
| | Drama | ● *1 | ● | ● | ● | | ● | ● | | ● | ● | | | | | ● | | | | | | | | | | | | | | | ● | |
| | Mono Movie | | ● | ● | ● | ● | | | | | | | | ● | ● | ● | ● | | | | | | | | | | | | | | ● | |
| | Sports | | ● | ● | ● | ● | | ● | ● | | ● | ● | | | | | ● | | | | | | | | | | | | | | ● | |
| | Action Game | | ● | ● | ● | ● | | ● | ● | | ● | ● | | | | | ● | | | | | | | | | | | | | | ● | |
| | Roleplaying Game | | ● | ● | ● | ● | | ● | ● | | ● | ● | | | | | ● | | | | | | | | | | | | | | ● | |
| MUSIC | Hall in Munich | | ● | ● | ● | ● | | | | | | | | | | ● | | | | | | | | | | | | | | ● | | |
| | Hall in Vienna | | ● | ● | ● | ● | | | | | | | | | | ● | | | | | | | | | | | | | | ● | | |
| | Chamber | | ● | ● | ● | ● | | | | | | | ● | ● | ● | ● | | | | | | | | | | | | | | ● | | |
| | Cellar Club | | ● | ● | ● | ● | | | | | | | | | | ● | | | | | | | | | | | | | | ● | | |
| | The Roxy Theatre | | ● | ● | ● | ● | | | | | | | | ● | ● | ● | ● | | | | | | | | | | | | | ● | | |
| | The Bottom Line | | ● | ● | ● | ● | | | | | | | | | | ● | | | | | | | | | | | | | | ● | | |
| | Music Video | | ● | ● | ● | ● | | ● | ● | | ● | ● | | | | ● | | | | | | | | | | | | | | ● | | |
| STEREO | 2ch Stereo | | | | | | | | | | | | | | | | | | | | | | | ● | | | | | | ● | | |
| | 7ch Stereo | | | | | | | | | | | | | | | | ● | ● | ● | ○ | ● | ● | | | | | | | | ● | | |
| MUSIC ENHANCER | Straight Enhancer | | | | | | | | | | | | | | | | | | | | | | | ● | | | | | | ● | | |
| | 7ch Enhancer | | | | | | | | | | | | | | | | | | | | | | | ● | | | | | | ● | | |
| SUR. DECODE | Surround Decoder | ● *2 | | | | | | | | | | | | | | | | | | | | | | | | △ | △ | △ | ▲ | ■ | ● | |
| STRAIGHT | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

○ : The parameter to be used varies between when there is one surround pack and when there are two. On the display, the parameter value varies accordingly while the same parameter name appears.
 △ : Setting is possible only when Pro Logic II x Music (Pro Logic II Music) is selected using decode type.
 ▲ : Setting is possible only when Neo:6 Music is selected using decode type.
 ■ : Setting is possible only when CS II Cinema/Music is selected using decode type.

*1 Decode Type

| | | |
|-------------|---------------|-----------------------------------|
| Decode Type | PL II x Movie | PL II when Surround Back is None. |
| | Neo:6 Cinema | |

*2 Decode Type

| | | |
|-------------|----------------|-----------|
| Decode Type | Pro Logic | (U model) |
| | PL II x Movie | |
| | PL II x Music | |
| | PL II x Game | |
| | Pro Logic II z | |
| | Neo:6 Cinema | |
| | Neo:6 Music | |
| | Neural Sur. | |

RX-V2065/HTR-6295

• SET MENU TABLE

| MAIN MENU | SUB-MENU | PARAMETER | VALUE [INITIAL VALUE] | |
|--------------------------|--------------------------|---------------------------|---|---|
| 1 • Speaker Setup | | | | |
| 1 Auto Setup (YPAO) | Extra Speaker Assignment | | [Zone2] / Zone2 + Zone3 / Presence / None | |
| | EQ Type | | [Natural] / Flat / Front | |
| | | Start | [ENTER]: Start | |
| 2 Manual Setup | A) Speaker Configuration | Extra Speaker Assignment | [Zone2] / Zone2 + Zone3 / Presence / None | |
| | | LFE/Bass Out | Subwoofer / Front / [Both] | |
| | | Front Speaker | Small / [Large] | |
| | | Center Speaker | None / [Small] / Large | |
| | | Surround L/R Speaker | None / Large x 1 / Small x 1 / Large x 2 / [Small x 2] | |
| | | Surround Back L/R Speaker | None / Large x 1 / Small x 1 / Large x 2 / [Small x 2] | |
| | | Bass Crossover Frequency | 40 / 60 / [80] / 90 / 100 / 110 / 120 / 160 / 200 Hz | |
| | | | Subwoofer Phase | [Normal] / Reverse |
| | B) Speaker Level | Front L | | -10.0 to +10.0 dB, [0 dB], 0.5 dB step |
| | | Front R | | |
| | | Center | | |
| | | Surround L | | -10.0 to +10.0 dB, [-1.0 dB], 0.5 dB step |
| | | Surround R | | |
| | | Surround Back L | | |
| | | Surround Back R | | -10.0 to +10.0 dB, [0 dB], 0.5 dB step |
| | | Subwoofer | | |
| | | Presence L | | |
| | Presence R | | | |
| | C) Speaker Distance | Unit | | meters (m) / [feet (ft)] |
| | | Front L | | 0.30 to 24.00 m, [3.00 m] |
| | | Front R | | |
| | | Center | | |
| | | Surround L | | 0.30 to 24.00 m, [2.60 m] |
| | | Surround R | | |
| | | Surround Back L | | |
| | | Surround Back R | | 0.30 to 24.00 m, [2.40 m] |
| | | Subwoofer | | |
| | | Presence L | | |
| | | Presence R | | 0.30 to 24.00 m, [3.00 m] |
| | | Front L | | 1.0 to 80.0 ft, [10.0 ft] |
| | | Front R | | |
| | | Center | | |
| | | Surround L | | 1.0 to 80.0 ft, [8.0 ft] |
| Surround R | | | | |
| Surround Back L | | | | |
| Surround Back R | | 1.0 to 80.0 ft, [10.0 ft] | | |
| Subwoofer | | | | |
| Presence L | | | | |
| Presence R | | | | |
| D) Equalizer | EQ Type Select | | Auto PEQ / [GEQ] / Off | |
| | GEQ | | * "GEQ" is available only when "EQ Type Select" is set to "GEQ" | |
| | Front L | 63 Hz 0 dB | -6.0 to +6.0 dB, [0 dB], 0.5 dB step | |
| | Front R | 160 Hz 0 dB | | |
| | Center | 400 Hz 0 dB | | |
| | Sur. L | 1 kHz 0 dB | | |
| | Sur. R | 2.5 kHz 0 dB | | |
| | SBL | 6.3 kHz 0 dB | | |
| | SBR | 16 kHz 0 dB | | |
| | E) Test Tone | | [Off] / On | |
| | 2 • Sound Setup | | | |
| | 1 Dynamic Range | | | Min/Auto / STD / [Max] |
| | 2 Lipsync | HDMI OUT1 | | 0 to 240 ms, [0 ms], 1 ms step |
| HDMI OUT2 | | | | |
| ANALOG MONITOR OUT | | | | |

RX-V2065/HTR-6295

| MAIN MENU | SUB-MENU | PARAMETER | VALUE [INITIAL VALUE] | |
|---------------------------|----------------------------|----------------------|--|-----------------------------|
| 3 • Function Setup | | | | |
| 1 HDMI | HDMI Control | | On / [Off] | |
| | Standby Through | | On / [Off] * This menu is available only when "HDMI Control" is set to "Off". | |
| | Audio Output | | [Amplifier] / TV / Amplifier + TV * This menu is available only when "HDMI Control" is set to "Off". | |
| | Resolution | | [Through] / 480p (576p) / 720p / 1080i / 1080p | |
| | Aspect | | [Through] / 16:9 / Smart Zoom | |
| 2 Display | Dimmer | | -4 to 0, [0] | |
| | Front Panel Display Scroll | | [Continuous] / Once | |
| | GUI Position | | -5 to +5, [0] | |
| 3 Volume | Adaptive DRC | | Auto / [Off] | |
| | Max Volume | | -30.0 dB to +15.0 dB / [+16.5 dB], 5.0 dB step | |
| | Initial Volume | | [Off] / Mute / -80.0 to +16.5 dB, 0.5 dB step | |
| 4 Input Rename | | | Input is possible to 9 characters Input possible Character type Capital : A to Z Small : a to z Figure : 0 to 9 Space Marks : # * + , - . / : < > ? etc. | |
| 5 Zone | Zone2/Zone3 Max. Volume | | -30.0 dB to +15.0 dB / [+16.5 dB], 5.0 dB step | |
| | Zone2/Zone3 Initial Volume | | [Off] / Mute / -80.0 to +16.5 dB, 0.5 dB step | |
| 6 Network | IP Address | DHCP | [On] / Off | |
| | | IP Address | xxx.xxx.xxx.xxx | |
| | | Subnet Mask | xxx.xxx.xxx.xxx | |
| | | Default Gateway | xxx.xxx.xxx.xxx | |
| | | DNS Server (Primary) | xxx.xxx.xxx.xxx | |
| | DNS Server (Secondary) | | xxx.xxx.xxx.xxx | |
| | MAC Address Filter | | [Off] / On | |
| | MAC Address 1-10 | | xx : xx : xx : xx : xx : xx * This menu is available only when "MAC Address Filter" is set to "On". | |
| | Network Standby | | | [Off] / On |
| | Information | MAC Address | | xx : xx : xx : xx : xx : xx |
| IP Address | | xxx.xxx.xxx.xxx | | |
| Subnet Mask | | xxx.xxx.xxx.xxx | | |
| Default Gateway | | xxx.xxx.xxx.xxx | | |
| DNS Server (Primary) | | xxx.xxx.xxx.xxx | | |
| DNS Server (Secondary) | | xxx.xxx.xxx.xxx | | |
| Link Status | | No Link | | |
| vTuner ID | | xxxxxxxxxxxx | | |
| 7 Rhapsody Information | Account Status | | | |
| | Sign In | | | |
| | Rhapsody Free Trial | | | |
| | Remove Account | | | |
| 4 • DSP Parameter | | | | |
| STEREO | 7ch Stereo | Center Level | 0 to 100 % | |
| | | Surround L Level | | |
| | | Surround R Level | | |
| | | Surround Back Level | | |
| | | Initialize | | |
| MUSIC ENHANCER | Straight Enhancer | Effect Level - High | [High] / Low | |
| | | Initialize | | |
| | 7ch Enhancer | Effect Level - High | [High] / Low | |
| | | Initialize | | |


RX-V2065/HTR-6295

| MAIN MENU | SUB-MENU | PARAMETER | VALUE [INITIAL VALUE] | |
|--|---|---|--|--------------------------|
| SURROUND DECODE | Surround Decoder | Decode Type Pro Logic | Pro Logic / PL Ilx Movie / PL Ilx Music / PL Ilx Game / Neo:6 Cinema / Neo:6 Music / Neural Sur. (U model) | |
| | | Pro Logic Initialize | | |
| | | PL Ilx Movie Initialize | | |
| | | PL Ilx Music Panorama | [Off] / On | |
| | | Center Width | 0 to 7, [3] | |
| | | Dimension | -3 to [STD] to +3 | |
| | | Initialize | | |
| | | PL Ilx Game Initialize | | |
| | | Neo:6 Cinema Initialize | | |
| | | Neo:6 Music Center Image | 0.0 to 1.0, [0.3] | |
| | | Initialize | | |
| | | Neural Sur. Initialize | | |
| | | MOVIE | Standard | Decode Type PL Ilx Movie |
| PL Ilx Movie [1], [4], [8], [11], [16] | | | | |
| Neo:6 Cinema [1], [4], [8], [11], [16] | | | | |
| Spectacle | Decode Type PL Ilx Movie | | PL Ilx Movie / Neo:6 Cinema | |
| | PL Ilx Movie [1], [3], [4], [7], [8], [16] | | | |
| | Neo:6 Cinema [1], [4], [8], [11], [16] | | | |
| Sci-Fi | Decode Type PL Ilx Movie | | PL Ilx Movie / Neo:6 Cinema | |
| | PL Ilx Movie [1], [3], [4], [7], [8], [16] | | | |
| | Neo:6 Cinema [1], [3], [4], [7], [8], [16] | | | |
| Adventure | Decode Type PL Ilx Movie | | PL Ilx Movie / Neo:6 Cinema | |
| | PL Ilx Movie [1], [3], [4], [7], [8], [16] | | | |
| | Neo:6 Cinema [1], [3], [4], [7], [8], [16] | | | |
| Drama | Decode Type PL Ilx Movie | | PL Ilx Movie / Neo:6 Cinema | |
| | PL Ilx Movie [1], [3], [4], [7], [8], [16] | | | |
| | Neo:6 Cinema [1], [3], [4], [7], [8], [16] | | | |
| Mono Movie | [1], [2], [6], [10], [13], [14], [15], [16] | | | |
| Sports | [1], [3], [4], [7], [8], [16] | | | |
| Action Game | [1], [3], [4], [7], [8], [16] | | | |
| Roleplaying Game | [1], [3], [4], [7], [8], [16] | | | |
| MUSIC | Hall in Munich | | [1], [2], [6], [10], [16] | |
| | Hall in Vienna | | [1], [2], [6], [10], [16] | |
| | Chamber | [1], [2], [10], [13], [14], [15], [16] | | |
| | Cellar Club | [1], [2], [6], [10], [16] | | |
| | The Roxy Theatre | [1], [2], [6], [10], [13], [14], [15], [16] | | |
| | The Bottom Line | [1], [2], [6], [10], [16] | | |
| | Music Video | [1], [3], [4], [7], [8], [16] | | |
| | | | | |
| STEREO | 2ch Stereo | Direct | [Auto] / Off | |
| | | Initialize | | |
| | [1] | DSP Level | -6 to +3 dB, [0 dB] | |
| | [2] | Initial Delay | 1 to 99 ms | |
| | [3] | P. Initial Delay | 1 to 49 ms | |
| | [4] | Sur. Initial Delay | 1 to 49 ms | |
| | [6] | Room Size | | |
| | [7] | P. Room Size | 0.1 to 2.0 | |
| | [8] | Sur. Room Size | | |
| | [10] | Liveness | 0 to 10 | |
| | [11] | S. Liveness | | |
| | [13] | Reverb Time | 1.0 to 5.0 s | |
| | [14] | Reverb Delay | 0 to 250 ms | |
| | [15] | Reverb Level | 0 to 100 % | |
| | [16] | Initialize | | |
| | | | | |
| | | | [Off] / On | |

5 • Memory Guard

[Off] / On

INTERNAL VIEW

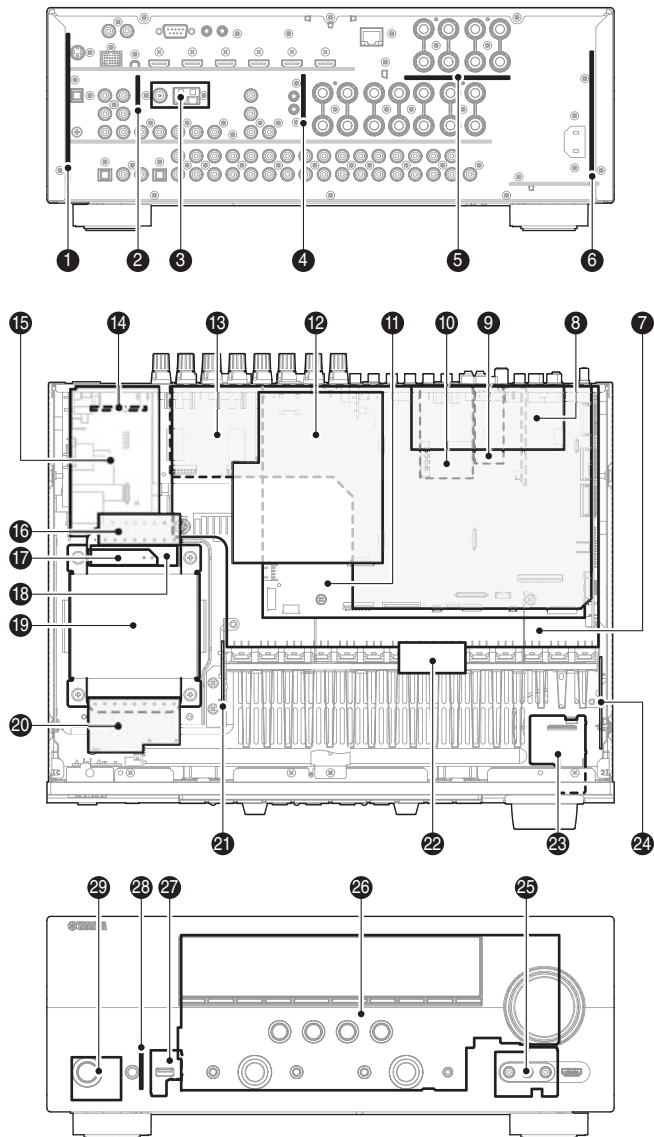

- ① OPERATION (2) P.C.B.
- ② OPERATION (9) P.C.B. (R, T, K, A, B, G, E, F, L models)
- ③ HD RADIO TUNER (U model)
- ④ VIDEO (4) P.C.B.
- ⑤ OPERATION (8) P.C.B.
- ⑥ ACDC (1) P.C.B.
- ⑦ MAIN (1) P.C.B.
- ⑧ DIGITAL (3) P.C.B.
- ⑨ VIDEO (9) P.C.B. (B, G, E, F models)
- ⑩ AM/FM TUNER (C, R, T, K, A, B, G, E, F, L models)
- ⑪ DIGITAL (1) P.C.B.
- ⑫ GUI P.C.B.
- ⑬ VIDEO (1) P.C.B.
- ⑭ MAIN (3) P.C.B. (R, L models)
- ⑮ VIDEO (3) P.C.B.
- ⑯ MAIN (2) P.C.B.
- ⑰ ACDC (2) P.C.B. (U, C, T, K, A, B, G, E, F models)
- ⑱ MAIN (4) P.C.B.
- ⑲ POWER TRANSFORMER
- ⑳ VIDEO (6) P.C.B.
- ㉑ MAIN (6) P.C.B.
- ㉒ ACDC (3) P.C.B.
- ㉓ DIGITAL (2) P.C.B.
- ㉔ OPERATION (10) P.C.B.
- ㉕ OPERATION (4) P.C.B.
- ㉖ OPERATION (1) P.C.B.
- ㉗ OPERATION (5) P.C.B.
- ㉘ OPERATION (3) P.C.B.
- ㉙ OPERATION (6) P.C.B.

SERVICE PRECAUTIONS

Safety measures

- Some internal parts in this product contain high voltages and are dangerous. Be sure to take safety measures during servicing, such as wearing insulating gloves.
- Note that positions indicated below are dangerous even after the power is turned off because an electric charge remains and a high voltage continues to exist there. Before starting any repair work, perform discharge by connecting a discharge resistor (5k-ohms/10W) between terminals at following positions. The time required for discharging is about 30 seconds.
C6006 on ACDC (1) P.C.B.
Refer to "PRINTED CIRCUIT BOARDS: ACDC (1) P.C.B.".

DISASSEMBLY PROCEDURES

(Remove parts in the order as numbered.)
 Disconnect the power cable from the AC outlet.

1. Removal of Top Cover

- a. Remove 4 screws (①), 5 screws (②) and screw (③). (Fig. 1)
- b. Slide the top cover rearward to remove it. (Fig. 1)

2. Removal of Front Panel and Sub-Chassis Unit

- a. Remove screw (④) and then remove the center frame. (Fig. 1)
- b. Remove 2 knobs. (Fig. 1)
- c. Remove 6 screws (⑤) and then remove the front panel. (Fig. 1)
- d. Remove 2 push rivets and then remove the plate side (L) and (R). (Fig. 1)
- e. Remove CB1, CB20, CB461 and CB550. (Fig. 1)
- f. Remove 2 screws (⑥) and then pull out the sub-chassis unit. (Fig. 1)
- g. Unlock and remove CB333 and CB477. (Fig. 1)
- h. Remove the sub-chassis unit. (Fig. 1)

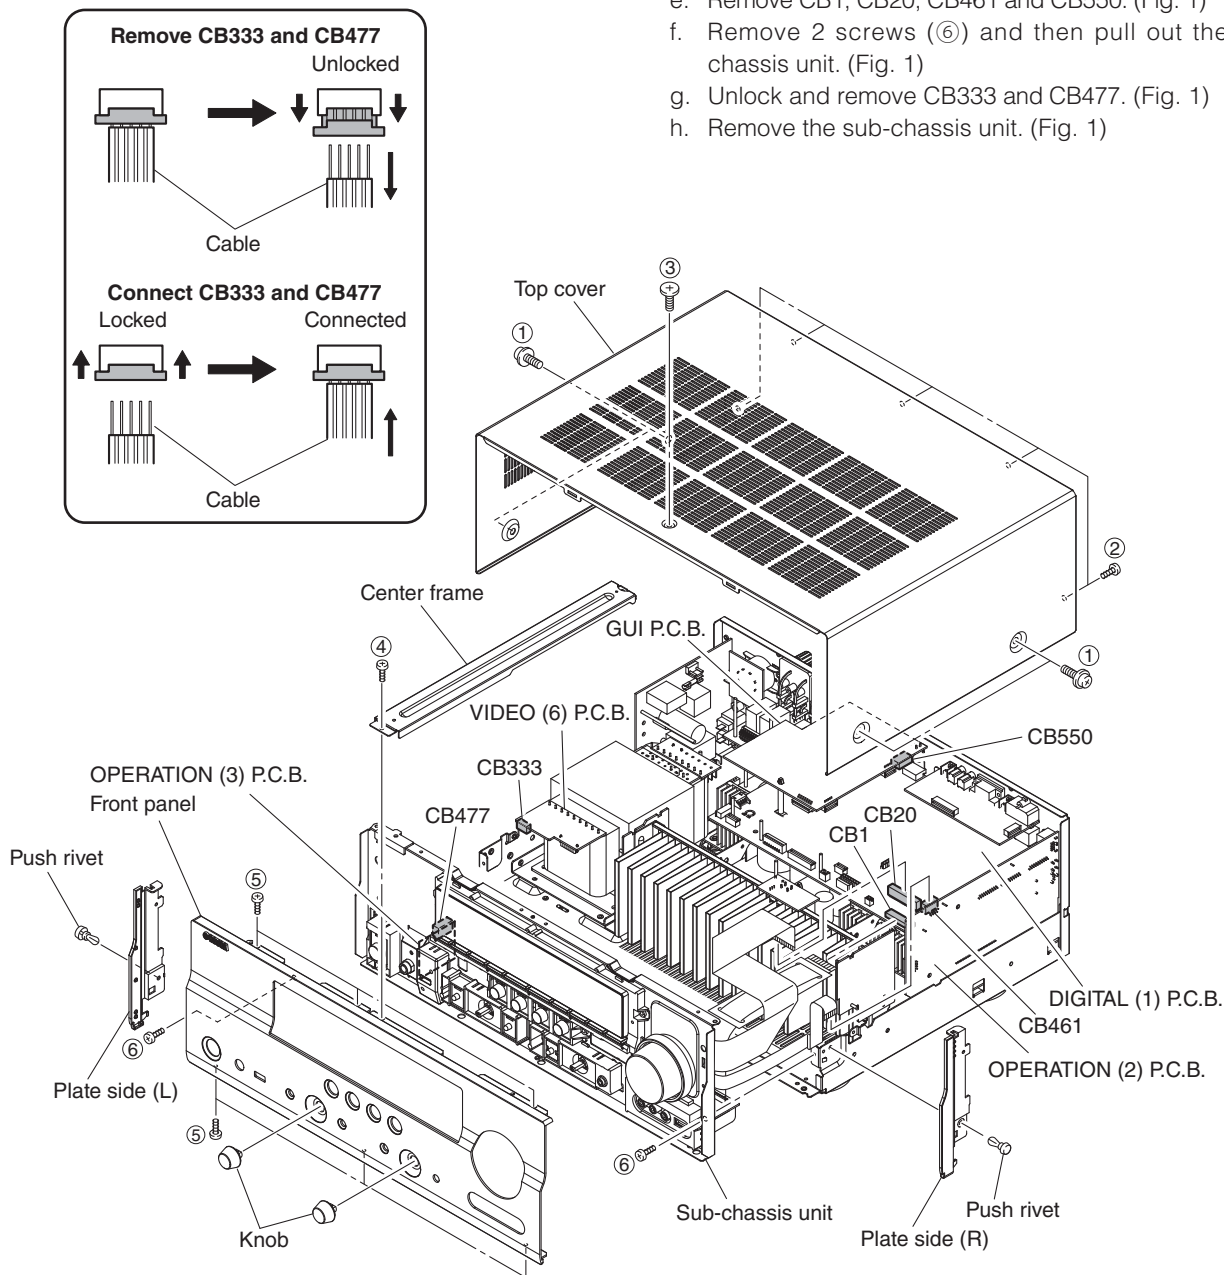


Fig. 1

3. Removal of GUI, DIGITAL (1) and (3) P.C.B.s

- a. Remove 2 screws (7). (Fig. 2)
- b. Remove CB501. (Fig. 2)
- c. Unlock and remove CB500 and CB503. (Fig. 2)
- d. Release hook, and remove the GUI P.C.B.. (Fig. 2)
- e. Remove 2 screws (8) and 2 jack screws. (Fig. 2)
- f. Remove CB80 (U model). (Fig. 2)
- g. Unlock and remove CB81. (Fig. 2)
- h. Remove the DIGITAL (3) P.C.B. (Fig. 2)
- i. Remove 3 screws (U model) / 2 screws (C, R, T, K, A, B, G, E, F, L models) (9) and 6 screws (10). (Fig. 2)
- j. Remove screw (11) and 2 screws (12). (Fig. 2)
- k. Remove CB7, CB21, CB25, CB29, CB31, CB71 and CB73 (B, G, E, F models). (Fig. 2)
- l. Unlock and remove CB22-24. (Fig. 2)
- m. Remove the DIGITAL (1) P.C.B. which is connected directly to the OPERATION (2) P.C.B. with board-to-board connectors. (Fig. 2)

4. Removal of AMP Unit

- a. Remove 3 screws (13) and 4 screws (14). (Fig. 2)
- b. Remove 3 screws (15). (Fig. 2)
- c. Remove the amp unit. (Fig. 2)

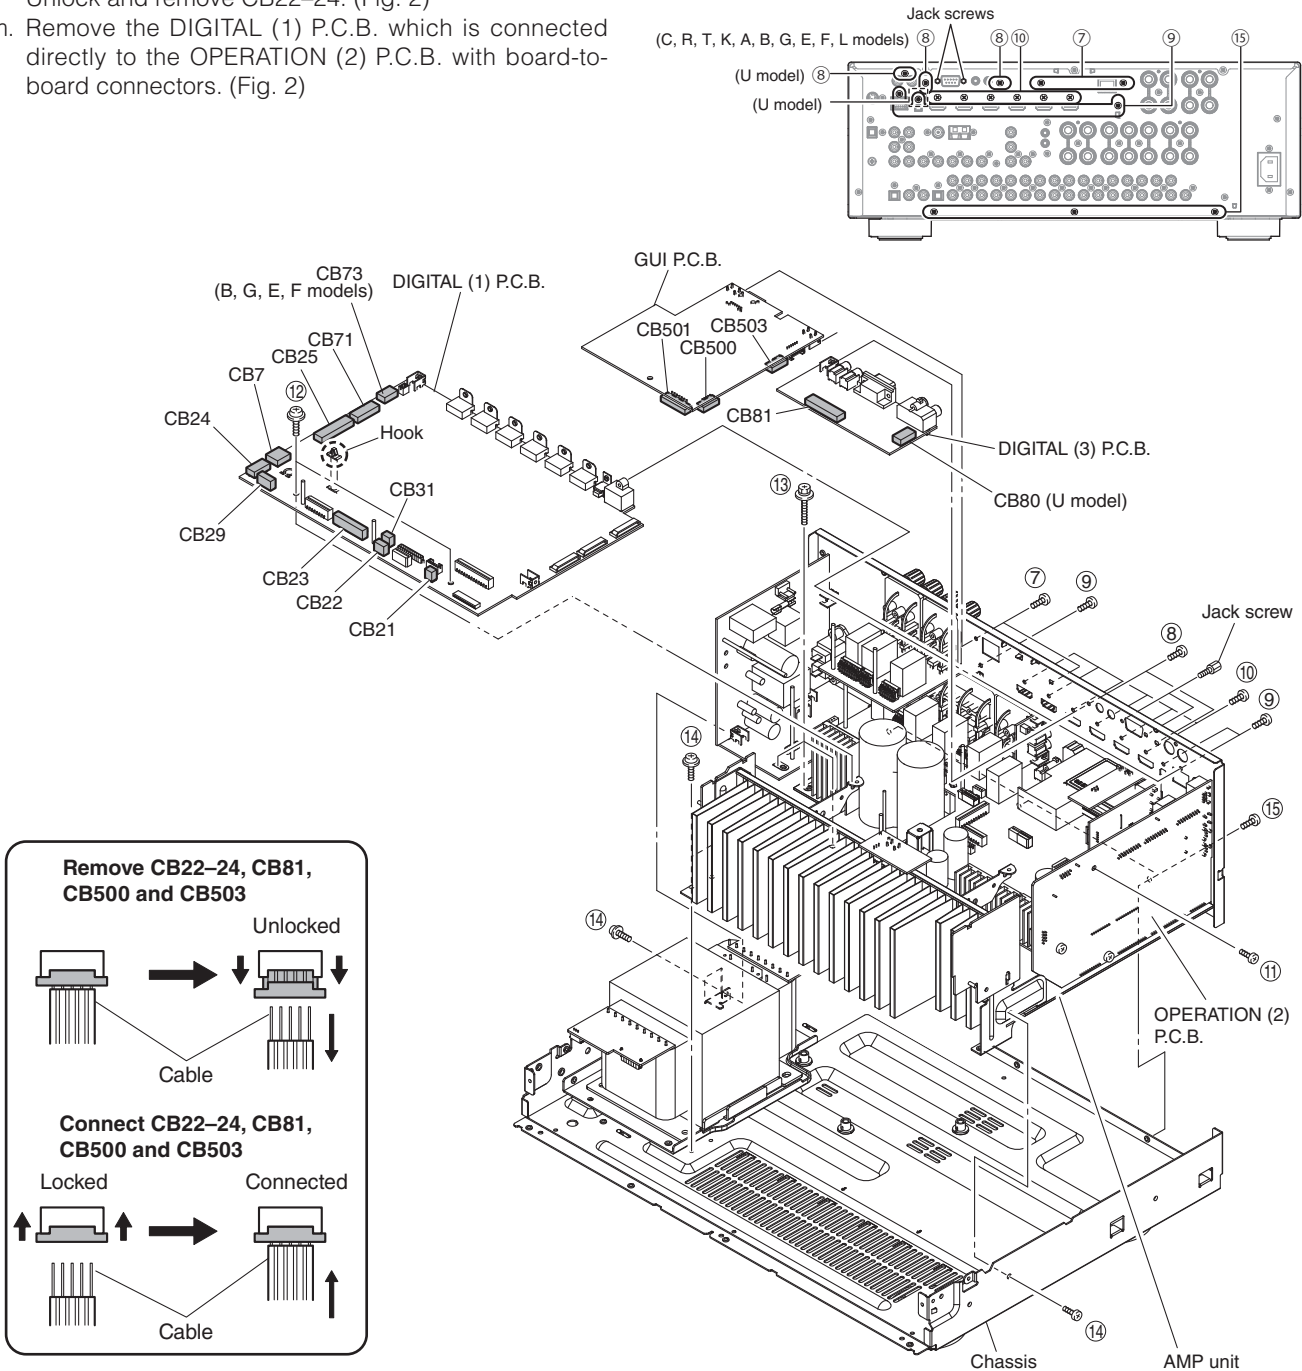


Fig. 2

When checking the P.C.B.s:

- Place the P.C.B.s (with rear panel) upright. (Fig. 3)
 - Connect the ground points of the heatsink, rear panel and MAIN (1) P.C.B. (G1000) to the chassis with a ground lead or the like. (Fig. 3)
 - When connecting the flexible flat cable, be careful with polarity.
 - Reconnect all cables (connectors) that have been disconnected.
- Be sure to use the extension cable for servicing for the following section.

DIGITAL (1) P.C.B. CB20 to OPERATION (1) P.C.B. CB401:

MF125400 (25P, 400mm, P=1.25)

OPERATION (1) P.C.B. CB402 to OPERATION (2) P.C.B. CB461:

MF109400 (9P, 400mm, P=1.25)

DIGITAL (1) P.C.B. CB1 to DIGITAL (2) P.C.B. CB96:

MFA20250 (20P, 250mm, P=1.0)

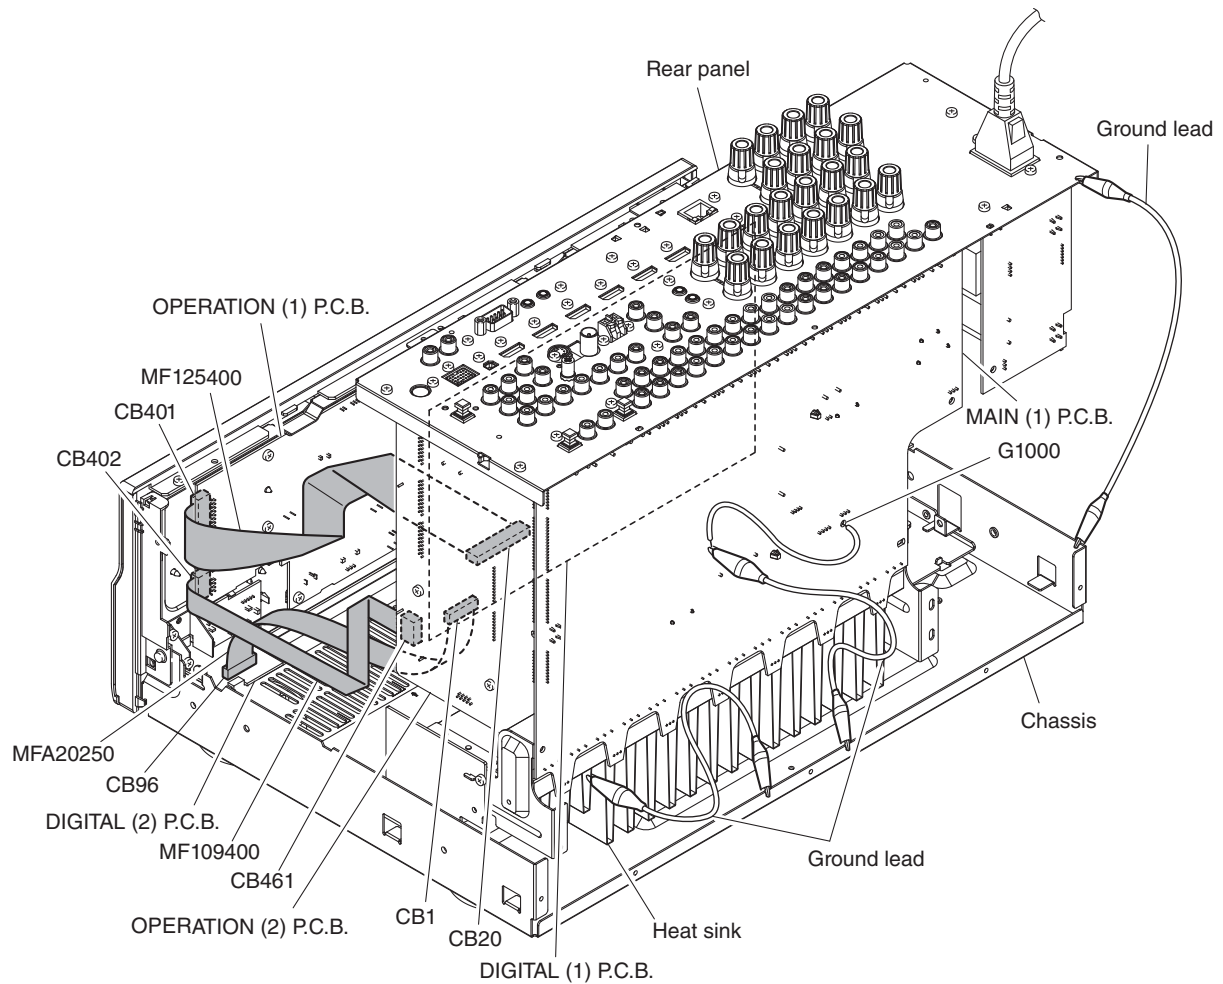


Fig. 3

■ UPDATING FIRMWARE

Note The user memories (sound field parameters, system memory, tuner presetting, etc.) are preserved even after the firmware is written.

When replacing the following parts, be sure to write the latest firmware.

| Replaced parts | Writing method using the USB | Writing method using PC (RS232C) |
|---|------------------------------|----------------------------------|
| DIGITAL P.C.B. | yes | yes |
| IC20 (Main microprocessor) of DIGITAL P.C.B. | no | yes |
| IC49 (TI (DSP) flash ROM) of DIGITAL P.C.B. | yes | yes |
| IC513 (BF (Sub-microprocessor) flash ROM) of GUI P.C.B. | yes | no |

● Confirmation of firmware version and checksum

Before and after writing firmware, check the firmware version and checksum by using the self-diagnostic function menu.

Start up the self-diagnostic function and select "25. ROM VER/SUM/PORT" menu. (See "SELF-DIAGNOSTIC FUNCTION")

Using the sub-menu, have the firmware version and checksum displayed, and note down them.

25. ROM VER/SUM/PORT

Firmware version

Ver: 0024

The firmware version of main microprocessor (IC20 DIGITAL P.C.B.) is displayed.

All checksum

Sum: 5253

The checksum value of main microprocessor (IC20 DIGITAL P.C.B.) is displayed.

TI (DSP) FLASH ROM version

TiVer:01.03r1

The firmware version of TI (DSP) FLASH ROM (IC49 DIGITAL P.C.B.) is displayed.

TI (DSP) FLASH ROM checksum

TiSum:F1AD0135A

The checksum value of TI (DSP) FLASH ROM (IC49 DIGITAL P.C.B.) is displayed.

BF version

BF Ver: 0019

The firmware version of BF (sub-microprocessor, IC505 GUI P.C.B.) is displayed.

BF checksum 1 (All/Master boot)

Al:3ED2Ma:0122

The checksum value (All/Master boot) of BF (sub-microprocessor, IC505 GUI P.C.B.) is displayed.

BF checksum 2 (Application/USB)

Ap:67DAUs:ADBC

The checksum value (Application/USB) of BF (sub-microprocessor, IC505 GUI P.C.B.) is displayed.

Supplementary information:

In this unit, it is possible to check the firmware version by using the ADVANCED SETUP menu as well as the self-diagnostic function menu.

Follow the procedures below.

1. While pressing the “STRAIGHT” key of this unit, press the “MAIN ZONE ON/OFF” key of this unit to turn on the power.
The ADVANCED SETUP mode is activated, and “ADVANCED SETUP” is displayed. (Fig. 1)
2. Rotate the “PROGRAM” knob and select the “VER---,---,---”. (Fig. 1)
After a few seconds, each firmware version is displayed.

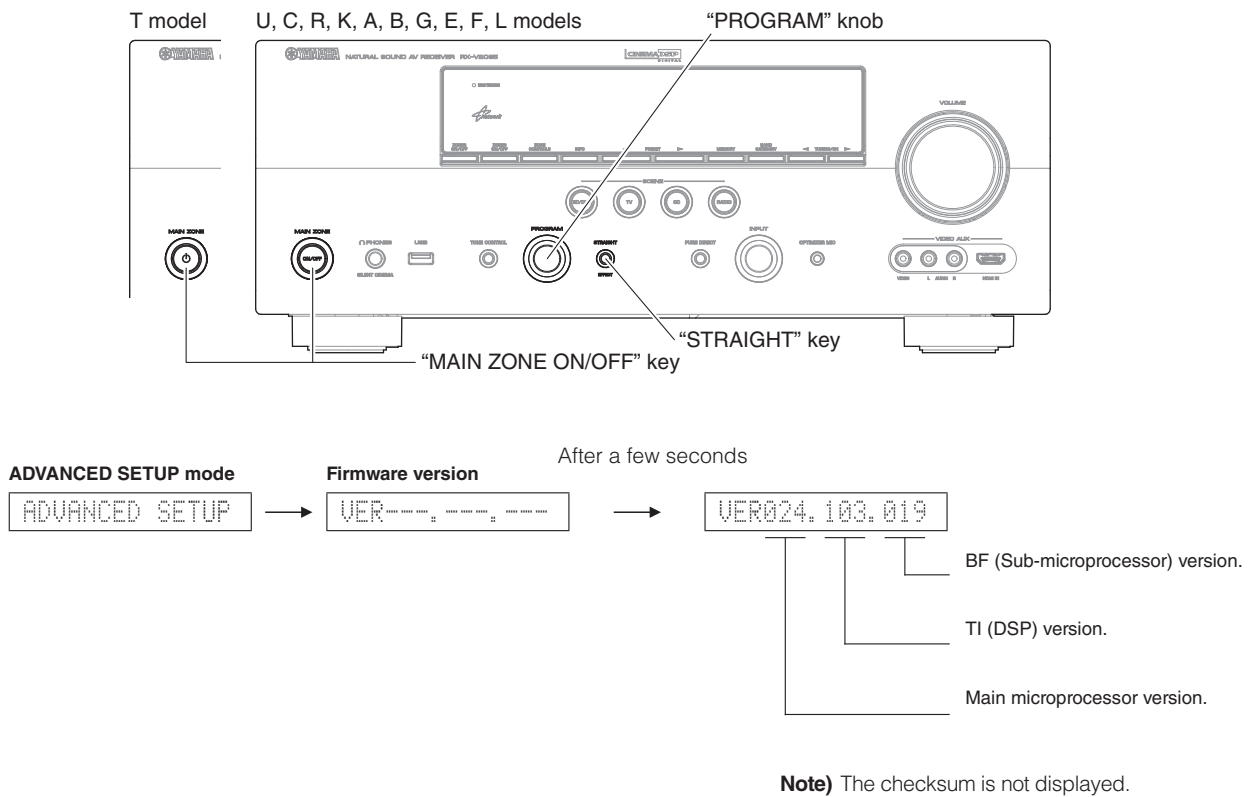


Fig. 1

3. Press the “MAIN ZONE ON/OFF” key of this unit to turn off the power.

Writing method using the USB

● **Required Tools**

- USB storage device
- Firmware RX-V2065 : RX-V2065_xxxx.bin
 HTR-6295 : HTR-6295_xxxx.bin

● **Preparation**

1. Download the latest firmware from the specified download source to the folder of the PC.
2. Copy the latest firmware from the PC to the root folder of the USB storage device.

Note) When the firmware is copied to a sub-folder of the USB storage device, the update will not proceed.

● **Operation procedures**

1. Insert the USB storage device to the USB terminal located on the front panel of this unit. (Fig. 2)
2. While pressing the “TONE CONTROL” key of this unit, connect the power cable to the AC outlet. (Fig. 2)
Writing of the firmware is started and the screen is displayed as shown below. (Fig. 3).

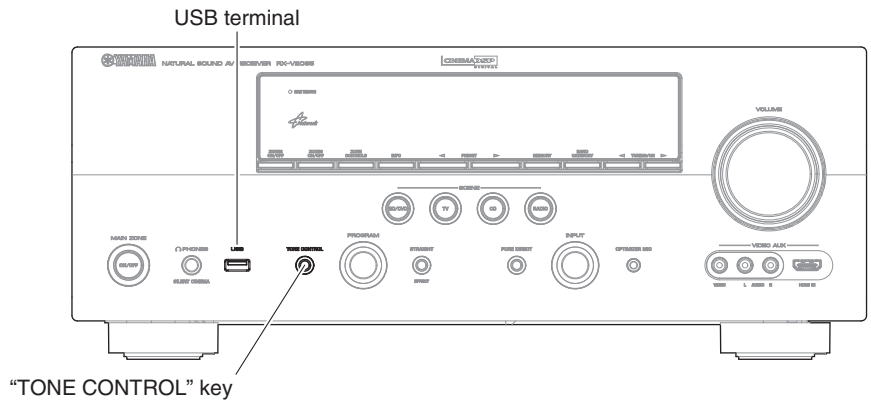


Fig. 2

Writing is started.

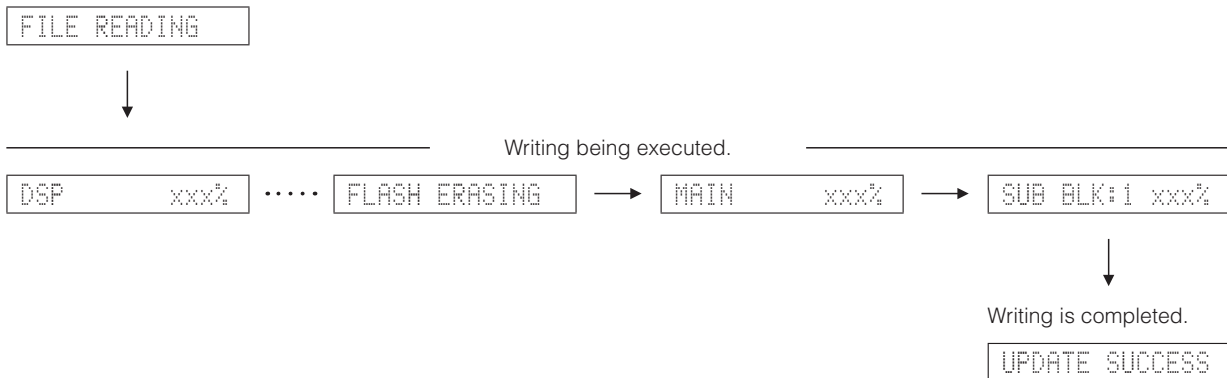


Fig. 3

3. When writing of the firmware is completed, "UPDATE SUCCESS" is displayed.
 - * When "UPDATE FAIL" is displayed before writing is completed, perform the operation procedures from step 1 to 2 again.
4. Press the "MAIN ZONE ON/OFF" key of this unit to turn off the power.
5. Remove the USB storage device from the USB terminal of this unit.
6. Start up the self-diagnostic function and select "25. ROM VER/SUM/PORT" menu.
Using the sub-menu, have the firmware version and checksum displayed, and then check that they are the same as written ones.
 - * When the displayed firmware version and checksum are different from written ones, perform the "Writing the Firmware" procedure all over again.
7. Press the "MAIN ZONE ON/OFF" key to turn off the power.

Writing method using PC (RS232C)

● **Required Tools**

- Firmware downloader program
 For main microprocessor:
 DSP_FLASHER_v3.0.exe
 For DSP (TI flash ROM):
 DSP_FLASHER Ver2.7.exe
 - Firmware
 For main microprocessor: V265xxxx.mot
 For DSP (TI flash ROM):
 Vx65_data1_verxxxxr.hex
 - RS232C cross cable "D-sub 9 pin female"
 (Specifications)
- | | | |
|--------------|-------|--------------|
| Pin No.2 RxD | ————— | Pin No.2 RxD |
| Pin No.3 TxD | ————— | Pin No.3 TxD |
| Pin No.5 GND | ————— | Pin No.5 GND |
| Pin No.7 RTS | ————— | Pin No.7 RTS |
| Pin No.8 CTS | ————— | Pin No.8 CTS |
- RS232C conversion adaptor (Part No.: WR492800)

● **Preparation and precautions**

- Download the firmware downloader program and the firmware from the specified source to the same folder of the PC.
- Prepare the above specified RS232C cross cable.
- While writing the firmware, keep the other application software on the PC closed.
 It is also recommended to keep the software on the task tray closed as well.

● **Connection**

1. Remove the top cover. (See "DISASSEMBLY PROCEDURES")
2. Connect the writing port (CB27 of DIGITAL P.C.B.) of this unit to the serial port (RS232C) of the PC with RS232C cross cable, RS232C conversion adaptor and flexible flat cable as shown below. (Fig. 1)
3. Set the switch (SW7) of RS232C conversion adaptor as shown below. (Fig. 1)

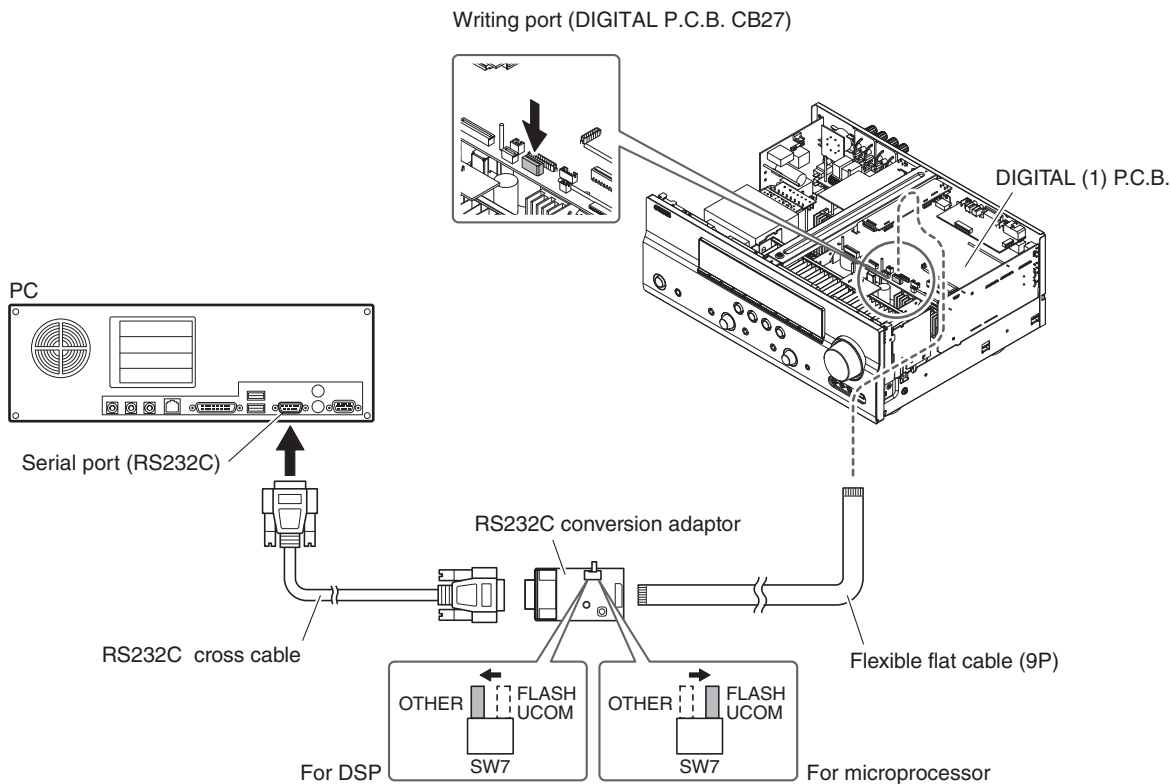


Fig. 1

● Operation Procedures

Writing to the main microprocessor

1. With the power cable of this unit disconnected from the AC outlet, start up DSP_FLASHER_v3.0.exe.
The screen appears as shown below. (Fig. 2)
2. Click [...] and select the firmware name. (Fig. 2)

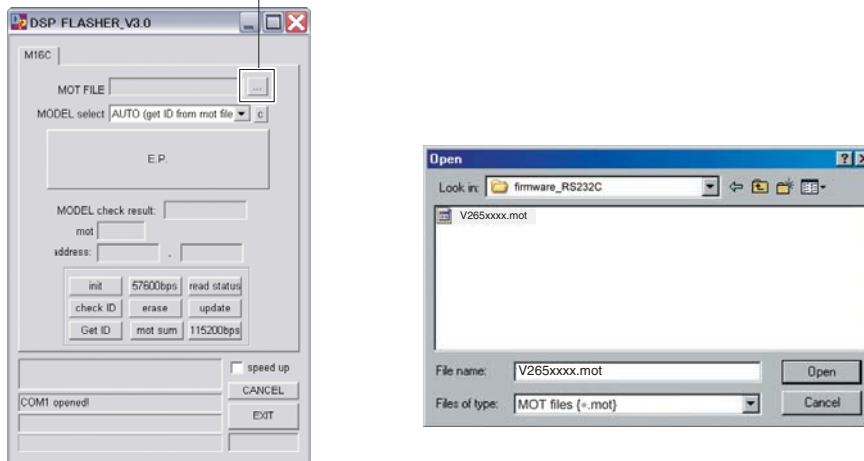


Fig. 2

3. Connect the power cable of this unit to the AC outlet.
4. Click [E.P.] to start writing. (Fig. 3)
5. When writing of the firmware is completed, "Program Finished!" is displayed. (Fig. 3)
Click [OK]. (Fig. 3)
6. Click [EXIT] to end DSP_FLASHER_v3.0.exe. (Fig. 3)

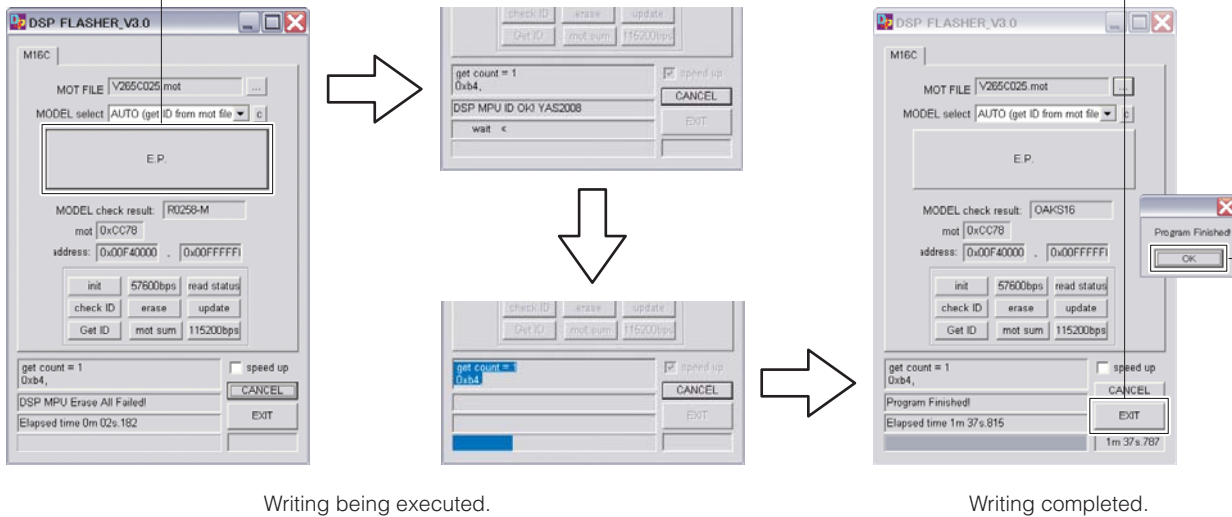


Fig. 3

7. Disconnect the power cable of this unit from the AC outlet.
8. Remove the RS232C conversion adaptor and flexible flat cable from the writing port (CB27, DIGITAL P.C.B.) of this unit.
9. Start up the self-diagnostic function and select "25.ROM VER/SUM/PORT" menu.
Using the sub-menu, have the firmware version and checksum displayed, and then check that they are the same as written ones.
* When the firmware version and checksum are different from written ones, perform the "Writing to the microprocessor" all over again.
10. Press the "MAIN ZONE ON/OFF" key of this unit to turn off the power.
11. Disconnect the power cable of this unit from the AC outlet.

Writing to DSP

1. With the power cable of this unit disconnected from the AC outlet, start up DSP_FLASHER Ver2.7.exe.
The screen appears as shown below. (Fig. 4)
2. Click [Vx61 DSP]. (Fig. 4)

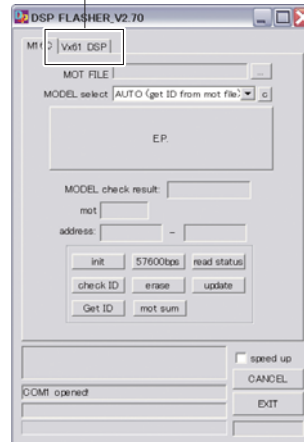


Fig. 4

3. Click [...] and select the firmware name. (Fig. 5)

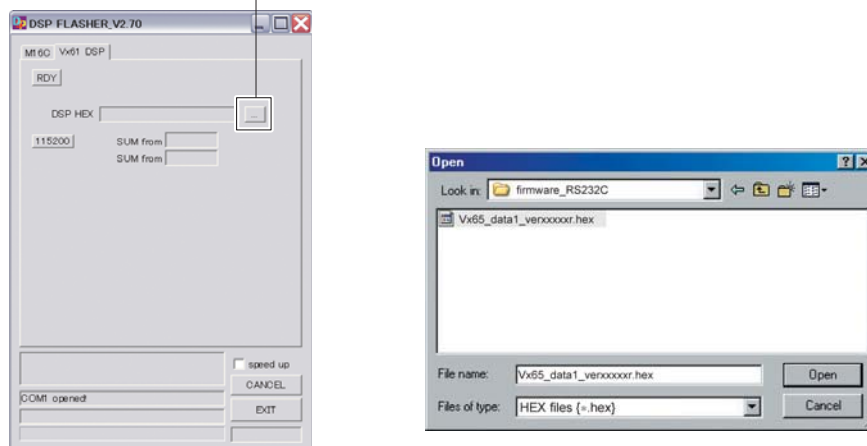



Fig. 5

- 4. Click [RDY]. (Fig. 6)



Fig. 6

- 5. While pressing the “PURE DIRECT” key of this unit, connect the power cable of this unit to the AC outlet. (Fig. 7)
Writing is started automatically. (Fig. 7)

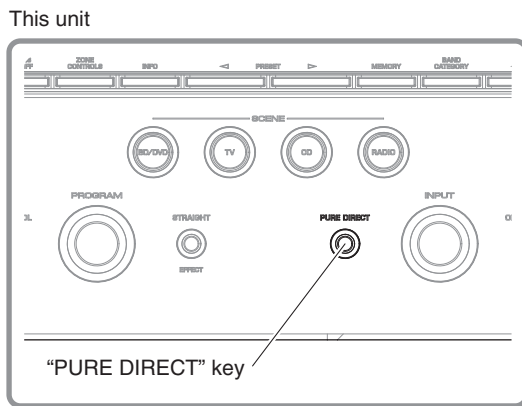

Writing being executed.

Fig. 7

6. When writing of the firmware is completed, "Vx61 DSP Flash finished!" is displayed. (Fig. 3)
7. Click [EXIT] to end DSP_FLASHER_v2.7.exe. (Fig. 8)

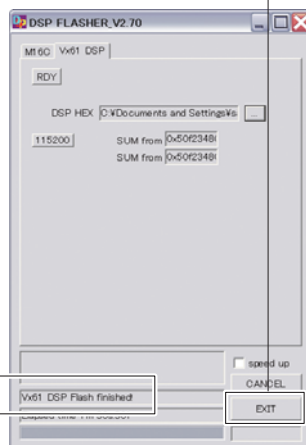


Fig. 8

8. Start up the self-diagnostic function and select "25.ROM VER/SUM/PORT" menu.
Using the sub-menu, have the firmware version and checksum displayed, and then check that they are the same as written ones.
* When the firmware version and checksum are different from written ones, perform the "Writing to DSP" all over again.
9. Press the "MAIN ZONE ON/OFF" key of this unit to turn off the power.
10. Disconnect the power cable of this unit from the AC outlet.
11. Remove the RS232C conversion adaptor and flexible flat cable from the writing port (CB27, DIGITAL P.C.B.) of this unit.

■ SELF-DIAGNOSTIC FUNCTION

CAUTION!

Do not disconnect the power cable of this unit from the AC outlet while this unit is in the self-diagnostic function mode, otherwise the user memories (input rename, sound field parameters, system memory, tuner presetting, etc.) will be initialized.

Therefore, to cancel the self-diagnostic function, be sure to press the "MAIN ZONE ON/OFF" key of this unit to turn off the power.

This unit has self-diagnostic functions that are intended for inspection, measurement and location of faulty point.

There are 27 main menu items, each of which has sub-menu items.

Listed in the table below are main menu items and sub-menu items.

Note that not all menu items listed will apply to the models covered in this service manual.

| No. | Main menu | Sub-menu | |
|-----|----------------|----------|-------------------------------------|
| 1 | BYPASS | 1 | ANALOG BYPASS |
| | | 2 | DSP BYPASS |
| 2 | RAM THROUGH | 1 | RAM MARGIN |
| | | 2 | RAM FULL ALL |
| | | 3 | RAM FULL CENTER |
| | | 4 | RAM FULL SURROUND |
| | | 5 | RAM FULL SURROUND BACK |
| 3 | HDMI AUDIO | 1 | SPDIF |
| | | 2 | Multi |
| | | 3 | DSD |
| 4 | SPEAKERS SET | 1 | FRNT: SML 0dB |
| | | 2 | CENTER: NONE |
| | | 3 | LFE/B: FRNT |
| | | 4 | Zone2/3 Amp ON |
| | | 5 | Bi-AMP |
| | | 6 | TONE: MAX |
| | | 7 | TONE: MIN |
| | | 8 | SPEAKER 6 ohms |
| 5 | MULTI CH-INPUT | 1 | 8ch INPUT 6 ohms |
| | | 2 | 8ch INPUT 8 ohms |
| | | 3 | LIM/PLDET/THM |
| 6 | MIC CHECK | 1 | MIC CHECK |
| 7 | FL/GUI CHECK | 1 | VFD CHECK |
| | | 2 | VFD DISP OFF / MONITOR OUTPUT OFF |
| | | 3 | VFD DISP ALL / COMPONENT OUTPUT OFF |
| | | 4 | VFD DIMMER / GUI SCREEN ON |
| | | 5 | CHECK PATTERN / GUI SCREEN ON |
| 8 | MANUAL TEST | 1 | TEST ALL |
| 9 | A/D DATA CHECK | 1 | PS1/PS2 |
| | | 2 | DC/TH |
| | | 3 | IMP/PL |
| | | 4 | DST/DK |
| | | 5 | K0/K1 |


| No. | Main menu | Sub-menu | |
|-----|---------------------|----------|---------------------------------|
| 10 | VIDEO CHECK | 1 | I2C |
| | | 2 | DIGITAL COMPONENT |
| | | 3 | DIGITAL CVBS |
| | | 4 | DIGITAL Y/C (B, G, E, F models) |
| | | 5 | ANALOG BYPASS |
| | | 6 | TEST PATTERN |
| | | 7 | VIDEO INFORMATION |
| 11 | XM STATUS (U model) | 1 | 1k -1dB /44kHz |
| | | 2 | 1k -61dB /44kHz |
| | | 3 | Mute /44kHz |
| | | 4 | XM Tone /44kHz |
| | | 5 | ISO Tone /44kHz |
| | | 6 | 1k -1dB /32kHz |
| | | 7 | 1k -61dB /32kHz |
| | | 8 | Mute /32kHz |
| | | 9 | XM Tone /32 kHz |
| | | 10 | ISO Tone /32 kHz |
| | | 11 | Bus Power: OFF |
| 12 | SIRIUS (U model) | 1 | SIRIUS: OK (NG) |
| | | 2 | SR |
| | | 3 | SSP (SIRIUS #0 VERSION) |
| | | 4 | MAC (SIRIUS #1 VERSION) |
| | | 5 | ADP (SIRIUS #2 VERSION) |
| | | 6 | PRDID |
| | | 7 | SEQID |
| 13 | HD RADIO (U model) | 1 | HD CPU VERSION |
| | | 2 | HD DSP VERSION |
| 14 | DOCK | 1 | DOCK |
| | | 2 | BT VERSION |
| 15 | HDMI INFO | 1 | HMN |
| | | 2 | HPI |
| | | 3 | HVN |
| 16 | HDMI SELECT | 1 | HDMI NONE |
| | | 2 | HDMI IN 1 |
| | | 3 | HDMI IN 2 |
| | | 4 | HDMI IN 3 |
| | | 5 | HDMI IN 4 |
| | | 6 | HDMI IN F |
| | | 7 | HDMI UP CONVERSION |
| | | 8 | HDMI UP THROUGH |
| 17 | USB | 1 | USB File 1 |
| | | 2 | USB File 2 |

| No. | Main menu | Sub-menu | |
|-----|--|------------|--|
| 18 | IF STATUS (Not applied to these models.) | 1 | DSP STATUS |
| 19 | BUS CHECK | 1 | TI BUS |
| | | 2 | BF LOOP |
| 20 | NO MENU | Invalidity | |
| 21 | PROTECTION HISTORY | 1 | HISTORY 1 |
| | | 2 | HISTORY 2 |
| | | 3 | HISTORY 3 |
| | | 4 | HISTORY 4 |
| 22 | NO MENU | 1 | Invalidity |
| 23 | UPDATE | 1 | TI FLASH BOOT (Not applied to these models.) |
| 24 | FACTORY PRESET | 1 | PRESET INHI |
| | | 2 | PRESET RSRV |
| 25 | ROM VER/SUM/PORT | 1 | VERSION |
| | | 2 | ALL SUM |
| | | 3 | TI (DSP) FLASH VERSION |
| | | 4 | TI (DSP) FLASH SUM |
| | | 5 | BF VERSION |
| | | 6 | BF SUM 1 (All/Main) |
| | | 7 | BF SUM 2 (Application/USB) |
| | | 8 | XM VERSION (U model) |
| | | 9 | SIRIUS VERSION (U model) |
| | | 10 | MODEL/DESTINATION |
| | | 11 | Verify (Not applied to these models.) |
| | | 12 | MAC address |
| 26 | SERIAL | 1 | RS-232C loop back check |
| | | 2 | EEPROM check |
| 27 | NETWORK | 1 | IP Address check |
| | | 2 | MAC Address check |
| | | 3 | MAC LABEL No. SET |
| | | 4 | LINK check |
| | | 5 | NETWORK loop back check |
| | | 6 | Line noise measurement 10Mbps |
| | | 7 | Line noise measurement 100Mbps |

● Starting Self-Diagnostic Function

While pressing those 2 keys of this unit as shown in the figure below, press the “MAIN ZONE ON/OFF” key to turn on the power.

The self-diagnostic function mode is activated.

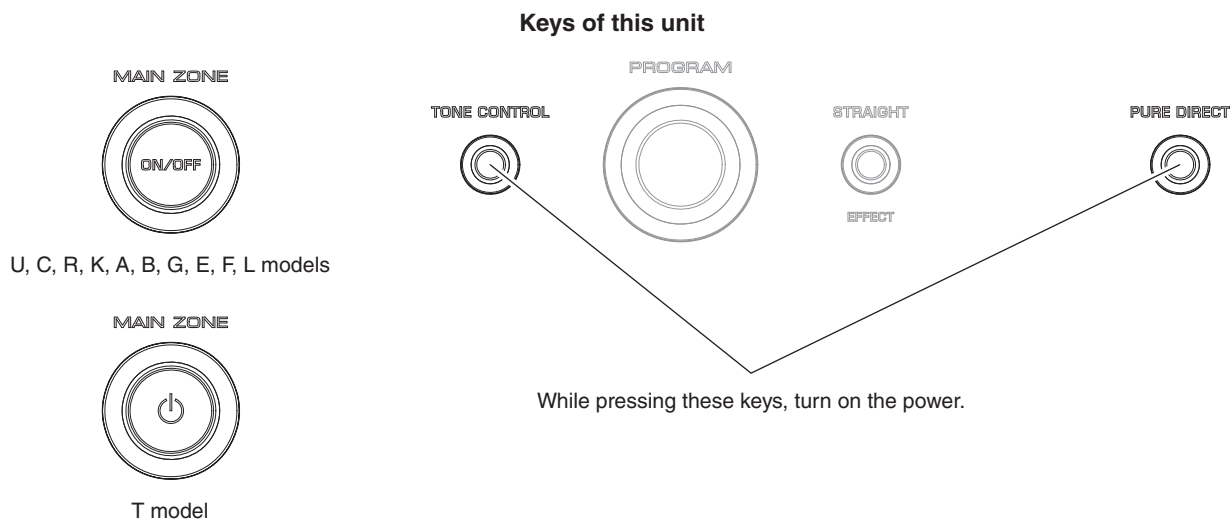

● Starting Self-Diagnostic Function in the protection cancel mode

If the protection function works and causes hindrance to trouble shoot, cancel the protection function as described below, and it will be possible to enter the self-diagnostic function mode.

(The protection functions other than the excess current detect function will be disabled.)

While pressing those 2 keys as shown in the figure above, press the “MAIN ZONE ON/OFF” key to turn on the power and keep pressing those 2 keys and “MAIN ZONE ON/OFF” key for 3 seconds or longer.

The self-diagnostic function mode is activated with the protection functions disabled.

In this mode, the SLEEP segment of the FL display of this unit flashes to indicate that the mode is self-diagnostic function mode with the protection functions disabled.

CAUTION!

Using this product with the protection function disabled may cause damage to itself. Use special care when using this mode.

● Canceling Self-Diagnostic Function


1. Before canceling self-diagnostic function, execute setting for FACTORY PRESET of main menu No. 24 (Memory initialization inhibited or Memory initialized).
 - * In order to keep the user memory stored, be sure to select PRESET INHIBITED (Memory initialization inhibited).
2. Press the “MAIN ZONE ON/OFF” key of this unit to turn off the power.

● Display provided when Self-Diagnostic Function started

The display is as described below depending on the situation when the last time the power to this unit is turned off.

1. When the power is turned off by usual operation:

The FL display of this unit displays "NO PROTECT" then the main menu (sub-menu "1. ANALOG BYPAS" of main menu 1 BYPASS) a few seconds later.

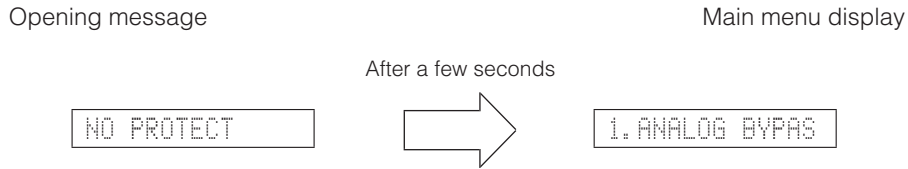

2. When the protection function worked to turn off the power:

The FL display of this unit displays the data of protection function which worked at that time then the main menu (sub-menu "1. ANALOG BYPAS" of main menu 1 BYPASS) a few seconds later.

Note: At that time if you reactivate the self-diagnostic function after turning off the power once by pressing the "MAIN ZONE ON/OFF" key, "NO PROTECT" will be displayed because that situation is equal to "1. When the power is turned off by usual operation:" described above.

However the protection function history is stored in a backup memory. For details, refer to main menu 21 PROTECTION HISTORY.

2-1. When the protection function worked due to excess current.

PS PRT:xxx

AD value when the protection function is working

Cause: An excessive current flowed through the power amplifier.

Supplementary information: As current of the power amplifier is detected, the abnormal channel can be identified by checking the current detect transistor.

Turning on the power without correcting the abnormality will cause the protection function to work immediately and the power supply will instantly be shut off.

Note)

- Applying the power to this unit without correcting the abnormality can be dangerous and cause additional circuit damage. To avoid this, if protection function has been activated 3 times continuously, the power will not turn on even when the "MAIN ZONE ON/OFF" key is pressed. In order to turn on the power again, disconnect the power cable of this unit from the AC outlet once and then reconnect it again.
- The output transistors in each amplifier channel should be checked for damage before applying power of this unit.
- Amplifier current should be monitored by measuring DC voltage across the emitter resistors for each channel.

2-2. When the protection function worked due to a short between speaker terminals.

I PROTECT:xxx

AD value when the protection function is working

Cause: The line between speaker terminals is shorted.

Supplementary information: As the excess current is detected after operation of the speaker relay, the shorted speaker terminal and the connected speaker can be identified.

Turning on the power without correcting the abnormality will cause the protection function to work immediately and the power supply will instantly be shut off.

2-3. When the protection function worked due to abnormal DC output.

DC PRT:xxx

AD value when the protection function is working

Cause: DC output from the power amplifier is abnormal.

Supplementary information: The protection function worked due to a DC voltage appearing at the speaker terminal. A cause could be a defect in the amplifier.

Turning on the power without correcting the abnormality will cause the protection function to work in 3 seconds and the power supply will be shut off.

2-4. When the protection function worked due to abnormal voltage in the power supply section.

PRV PRT: xxx

AD value when the protection function is working

Cause: The voltage in the power supply section is abnormal.

Supplementary information: The protection function worked due to a defect or overload in the power supply.

Turning on the power without correcting the abnormality will cause the protection function to work in 1 second and the power supply will be shut off.

2-5. When the protection function worked due to excessive heatsink temperature.

THM PRT: xxx

AD value when the protection function is working

Cause: The temperature on the heatsink is excessive.

Supplementary information: The protection function worked due to the temperature limit being exceeded.

Causes could be poor ventilation or a defect related to the thermal sensor.

Turning on the power without correcting the abnormality will cause the protection function to work in 1 second and the power supply will be shut off.

* For detection of each protection function, refer to main menu described later.

● History of protection function

When the protection function has worked, its history is stored in memory with a backup.

Even if no abnormality is noted while servicing the unit, an abnormality which has occurred previously can be defined as long as the backup data has been stored.

For details of the history of protection function, refer to main menu 21 PROTECTION HISTORY.

The history of the protection function is cleared when self-diagnostic function is cancelled by selecting PRESET RESERVED (Memory initialized) of main menu 24 or when the backup data is erased.

● Operation procedure of Main menu and Sub-menu


There are 27 main menu items, each of them having sub-menu items.

Main menu selection

Select the main menu using "PROGRAM" knob.

Sub-menu selection

Select the sub-menu using "SCENE RADIO" (forward) and "SCENE CD" (reverse) keys.

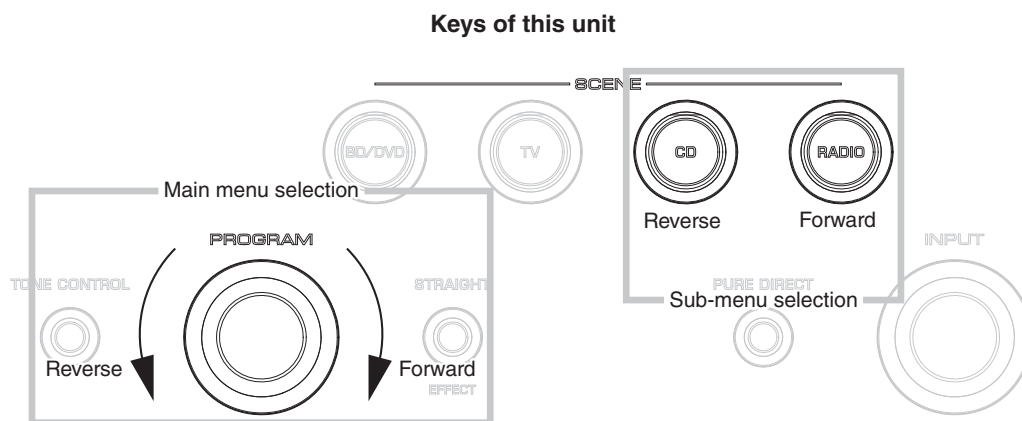

● Functions in Self-Diagnostic Function mode

In addition to the self-diagnostic function menu items, functions as listed below are available.

- Power ON/OFF
- Master volume
- Muting
- Input select
- Audio select
- PROGRAM select
- Tone control
- PURE DIRECT ON/OFF
- ZONE2 ON/OFF
- ZONE3 ON/OFF

* Functions related to the tuner and the set menu are not available.

● Initial settings used to start Self-Diagnostic Function

The following initial settings are used when starting self-diagnostic function.

When self-diagnostic function is canceled, these settings are restored to those before starting self-diagnostic function.

- Master volume: -20 dB
- Zone2 Volume: +2.5 dB
- Input: AV5 (MAIN ZONE) / AUDIO1 (ZONE2)
- Main menu: 1. ANALOG BYPASS
- Speaker setting: LARGE, Bass out to SWFR (All channels)
- Speaker impedance: 8 ohms position
- OSD: ON
- XM Power: ON (U model)

● **Details of Self-Diagnostic Function menu**

1. BYPASS

Using the sub-menu, it is possible to select ANALOG BYPASS output or DSP BYPASS output.

ANALOG BYPASS

The analog input audio signal is output to FRONT L/R in PURE DIRECT.

1. ANALOG BYPASS

INPUT: AV5 ANALOG

SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz


| Input level | Volume | SPEAKER OUT | | | | | | | SUB-WOOFER OUTPUT |
|------------------|---------|-------------|--------|----------|---------------|----------|-------|-------|-------------------|
| | | FRONT | CENTER | SURROUND | SURROUND BACK | PRESENCE | ZONE2 | ZONE3 | |
| Both ch, -20 dBm | +6.5 dB | +13.0 dBm | -∞ | -∞ | -∞ | -∞ | -∞ | -∞ | -∞ |

DSP BYPASS

The digital input audio signal is output to FRONT L/R in PURE DIRECT.

1. DSP BYPASS


ANALOG BYPASS

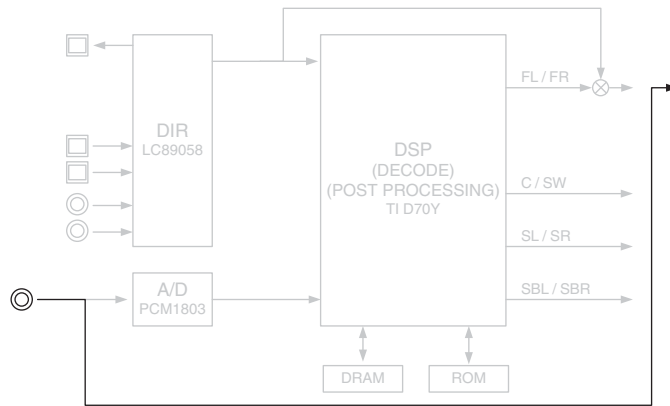

(Shaded items not used in this example)

RX-V2065/HTR-6295

DSP BYPASS

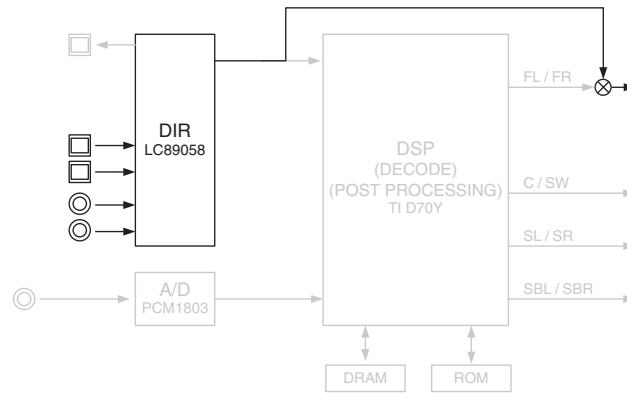

(Shaded items not used in this example)

2. RAM THROUGH

Using the sub-menu, it is possible to select MARGIN output or FULL BIT output.

RAM MARGIN

The audio signal is output including the head margin.

2. RAM MARGIN

INPUT: AV5 ANALOG

SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

| Input level | Volume | SPEAKER OUT | | | | | | | SUB-WOOFER OUTPUT |
|------------------|---------|-------------|-----------|-----------|---------------|----------|-------|-------|-------------------|
| | | FRONT | CENTER | SURROUND | SURROUND BACK | PRESENCE | ZONE2 | ZONE3 | |
| Both ch, -20 dBm | +6.5 dB | +13.0 dBm | +13.0 dBm | +13.0 dBm | +13.0 dBm | -∞ | -∞ | -∞ | -6.5 dBm |

RAM FULL BIT

The audio signal is output in digital full bit without including the head margin.


The SUBWOOFER signal is output but not in digital full bit.

2. RAM FULL ALL

INPUT: AV5 ANALOG

SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

| Input level | Volume | SPEAKER OUT | | | | | | | SUB-WOOFER OUTPUT |
|------------------|---------|-------------|-----------|-----------|---------------|----------|-------|-------|-------------------|
| | | FRONT | CENTER | SURROUND | SURROUND BACK | PRESENCE | ZONE2 | ZONE3 | |
| Both ch, -20 dBm | +6.5 dB | +13.0 dBm | +13.0 dBm | +13.0 dBm | +13.0 dBm | -∞ | -∞ | -∞ | -6.5 dBm |

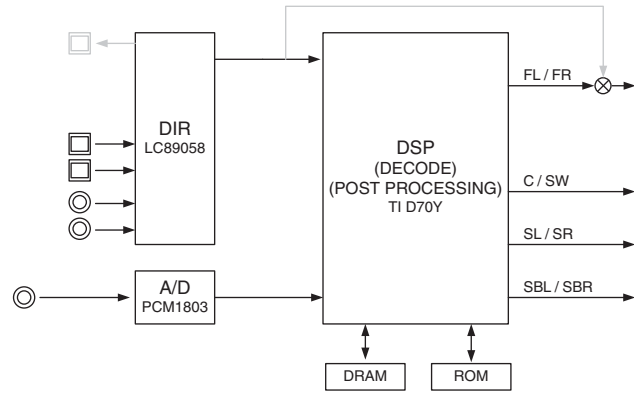

(Shaded items not used in this example)

When input source is stereo, signal is assigned as below.

- Front L → Front L / Center / Surround L / Surround Back L, R
- Front R → Front R / Surround R
- Front L +10 dB → SWFR

RAM FULL CENTER

The audio signal is output to only CENTER in digital full bit without including the head margin.

2. RAM FULL C

INPUT: AV5 ANALOG

SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

| Input level | Volume | SPEAKER OUT | | | | | | | SUB-WOOFER OUTPUT |
|------------------|---------|-------------|-----------|----------|---------------|----------|-------|-------|-------------------|
| | | FRONT | CENTER | SURROUND | SURROUND BACK | PRESENCE | ZONE2 | ZONE3 | |
| Both ch, -20 dBm | +6.5 dB | -∞ | +13.0 dBm | -∞ | -∞ | -∞ | -∞ | -∞ | -∞ |

RAM FULL SURROUND

The audio signal is output to only SURROUND L/R in digital full bit without including the head margin.

2. RAM FULL SUR

INPUT: AV5 ANALOG

SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

| Input level | Volume | SPEAKER OUT | | | | | | | SUB-WOOFER OUTPUT |
|------------------|---------|-------------|--------|-----------|---------------|----------|-------|-------|-------------------|
| | | FRONT | CENTER | SURROUND | SURROUND BACK | PRESENCE | ZONE2 | ZONE3 | |
| Both ch, -20 dBm | +6.5 dB | -∞ | -∞ | +13.0 dBm | -∞ | -∞ | -∞ | -∞ | -∞ |

RAM FULL SURROUND BACK

The audio signal is output to only SURROUND BACK L/R in digital full bit without including the head margin.

2. RAM FULL SB

INPUT: AV5 ANALOG


SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

| Input level | Volume | SPEAKER OUT | | | | | | | SUB-WOOFER OUTPUT |
|------------------|---------|-------------|--------|----------|---------------|----------|-------|-------|-------------------|
| | | FRONT | CENTER | SURROUND | SURROUND BACK | PRESENCE | ZONE2 | ZONE3 | |
| Both ch, -20 dBm | +6.5 dB | -∞ | -∞ | -∞ | +13.0 dBm | -∞ | -∞ | -∞ | -∞ |

3. HDMI AUDIO

Using the sub-menu, the audio signals input to HDMI IN are selected and output.

* When selecting "DSD", be sure to connect an HDMI unit equipped with DSD output function to this unit.

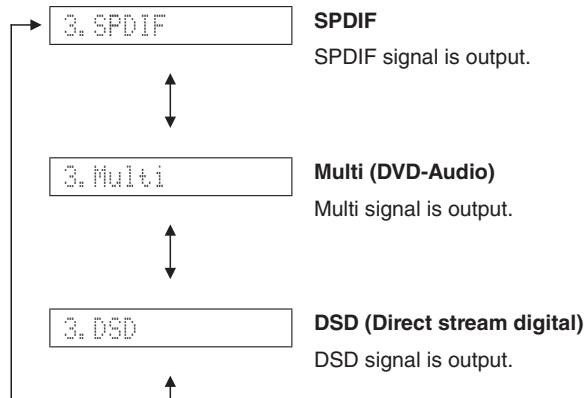

4. SPEAKER SET

The analog switch settings for each sub-menu are as shown in the table below.

| | FRONT | CENTER | SURROUND | SURROUND BACK | SUBWOOFER |
|----------------|-------|--------|----------|---------------|-----------|
| FRNT : SML 0dB | SMALL | LARGE | LARGE | LARGE | SWFR |
| CENTER : NONE | LARGE | NONE | LARGE | LARGE | SWFR |
| LFE/B : FRNT | LARGE | SMALL | SMALL | SMALL | FRONT |
| Zone2/3 Amp ON | LARGE | LARGE | – (*1) | – (*1) | SWFR |
| Bi-AMP | LARGE | LARGE | LARGE | LARGE (*2) | SWFR |
| TONE : MAX | LARGE | LARGE | LARGE | LARGE | SWFR |
| TONE : MIN | LARGE | LARGE | LARGE | LARGE | SWFR |
| SPEAKER 6 ohms | LARGE | LARGE | LARGE | LARGE | SWFR |

(*1) ZONE2/3 L/R (EXTRA SP1/2 L/R): LARGE

(*2) Bi-AMP: LARGE


LARGE: This mode is used for a speaker with high bass reproduction performance (a large unit). Full bandwidth signals are output.

SMALL: This mode is used for a speaker with low bass reproduction performance (a small unit). The signals of 90 Hz or less are mixed into the channel specified by LFE/BASS.

NONE: This mode is used for no center speaker. The center content is reduced by 3 dB and distributed to FRONT L/R.

SWFR: LFE of 5.1 ch signal or LFE/BASS lower than 90 Hz is output through SUBWOOFER OUT.

FRONT: LFE of 5.1 ch signal or LFE/BASS lower than 90 Hz is distributed to FRONT L/R.

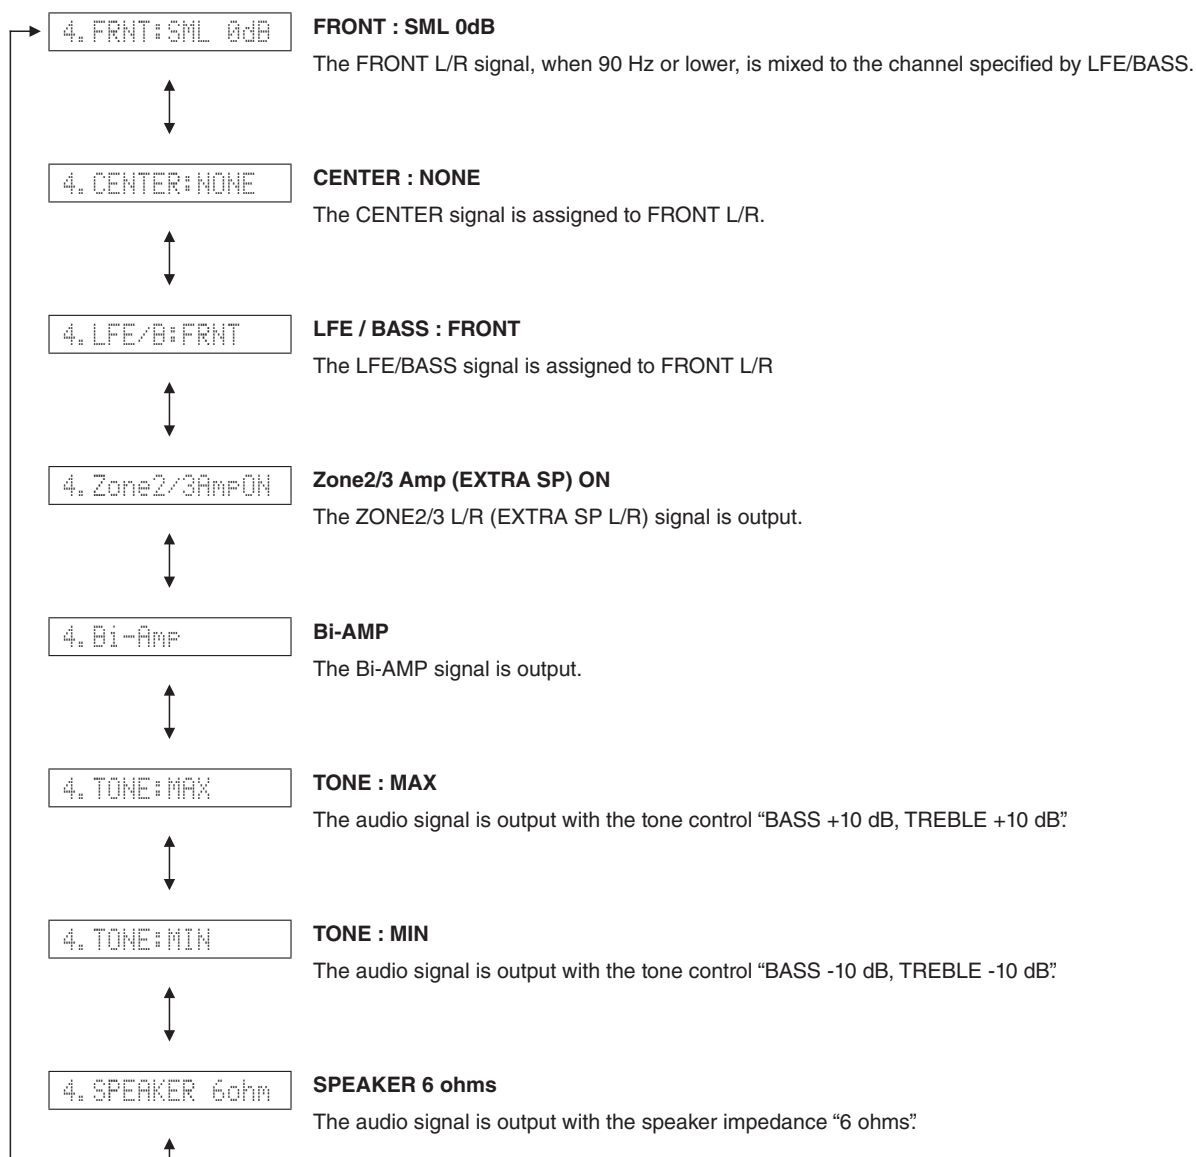

INPUT: AV5 ANALOG

SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

| Sub-menu | Input level | Volume | SPEAKER OUT | | | | SUBWOOFER OUTPUT |
|----------------------|------------------|---------|-------------|-----------|--------------|-------------------|------------------|
| | | | FRONT L/R | CENTER | SURROUND L/R | SURROUND BACK L/R | |
| FRNT : SML 0dB | Both ch, -20 dBm | +6.5 dB | +13.0 dBm | +13.0 dBm | +13.0 dBm | +13.0 dBm | -3.0 dBm |
| CENTER : NONE | Both ch, -20 dBm | +6.5 dB | +18.0 dBm | -∞ | +13.0 dBm | +13.0 dBm | -7.5 dBm |
| LFE/B : FRNT (50 Hz) | Both ch, -20 dBm | +6.5 dB | -∞ | +13.0 dBm | +13.0 dBm | +13.0 dBm | -∞ |
| Zone2/3 Amp ON | Both ch, -20 dBm | +6.5 dB | +13.0 dBm | +13.0 dBm | -∞ (*) | -∞ (*) | -7.5 dBm |
| Bi-AMP | Both ch, -20 dBm | +6.5 dB | +13.0 dBm | +13.0 dBm | +13.0 dBm | +13.0 dBm | -7.5 dBm |
| TONE : MAX | Both ch, -20 dBm | +6.5 dB | +14.0 dBm | +13.0 dBm | +13.0 dBm | +13.0 dBm | -7.5 dBm |
| TONE : MIN | Both ch, -20 dBm | +6.5 dB | +12.0 dBm | +13.0 dBm | +13.0 dBm | +13.0 dBm | -7.5 dBm |
| SPEAKER 6 ohms | Both ch, -20 dBm | +6.5 dB | +13.0 dBm | +13.0 dBm | +13.0 dBm | +13.0 dBm | -7.5 dBm |

(*) ZONE2/3 L/R (EXTRA SP1/2 L/R) SPEAKER OUT: +13.0 dBm

5. MULTI CH-INPUT

The input source “MULTI CHANNEL INPUT” is selected.

Using the sub-menu, it is possible to select the 6 ohms/8 ohms.

When LIM / PLDET / THM menu is selected, keys become non-operable.

However, it is possible to advance to the next main menu by turning the “PROGRAM” knob of this unit.

8 ch INPUT 6 ohms

5.8ch INPUT_60

INPUT: MULTI CH INPUT

SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

| Input level | Volume | SPEAKER OUT | | | | | | | SUB-WOOFER OUTPUT |
|------------------|---------|-------------|-----------|-----------|---------------|----------|-------|-------|-------------------|
| | | FRONT | CENTER | SURROUND | SURROUND BACK | PRESENCE | ZONE2 | ZONE3 | |
| Both ch, -20 dBm | +6.5 dB | +13.0 dBm | +13.0 dBm | +13.0 dBm | +13.0 dBm | -∞ | -∞ | -∞ | -16.5 dBm |

8 ch INPUT 8 ohms

5.8ch INPUT_80

INPUT: MULTI CH INPUT

SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

| Input level | Volume | SPEAKER OUT | | | | | | | SUB-WOOFER OUTPUT |
|------------------|---------|-------------|-----------|-----------|---------------|----------|-------|-------|-------------------|
| | | FRONT | CENTER | SURROUND | SURROUND BACK | PRESENCE | ZONE2 | ZONE3 | |
| Both ch, -20 dBm | +6.5 dB | +13.0 dBm | +13.0 dBm | +13.0 dBm | +13.0 dBm | -∞ | -∞ | -∞ | -16.5 dBm |

RX-V2065/HTR-6295

LIM / PLDET / THM

LIM: Setting value of LIM (Limiter control)

* Do not change the value settings because this menu is only for the use of development staff.

PLDET: Power limiter detection


The A/D conversion value during operation is displayed.

(Reference voltage: 3.3 V=255)

THM: Temperature protection detection

The A/D conversion value during operation is displayed.

(Reference voltage: 3.3 V=255)

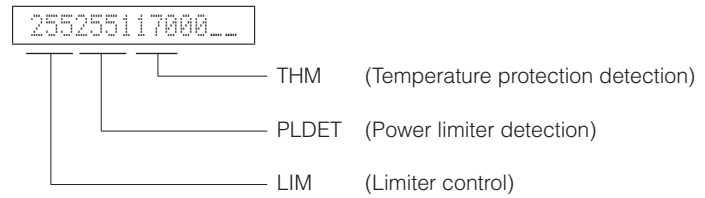**6. MIC CHECK**

The signals input through the microphone are output to only FRONT L via A/D and D/A.


6.MIC CHK

7. FL/GUI CHECK


This menu is used to check the FL display and video control sections. When checking the video control section, connect a TV monitor to this unit with a component video cable and video pin cable.

Using the sub-menu, the FL display section or video control section switches as shown below.

Checking FL display section

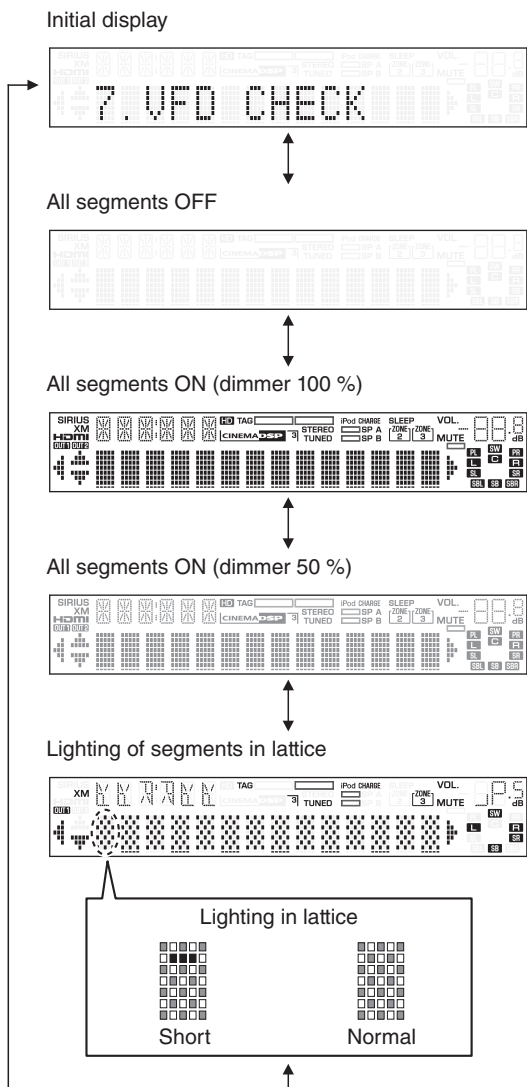

Check of the Video control section. (Monitor out)

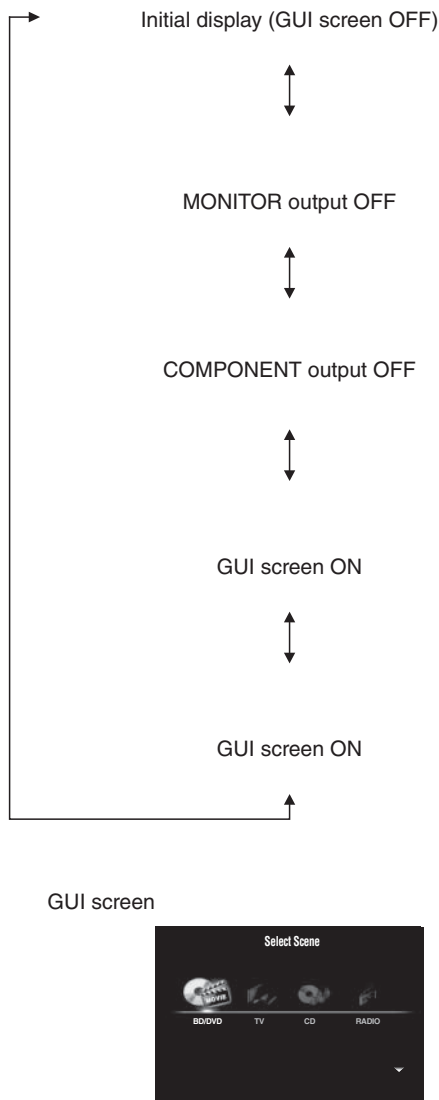

Segment conditions of the FL driver and the FL tube are checked by turning ON and OFF all segments. Next, the operation of the FL driver is checked by using the dimmer control. Then a short between segments next to each other is checked by turning ON and OFF all segments alternately (in lattice).

(In the above example, the segments in the second row from the top are shorted.)

8. MANUAL TEST

The built-in noise generator of DSP outputs the test noise through the channels specified by using the sub-menu.
The noise frequency for LFE is 30 to 80 Hz. Other than that, the noise frequency is 500 Hz to 2 kHz.

TEST ALL

The test noise is output from all channels.



9. A/D DATA CHECK

This menu is used to display the A/D conversion value of the microprocessor which detects panel keys of this unit and protection functions by using the sub-menu.

When K0/K1 menu is selected, keys become non-operable due to detection of the values of all keys.

However, it is possible to advance to the next main menu by turning the "PROGRAM" knob of this unit.

* The figures in the diagram are given as reference only.

PS1/PS2

PSx: Power supply voltage protection detection

PS1

Voltage detects: AC_BL, AC_12, AC_5, ± 12 and +5V

Normal value: 38 to 128
(Reference voltage: 3.3 V=255)

PS2

Voltage detects: -5 and +5V

Normal value: 31 to 125
(Reference voltage: 3.3 V=255)

* If PS1 or PS2 becomes out of the normal value range, the protection function works to turn off the power.



DC/TH

DC: Power amplifier DC (DC voltage) output is detected.

Normal value: 32 to 74
(Reference voltage: 3.3 V=255)

TH: Temperature on the heatsink is detected.

Normal value: 0 to 124
(Reference voltage: 3.3 V=255)

* If DC or TH becomes out of the normal value range, the protection function works to turn off the power.

DC:049 TH:117

IMP/PL

IMP: 8 or 6 ohms impedance setup detection

IMP 8: 8 ohms setting

IMP 6: 6 ohms setting

PL: PLDET (Power amplifier output voltage detection)

The power amplifier output voltage is detected and the power amplifier input voltage is controlled according to the detected output voltage.

(Reference voltage: 3.3 V=255)

IMP:8 PL:255

U, C, T, K, A, B, G, E, F models (Reference voltage: 3.3 V=255)

| | During normal operation | Value for starting limiter operation | Value for canceling limiter operation |
|-----------------------|-------------------------|--------------------------------------|---------------------------------------|
| PLDET (8 ohms/6 ohms) | 255 / 255 | 87 / 146 | 125 / 171 |
| LIM (Limiter control) | H | L | H |

R, L models (Reference voltage: 3.3 V=255)

| | During normal operation | Value for starting limiter operation | Value for canceling limiter operation |
|-----------------------|-------------------------|--------------------------------------|---------------------------------------|
| PLDET (8 ohms/6 ohms) | 255 / 255 | 100 / 100 | 131 / 131 |
| LIM (Limiter control) | H | L | H |

DST/DK

DST: Destination detection
(Reference voltage: 3.3 V=255)

DK: DOCK type detection
(Reference voltage: 3.3 V=255)

| |
|----------------|
| DST:211 DK:255 |
|----------------|

Destination detection for AD port
Pull-up resistance 10 k-ohms

| Ohm (R3809 VIDEO P.C.B.) | 1.2 k | 2.7 k | 4.7 k | 6.8 k | 10.0 k | 15.0 k | 47.0 k | 100.0 k |
|--------------------------|---------|---------|---------|----------|-----------|-----------|------------|-----------|
| A/D value (3.3 V=255) | 15 – 46 | 46 – 69 | 69 – 92 | 92 – 115 | 115 – 139 | 139 – 177 | 185 – 224 | 224 – 247 |
| DEST (139 pin) | U | C | R | T | K | A | B, G, E, F | L |

DOCK detection for AD port (IC20 Microprocessor pin no. 128)
Pull-up resistance 10 k-ohms

| DOCK type (DKID 141 pin) | Bluetooth | iPod | No connect |
|--------------------------|-----------|-----------|------------|
| A/D value (3.3 V=255) | 5 – 25 | 120 – 140 | 255 |

K0/K1

K0/K1: KEY0/KEY1 (Panel key of this unit)

When the A/D conversion value of the panel key becomes out of the specified range, normal operation will not be available.

In that case, check the constant of voltage dividing resistor, solder condition, etc. Refer to the table below.

(Reference voltage: 3.3 V=255)

| |
|---------------|
| K0:255 K1:255 |
|---------------|


| Display | K0 |
|-----------|------------------|
| 0 – 11 | SCENE RADIO |
| 12 – 32 | SCENE CD |
| 33 – 54 | SCENE TV |
| 55 – 75 | SCENE BD/DVD |
| 76 – 95 | ZONE2 ON/OFF |
| 96 – 118 | ZONE3 ON/OFF |
| 119 – 142 | — |
| 143 – 162 | — |
| 181 – 197 | MAIN ZONE ON/OFF |
| 198 – 229 | TONE CONTROL |
| 255 | KEY OFF |

| Display | K1 |
|-----------|-------------------|
| 0 – 11 | PURE DIRECT |
| 12 – 32 | STRAIGHT / EFFECT |
| 33 – 54 | ZONE CONTROLS |
| 55 – 77 | INFO |
| 78 – 98 | PRESET ◀ |
| 99 – 120 | PRESET ▶ |
| 121 – 143 | MEMORY |
| 144 – 165 | BAND/CATEGORY |
| 166 – 185 | TUNING CH ◀ |
| 186 – 205 | TUNING CH ▶ |
| 255 | KEY OFF |

10. VIDEO CHECK

I2C check


The I2C (Inter integrated circuit) bus line connection is checked.

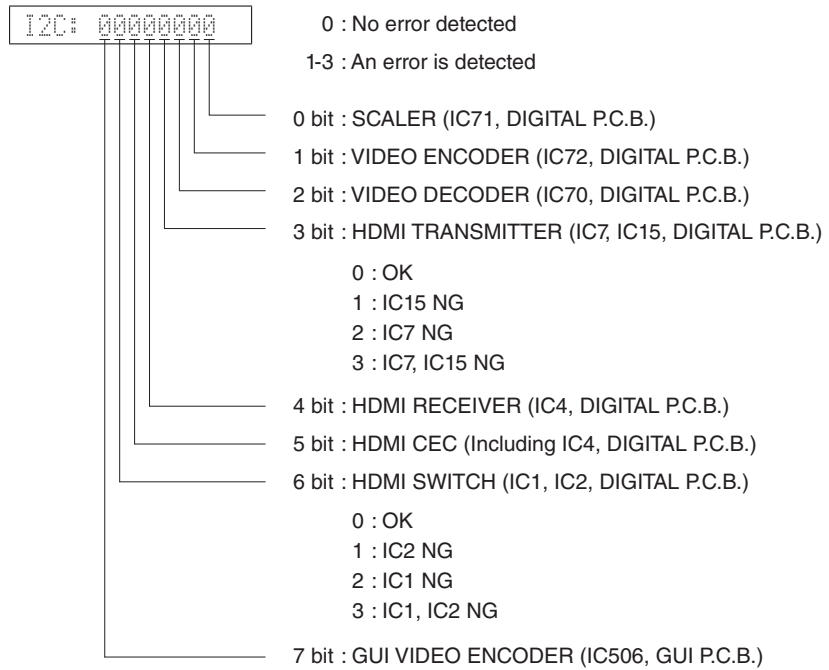

Digital component


The video signal is converted and output as shown below.

DIGITAL COMP

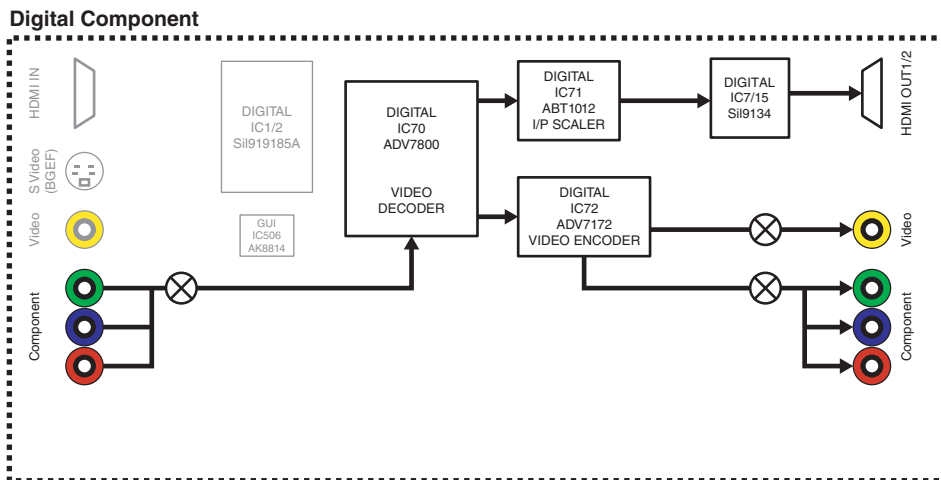


Digital CVBS (Video)

The video signal is converted and output as shown below.

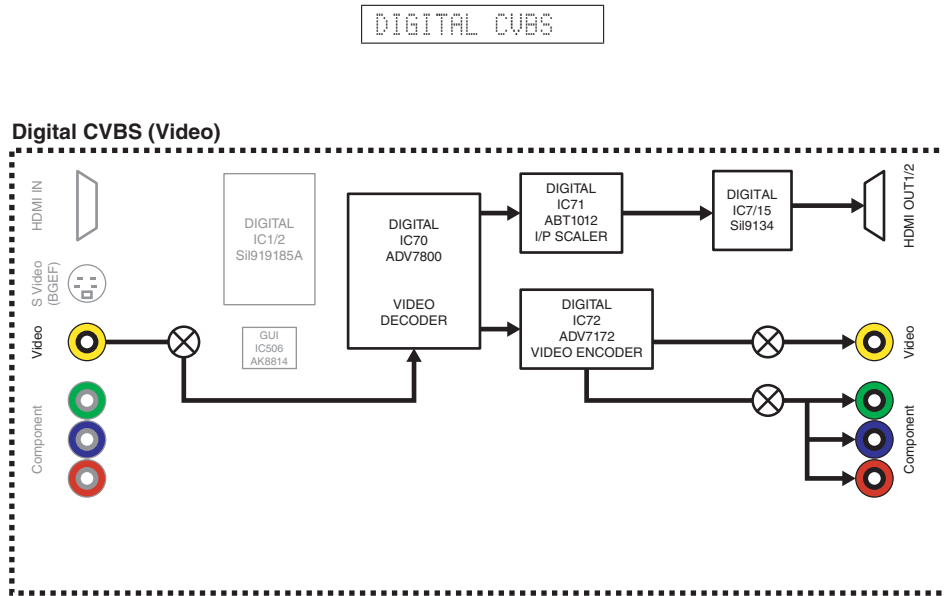

Digital Y/C (S-Video) (B, G, E, F models)


The video signal is converted and output as shown below.

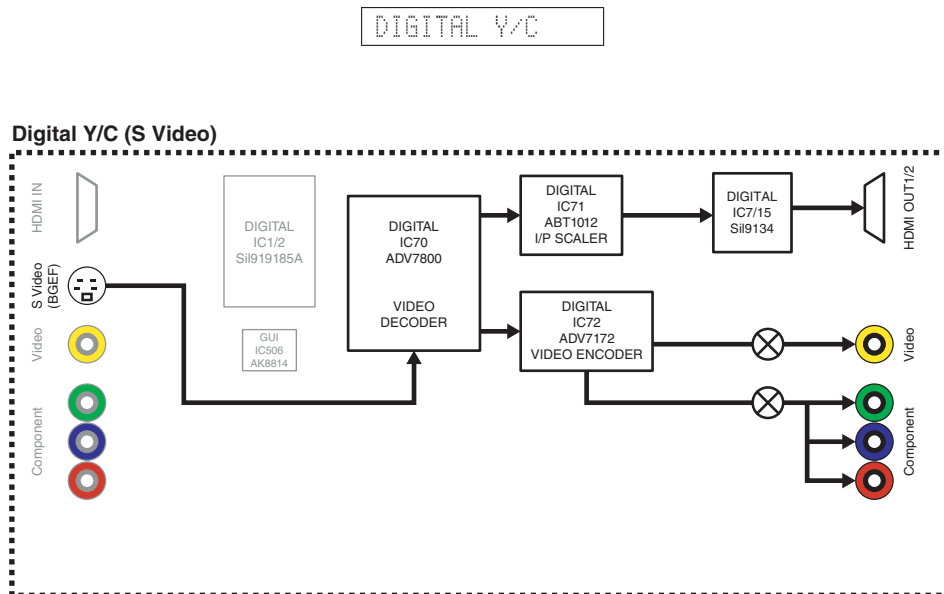

RX-V2065/HTR-6295


Analog bypass

The video signal is converted and output as shown below.

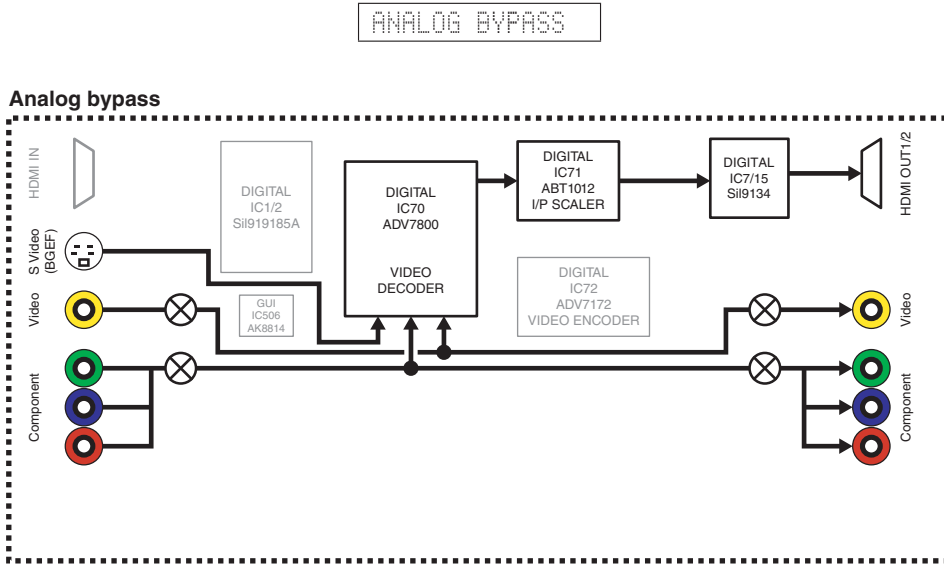

Test pattern

The test pattern is output from IC72 (DIGITAL P.C.B.).

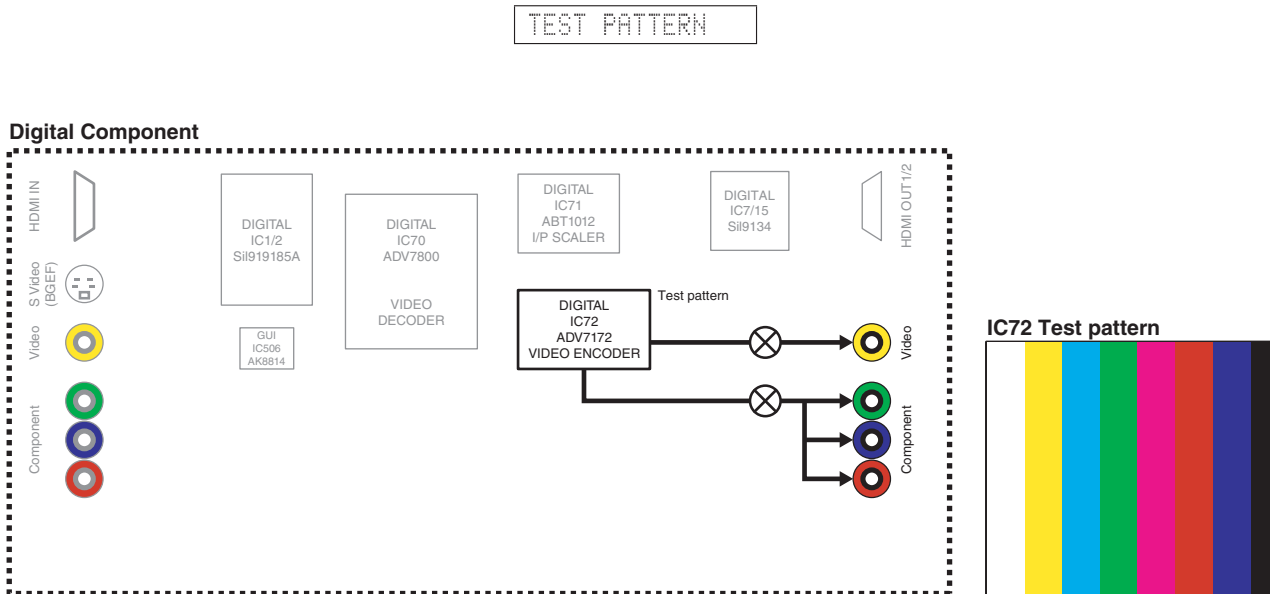

Video information


The information of input video signal is displayed.

Example




11. XM STATUS (U model)

This menu is used to check the output of XM Radio Antenna.

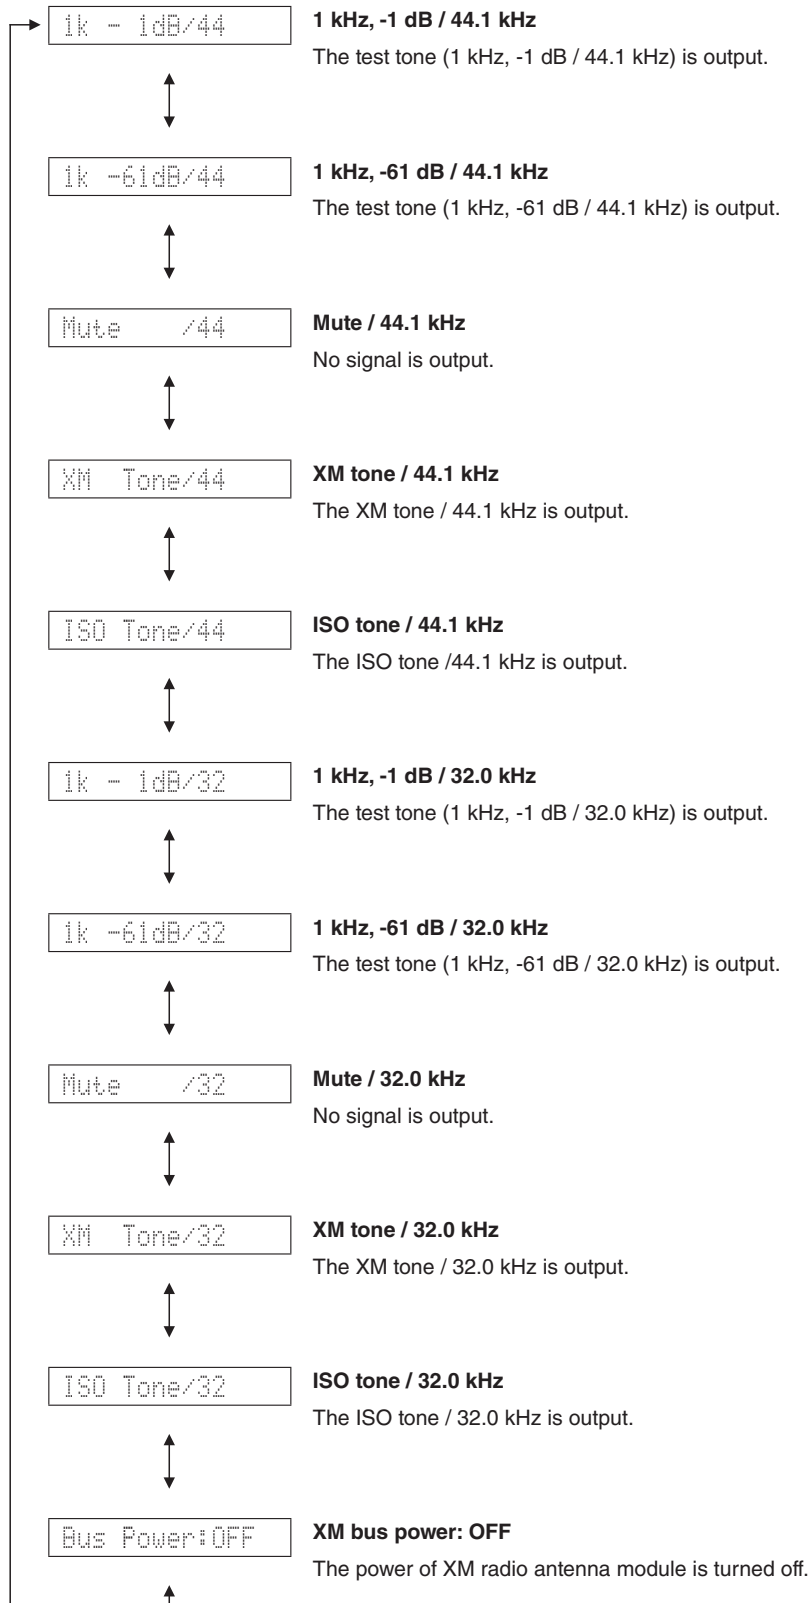

12. SIRIUS (U model)

The SIRIUS information are displayed.

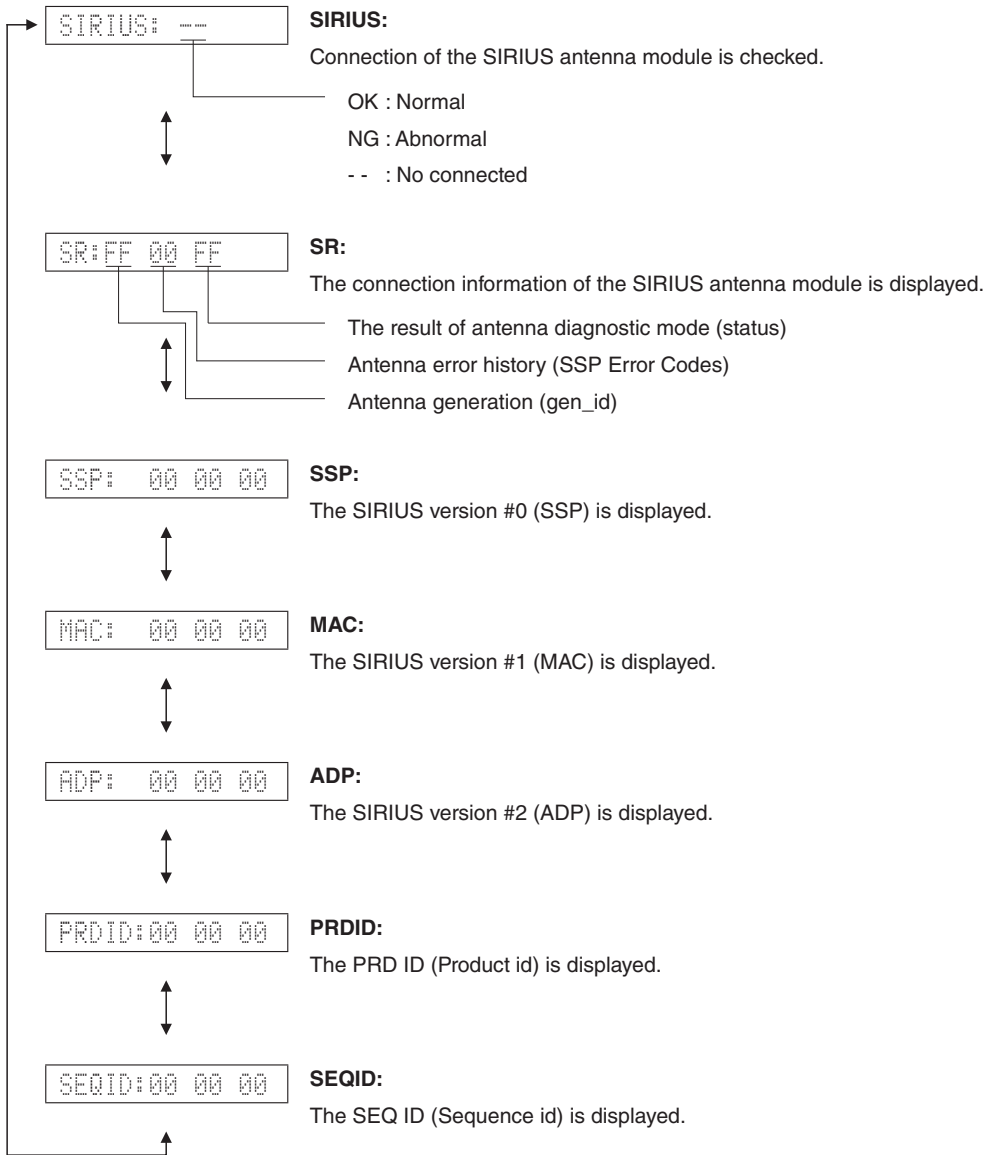

13. HD RADIO (U model)

The firmware version is displayed.

CPU version

The firmware version is displayed.

HD CPU V:03.00

DSP version

The DSP version is displayed.

D:C0003.000

14. DOCK


This menu is used to check the DOCK connector without the iPod itself.

With the power to this unit turned off, short between pins No. 14 (TX) and No. 18 (RX), between pins No. 1 (PWR) and No. 17 (ACCPOW), between pins No. 4 (iPDET) and No. 8 (DGND). Also, connect a 10 k-ohms, 1/4 W resistor between pins NO. 21 (DKID) and No. 8 (DGND). (Make sure that the power is turned off when shorting pins.)


Start up the self-diagnostic function and select this menu.

The check result is displayed according to the following display specifications.

Note) Be sure to return the shorted pins to their original condition after executing this test.

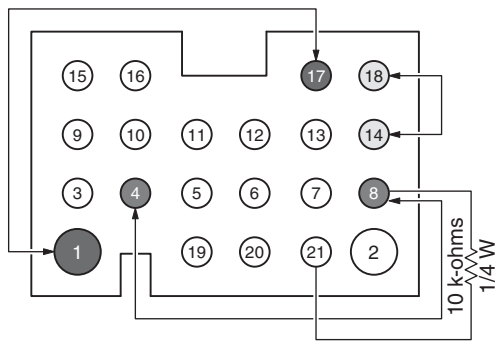


DOCK CONNECTOR

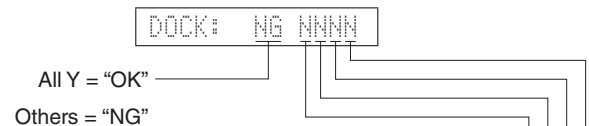

| Check item | Short pins | Result | Display |
|---|---|--|---------|
| UART loop back test | Pins No.14 (TX) – No.18 (RX) | OK | Y |
| | | NG | N |
| iPAP (iPod accessory power) detection | Pins No.1 (PWR) – No.17 (ACCPOW) | IC20 pin No. 114 High = YES | Y |
| | | Low = No | N |
| iPDET (iPod installation to DOCK) detection | Pins No.4 (iPDET) – No.8 (DGND) | IC20 pin No. 8 Low = installed | Y |
| | | High = not installed | N |
| DKID (DOCK ID) detection | Pins No.21 (DKID) – No.8 (DGND) * 10 k-ohms, 1/4 W pull down | IC20 pin No. 141 10 k-ohms, 1/4 W pull down | Y |
| | | Other | N |

BT VERSION


The DOCK (Bluetooth module) version is displayed.



RX-V2065/HTR-6295

15. HDMI INFORMATION



The HDMI informations are displayed.

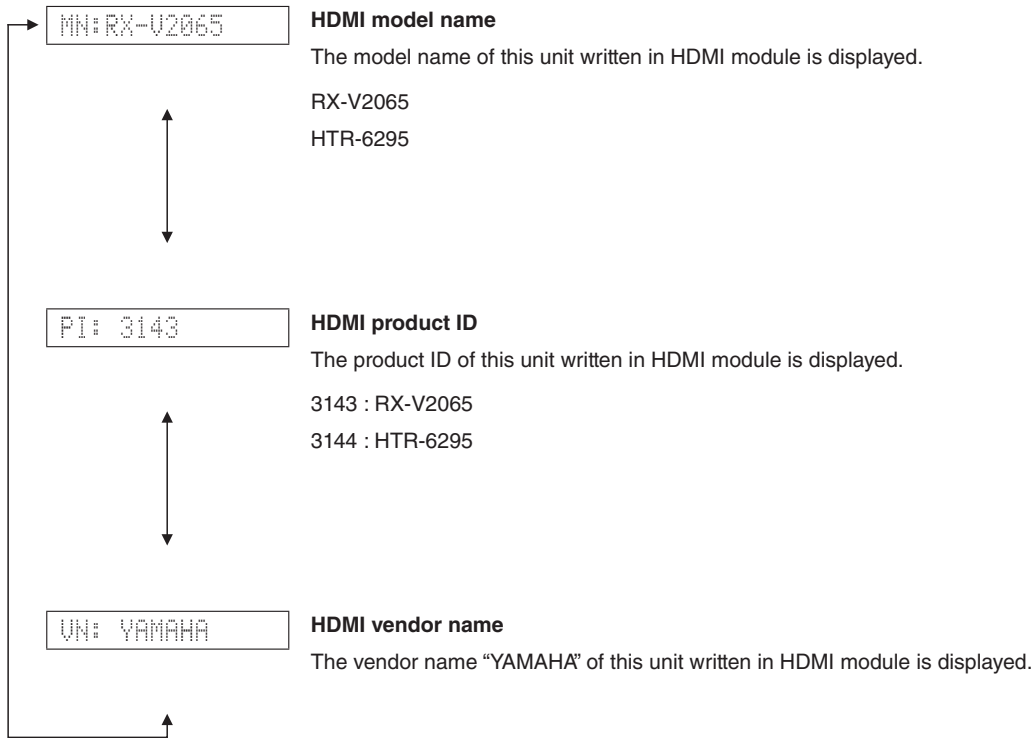


16. HDMI SELECT

Using the sub-menu, the selected input signal is output to HDMI OUT.

* Support audio is set to "OTHER".

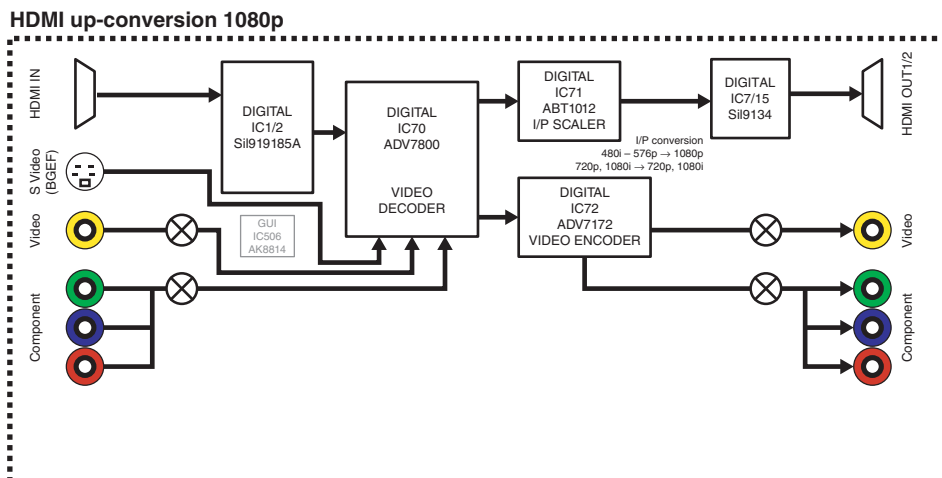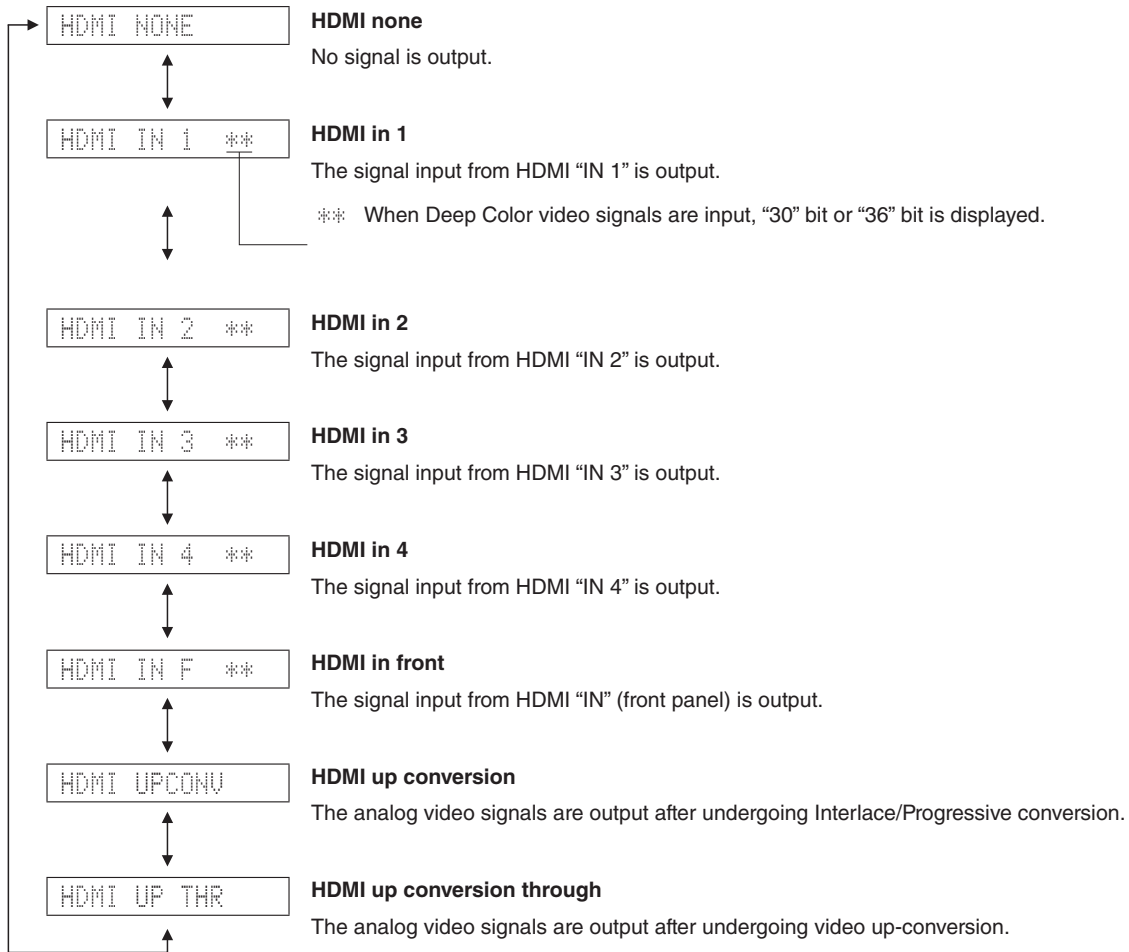

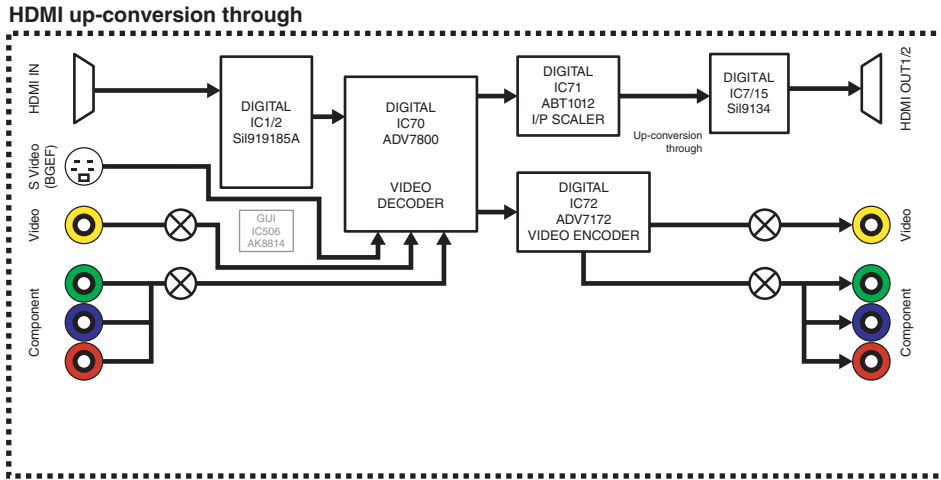

17. USB

The music file stored in the USB storage device is reproduced.

- a. Copy 2 or more music files from PC to the root folder of the USB storage device.
- b. Insert the USB storage device to the USB terminal of this unit.

USB file 1

The 1st music file stored in the USB storage device connected to the USB terminal is reproduced.

```
17:USB file 1
```

USB file 2

The 2nd music file stored in the USB storage device connected to the USB terminal is reproduced.

```
17:USB file 2
```

18. IF STATUS (Input function status)

Not applied to these models.

DSP status

```
DST: 710EMF2390
```

19. BUS CHECK

Communication and bus line connection between devices on the DIGITAL P.C.B. are checked.

TI (DSP) BUS check

Communication and bus line connection between microprocessor (IC20) and TI (DSP, IC44) are checked.

```
TI BUS: NoEr
```

NoEr : No error detected.

Boot : When "Boot" is displayed for a few seconds or "Boot" and "NoEr" are displayed alternately, there is a possibility that an error had occurred.

BF LOOP :

Communication and bus line connection between main microprocessor (IC20) and BF (sub-microprocessor, IC505) are checked.

```
BF LOOP: OK
```

OK : No error detected.

NG : An error is detected.


20. NO MENU (Invalidity)

```
Invalidity
```

21. PROTECTION HISTORY

The history of protection function is displayed.

Select this menu and press the "STRAIGHT" key, all history will be erased.

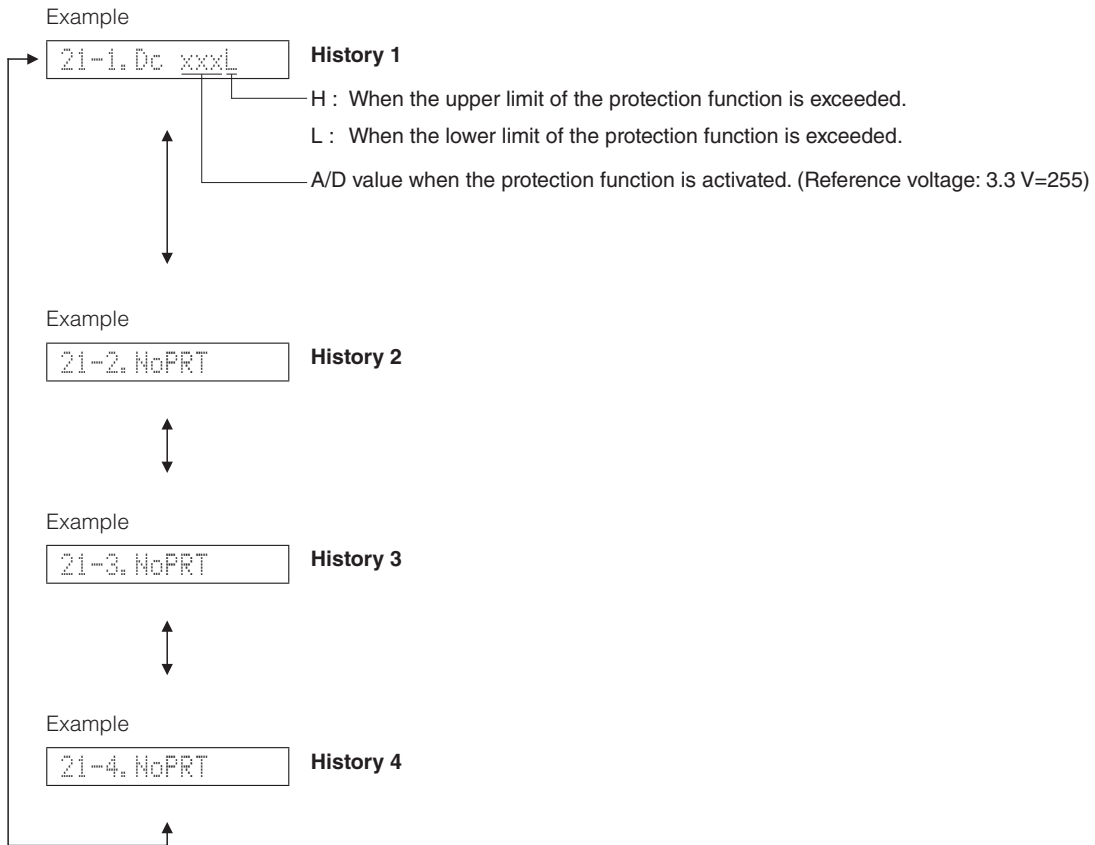

22. NO MENU (Invalidity)

23. UPDATE

Not applied to these models.

UPDATE TI

23.UPDATE TI

24. FACTORY PRESET

This menu is used to reserve/inhibit initialization of the back-up IC.

24.PRESET INHI



24.PRESET RSRV

PRESET INHIBIT (Initialization inhibited) / PRESET INHIBIT

Back-up IC initialization is not executed. Select this sub-menu to protect the values set by the user.

PRESET RESERVED (Initialization reserved)

Initialization of the back-up IC is reserved. (Actually, initialization is executed the next time that the power is turned on.) Select this sub-menu to reset to the original factory settings or to reset the back-up IC. Any protection history will be cleared.

CAUTION: Before setting to the PRESET RESERVED, write down the existing preset memory content of the tuner.
(This is because setting to the PRESET RESERVED will cause the user memory content to be erased.)

25. ROM VER/SUM/PORT

The firmware version, checksum values, model name and destination are displayed.

The checksum is obtained by adding the data at every 8-bit for each program area and expressing the result as a 4-figure hexadecimal data.

* The figures in the diagram are given as reference only.

Firmware version

The firmware version of microprocessor (IC20 DIGITAL P.C.B.) is displayed.

```
Ver: 0024
```

All checksum

The checksum value of microprocessor (IC20 DIGITAL P.C.B.) is displayed.

```
Sum: 5253
```

TI (DSP) FLASH ROM version

The firmware version of TI (DSP) FLASH ROM (IC49 DIGITAL P.C.B.) is displayed.

```
TiVer:01.03r1
```

TI (DSP) FLASH ROM checksum

The checksum value of TI (DSP) FLASH ROM (IC49 DIGITAL P.C.B.) is displayed.

```
TiSum:F1D0135A
```

BF version

The firmware version of BF (sub-microprocessor, IC505 GUI P.C.B.) is displayed.

```
BF Ver: 0019
```

BF checksum 1 (All/Master boot)

The checksum value (All/Master boot) of BF (sub-microprocessor, IC505 GUI P.C.B.) is displayed.

```
A1:3ED2Ma:0122
```

BF checksum 2 (Application/USB)

The checksum value (Application/USB) of BF (sub-microprocessor, IC505 GUI P.C.B.) is displayed.

AP:67DAUs:ADBC

XM version (U model)

The firmware version of XM is displayed.

XM A010-A001

BF (sub-microprocessor)
Main microprocessor

SIRIUS version (U model)

The firmware version of SIRIUS is displayed.


SR A001-A001

BF (sub-microprocessor)
Main microprocessor

MODEL/DESTINATION

The model name and destination are displayed.

V2 000 U 027

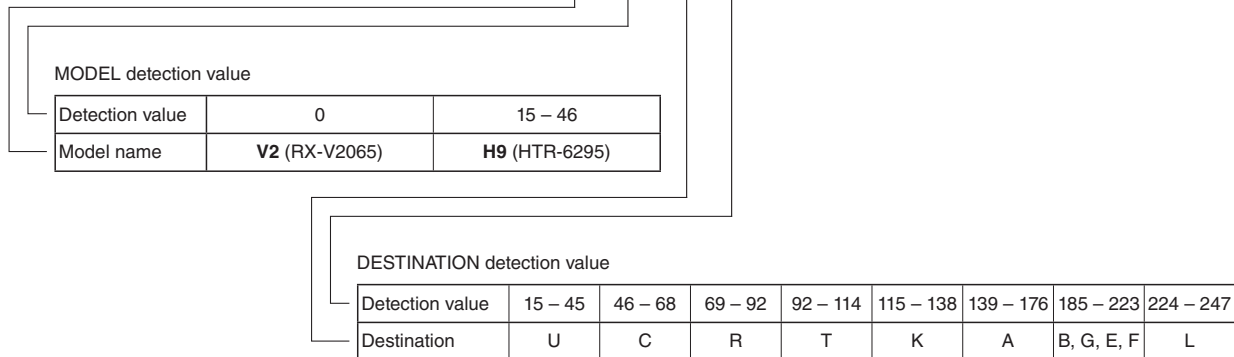

VERIFY error

Not applied to these models.

Verify 255

MAC address

The MAC address is displayed.

XXXXXXXXXXXX

26. SERIAL

RS-232C loop back check

This menu is used to check transmission and reception of the data, and the flow port of hardware.


With the power to this unit turned off, short between pins No. 2 (RxD) and No. 3 (TxD), and between pins No. 7 (RTS) and No. 8 (CTS) of the RS232C terminal. (Be sure to turn off the power when shorting the pins.)

Start up the self-diagnostic function and select this menu.

“OK” appears when the data is transmitted and received properly, and “NG” appears when it is not.

In this mode, NULL command transmission is continued after the test command is transmitted.

Note) Be sure to return the shorted pins to their original condition after executing this test.



EEPROM check

Communication and bus line connection between main microprocessor (IC20) and EEPROM (IC22) on the DIGITAL P.C.B. are checked.

26. EEPROM: OK

OK: No error detected

NG: An error is detected

27. Network

- * When the network condition varies while sub-menu is displayed (e.g., the network is deactivated once), the correct result will not be displayed.

In that case, once turn off the power to this unit, then start up the self-diagnostic function again and select this menu.

IP Address Check

Whether IP address is obtained or not is checked.

27.NET IP: NG

OK: Connected (IP address obtained)

NG: No traffic / Unconnected

MAC Address Check

MAC address information is checked.

27.NET MAC: OK

OK: Normal

NG: Unwritten

MAC LABEL No SET

This menu is used to change MAC address number.

When IC513 of GUI P.C.B. or GUI P.C.B. is replaced, use this menu to restore the previous MAC address number.

Yamaha Corporation will provide the setting procedure for proper operation.

Please report the serial number of this unit to the following e-mail address for further instruction.

E-mail: ycav-ysiss@gmx.yamaha.com

27.NET MAC SET

LINK CHECK

A network cable connection is checked.

27.NET LNK: OK

OK: Normal
NG: Unconnected


NETWORK loop back check

This menu is used to check the NETWORK connector.

With the power to this unit turned off, short between pins No. 1 (Tx+) and No. 3 (Rx+) and between pins No. 2 (Tx-) and No. 6 (Rx-) of the NETWORK connector. (Be sure to turn off the power to this unit when shorting these pins.)

Start up the self-diagnostic function and select this menu.

Note) Be sure to return the shorted pins to their original condition after executing this test.



27.NET LOOP:NG

OK: Normal
NG: Abnormal

Line noise measurement 10Mbps

The line noise 10Mbps is output.

27.NET LN 10M ↔ LN OUTPUT:10M

Press "STRAIGHT" key

Line noise measurement 100Mbps

The line noise 100Mbps is output.

27.NET LN 100M ↔ LN OUTPUT:100M

Press "STRAIGHT" key

RX-V2065/HTR-6295



■ CONFIRMATION OF IDLING CURRENT OF AMP UNIT

- Right after power is turned on, confirm that the voltage across the terminals of R1152 (SURROUND BACK Rch), R1154 (SURROUND Rch), R1150 (FRONT Rch), R1148 (CENTER), R1149 (FRONT Lch), R1153 (SURROUND Lch), R1151 (SURROUND BACK Lch) are between 0.1mV and 10.0mV.
- If it exceeds 10.0 mV, open (cut off) R1104 (SURROUND BACK Rch), R1106 (SURROUND Rch), R1102 (FRONT Rch), R1100 (CENTER), R1101 (FRONT Lch), R1105 (SURROUND Lch), R1103 (SURROUND BACK Lch) and reconfirm the voltage.

Attention


If the measured voltage exceeds 10.0mV after an amplifier repair, first check for a defective component before cutting the bias resistor.

- Confirm that the voltage is 0.2 mV to 15.0 mV after 60 minutes.

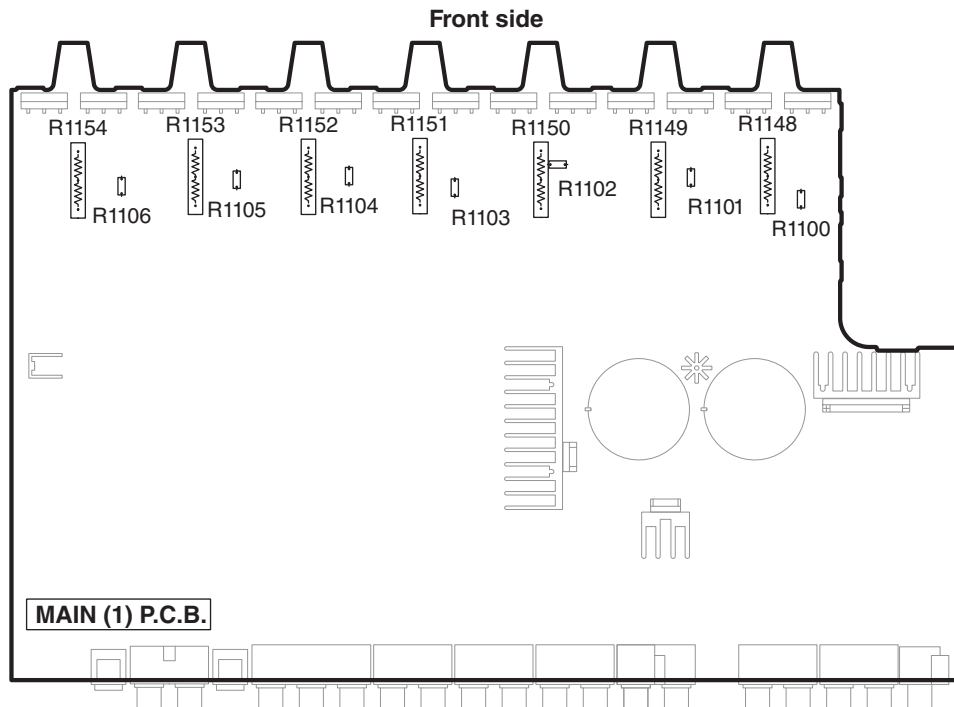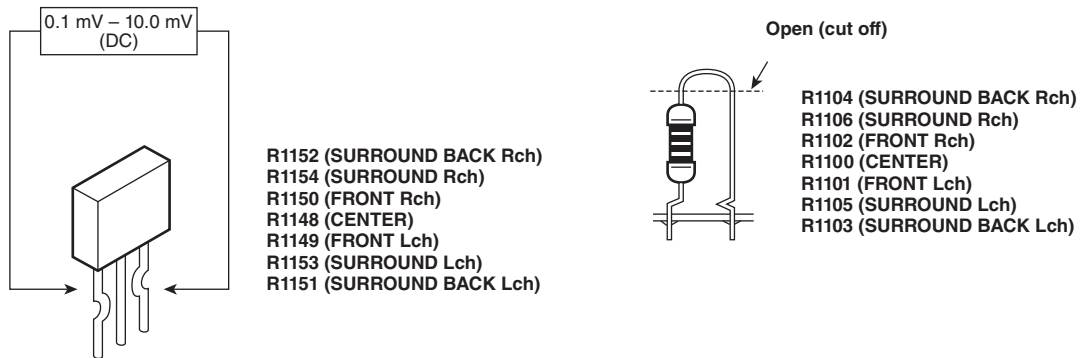

■ DISPLAY DATA

● V4001 : 18-MT-09GNK (OPERATION P.C.B.)

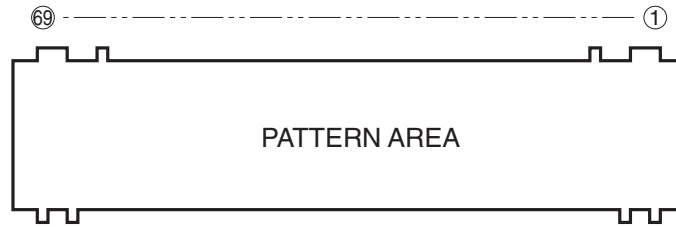





● PIN CONNECTION

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Pin No. | 69 | 68 | 67 | 66 | 65 | 64 | 63 | 62 | 61 | 60 | 59 | 58 | 57 | 56 | 55 | 54 | 53 | 52 | 51 | 50 | 49 | 48 | 47 | 46 | 45 | 44 | 43 | 42 | 41 | 40 | 39 | 38 | 37 | 36 | 35 |
| Connection | F2 | NX | NP | NP | P1 | P2 | P3 | P4 | P5 | P6 | P7 | P8 | P9 | P10 | P11 | P12 | P13 | P14 | P15 | P16 | P17 | P18 | P19 | P20 | P21 | P22 | P23 | P24 | P25 | P26 | P27 | P28 | P29 | P30 | P31 |

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Pin No. | 34 | 33 | 32 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| Connection | P32 | P33 | P34 | P35 | P36 | NX | NX | NX | NX | NX | NX | NX | 18G | 17G | 16G | 15G | 14G | 13G | 12G | 11G | 10G | 9G | 8G | 7G | 6G | 5G | 4G | 3G | 2G | 1G | NP | NP | NX | F1 |

Note : 1) F1, F2 Filament pin 2) NP No pin 3) NX No extend pin 4) 1G-18G Grid pin

● GRID ASSIGNMENT

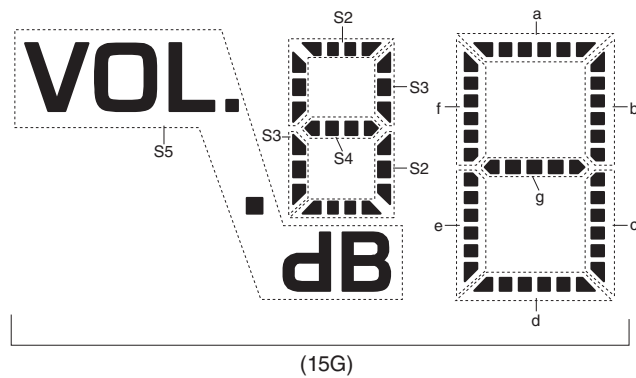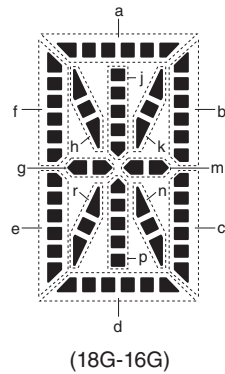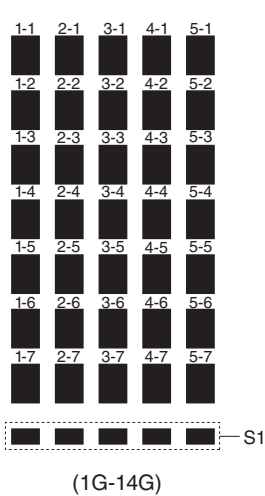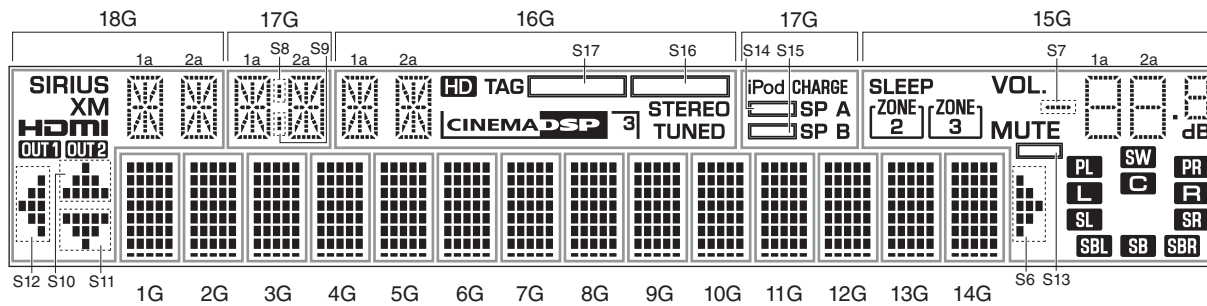

● ANODE CONNECTION



| | 18G | 17G | 16G | 15G | 1G-14G |
|-----|---------------|-------------|-------------------|---------------|--------|
| P1 | 1a | 1a | 1a | S5 | 1-1 |
| P2 | 1h | 1h | 1h | S7 | 2-1 |
| P3 | 1j | 1j | 1j | 1d | 3-1 |
| P4 | 1k | 1k | 1k | 2d | 4-1 |
| P5 | 1b | 1b | 1b | S2 | 5-1 |
| P6 | 1f | 1f | 1f | 1e | 1-2 |
| P7 | 1m | 1m | 1m | 2e | 2-2 |
| P8 | 1g | 1g | 1g | S3 | 3-2 |
| P9 | 1c | 1c | 1c | 1c | 4-2 |
| P10 | 1e | 1e | 1e | 2c | 5-2 |
| P11 | 1r | 1r | 1r | S4 | 1-3 |
| P12 | 1p | 1p | 1p | 1g | 2-3 |
| P13 | 1n | 1n | 1n | 2g | 3-3 |
| P14 | 1d | 1d | 1d | 1f | 4-3 |
| P15 | 2a | 2a | 2a | 2f | 5-3 |
| P16 | 2h | 2h | 2h | 1b | 1-4 |
| P17 | 2j | 2j | 2j | 2b | 2-4 |
| P18 | 2k | 2k | 2k | 1a | 3-4 |
| P19 | 2b | 2b | 2b | 2a | 4-4 |
| P20 | 2f | 2f | 2f | PL | 5-4 |
| P21 | 2m | 2m | 2m | SW | 1-5 |
| P22 | 2g | 2g | 2g | PR | 2-5 |
| P23 | 2c | 2c | 2c | L | 3-5 |
| P24 | 2e | 2e | 2e | C | 4-5 |
| P25 | 2r | 2r | 2r | R | 5-5 |
| P26 | 2p | 2p | 2p | SL | 1-6 |
| P27 | 2n | 2n | 2n | SR | 2-6 |
| P28 | 2d | 2d | 2d | SBL | 3-6 |
| P29 | SIRIUS | S8 | HD | SB | 4-6 |
| P30 | XM | S9 | TAG | SBR | 5-6 |
| P31 | HDMI | iPod CHARGE | CINEMA DSP | S6 | 1-7 |
| P32 | OUT1 | SP B | 3 | S13 | 2-7 |
| P33 | OUT2 | S15 | STEREO | MUTE | 3-7 |
| P34 | S12 | SP A | TUNED | ZONE 2 | 4-7 |
| P35 | S10 | S14 | S17 | ZONE 3 | 5-7 |
| P36 | S11 | — | S16 | SLEEP | S1 |

IC DATA

IC44: D70YE101BRFP266 (DIGITAL P.C.B.)

Decoder/Post processor

* No replacement part available.

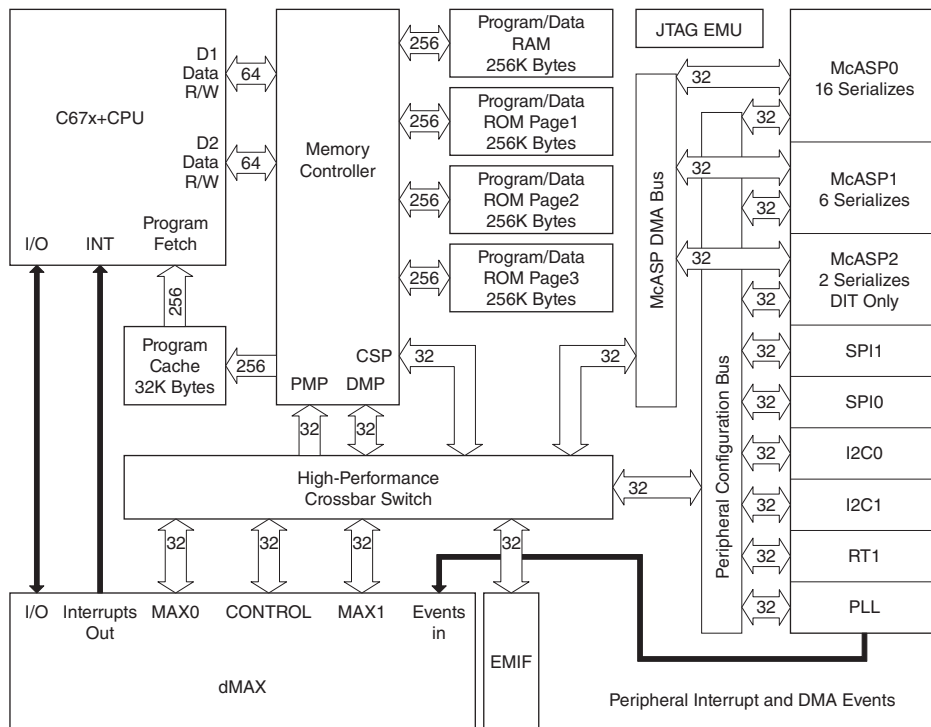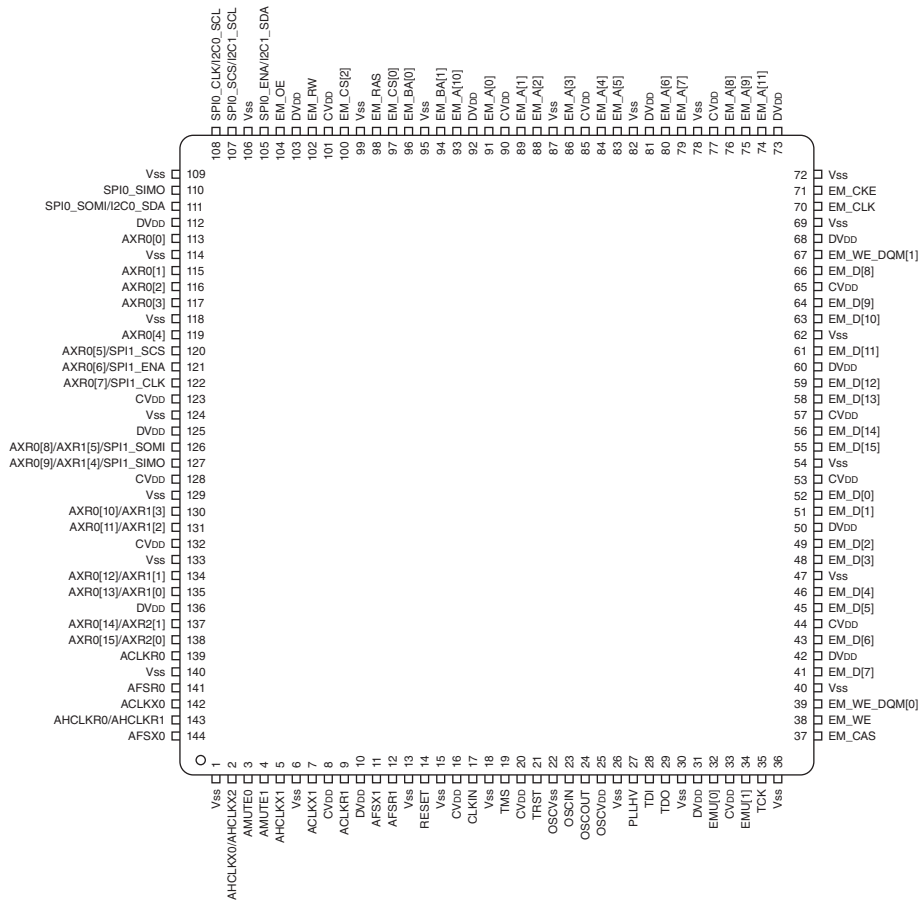



RX-V2065/HTR-6295

| No. | Function Name (P.C.B.) | TYPE ⁽¹⁾ | PULL ⁽²⁾ | GPIO ⁽³⁾ | Detail of Function |
|-----|---------------------------|---------------------|---------------------|---------------------|---|
| 1 | VSS | | | | |
| 2 | AHCLKX0/AHCLKX2 | IO | – | Y | McASP0 and McASP2 transmit master clock |
| 3 | AMUTE0 | IO | – | Y | McASP0 mute output |
| 4 | AMUTE1 | IO | – | Y | McASP1 mute output |
| 5 | AHCLKX1 | IO | – | Y | McASP1 transmit master clock |
| 6 | VSS | | | | |
| 7 | ACLKX1 | IO | – | Y | McASP1 transmit bit clock |
| 8 | CVDD | | | | |
| 9 | ACLKR1 | IO | – | Y | McASP1 receive bit clock |
| 10 | DVDD | | | | |
| 11 | AFSX1 | IO | – | Y | McASP1 transmit frame Sync (L/R clock) |
| 12 | AFSR1 | IO | – | Y | McASP1 receive frame Sync (L/R clock) |
| 13 | VSS | | | | |
| 14 | RESET | IO | – | N | Device reset pin |
| 15 | VSS | | | | |
| 16 | CVDD | | | | |
| 17 | CLKIN | IO | – | N | Alternate clock input (3.3-V LVCMOS input) |
| 18 | VSS | | | | |
| 19 | TMS | IO | IPU | N | Test mode select |
| 20 | CVDD | | | | |
| 21 | TRST | IO | IPU | N | Test reset |
| 22 | OSCVSS | PWR | – | N | Oscillator Vss tap point (for filter only) |
| 23 | OSCIN | IO | – | N | 1.2-V oscillator input |
| 24 | NC | O | – | N | |
| 25 | OSCVDD | PWR | – | N | Oscillator 1.2-V Vpp tap point (for filter only) |
| 26 | VSS | | | | |
| 27 | PLLHV | PWR | – | N | PLL 3.3-V supply input (requires external filter) |
| 28 | TDI | IO | IPU | N | Test data in |
| 29 | TDO | OZ | IPU | N | Test data out |
| 30 | VSS | | | | |
| 31 | DVDD | | | | |
| 32 | EMU[0] | IO | IPU | N | Emulation pin 0 |
| 33 | CVDD | | | | |
| 34 | EMU[1] | IO | IPU | N | Emulation pin 1 |
| 35 | TCK | IO | IPU | N | Test clock |
| 36 | Ground(Vss) | | | | |
| 37 | EM_CAS | O | – | N | SDRAM column address strobe |
| 38 | EM_WE | O | – | N | SDRAM write enable |
| 39 | EM_WE_DQM[0] | O | – | N | Write enable or byte enable for EM_D [7:0] |
| 40 | VSS | | | | |
| 41 | EM_D[7] | IO | – | N | EMIF data bus [lower 16-bits] |
| 42 | DVDD | | | | |
| 43 | EM_D[6] | IO | – | N | EMIF data bus [lower 16-bits] |
| 44 | CVDD | | | | |
| 45 | EM_D[5] | IO | – | N | EMIF data bus [lower 16-bits] |
| 46 | EM_D[4] | IO | – | N | EMIF data bus [lower 16-bits] |
| 47 | VSS | | | | |
| 48 | EM_D[3] | IO | – | N | EMIF data bus [lower 16-bits] |
| 49 | EM_D[2] | IO | – | N | EMIF data bus [lower 16-bits] |
| 50 | DVDD | | | | |
| 51 | EM_D[1] | IO | – | N | EMIF data bus [lower 16-bits] |
| 52 | EM_D[0] | IO | – | N | EMIF data bus [lower 16-bits] |
| 53 | CVDD | | | | |
| 54 | VSS | | | | |
| 55 | EM_D[15] | IO | – | N | EMIF data bus [lower 16-bits] |
| 56 | EM_D[14] | IO | – | N | EMIF data bus [lower 16-Bits] |
| 57 | CVDD | | | | |
| 58 | EM_D[13] | IO | – | N | EMIF data bus [lower 16-Bits] |
| 59 | EM_D[12] | IO | – | N | EMIF data bus [lower 16-Bits] |
| 60 | DVDD | | | | |
| 61 | EM_D[11] | IO | – | N | EMIF data bus [lower 16-Bits] |

| No. | Function Name (P.C.B.) | TYPE ⁽¹⁾ | PULL ⁽²⁾ | GPIO ⁽³⁾ | Detail of Function |
|-----|---------------------------|---------------------|---------------------|---------------------|--|
| 62 | VSS | | | | |
| 63 | EM_D[10] | IO | – | N | EMIF data bus [lower 16-Bits] |
| 64 | EM_D[9] | IO | – | N | EMIF data bus [lower 16-Bits] |
| 65 | CVDD | | | | |
| 66 | EM_D[8] | IO | – | N | EMIF data bus [lower 16-bits] |
| 67 | EM_WE_DQM[1] | O | – | N | Write enable or byte enable for EM_D [15:8] |
| 68 | DVDD | | | | |
| 69 | VSS | | | | |
| 70 | EM_CLK | O | – | N | SDRAM clock |
| 71 | EM_CKE | O | – | N | SDRAM clock enable |
| 72 | VSS | | | | |
| 73 | DVDD | | | | |
| 74 | EM_A[11] | O | – | N | EMIF address bus |
| 75 | EM_A[9] | O | – | N | EMIF address bus |
| 76 | EM_A[8] | O | – | N | EMIF address bus |
| 77 | CVDD | | | | |
| 78 | VSS | | | | |
| 79 | EM_A[7] | O | – | N | EMIF address bus |
| 80 | EM_A[6] | O | – | N | EMIF address bus |
| 81 | DVDD | | | | |
| 82 | VSS | | | | |
| 83 | EM_A[5] | O | – | N | EMIF address bus |
| 84 | EM_A[4] | O | – | N | EMIF address bus |
| 85 | CVDD | | | | |
| 86 | EM_A[3] | O | – | N | EMIF address bus |
| 87 | VSS | | | | |
| 88 | EM_A[2] | O | – | N | EMIF address bus |
| 89 | EM_A[1] | O | – | N | EMIF address bus |
| 90 | CVDD | | | | |
| 91 | EM_A[0] | O | – | N | EMIF address bus |
| 92 | DVDD | | | | |
| 93 | EM_A[10] | O | – | N | EMIF address bus |
| 94 | EM_BA[1] | O | – | N | SDRAM bank address and asynchronous memory Low-Order address |
| 95 | VSS | | | | |
| 96 | EM_BA[0] | O | – | N | SDRAM bank address and asynchronous memory Low-Order address |
| 97 | EM_CS[0] | O | – | N | SDRAM chip select |
| 98 | EM_RAS | O | – | N | SDRAM row address strobe |
| 99 | VSS | | | | |
| 100 | EM_CS[2] | O | – | N | Asynchronous memory chip Select |
| 101 | CVDD | | | | |
| 102 | NC | O | – | N | Asynchronous memory read/not write |
| 103 | DVDD | | | | |
| 104 | EM_OE | O | – | N | SDRAM output enable |
| 105 | SPI0_ENA/I2C1_SDA | IO | – | Y | SPI0 enable (ready) or I2c1 serial data |
| 106 | VSS | | | | |
| 107 | SPI0_ENA/I2C1_SCL | IO | – | Y | SPI0 enable (ready) or I2c1 serial clock |
| 108 | SPI0_CLK/I2C0_SCL | IO | – | Y | SPI0 serial clock or I2c0 serial clock |
| 109 | VSS | | | | |
| 110 | SPI0_SIMO | IO | – | Y | SPI0 data pin slave in master out |
| 111 | SPI0_SOMI/I2C0_SDA | IO | – | Y | SPI0 data pin slave out master in or I2C0 serial data |
| 112 | DVDD | | | | |
| 113 | AXR0[0] | IO | – | Y | McASP0 serial data 0 |
| 114 | VSS | | | | |
| 115 | AXR0[1] | IO | – | Y | McASP0 serial data 1 |
| 116 | AXR0[2] | IO | – | Y | McASP0 serial data 2 |
| 117 | AXR0[3] | IO | – | Y | McASP0 serial data 3 |
| 118 | VSS | | | | |
| 119 | AXR0[4] | IO | – | Y | McASP0 serial data 4 |
| 120 | SPI1_SCS | IO | – | Y | McASP0 serial data 5 or SPI1 slave chip select |
| 121 | SPI1_ENA | IO | – | Y | McASP0 serial data 6 or SPI1 enable (ready) |
| 122 | SPI1_CLK | IO | – | Y | McASP0 serial data 7 or SPI1 serial clock |

| No. | Function Name (P.C.B.) | TYPE ⁽¹⁾ | PULL ⁽²⁾ | GPIO ⁽³⁾ | Detail of Function |
|-----|---------------------------|---------------------|---------------------|---------------------|---|
| 123 | CVDD | | | | |
| 124 | VSS | | | | |
| 125 | DVDD | | | | |
| 126 | /SPI1_SOMI | IO | – | Y | McASP0 serial data 8 or McASP1 serial data 5 or SPI1 data pin slave out master in |
| 127 | /SPI1_SIMO | IO | – | Y | McASP0 serial data 9 or McASP1 serial data 4 or SPI1 data pin slave in master out |
| 128 | CVDD | | | | |
| 129 | VSS | | | | |
| 130 | AXR0[10] | IO | – | Y | McASP0 serial data 10 or McASP1 serial data 3 |
| 131 | AXR0[11] | IO | – | Y | McASP0 serial data 11 or McASP1 serial data 2 |
| 132 | CVDD | | | | |
| 133 | VSS | | | | |
| 134 | AXR0[12] | IO | – | Y | McASP0 serial data 12 or McASP1 serial data 1 |
| 135 | AXR0[13] | IO | – | Y | McASP0 serial data 13 or McASP1 serial data 0 |
| 136 | DVDD | | | | |
| 137 | AXR0[14] | IO | – | Y | McASP0 serial data 14 or McASP2 serial data 1 |
| 138 | AXR0[15] | IO | – | Y | McASP0 serial data 15 or McASP2 serial data 0 |
| 139 | ACLKR0 | IO | – | Y | McASP0 receive bit clock |
| 140 | VSS | | | | |
| 141 | AFSR0 | IO | – | Y | McASP0 receive frame Sync (L/R clock) |
| 142 | ACLKX0 | IO | – | Y | McASP0 transmit bit clock |
| 143 | AHCLKR0/AHCLKR1 | IO | – | Y | McASP0 and McASP1 receive master clock |
| 144 | AFSX0 | IO | – | Y | McASP0 transmit frame Sync (L/R clock) |



IC402: M66003-0131FP (OPERATION P.C.B.)
FL display driver

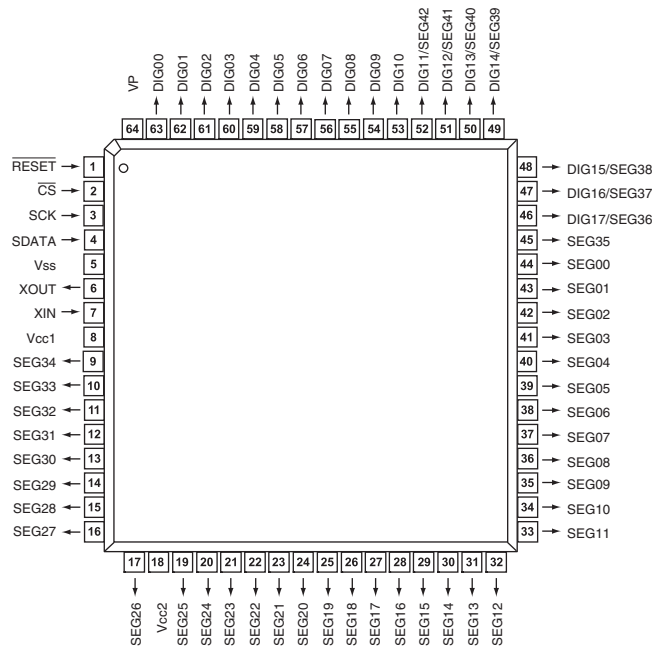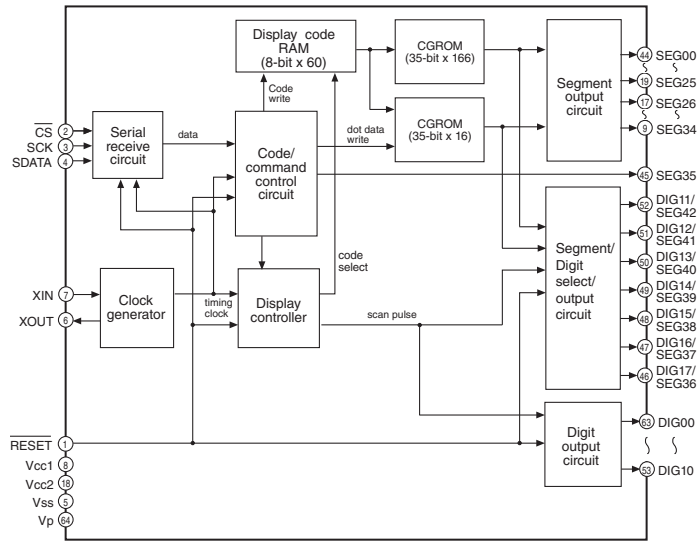

| Pin No. | Port Name | Function Name | I/O | Detail of Function |
|---------|-----------|---------------|-------------------|--|
| 1 | RESET | /RESET | Reset input | When "L" M66003 is initialized. |
| 2 | CS | /CEFL | Chip select input | When "L" communication with the MCU is possible. |
| 3 | SCK | CKFL | Shift clock input | When "H", any instruction from the MCU is neglected. |
| 4 | SDATA | DTFL | Serial data input | Serial input data is taken and shifted by the positive edge of SCK. |
| 5 | Vss | VSS | | GND (0V) |
| 6 | XOUT | XOUT | Clock out | When use as a CR oscillator, connect external resistor and capacitor. |
| 7 | XIN | XIN | Clock in | When use an external clock input external clock to XIN, and XOUT must be opened. |

| Pin No. | Port Name | Function Name | I/O | Detail of Function |
|---------|-------------|---------------|----------------|--|
| 8 | Vcc1 | VDD | | Positive power supply for internal logic. |
| 9 | SEG34 | P11 | Segment output | Connect to segment (anode) pins of VFD. |
| 10 | SEG33 | P2 | | |
| 11 | SEG32 | P3 | | |
| 12 | SEG31 | P4 | | |
| 13 | SEG30 | P5 | | |
| 14 | SEG29 | P6 | | |
| 15 | SEG28 | P7 | | |
| 16 | SEG27 | P8 | | |
| 17 | SEG26 | P9 | | |
| 18 | Vcc2 | VDD | | Positive power supply for DIG and SEG outputs. |
| 19 | SEG25 | P10 | Segment output | Connect to segment (anode) pins of VFD. |
| 20 | SEG24 | P11 | | |
| 21 | SEG23 | P12 | | |
| 22 | SEG22 | P13 | | |
| 23 | SEG21 | P14 | | |
| 24 | SEG20 | P15 | | |
| 25 | SEG19 | P16 | | |
| 26 | SEG18 | P17 | | |
| 27 | SEG17 | P18 | | |
| 28 | SEG16 | P19 | | |
| 29 | SEG15 | P20 | | |
| 30 | SEG14 | P21 | | |
| 31 | SEG13 | P22 | | |
| 32 | SEG12 | P23 | | |
| 33 | SEG11 | P24 | | |
| 34 | SEG10 | P25 | | |
| 35 | SEG09 | P26 | | |
| 36 | SEG08 | P27 | | |
| 37 | SEG07 | P28 | | |
| 38 | SEG06 | P29 | | |
| 39 | SEG05 | P30 | | |
| 40 | SEG04 | P31 | | |
| 41 | SEG03 | P32 | | |
| 42 | SEG02 | P33 | | |
| 43 | SEG01 | P34 | | |
| 44 | SEG00 | P35 | | |
| 45 | SEG35 | P36 | | |
| 46 | SEG36 | P37 | | |
| 47 | DIG16/SEG37 | G17 | Digital output | Connect to digit (grid) pins of VFD. |
| 48 | DIG15/SEG38 | G16 | | |
| 49 | DIG14/SEG39 | G15 | | |
| 50 | DIG13/SEG40 | G14 | | |
| 51 | DIG12/SEG41 | G13 | | |
| 52 | DIG11/SEG42 | G12 | | |
| 53 | DIG10 | G11 | | |
| 54 | DIG09 | G10 | | |
| 55 | DIG08 | G9 | | |
| 56 | DIG07 | G8 | | |
| 57 | DIG06 | G7 | | |
| 58 | DIG05 | G6 | | |
| 59 | DIG04 | G5 | | |
| 60 | DIG03 | G4 | | |
| 61 | DIG02 | G3 | | |
| 62 | DIG01 | G2 | | |
| 63 | DIG00 | G1 | | |
| 64 | VP | VP | | Negative power supply to pull down. |

IC41: LC89058WD-E (DIGITAL P.C.B.)
Digital audio interface receiver

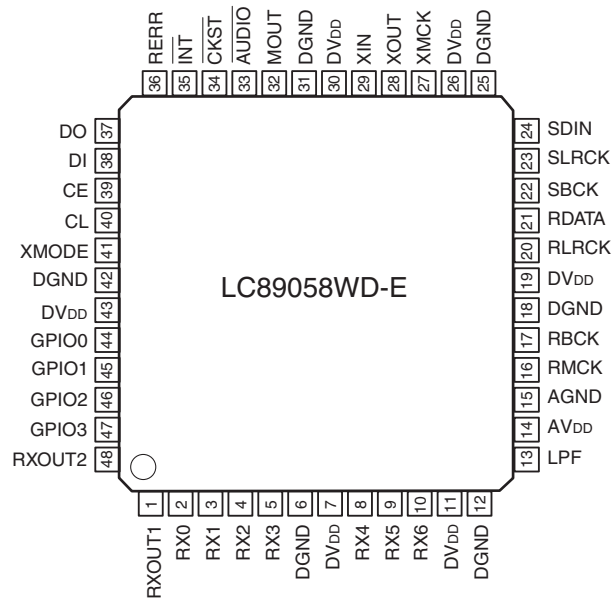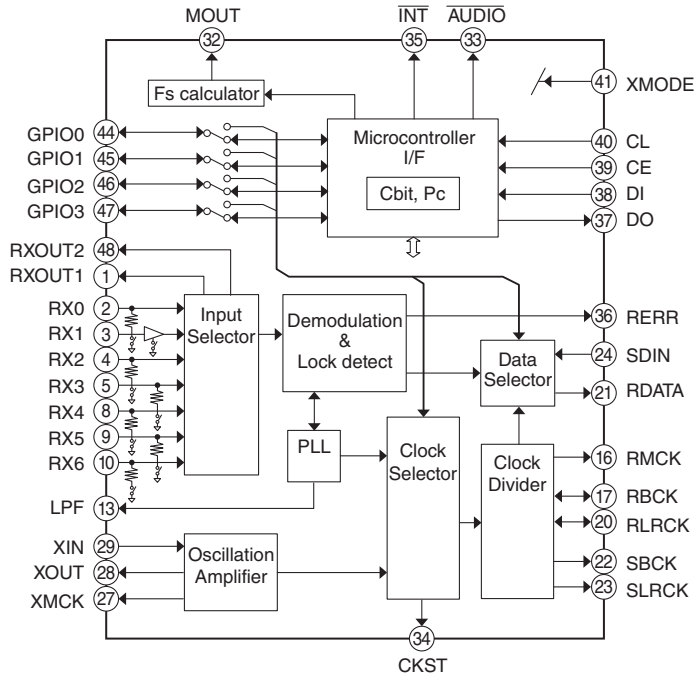

RX-V2065/HTR-6295

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|---------------------|---|
| 1 | RXOUT1 | O | RX0-6 input S/PDIF through output pin 1 |
| 2 | RX0 | I _s (pd) | 5V withstand voltage TIL input level compatible S/PDIF input pin (connected to GND when RX1 is set) |
| 3 | RX1 | I(pd) | Co-axial compatible S/PDIF input pin (supported demodulation sampling frequency of up to 96 kHz) |
| 4 | RX2 | I _s (pd) | 5V withstand voltage TIL input level compatible S/PDIF input pin (connected to GND when RX1 is set) |
| 5 | RX3 | I _s (pd) | 5V withstand voltage TIL input level compatible S/PDIF input pin |
| 6 | DGND | | Digital GND |
| 7 | DVDD | | Digital power supply (3.3V) |
| 8 | RX4 | I _s (pd) | 5V tolerable TIL input level compatible S/PDIF input pin |
| 9 | RX5 | I _s (pd) | 5V tolerable TIL input level compatible S/PDIF input pin |
| 10 | RX6 | I _s (pd) | 5V tolerable TIL input level compatible SIPDIF input pin |
| 11 | DVDD | | Digital power supply (3.3V) |
| 12 | DGND | | Digital GND |
| 13 | LPF | O | PLL loop filter connection pin |
| 14 | AVDD | | Analog power supply (3.3V) |
| 15 | AGND | | Analog GND |
| 16 | RMCK | O | R system clock output pin (VCO, 512fs, XIN) |
| 17 | RBCK | O/I | R system bit clock 1/0 pin (64fs) |
| 18 | DGND | | Digital GND |
| 19 | DVDD | | Digital power supply (3.3V) |
| 20 | RLRCK | O/I | R system LR clock 1/0 pin (fs) |
| 21 | RDATA | O | Serial audio data output pin |
| 22 | SBCK | O | S system bit clock output pin (16fs, 32fs, 64fs, 128fs) |
| 23 | SLRCK | O | S system LR clock output pin (fs/4, fs/2, fs, 2fs) |
| 24 | SDIN | I _s | External serial audio data input pin |
| 25 | DGND | | Digital GND |
| 26 | DVDD | | Digital power supply (3.3V) |
| 27 | XMCK | O | Oscillation amplifier clock output pin |
| 28 | XOUT | O | Output pin connected to the resonator |
| 29 | XIN | I | External clock input pin. connected to the resonator (12.288 MHz or 24.576 MHz) |
| 30 | DVDD | | Digital power supply (3.3V) |
| 31 | DGND | | Digital GND |
| 32 | MOUT | I/O | Emphasis information II input fs monitor output II chip address setting input pin |
| 33 | AUDIO | I/O | Channel status bit 1 output II chip address setting input pin |
| 34 | CKST | I/O | Clock switching transition period signal output II master/slave setting input pin |
| 35 | INT | I/O | Microcontroller interrupt signal output II pins 44-48 I/O setting input pin |
| 36 | RERR | O | PLL lock error and data error flag output pin |
| 37 | DO | O | CCB microcontroller I/F, read data output pin (3-state) |
| 38 | DI | I _s | CCB microcontroller I/F, write data input pin |
| 39 | CE | I _s | CCB microcontroller I/F, chip enable input pin |
| 40 | CL | I _s | CCB microcontroller I/F, clock input pin |
| 41 | XMODE | I _s | System reset input pin |
| 42 | DGND | | Digital GND |
| 43 | DVDD | | Digital power supply (3.3V) |
| 44 | GPI00 | O/I | General-purpose I/O pin II selector input pin (output referred to RMCK pin) |
| 45 | GPI01 | O/I | General-purpose I/O pin II selector input pin (output referred to RBCK pin) |
| 46 | GPI02 | O/I | General-purpose I/O pin II selector input pin (output referred to RLRCK pin) |
| 47 | GPI03 | O/I | General-purpose I/O pin II selector input pin (output referred to RDATA pin) |
| 48 | RXOUT2 | O | RX0-6 input S/PDIF through output pin 2 |

* Input voltage: 1= -0.3 to 3.6V, I_s = -0.3 to 5.5V

* Output voltage: 0= -0.3 to 3.6V

* Pins 2, 4, 5, 8, 9, 10, 24, 38, 39, 40, and 41 have an internal pull-down resistor (Pd).

Their level is fixed when they are unselected.

* Pins 32 and 33 are input pins for chip address setting when pin 41 is held at the low level.


* Pin 34 serves as the input pin for designating as the master or slave when pin 41 is held at the low level.

* Pin 35 serves as the input pin for configuring the I/O of pins 44 to 47 when pin 41 is held at the low level.

* The DVDD and AVDD pins must be held at the same level and turned on and off at the same timing to preclude latch-up conditions.

IC153: R2A15220FP (MAIN P.C.B.)

8-channel electronic volume with 11 input selector and tone control

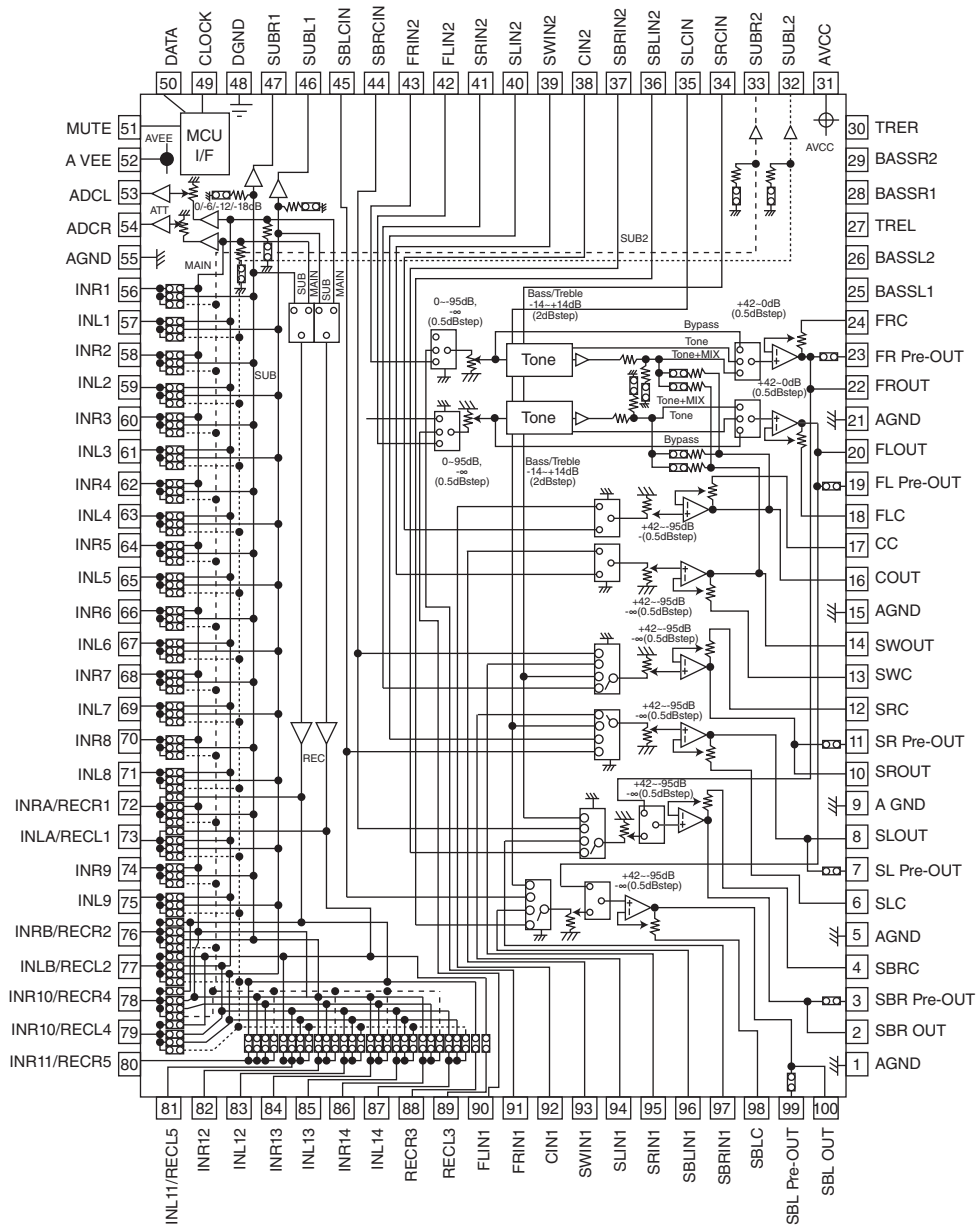


RX-V2065/HTR-6295


| Pin No. | Port name | Function Name | Detail of Function |
|---------|-------------|---------------|--|
| 1 | AGND | AE | Analog ground of internal circuit |
| 2 | SBROUT | VOSBL | Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel |
| 3 | SBR Pre-OUT | VOPSBL | Pre-output pin of FL/FR/SL/SR/SBL/SBR channel |
| 4 | SBRC | AE | Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume |
| 5 | AGND | AE | Analog ground of internal circuit |
| 6 | SLC | VOPSR | Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume |
| 7 | SL Pre-OUT | VOSR | Pre-output pin of FL/FR/SL/SR/SBL/SBR channel |
| 8 | SLOUT | AE | Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel |
| 9 | AGND | AE | Analog ground of internal circuit |
| 10 | SROUT | VOSL | Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel |
| 11 | SR Pre-OUT | VOPSL | Pre-output pin of FL/FR/SL/SR/SBL/SBR channel |
| 12 | SRC | AE | Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume |
| 13 | SWC | AE | Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume |
| 14 | SWOUT | VOSW | Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel |
| 15 | AGND | AE | Analog ground of internal circuit |
| 16 | COUT | VOC | Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel |
| 17 | CC | AE | Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume |
| 18 | FLC | AE | Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume |
| 19 | FL Pre-OUT | VOPFR | Pre-output pin of FL/FR/SL/SR/SBL/SBR channel |
| 20 | FLOUT | VOFR | Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel |
| 21 | AGND | POE | Analog ground of internal circuit |
| 22 | FROUT | VOFL | Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel |
| 23 | FR Pre-OUT | VOPFL | Pre-output pin of FL/FR/SL/SR/SBL/SBR channel |
| 24 | FRC | AE | Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume |
| 25 | BASSL1 | AE | Frequency characteristic setting pin of L/R channel tone control (Bass) |
| 26 | BASSL2 | AE | Frequency characteristic setting pin of L/R channel tone control (Bass) |
| 27 | TREL | AE | Frequency characteristic setting pin of L/R channel tone control (Treble) |
| 28 | BASSR1 | AE | Frequency characteristic setting pin of L/R channel tone control (Bass) |
| 29 | BASSR2 | AE | Frequency characteristic setting pin of L/R channel tone control (Bass) |
| 30 | TRER | AE | Frequency characteristic setting pin of L/R channel tone control (Treble) |
| 31 | AVCC | VCC | Positive power supply to internal circuit |
| 32 | SUBL1 | N.C. | Output pin for L/R channel SUB1/SUB2 output |
| 33 | SUBL2 | N.C. | Output pin for L/R channel SUB1/SUB2 output |
| 34 | SRCIN | N.C. | 3rd multi input pin for SBL/SBR/SL/SR channel volume that is able to swap SBR/SBL with SR/SL |
| 35 | SLCIN | N.C. | 3rd multi input pin for SBL/SBR/SL/SR channel volume that is able to swap SBR/SBL with SR/SL |
| 36 | SBLIN2 | 8SBR | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 37 | SBRIN2 | 8SBL | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 38 | CIN2 | 8C | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 39 | SWIN2 | 8SW | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 40 | SLIN2 | 8SR | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 41 | SRIN2 | 8SL | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 42 | FLIN2 | 8FR | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 43 | FRIN2 | 8FL | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 44 | SBRCIN | Z2L | 3rd multi input pin for SBL/SBR/SL/SR channel volume that is able to swap SBR/SBL with SR/SL |
| 45 | SBLCIN | Z2R | 3rd multi input pin for SBL/SBR/SL/SR channel volume that is able to swap SBR/SBL with SR/SL |
| 46 | SUBL1 | Z2R | Output pin for L/R channel SUB1/SUB2 output |
| 47 | SUBR1 | Z2L | Output pin for L/R channel SUB1/SUB2 output |
| 48 | DGND | MG | Digital ground of internal circuit |
| 49 | DATA | VOL_SCK | Input pin of control data |
| 50 | CLOCK | VOL_MOSI | Input pin of control clock |
| 51 | MUTE | AE | Outside mute control pin |
| 52 | AVEE | - | Negative power supply to internal circuit |
| 53 | ADCL | ADR | Output pin for L/R channel ADC |
| 54 | ADCR | ADL | Output pin for L/R channel ADC |
| 55 | AGND | AE | Analog ground of internal circuit |
| 56 | INR1 | AU2L | Input pin of L/R channel (Input selector) |
| 57 | INL1 | AU2R | Input pin of L/R channel (Input selector) |

| Pin No. | Port name | Function Name | Detail of Function |
|---------|-------------|---------------|--|
| 58 | INR2 | AU1L | Input pin of L/R channel (Input selector) |
| 59 | INL2 | AU1R | Input pin of L/R channel (Input selector) |
| 60 | INR3 | AV-6L | Input pin of L/R channel (Input selector) |
| 61 | INL3 | AV-6R | Input pin of L/R channel (Input selector) |
| 62 | INR4 | AV-5L | Input pin of L/R channel (Input selector) |
| 63 | INL4 | AV-5R | Input pin of L/R channel (Input selector) |
| 64 | INR5 | PHL | Input pin of L/R channel (Input selector) |
| 65 | INL5 | PHR | Input pin of L/R channel (Input selector) |
| 66 | INR6 | SRL | Input pin of L/R channel (Input selector) |
| 67 | INL6 | SRR | Input pin of L/R channel (Input selector) |
| 68 | INR7 | IPL | Input pin of L/R channel (Input selector) |
| 69 | INL7 | IPR | Input pin of L/R channel (Input selector) |
| 70 | INR8 | XML | Input pin of L/R channel (Input selector) |
| 71 | INL8 | XMR | Input pin of L/R channel (Input selector) |
| 72 | INRA/RECR1 | AV-OUT_L | Output pin for L/R channel (input selector)/Output pin for L/R channel REC output |
| 73 | INLA/RECL1 | AV-OUT_R | Output pin for L/R channel (input selector)/Output pin for L/R channel REC output |
| 74 | INR9 | USBL | Input pin of L/R channel (Input selector) |
| 75 | INL9 | USBR | Input pin of L/R channel (Input selector) |
| 76 | INRB/RECR2 | AOL | Output pin for L/R channel (input selector)/Output pin for L/R channel REC output |
| 77 | INLB/RECL2 | AOR | Output pin for L/R channel (input selector)/Output pin for L/R channel REC output |
| 78 | INR10/RECR4 | TUL | Output pin for L/R channel (input selector)/Output pin for L/R channel REC output |
| 79 | INL10/RECL4 | TUR | Output pin for L/R channel (input selector)/Output pin for L/R channel REC output |
| 80 | INR11/RECR5 | MIC | Output pin for L/R channel (input selector)/Output pin for L/R channel REC output |
| 81 | INL11/RECL5 | AE | Output pin for L/R channel (input selector)/Output pin for L/R channel REC output |
| 82 | INR12 | AUXL | Input pin of L/R channel (Input selector) |
| 83 | INL12 | AUXR | Input pin of L/R channel (Input selector) |
| 84 | INR13 | AE | Input pin of L/R channel (Input selector) |
| 85 | INL13 | AE | Input pin of L/R channel (Input selector) |
| 86 | INR14 | AE | Input pin of L/R channel (Input selector) |
| 87 | INL14 | AE | Input pin of L/R channel (Input selector) |
| 88 | RECR3 | N.C. | Output pin for L/R channel REC output |
| 89 | RECL3 | N.C. | Output pin for L/R channel REC output |
| 90 | FLIN1 | DAFR | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 91 | FRIN1 | DAFL | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 92 | CIN1 | DAC | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 93 | SWIN1 | DASW | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 94 | SLIN1 | DASR | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 95 | SEIN1 | DASL | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 96 | SBLIN1 | DASBR | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 97 | SBRIN1 | DASBL | Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2) |
| 98 | SBLC | AE | Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume |
| 99 | SBL Pre-OUT | VOPSBR | Pre-output pin of FL/FR/SL/SR/SBL/SBR channel |
| 100 | SBL OUT | VOSBR | Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel |

IC20: M3087BFK BGP (DIGITAL P.C.B.)
Main microprocessor

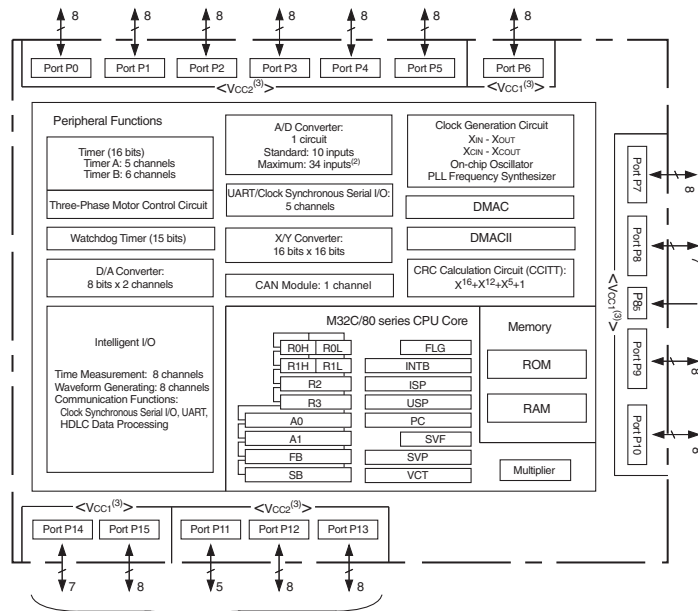

- (Note 1)
- NOTES:
1. Ports P11 to P15 are provided in the 144-pin package only.
 2. Included in the 144-pin package only.
 3. The supply voltage of M32C/84T (High-reliability version) must be VCC1=VCC2.

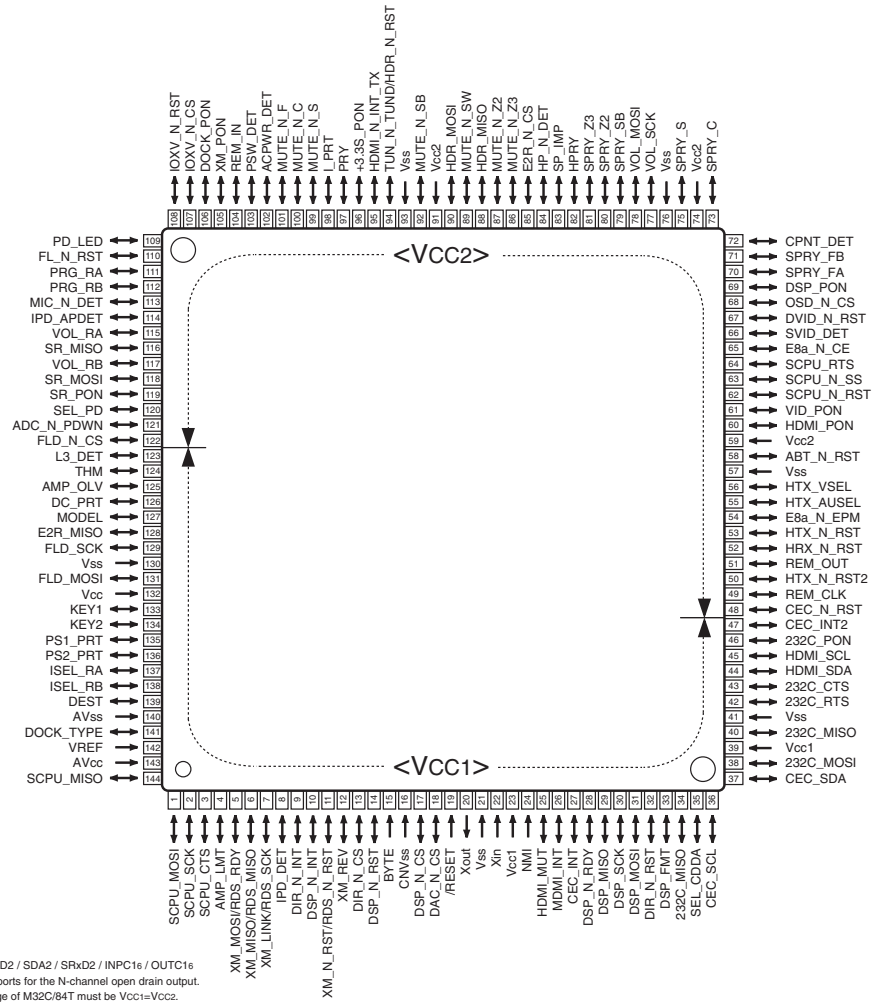

- NOTES:
1. P7b / TA0out / Tx2 / SDA2 / SRxD2 / INPC16 / OUTC16
 2. P7a and P71 are ports for the N-channel open drain output.
 3. The supply voltage of M32C/84T must be VCC1=VCC2.

RX-V2065/HTR-6295

| Pin No. | Port Name | Function Name (P.C.B.) | I/O | | | | | | E8a, ICP | Detail of Function |
|---------|---|------------------------|---------|-----------|---------|------------|-------------|--|--|--------------------|
| | | | PowerOn | Stby Thrh | Standby | Stby Sleep | Sleep [MCU] | | | |
| 1 | TXD4 | SCPU_MOSI | SO | O | O | O | [O] | | Synchronous data output for SubCPU | |
| 2 | CLK4 P95/ANEX0/CLK4 | SCPU_SCK | SO | O | O | O | [O] | | Synchronous clock output for SubCPU | |
| 3 | P94 P94/DA1/TB4in/ CTS4/RTS4/SS4 | SCPU_CTS | SI | I | I | O | [O] | | Input for transmission control for SubCPU (clear to send) | |
| 4 | DA0 P93/DA0/TB3in/ CTS3/RTS3/SS3 | AMP_LMT | DA | I | I | I | [I] | | Limiter control output | |
| 5 | TXD3 P92/TB2in/TXD3/ SDA3/SRXD3/ OUTC20/Ieout/ ISTXD2 | XM_MOSI | SO | O | O | O | O | | Asynchronous data output for XM (U model) | |
| | P92 | | O | O | O | O | O | | (C, R, T, K, A, L models) | |
| | TB2in | RDS_RDY | TMR | O | O | O | O | | RDS READY input | |
| 6 | RXD3 P91/TB1in/RXD3/ SCL3/STXD3/Iein/ ISRXD2 | XM_MISO | SI | O | O | O | O | | Asynchronous data input for XM (U model) | |
| | P91 | | O | O | O | O | [O] | | (C, R, T, K, A, L models) | |
| | RXD3 | RDS_MISO | SI | O | O | O | [O] | | Synchronous data input for RDS (B, G, E, F model) | |
| 7 | P90 P90/TB0in/CLK3 | XM_LINK | I | I | O | O | [O] | | XM LINK detection (U model) | |
| | P90 | | O | O | O | O | [O] | | (C, R, T, K, A, L models) | |
| | CLK3 | RDS_SCK | SO | O | O | O | [O] | | Synchronous clock output for RDS IC Low level should stand by (B, G, E, F model) | |
| 8 | INT8 P146/INT8 | IPD_DET | IRQ | IRQ | IRQ | IRQ | [O] | | iPod detection Restriction of port: INT is high edge or low edge only When inserting an iPod into the DOCK H → L | |
| 9 | P145 P145/INT7 | DIR_N_INT | IRQ | I | O | O | [O] | | DIR interrupt Restriction of port: INT is high edge or low edge only | |
| 10 | P144 P144/INT6 | DSP_N_INT | IRQ | I | O | O | [O] | | DA70Y interrupt Restriction of port: INT is high edge or low edge only | |
| 11 | P143 P143/INPC17/ OUTC17 | XM_N_RST | O | O | O | O | O | | XM reset (U model) | |
| | P143 | | O | O | O | O | O | | (C, R, T, K, A, L models) | |
| | P143 | RDS_N_RST | O | O | O | O | O | | RDS reset (B, G, E, F model) | |
| 12 | P142 P142/INPC16/ OUTC16 | XM_REV | I | I | O | O | [O] | | XM antenna revision detection (U model) H: An compatibility antenna | |
| | P142 | | O | O | O | O | [O] | | (C, R, T, K, A, B, G, E, F, L models) | |
| 13 | P141 P141/INPC15/ OUTC15 | DIR_N_CS | CS | O | O | O | [O] | | DIR chip select | |
| 14 | P140 P140/INPC14/ OUTC14 | DSP_N_RST | O | O | O | O | [O] | | DA70Y reset | |
| 15 | BYTE BYTE | BYTE | MCU | MCU | MCU | MCU | [MCU] | | Switch of width of data bus input When set to single chip mode: L (16 bit) | |
| 16 | CNVss | CNVss | MCU | MCU | MCU | MCU | [MCU] | | Processor mode select Low: Single chip mode High: To Flash included boot mode To boot mode with hardware resetting of P50=H, P55=L, CNVss=H, and a standard serial. Input/output mode | |
| | CNVss | | | | | | | | | |
| 17 | P87 P87/Xcin | DSP_N_CS | CS | O | O | O | [O] | | DA70Y chip select | |
| 18 | P86 P86/Xcout | DAC_N_CS | CS | O | O | O | [O] | | DAC chip select | |

RX-V2065/HTR-6295

| Pin No. | Port Name | Function Name (P.C.B.) | I/O | | | | | | E8a, ICP | Detail of Function |
|---------|--|------------------------|---------|-----------|---------|------------|-------------|--|---|--------------------|
| | | | PowerOn | Stby Thrh | Standby | Stby Sleep | Sleep [MCU] | | | |
| 19 | /RESET /RESET | /RESET | MCU | MCU | MCU | MCU | [MCU] | | Reset | |
| 20 | Xout Xout | Xout | MCU | MCU | MCU | MCU | [MCU] | | 20 MHz ceramic resonator | |
| 21 | Vss Vss | Vss | MCU | MCU | MCU | MCU | [MCU] | | GND | |
| 22 | Xin Xin | Xin | MCU | MCU | MCU | MCU | [MCU] | | 20 MHz ceramic resonator | |
| 23 | Vcc1 Vcc1 | Vcc1 | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor power supply | |
| 24 | /NMI P85/NMI | /NMI | MCU | MCU | MCU | MCU | [MCU] | | Unused, pull up to Vcc | |
| 25 | INT2 P84/INT2 | HDMI_MUT | IRQ | IRQ | O | O | [O] | | HDMI mute input H: Mute | |
| 26 | INT1 P83/INT1 | HDMI_INT | IRQ | IRQ | O | O | [O] | | Interrupt from HDMI RX | |
| 27 | INT0 P82/INT0 | HEQ_N_INT | IRQ | IRQ | O | O | O | | Interrupt from HDMI INPUT EQ While CEC microprocessor is in use, interruptive CEC microprocessor may be used | |
| 28 | P81 P81/TA4in/U/ INPC15/OUTC15/ CTS5/RTS5/RTP23 | DSP_N_RDY | I | I | O | O | [O] | | DA70Y RDY | |
| 29 | RXD5 P80/TA4out/U/ ISRXD0/RXD5 | DSP_MISO | SI | I | O | O | [O] | | Synchronous data input for DIR, DA70Y, DAC | |
| 30 | CLK5 P77/TA3in/INPC14/ OUTC14/ISCLK0/ CLK5/RTP22 | DSP_SCK | SO | O | O | O | [O] | | Synchronous clock output for DIR, DA70Y, DAC | |
| 31 | TXD5 P76/TA3out/INPC13/ OUTC13/ISTXD0/ TXD5 | DSP_MOSI | SO | O | O | O | [O] | | Synchronous data output for DIR, DA70Y, DAC | |
| 32 | P75 P75/TA2in/W/ INPC12/OUTC12/ ISRXD1/RTP21 | DIR_N_RST | O | O | O | O | [O] | | DIR reset | |
| 33 | P74 P74/TA2out/W/ INPC11/OUTC11/ ISCLK1/RTP20 | DSP_FMT | O | O | O | O | [O] | | DA70Y full mute output H: Mute | |
| 34 | TA1in P73/TA1in/V/CTS2/ RTS2/SS2/INPC10/ OUTC10/ISTXD1 | 232C_MISO | TMR | TMR | TMR | TMR | [O] | | RS232C reception detection Uses for the return trigger from stop mode (MCUSleep) | |
| 35 | P72 P72/TA1out/V/CLK2 | SEL_CDDA | O | O | O | O | [O] | | CDDA writing route select H: CDDA writing mode L: Operational mode usually | |
| 36 | SCL2 P71/TA0in/TB5in/ RXD2/SCL2/STXD2/ INPC17/OUTC17/ OUTC22/ISRXD2/ IEin/RTP03 | CEC_SCL | SO | SO | O | O | [O] | | CEC microprocessor, Tuner, HDMI_EQ (SiI9185A) I2C SCL output U-com block then +3.3S, 3.3k then pull up (100 kHz device) | |
| 37 | SDA2 P70/TA0out/TXD2/ SDA2/SRXD2/ INPC16/OUTC16/ OUTC20/ISTXD2/ IEout/RTP02 | CEC_SDA | SIO | SIO | O | O | [O] | | CEC microprocessor, Tuner, HDMI_EQ (SiI9185A) I2C SDA input U-com block then +3.3S, 3.3k then pull up (100 kHz device) | |

RX-V2065/HTR-6295

| Pin No. | Port Name | Function Name (P.C.B.) | I/O | | | | | | E8a, ICP | Detail of Function |
|---------|---------------------------------|------------------------|---------|-----------|---------|------------|-------------|----|---|--------------------|
| | | | PowerOn | Stby Thrh | Standby | Stby Sleep | Sleep [MCU] | | | |
| 38 | TxD1 | 232C_MOSI | SO | SO | SO | O | [O] | | RS232C data output Pull up at 100 k-ohms | |
| | P67/TXD1/SDA1/SRXD1 | | | | | | | | | |
| 39 | TxD1 | TXD | | | | | | SO | E8a, ICP (In-Circuit Programmer) data output | |
| | Vcc1 | Vcc1 | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor power supply | |
| 40 | RxD1 | 232C_MISO | SI | SI | SI | I | [I] | | RS232C data input Pull up at 100 k-ohms | |
| | P66/RXD1/SCL1/STXD1 | | | | | | | | | |
| 41 | RxD1 | RXD | | | | | | SI | E8a, ICP (In-Circuit Programmer) data input | |
| | Vss | Vss | All | MCU | MCU | MCU | [MCU] | | Microprocessor GND | |
| 42 | P65 | 232C_RTS | SO | SO | SO | O | [O] | | RS232C CTS input | |
| | P65/CLK1 | E8a_SCLK | | | | | | SI | E8a, ICP (In-Circuit Programmer) clock input Pull up at 100 k-ohms | |
| 43 | CTS1 | 232C_CTS | SI | SI | SI | I | [I] | | RS232C CTS input Pull down at 100 k-ohms | |
| | P64/CTS1/RTS1/SS1/OUTC21/ISCLK2 | | | | | | | | | |
| 44 | RTS1 | E8a_BUSY | | | | | | SO | E8a, ICP (In-Circuit Programmer) BUSY output | |
| | SDA0 | HDMI_SDA | SIO | SIO | O | O | [O] | | HDMI RX/TX, Video Enc/Dec I2C SCL output Pull up at HDMI block HDMI RX/TX: 5V tolerant (400 kHz device) | |
| 45 | P63/TXD0/SDA0/SRXD0/IrDAout | HDMI_SCL | SIO | SIO | O | O | [O] | | HDMI RX/TX, Video Enc/Dec I2C SDA input/output Pull up at HDMI block HDMI RX/TX: 5V tolerant (400 kHz device) | |
| | SCL0 | | | | | | | | | |
| 46 | P61 | 232C_PON | O | O | O | O | [O] | | RS232C driver power supply ON/OFF control H: ON, L: OFF Default at standby U, C models: H (232C ON) R, T, K, A, B, G, E, F, L models: L | |
| | P61/CLK0/RTP01 | | | | | | | | | |
| 47 | P60 | CXB1442_CE | O | O | O | O | [O] | | FRONT HDMI EQ chip enable output Pull down at FRONT HDMI block H: enable When CEC microprocessor is used, it substitutes it with HDMI_PON (Pin 60) | |
| | P60/CTS0/RTS0/SS0/RTP00 | | | | | | | | | |
| 48 | P137 | HEQ_N_RST | O | O | O | O | [O] | O | HDMI INPUT EQ reset output Pull up at HDMI EQ block L: Reset When CEC microprocessor is used, it substitutes it with HDMI_PON (Pin 60) | |
| | P137/OUTC27 | | | | | | | | | |
| 49 | ISCLK2 | REM_CLK | SO | O | O | O | [O] | | Clock output for remote control code generation No connection destination | |
| | P136/OUTC21/ISCLK2 | | | | | | | | | |
| 50 | P135 | HTX_N_RST2 | O | O | O | O | [O] | | HDMI TX (OUT2) reset output Pull down at HDMI block L: Reset | |
| | P135/OUTC22/ISRXD2/IEin | | | | | | | | | |
| 51 | ISTXD2 | REM_OUT | SO | O | O | O | [O] | | SCENE select DVD control remote control code output | |
| | P134/OUTC20/ISTXD2/leout | | | | | | | | | |
| 52 | P57 | HRX_N_RST | O | O | O | O | [O] | | HDMI TX reset output Pull down at HDMI block L: Reset | |
| | P57/RDY | | | | | | | | | |
| 53 | P56 | HTX_N_RST | O | O | O | O | [O] | | HDMI TX (OUT1) reset output Pull down at HDMI block L: Reset | |
| | P56/ALE | | | | | | | | | |
| 54 | P55 | E8a_N_EPM | I | I | I | I | [I] | | E8a writing mode enable input 10 k-ohms pull down | |
| | P55/HOLD | | | | | | | | | |
| 55 | P54 | HTX_AUSEL | O | O | O | O | [O] | | | |
| | P54/HLDA/ALE | | | | | | | | | |

| Pin No. | Port Name | Function Name (P.C.B.) | I/O | | | | | | Detail of Function |
|---------|--------------------------------|------------------------|---------|-----------|---------|------------|-------------|----------|--|
| | | | PowerOn | Stby Thrh | Standby | Stby Sleep | Sleep [MCU] | E8a, ICP | |
| 56 | P133 P133/OUTC23 | HTX_VSEL | O | O | O | O | [O] | | |
| 57 | Vss Vss | Vss | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor GND |
| 58 | P132 P132/OUTC26 | ABT_N_RST | O | O | O | O | [O] | | Video I/P & Scaler IC reset VID_PON=L: Low fix L: reset |
| 59 | Vcc2 Vcc2 | Vcc2 | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor power supply |
| 60 | P131 P131/OUTC25 | HDMI_PON | O | O | O | O | [O] | | HDMI power supply ON/OFF control When uses CEC microprocessor, HDMI EQ (CXB1442, Si9185A) reset may be used H: ON, L: OFF |
| 61 | P130 P130/OUTC24 | VID_PON | O | O | O | O | [O] | | Video power supply ON/OFF control Configured based on the Pure Direct specification H: ON, L: OFF |
| 62 | P53 P53/CLKout/BCLK/ ALE | SCPU_N_RST | O | O | O | O | [O] | | SubCPU reset Because the delay circuit of 2 ms is passed so that it may discriminate against reset of Flash and BlackFin, it is necessary to secure the change time of 5 ms or more |
| 63 | P52 P52/RD | SCPU_N_SS | O | O | O | O | [O] | | SubCPU slave select |
| 64 | P51 P51/WRH/BHE | SCPU_RTS | SO | O | O | O | [O] | | Output for SubCPU reception control (request to send) |
| 65 | P50 P50/WRL/WR | E8a_N_CE | I | I | I | I | [I] | | E8a enable input 10 k-ohms pull up |
| 66 | P127 P127 | SVID_DET | I | O | O | O | [O] | | S video detection VID_PON = L: Low fix |
| 67 | P126 P126 | DVID_N_RST | O | O | O | O | [O] | | Video Enc/Dec reset VID_PON = L: Low fix |
| 68 | P125 P125 | OSD_N_CS | CS | O | O | O | [O] | | OSD chip select VID_PON = L: Low fix |
| 69 | P47 P47/SC0/A23 | DSP_PON | O | O | O | O | [O] | | DSP power supply ON/OFF control H: ON, L: OFF |
| 70 | P46 P46/SC1/A22 | SPRY_FA | O | O | O | O | [O] | | Front A speaker relay control H: ON, L: OFF |
| 71 | P45 P45/SC2/A21 | SPRY_FB | O | O | O | O | [O] | | Front B speaker relay control H: ON, L: OFF |
| 72 | P44 P44/SC3/A20 | CPNT_DET | O | O | O | O | [O] | | No use |
| 73 | P43 P43/A19 | SPRY_C | O | O | O | O | [O] | | Center speaker relay control |
| 74 | Vcc2 Vcc2 | Vcc2 | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor power supply |
| 75 | P42 P42/A18 | SPRY_S | O | O | O | O | [O] | | Surround speaker relay control |
| 76 | Vss Vss | Vss | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor GND |
| 77 | P41 P41/A17 | VOL_SCK | O | O | O | O | [O] | | Electronic volume Flip-flop synchronous clock output |
| 78 | P40 P40/A16 | VOL_MOSI | O | O | O | O | [O] | | Electronic volume Flip-flop synchronous data output |
| 79 | P37 P37/A15/(D15) | SPRY_SB | O | O | O | O | [O] | | Surround back/Bi-AMP relay control |
| 80 | P36 P36/A14/(D14) | SPRY_Z2 | O | O | O | O | [O] | | Zone2/Presence Speaker relay control SPRY_Z2 and SPRY_FB do not become High at the same time |
| 81 | P35 P35/A13/(D13) | SPRY_Z3 | O | O | O | O | [O] | | Zone3 speaker relay control |
| 82 | P34 P34/A12/(D12) | HPRY | O | O | O | O | [O] | | Head phone relay control |

| Pin No. | Port Name | Function Name (P.C.B.) | I/O | | | | | | E8a, ICP | Detail of Function |
|---------|-------------------------|---------------------------|---------|-----------|---------|------------|-------------|--|--|--------------------|
| | | | PowerOn | Stby Thrh | Standby | Stby Sleep | Sleep [MCU] | | | |
| 83 | P33 | SP_IMP | O | HiZ | HiZ | HiZ | [HiZ] | | Speaker impedance relay control GND pull down Set to 8 ohms: Hi-Z (Relay OFF, B voltage High) Set to 6 ohms plus during rising temperature: High (Relay ON, B voltage Low) | |
| | P33/A11/(D11) | | | | | | | | | |
| 84 | P32 | HP_N_DET | I | O | O | O | [O] | | Headphone detection +3.3S pull up L: Headphone | |
| | P32/A10/(D10) | | | | | | | | | |
| 85 | P31 P31/A9/(D9) | E2R_N_CS | CS | CS | CS | I | [I] | | EEPROM chip select Pull up to EEPROM power at 10 k-ohms | |
| 86 | P124 | MUTE_N_Z3 | O | O | O | O | [O] | | Zone3 line out mute control L: Mute | |
| | P124 | | | | | | | | | |
| 87 | P123 | MUTE_N_Z2 | O | O | O | O | [O] | | Zone2 line out mute control L: Mute | |
| | P123/CTS6/RTS6 | | | | | | | | | |
| 88 | RXD6 | HDR_MISO | SI | I | I | I | [I] | | Asynchronous data input for HD Radio To prevent pulling of HD Radio's High output and microprocessor's Low Fix output, switch to constant input (U model) | |
| | P122/RXD6 | | | | | | | | | |
| | P122 | TUN_N_ST | I | O | O | O | [O] | | FM/AM tuner STEREO detection input +3.3S to 47k then pull up | |
| 89 | P121 | MUTE_N_SW | O | O | O | O | [O] | | Subwoofer mute control L: Mute All | |
| | P121/CLK6 | | | | | | | | | |
| 90 | TXD6 | HDR_MOSI | SO | O | O | O | [O] | | HD Radio asynchronous data output (U model) | |
| | P120/TXD6 | | | | | | | | | |
| | P120 | HDR_MOSI (TUNCEC_N_EN) | O | O | O | O | [O] | | FM/AM tuner CEC enable output Pull up at +3.3SDSP L: Enable, H: Disable (C, R, T, K, A, B, G, E, F, L, J models) | |
| 91 | Vcc2 Vcc2 | Vcc2 | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor power supply | |
| 92 | P30 | MUTE_N_SB | O | O | O | O | [O] | | Surround back/Bi-AMP/Zone2 mute control L: Mute | |
| | P30/A8/(D8) | | | | | | | | | |
| 93 | Vss | Vss | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor GND | |
| | Vss | | | | | | | | | |
| 94 | P27 | HDR_N_RST | O | O | O | O | [O] | | HD Radio reset (U model) | |
| | P27 | TUN_N_TUND | I | O | O | O | [O] | | FM/AM tuner TUNED input +3.3S to 47k then pull up (C, R, T, K, A, B, G, E, F, L, J models) | |
| | P27/A7/(D7)/AN27 | | | | | | | | | |
| 95 | P26 | HDMI_N_INT_TX | I | I | O | O | | | HDMI TX1,2 interrupts (receive with polling) TUN_N_ST is received by pin 88 | |
| | P26/A6/(D6)/AN26 | | | | | | | | | |
| 96 | P25 | +3.3S_PON | O | O | O | O | [I] | | +3.3S power supply ON/OFF control H: ON, L: OFF At standby sleep, becomes L [to avoid unnecessary power consumption (Mute, pull Up)] Input (HiZ) then mechanically +3.3S power switches on (to function Mute, when power down is detected) | |
| | P25/A5/(D5)/AN25 | | | | | | | | | |
| 97 | P24 P24/A4/(D4)/AN24 | PRY | O | O | O | O | [O] | | Power relay ON/OFF control H: ON, L: OFF | |
| 98 | P23 | I_PRT | I | I | O | O | [O] | | Overcurrent protection detection | |
| | P23/A3/(D3)/AN23 | | | | | | | | | |
| 99 | P22 | MUTE_N_S | O | O | O | O | [O] | | Surround mute control L: Mute | |
| | P22/A2/(D2)/AN22 | | | | | | | | | |
| 100 | P21 | MUTE_N_C | O | O | O | O | [O] | | Center mute control L: Mute | |
| | P21/A1/(D1)/AN21 | | | | | | | | | |
| 101 | P20 | MUTE_N_F | O | O | O | O | [O] | | Front (Headphone is contained) mute control L: Mute | |
| | P20/A0/(D0)/AN20 | | | | | | | | | |
| 102 | INT5 | ACPWR_DET | IRQ | IRQ | IRQ | IRQ | [O] | | AC power detection L: Power down | |
| | P17/D15/INT5 | | | | | | | | | |
| 103 | INT4 | PSW_DET | IRQ | IRQ | IRQ | IRQ | [O] | | Main/Zone/Input key interrupt KEY1 port distinguishes the pressed keys | |
| | P16/D14/INT4 | | | | | | | | | |
| 104 | INT3 | REM_IN | IRQ | IRQ | IRQ | IRQ | [O] | | Remote control pulse input | |
| | P15/D13/INT3 | | | | | | | | | |

| Pin No. | Port Name | Function Name (P.C.B.) | I/O | | | | | | Detail of Function |
|---------|-------------------------------|------------------------|---------|-----------|---------|------------|-------------|---|--|
| | | | PowerOn | Stby Thrh | Standby | Stby Sleep | Sleep [MCU] | E8a, ICP | |
| 105 | P14 | XM_PON | O | O | O | O | [O] | XM Radio power supply ON/OFF control H: ON, L: OFF (U model) | |
| | P14/D12 | | O | O | O | O | [O] | | (C, R, T, K, A, B, G, E, F, L, J models) |
| 106 | P13 | DOCK_PON | O | O | O | O | [O] | DOCK power supply ON/OFF control H: ON, L: OFF | |
| | P13/D11 | | O | O | O | O | [O] | | |
| 107 | P12 | IOXV_N_CS | CS | O | O | O | [O] | IO extended IC (for video) chip select | |
| | P12/D10 | | CS | O | O | O | [O] | | |
| 108 | P11 | IOXV_N_RST | O | O | O | O | [O] | IO extended IC (for video) reset | |
| | P11/D9 | | O | O | O | O | [O] | | |
| 109 | P10 | PD_LED | O | O | O | O | [O] | Pure Direct LED ON/OFF control H: ON, L: OFF | |
| | P10/D8 | | O | O | O | O | [O] | | |
| 110 | P07 | FLD_N_RST | O | O | O | O | [O] | FL driver reset | |
| | P07/D7/AN07 | | O | O | O | O | [O] | | |
| 111 | P06 | PRG_RA | I | O | O | O | [O] | Program rotary A | |
| | P06/D6/AN06 | | I | O | O | O | [O] | | |
| 112 | P05 | PRG_RB | I | O | O | O | [O] | Program rotary B | |
| | P05/D5/AN05 | | I | O | O | O | [O] | | |
| 113 | P04 | MIC_N_DET | I | O | O | O | [O] | MIC detection L: MIC | |
| | P04/D4/AN04 | | I | O | O | O | [O] | | |
| 114 | P114 | IPD_APDET | I | I | I | I | [I] | iPod accessory power detection While iPod boots up (about two seconds) it is set at Low after the boot, it identifies To prevent pulling of iPod High output and microprocessor Low Fix output, switch to constant input | |
| | P114 | | I | I | I | I | [I] | | |
| 115 | P113 | VOL_RA | I | O | O | O | [O] | Volume rotary A | |
| | P113/INPC13/ OUTC13 | | I | O | O | O | [O] | | |
| 116 | ISRXD1 | SR_MISO | SI | I | I | I | [I] | Asynchronous data input for SIRIUS Pull up at 100 k-ohms Serial communication is 5V TTL/CMOS logic level To prevent pulling of SIRIUS tuner's High output and microprocessor's Low Fix output, switch to constant input (U model) | |
| | P112/INPC12/ OUTC12/ISRXD1 | | SI | I | I | I | [I] | | |
| | P112 | | O | O | O | O | [O] | | (C, R, T, K, A, B, G, E, F, L, J models) |
| 117 | P111 | VOL_RB | I | O | O | O | [O] | Volume rotary B | |
| | P111/INPC11/ OUTC11/ISCLK1 | | I | O | O | O | [O] | | |
| 118 | ISTXD1 | SR_MOSI | SO | O | O | O | [O] | Asynchronous data output for SIRIUS Serial communication is 5V TTL/CMOS logic level (U model) | |
| | P110/INPC10/ OUTC10/ISTXD1 | | SO | O | O | O | [O] | | (C, R, T, K, A, B, G, E, F, L, J models) |
| 119 | P03 | SR_PON | O | O | O | O | [O] | SIRIUS radio power supply ON/OFF control H: Power ON, L: Power OFF (U model) | |
| | P03/D3/AN03 | | O | O | O | O | [O] | | (C, R, T, K, A, B, G, E, F, L, J models) |
| 120 | P02 | SEL_PD | O | O | O | O | [O] | DSP Pure Direct route select H: Pure Direct ON | |
| | P02/D2/AN02 | | O | O | O | O | [O] | | |
| 121 | P01 | ADC_N_ PDWN | O | O | O | O | [O] | ADC power down L: Power down | |
| | P01/D1/AN01 | | O | O | O | O | [O] | | |
| 122 | P00 | FLD_N_CS | CS | O | O | O | [O] | FL driver chip select | |
| | P00/D0/AN00 | | CS | O | O | O | [O] | | |
| 123 | AN157 | L3_DET | I | I | I | O | [O] | No use Pull down at GND | |
| | P157/AN157/CTS6/ RTS6 | | I | I | I | O | [O] | | |
| 124 | AN156 | THM | AD | AD | O | O | [O] | Temperature detection | |
| | P156/AN156/CLK6 | | AD | AD | O | O | [O] | | |
| 125 | AN155 | AMP_OLV | AD | AD | O | O | [O] | Power AMP output level detection | |
| | P155/AN155/RXD6 | | AD | AD | O | O | [O] | | |
| 126 | AN154 | DC_PRT | AD | AD | O | O | [O] | Power AMP DC detection | |
| | P154/AN154/TXD6 | | AD | AD | O | O | [O] | | |
| 127 | AN153 | MODEL | AD | AD | AD | O | [O] | AD destination discrimination Data is taken in when resetting is cancelled | |
| | P153/AN153/CTS5/ RTS5 | | AD | AD | AD | O | [O] | | |

| Pin No. | Port Name | Function Name (P.C.B.) | I/O | | | | | | E8a, ICP | Detail of Function |
|---------|---------------------------------------|------------------------|---------|-----------|---------|------------|-------------|--|--|--------------------|
| | | | PowerOn | Stby Thrh | Standby | Stby Sleep | Sleep [MCU] | | | |
| 128 | ISRXD0 P152/AN152/ ISRXD0/RXD5 | E2R_MISO | SI | SI | SI | O | [O] | | Synchronous data input for EEPROM | |
| 129 | ISCLK0 P151/AN151/ ISCLK0/CLK5 | FLD_SCK | SO | SO | SO | O | [O] | | FL driver, OSD, IO extended IC (Video), EEPROM synchronous clock output Inhalation attention of power supply off device | |
| 130 | Vss Vss | Vss | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor GND | |
| 131 | ISTXD0 P150/AN150/ ISTXD0/TXD5 | FLD_MOSI | SO | SO | SO | O | [O] | | FL driver, OSD, IO extended IC (Video), EEPROM synchronous data output Inhalation attention of power supply off device | |
| 132 | Vcc1 Vcc1 | Vcc1 | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor power supply | |
| 133 | AN7 P107/AN7/KI3/ RTP33 | KEY1 | AD | AD | AD | I | [O] | | KEY1 AD value taken in During PSW_DET interruption, distinguishes the used keys which are switched to AD | |
| 134 | AN6 P106/AN6/KI2/ RTP32 | KEY2 | AD | AD | AD | I | [O] | | KEY2 AD value taken in During PSW_DET interruption, distinguishes the used keys which are switched to AD | |
| 135 | AN5 P105/AN5/KI1/ RTP31 | PS1_PRT | AD | AD | O | O | [O] | | PS protection detection 1 | |
| 136 | AN4 P104/AN4/KI0/ RTP30 | PS2_PRT | AD | AD | O | O | [O] | | PS protection detection 2 | |
| 137 | P103 P103/AN3/RTP13 | ISEL_RA | I | O | O | O | [O] | | Input selector rotary A | |
| 138 | P102 P102/AN2/RTP12 | ISEL_RB | I | O | O | O | [O] | | Input selector rotary B | |
| 139 | AN1 P101/AN1/RTP11 | DEST | AD | AD | AD | O | [O] | | AD destination discrimination Data is taken in when resetting is cancelled | |
| 140 | AVss AVss | AVss | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor GND | |
| 141 | AN0 P100/AN0/RTP10 | DOCK_TYPE | AD | AD | AD | I | [O] | | DOCK discriminate Make a distinction from IPD_DET Low edge through post-10ms A/D value Identifies the connected DOCK type, then switches the action During IPD_DET interruption, switches to AD, make a distinction based on post-10 ms A/D value | |
| 142 | Vref Vref | VREF | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor power supply | |
| 143 | AVcc AVcc | AVcc | MCU | MCU | MCU | MCU | [MCU] | | Microprocessor power supply | |
| 144 | RXD4 P97/ADTRG/RXD4/ SCL4/STXD4 | SCPU_MISO | SO | I | I | I | [O] | | Synchronous data input for SubCPU | |

Key detection for A/D port

Key input (A/D) pull-up resistance 10 k-ohms

| | | | | | | | | | | |
|--------------------------|----------------|-------------|-------------|-----------------|-----------------|-----------------|-------------|------------|---------------------|-----------------|
| Ohm | 0 | +1.0k | +1.0k | +1.5k | +1.5k | +2.2k | +3.3k | +4.7k | +22.0k | +33.0k |
| V | 0 – 0.15 | 0.15 – 0.42 | 0.43 – 0.70 | 0.71 – 0.97 | 0.98 – 1.24 | 1.25 – 1.53 | 1.54 – 1.84 | 1.84 – 2.1 | 2.34 – 2.55 | 2.55 – 2.97 |
| A/D value (3.3 V=255) | 0 – 11 | 12 – 32 | 33 – 54 | 55 – 75 | 76 – 95 | 96 – 118 | 119 – 142 | 143 – 162 | 181 – 197 | 198 – 229 |
| KEY1 (133 pin) | SCENE RADIO | SCENE CD | SCENE TV | SCENE BD/DVD | ZONE2 ON/OFF | ZONE3 ON/OFF | — | — | MAIN ZONE ON/OFF | ZONE CONTROL |

| | | | | | | | | | | |
|--------------------------|----------------|----------------------|------------------|-------------|-------------|-------------|-------------|-------------------|----------------|----------------|
| Ohm | 0 | +1.0k | +1.0k | +1.5k | +1.8k | +2.2k | +3.3k | +4.7k | +6.8k | +10.0k |
| V | 0 – 0.15 | 0.15 – 0.42 | 0.43 – 0.70 | 0.71 – 0.99 | 1.0 – 1.27 | 1.28 – 1.56 | 1.57 – 1.86 | 1.86 – 2.14 | 2.14 – 2.4 | 2.4 – 2.65 |
| A/D value (3.3 V=255) | 0 – 11 | 12 – 32 | 33 – 54 | 55 – 77 | 78 – 98 | 99 – 120 | 121 – 143 | 144 – 165 | 166 – 185 | 186 – 205 |
| KEY2 (134 pin) | PURE DIRECT | STRAIGHT / EFFECT | ZONE CONTROLS | INFO | PRESET < | PRESET > | MEMORY | BAND/ CATEGORY | TUNING CH < | TUNING CH > |

Destination detection for A/D port

Destination input (A/D) pull-up resistance 10 k-ohms



| | | | | | | | | |
|--------------------------|-----------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| Ohm (R3809 VIDEO P.C.B.) | 1.2 k | 2.7 k | 4.7 k | 6.8 k | 10.0 k | 15.0 k | 47.0 k | 100.0 k |
| V | 0.2 – 0.6 | 0.6 – 0.9 | 0.9 – 1.2 | 1.2 – 1.5 | 1.5 – 1.8 | 1.8 – 2.3 | 2.4 – 2.9 | 2.9 – 3.2 |
| A/D value (3.3V=255) | 15 – 46 | 46 – 69 | 69 – 92 | 92 – 115 | 115 – 139 | 139 – 177 | 185 – 224 | 224 – 247 |
| DEST (139 pin) | U | C | R | T | K | A | B, G, E, F | L |

Model detection for A/D port

| | | |
|---------------------------|----------|-----------|
| Ohm (R200 DIGITAL P.C.B.) | — | 10 k |
| Ohm (R201 DIGITAL P.C.B.) | 1 k | 1 k |
| V | 0 | 0.2 – 0.6 |
| A/D value (3.3 V=255) | 0 | 15 – 46 |
| MODEL (127 pin) | RX-V2065 | HTR-6295 |

IC505: AD91089ZSKBC (GUI P.C.B.)
Sub-microprocessor

* **No replacement part available.**

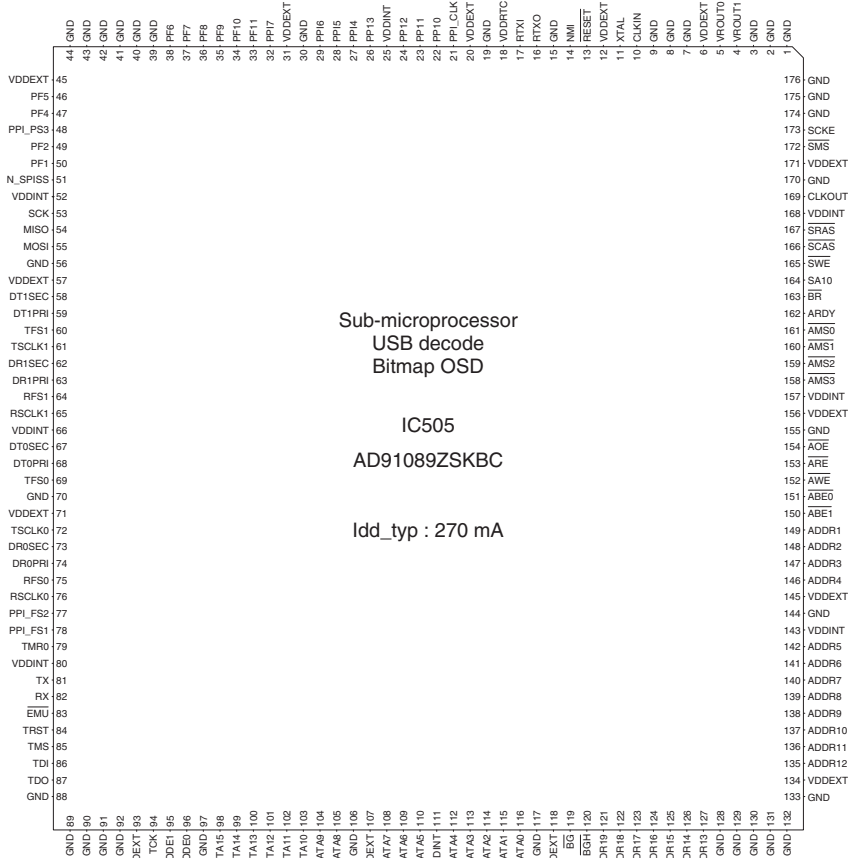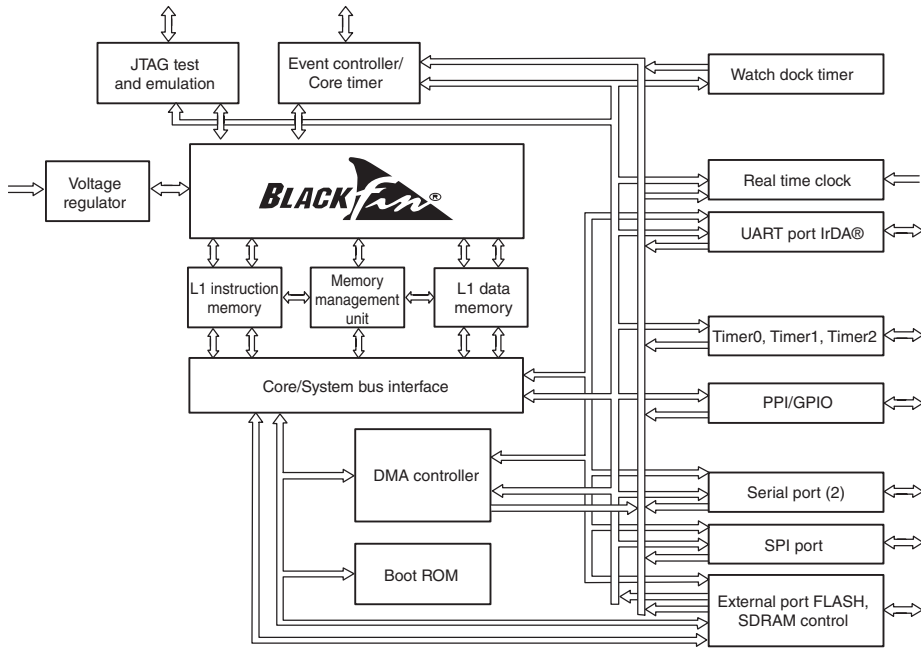

RX-V2065/HTR-6295

Memory Interface

| Pin No. | Function Name | I/O | Detail of Function | | |
|---------|---------------|-----|-----------------------------------|-----|---|
| 121 | ADDR19 | O | Address bus for async/Sync access | | |
| 122 | ADDR18 | | | | |
| 123 | ADDR17 | | | | |
| 124 | ADDR16 | | | | |
| 125 | ADDR15 | | | | |
| 126 | ADDR14 | | | | |
| 127 | ADDR13 | | | | |
| 135 | ADDR12 | O | Address bus for async/Sync access | | |
| 136 | ADDR11 | | | | |
| 137 | ADDR10 | | | | |
| 138 | ADDR9 | | | | |
| 139 | ADDR8 | | | | |
| 140 | ADDR7 | | | | |
| 141 | ADDR6 | | | | |
| 142 | ADDR5 | O | Address bus for async/Sync access | | |
| 146 | ADDR4 | | | | |
| 147 | ADDR3 | | | | |
| 148 | ADDR2 | | | | |
| 149 | ADDR1 | | | | |
| 98 | DATA15 | | | I/O | Data bus for async access |
| 99 | DATA14 | | | | |
| 100 | DATA13 | | | | |
| 101 | DATA12 | | | | |
| 102 | DATA11 | | | | |
| 103 | DATA10 | | | | |
| 104 | DATA9 | | | | |
| 105 | DATA8 | I/O | Data bus for async access | | |
| 108 | DATA7 | | | | |
| 109 | DATA6 | | | | |
| 110 | DATA5 | | | | |
| 112 | DATA4 | | | | |
| 113 | DATA3 | | | | |
| 114 | DATA2 | | | | |
| 115 | DATA1 | I/O | Data bus for async access | | |
| 116 | DATA0 | | | | |
| 150 | ABE $\bar{1}$ | | | O | Byte enables/Data masks for async/Sync access |
| 151 | ABE0 | | | | |
| 163 | $\bar{B}R$ | | | I | Bus request (This pin should be pulled HIGH if not used.) |
| 119 | BG | | | O | Bus grant |
| 120 | BGH | | | O | Bus grant hang |

Asynchronous memory control

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|--|
| 158 | AMS3 | O | Banks select |
| 159 | AMS2 | | |
| 160 | AMS1 | | |
| 161 | AMS0 | | |
| 162 | ARDY | I | Hardware ready control (This pin should be pulled HIGH if not used.) |
| 154 | AOE | O | Output enable |
| 153 | ARE | O | Read enable |
| 152 | AWE | O | Write enable |

Synchronous memory control

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|-----------------------|
| 167 | SRAS | O | Row address strobe |
| 166 | SCAS | O | Column address strobe |
| 165 | SWE | O | Write enable |
| 173 | SCKE | O | Clock enable |
| 169 | CLKOUT | O | Clock output |
| 164 | SA10 | O | A10 pin |
| 172 | SMS | O | Bank select |

Timers

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|------------------------|
| 79 | TMR0 | I/O | Timer0 |
| 78 | PPI_FS1 | I/O | Timer1/PPI frame sync1 |
| 77 | PPI_FS2 | I/O | Timer2/PPI frame sync2 |

PPI port

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|------------------------------------|
| 22 | PP10 | I/O | PPI3-0 |
| 23 | PP11 | | |
| 24 | PP12 | | |
| 26 | PP13 | | |
| 21 | PPI_CLK | I | PPI clock/External timer reference |

Port F: GPIO/Parallel peripheral interface port/SPI/Timers

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|--|
| 51 | N_SPISS | I/O | GPIO/SPI slave select input |
| 50 | PF1 | I/O | GPIO/SPI slave select enable 1/ Timer alternate clock input |
| 49 | PF2 | I/O | GPIO/SPI slave select enable 2 |
| 48 | PPI_PS3 | I/O | GPIO/SPI slave select enable 3/ PPI frame sync 3 |
| 47 | PF4 | I/O | GPIO/SPI slave select enable 4/ PPI 15 |
| 46 | PF5 | I/O | GPIO/SPI slave select enable 5/ PPI 14 |
| 38 | PF6 | I/O | GPIO/SPI slave select enable 6/ PPI 13 |
| 37 | PF7 | I/O | GPIO/SPI slave select enable 7/ PPI 12 |
| 36 | PF8 | I/O | GPIO/PPI 11 |
| 35 | PF9 | I/O | GPIO/PPI 10 |
| 34 | PF10 | I/O | GPIO/PPI 9 |
| 33 | PF11 | I/O | GPIO/PPI 8 |
| 32 | PPI7 | I/O | GPIO/PPI 7 |
| 29 | PPI6 | I/O | GPIO/PPI 6 |
| 28 | PPI5 | I/O | GPIO/PPI 5 |
| 27 | PPI4 | I/O | GPIO/PPI 4 |

JTAG port

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|--|
| 94 | TCK | I | JTAG clock |
| 87 | TDO | O | JTAG serial data out |
| 86 | TDI | I | JTAG serial data in |
| 85 | TMS | I | JTAG mode select |
| 84 | TRST | I | JTAG reset (This pin is should be pulled LOW if JTAG is not used.) |
| 83 | EMU | O | Emulation output |

SPI port

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|--|
| 55 | MOSI | I/O | Master out slave in |
| 54 | MISO | I/O | Master in slave out (This pin is should be pulled HIGH through a 4.7 k-ohms resistor if booting via the SPI port.) |
| 53 | SCK | I/O | SPI clock |

Serial ports

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|--------------------------------|
| 76 | RSCLK0 | I/O | SPORT0 receive serial clock |
| 75 | RFS0 | I/O | SPORT0 receive frame sync |
| 74 | DR0PRI | I | SPORT0 receive data primary |
| 73 | DR0SEC | I | SPORT0 receive data secondary |
| 72 | TSCLK0 | I/O | SPORT0 transmit serial clock |
| 69 | TFS0 | I/O | SPORT0 transmit frame sync |
| 68 | DT0PRI | O | SPORT0 transmit data primary |
| 67 | DT0SEC | O | SPORT0 transmit data secondary |
| 65 | RSCLK1 | I/O | SPORT1 receive serial clock |
| 64 | RFS1 | I/O | SPORT1 receive frame sync |
| 63 | DR1PRI | I | SPORT1 receive data primary |
| 62 | DR1SEC | I | SPORT1 receive data secondary |
| 61 | TSCLK1 | I/O | SPORT1 transmit serial clock |
| 60 | TFS1 | I/O | SPORT1 transmit frame sync |
| 59 | DT1PRI | O | SPORT1 transmit data primary |
| 58 | DT1SEC | O | SPORT1 transmit data secondary |

UART port

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|--------------------|
| 82 | RX | I | UART receive |
| 81 | TX | O | UART transmit |

Real-time clock

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|--|
| 17 | RTXI | I | RTC crystal input (This pin should be pulled LOW when not used.) |
| 16 | RTXO | O | RTC crystal output |

Clock

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|--|
| 10 | CLKIN | I | Clock/Crystal input (This pin needs to be at a level or clocking.) |
| 11 | XTAL | O | Crystal output |

Mode controls

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|--|
| 13 | RESET | I | Reset (This pin is always active during core power-on.) |
| 14 | NMI | I | Nonmaskable interrupt (This pin should be pulled LOW when not used.) |
| 95 | BMODE1 | I | Boot mode strap (These pins must be pulled to the state required for the desired boot mode.) |
| 96 | BMODE0 | | |

Voltage regulator

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|--------------------|
| 4 | VROUT1 | O | External FET drive |
| 5 | VROUT0 | | |























Supplies

| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|------------------------------|
| 6 | VDDEXT | P | I/O power supply |
| 12 | | | |
| 20 | | | |
| 31 | | | |
| 45 | | | |
| 57 | | | |
| 71 | | | |
| 93 | | | |
| 107 | | | |
| 118 | | | |
| 134 | | | |
| 145 | | | |
| 156 | | | |
| 171 | | | |
| 25 | VDDINT | P | Core power supply |
| 52 | | | |
| 66 | | | |
| 80 | | | |
| 111 | | | |
| 143 | | | |
| 157 | VDDRTC | P | Real-time clock power supply |
| 168 | | | |
| 18 | | | |

































| Pin No. | Function Name | I/O | Detail of Function |
|---------|---------------|-----|--------------------|
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 7 | | | |
| 8 | | | |
| 9 | | | |
| 15 | | | |
| 19 | | | |
| 30 | | | |
| 39 | | | |
| 40 | | | |
| 41 | | | |
| 42 | | | |
| 43 | | | |
| 44 | | | |
| 56 | | | |
| 70 | | | |
| 88 | | | |
| 89 | GND | G | External ground |
| 90 | | | |
| 91 | | | |
| 92 | | | |
| 97 | | | |
| 106 | | | |
| 117 | | | |
| 128 | | | |
| 129 | | | |
| 130 | | | |
| 131 | | | |
| 132 | | | |
| 133 | | | |
| 144 | | | |
| 155 | | | |
| 170 | | | |
| 174 | | | |
| 175 | | | |
| 176 | | | |

PIN CONNECTION DIAGRAMS

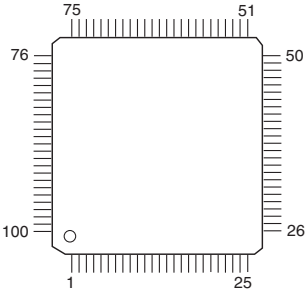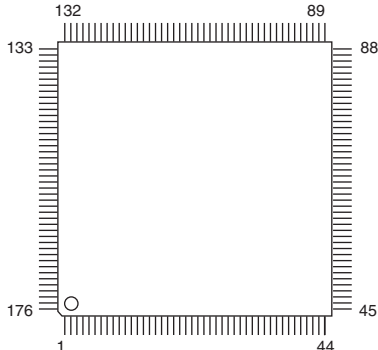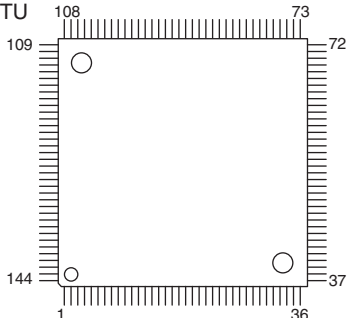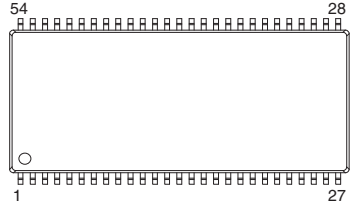• ICs











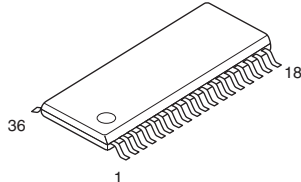


| | | | | |
|---|--|---|---|---|
| <p>74LVC08APW 74LVC32APW</p>  | <p>74LVC1G08GW</p>  | <p>74LVC245APW,118</p>  | <p>CS230003-CZZR</p>  | <p>CXB1442AR-T4</p>  |
| <p>ABT1012Q100 LAN9217-MT SiI9134CTU</p>  | <p>ADV7800BSTZ-80 AD91089ZSKBC</p>  | <p>ADV7172KST AK8814VQ</p>  | <p>BA00JC5WT-V5</p>  | |
| <p>BD9323EFJ-E2</p>  | <p>D70YE101BRFP266 M3087BFKBGP SiI9233ACTU</p>  | <p>FHP3350IM14X</p>  | <p>K4S641632N-LC60000</p>  | |
| <p>F2621E-01-TR</p>  | <p>ISL83385EIBZ-T</p>  | <p>ISP1760BE</p>  | <p>KIA7912PI</p>  | <p>K4S560832J-UC75000</p>  |
| <p>K8P6415UQB-PI4B000</p>  | <p>LA73050-TLM-E</p>  | <p>LC709004A-TLM-E</p>  | <p>LC72725KM-UY-TLM-E</p>  | |

RX-V2065/HTR-6295

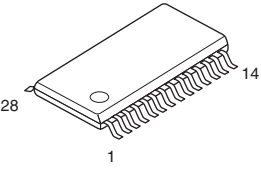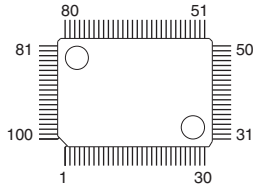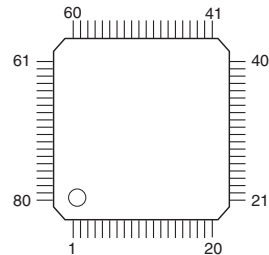
















| | | | | | |
|--|--|--|---|---|--|
| <p>LC89058WD-E</p>  | <p>LE25LB2562M-TLM-E LE25LB643M-TLM-E NJM4565M (TE1)</p>  | <p>LM19CIZ/LF</p>  | <p>M66003-0131FP-R</p>  | <p>NE5532DR</p>  | <p>NJM2068MD-TE2</p>  |
| <p>NJM2388F05</p>  <p>1. V_{IN} 2. V_{OUT} 3. GND 4. ON/OFF CONTROL</p> | <p>NJM2396F05</p>  <p>1. IN 2. V_{OUT} 3. GND 4. ON/OFF CONTROL</p> | <p>NJM2581M</p>  | <p>NJM2867F3-05</p>  | <p>NJM7812FA</p>  <p>3: IN 2: COM 1: OUT</p> | <p>NJM78M05DL1A (TE1)</p>  <p>1: INPUT 2: GND 3: OUTPUT</p> |
| <p>PCA9517DP</p>  | <p>PCM1680DBQR</p>  | <p>PCM1781DBQR SN74LV163APWR</p>  | <p>PCM1803DBR</p>  | <p>R1172H181B-T1-F R1172H331D-T1-F R1172H501D-T1-F</p>  <p>1: CE 2: GND 3: NC 4: V_{DD} 5: V_{OUT}</p> | |
| <p>R1173S001D-E2-F R1172S121D-E2-F R1172S331B-E2-F</p>  | <p>R2A15220FP</p>  | <p>R5523N001A-TR-F</p>  | <p>SN74LVC245APWR SN74LVTH245APW</p>  | <p>SN74LV74APWR</p>  | |
| <p>Sii9185ACTU</p>  | <p>TC74HC4051AFEL</p>  | <p>TC74HC4053AF</p>  | <p>TC74VHC157FT</p>  | <p>TC74VHCT08AFT TC74VHCU04FT</p>  | |
| <p>TC7SH04FU-TE85L TC7SH08FU</p>  | <p>TC7WH14FK TC7WZ32FK (TE85L, F)</p>  | <p>TC7WHU04FU</p>  | <p>TL431ACLPR</p>  <p>1: CATHODE 2: ANODE 3: REF</p> | <p>TOP255MN</p>  | |

RX-V2065/HTR-6295

• Diodes

| | | | | |
|--|--|---|--|--|
| <p>1N4002S 1SS133 1SS176</p>  | <p>1SS355</p>  | <p>D15XBN20-7001 15A</p>  | <p>HT18G</p>  | |
| <p>MAZ8033GHL 3.4V MAZ8036GLL 3.5V</p>  | <p>MTZJ10B MTZJ12B MTZJ13B MTZJ2.4B MTZJ22C MTZJ3.3B MTZJ39D</p> <p>MTZJ5.1B MTZJ5.1C MTZJ6.8C</p>  | <p>RB051L-40 UDZ5.1B</p>  | <p>P6KE100A</p>  | |
| <p>MA111 RB501V-40</p>  | <p>RLZ7.5B 7.5V</p>  | <p>RS203M-B-C-J80</p>  | <p>S1NBC60 1A 600V</p>  | <p>SG10SC4M</p>  |

• Transistors

| | | | | | |
|---|---|--|---|--|---|
| <p>2N5401C-AT/P 2SA1015-Y</p>  | <p>2SA1145 2SC2705 2N5551C-AT</p>  | <p>2SA1576A</p>  | <p>2SA1708</p>  | <p>2SA2168 2SC5291</p>  | <p>2SC6011/2SA2151</p>  |
| <p>2SC1815 Y</p>  | <p>2SC1740S</p>  | <p>2SC4081 T106</p>  | <p>2SD1938F 2SC3906K</p>  | <p>2SD1915F</p>  | <p>DTA114EKA DTA143EKA DTA144EKA DTC114EKA DTC144EKA</p>  <p>1: GND 2: IN 3: OUT</p> |
| <p>KRA102M-AT/P KRC105M-AT</p>  | <p>KTA1046-Y-U/P KTA1837-U/P</p>  | <p>KTA1517S KTC3875S KTC3911S</p>  | <p>MCH6336-TL-E</p>  <p>1. Drain 2. Drain 3. Gate 4. Source 5. Drain 6. Drain</p> | <p>μPA672T-T1-A</p>  <p>1. Source 1 (S1) 2. Gate 1 (G1) 3. Drain 2 (D2) 4. Source 2 (S2) 5. Gate 2 (G2) 6. Drain 1 (D1)</p> | |


BLOCK DIAGRAMS

ANALOG AUDIO Section Block Diagram

MAIN • See page 132, 133 → SCHEMATIC DIAGRAM

VIDEO • See page 134-136 → SCHEMATIC DIAGRAM

OPERATION • See page 130, 131 → SCHEMATIC DIAGRAM

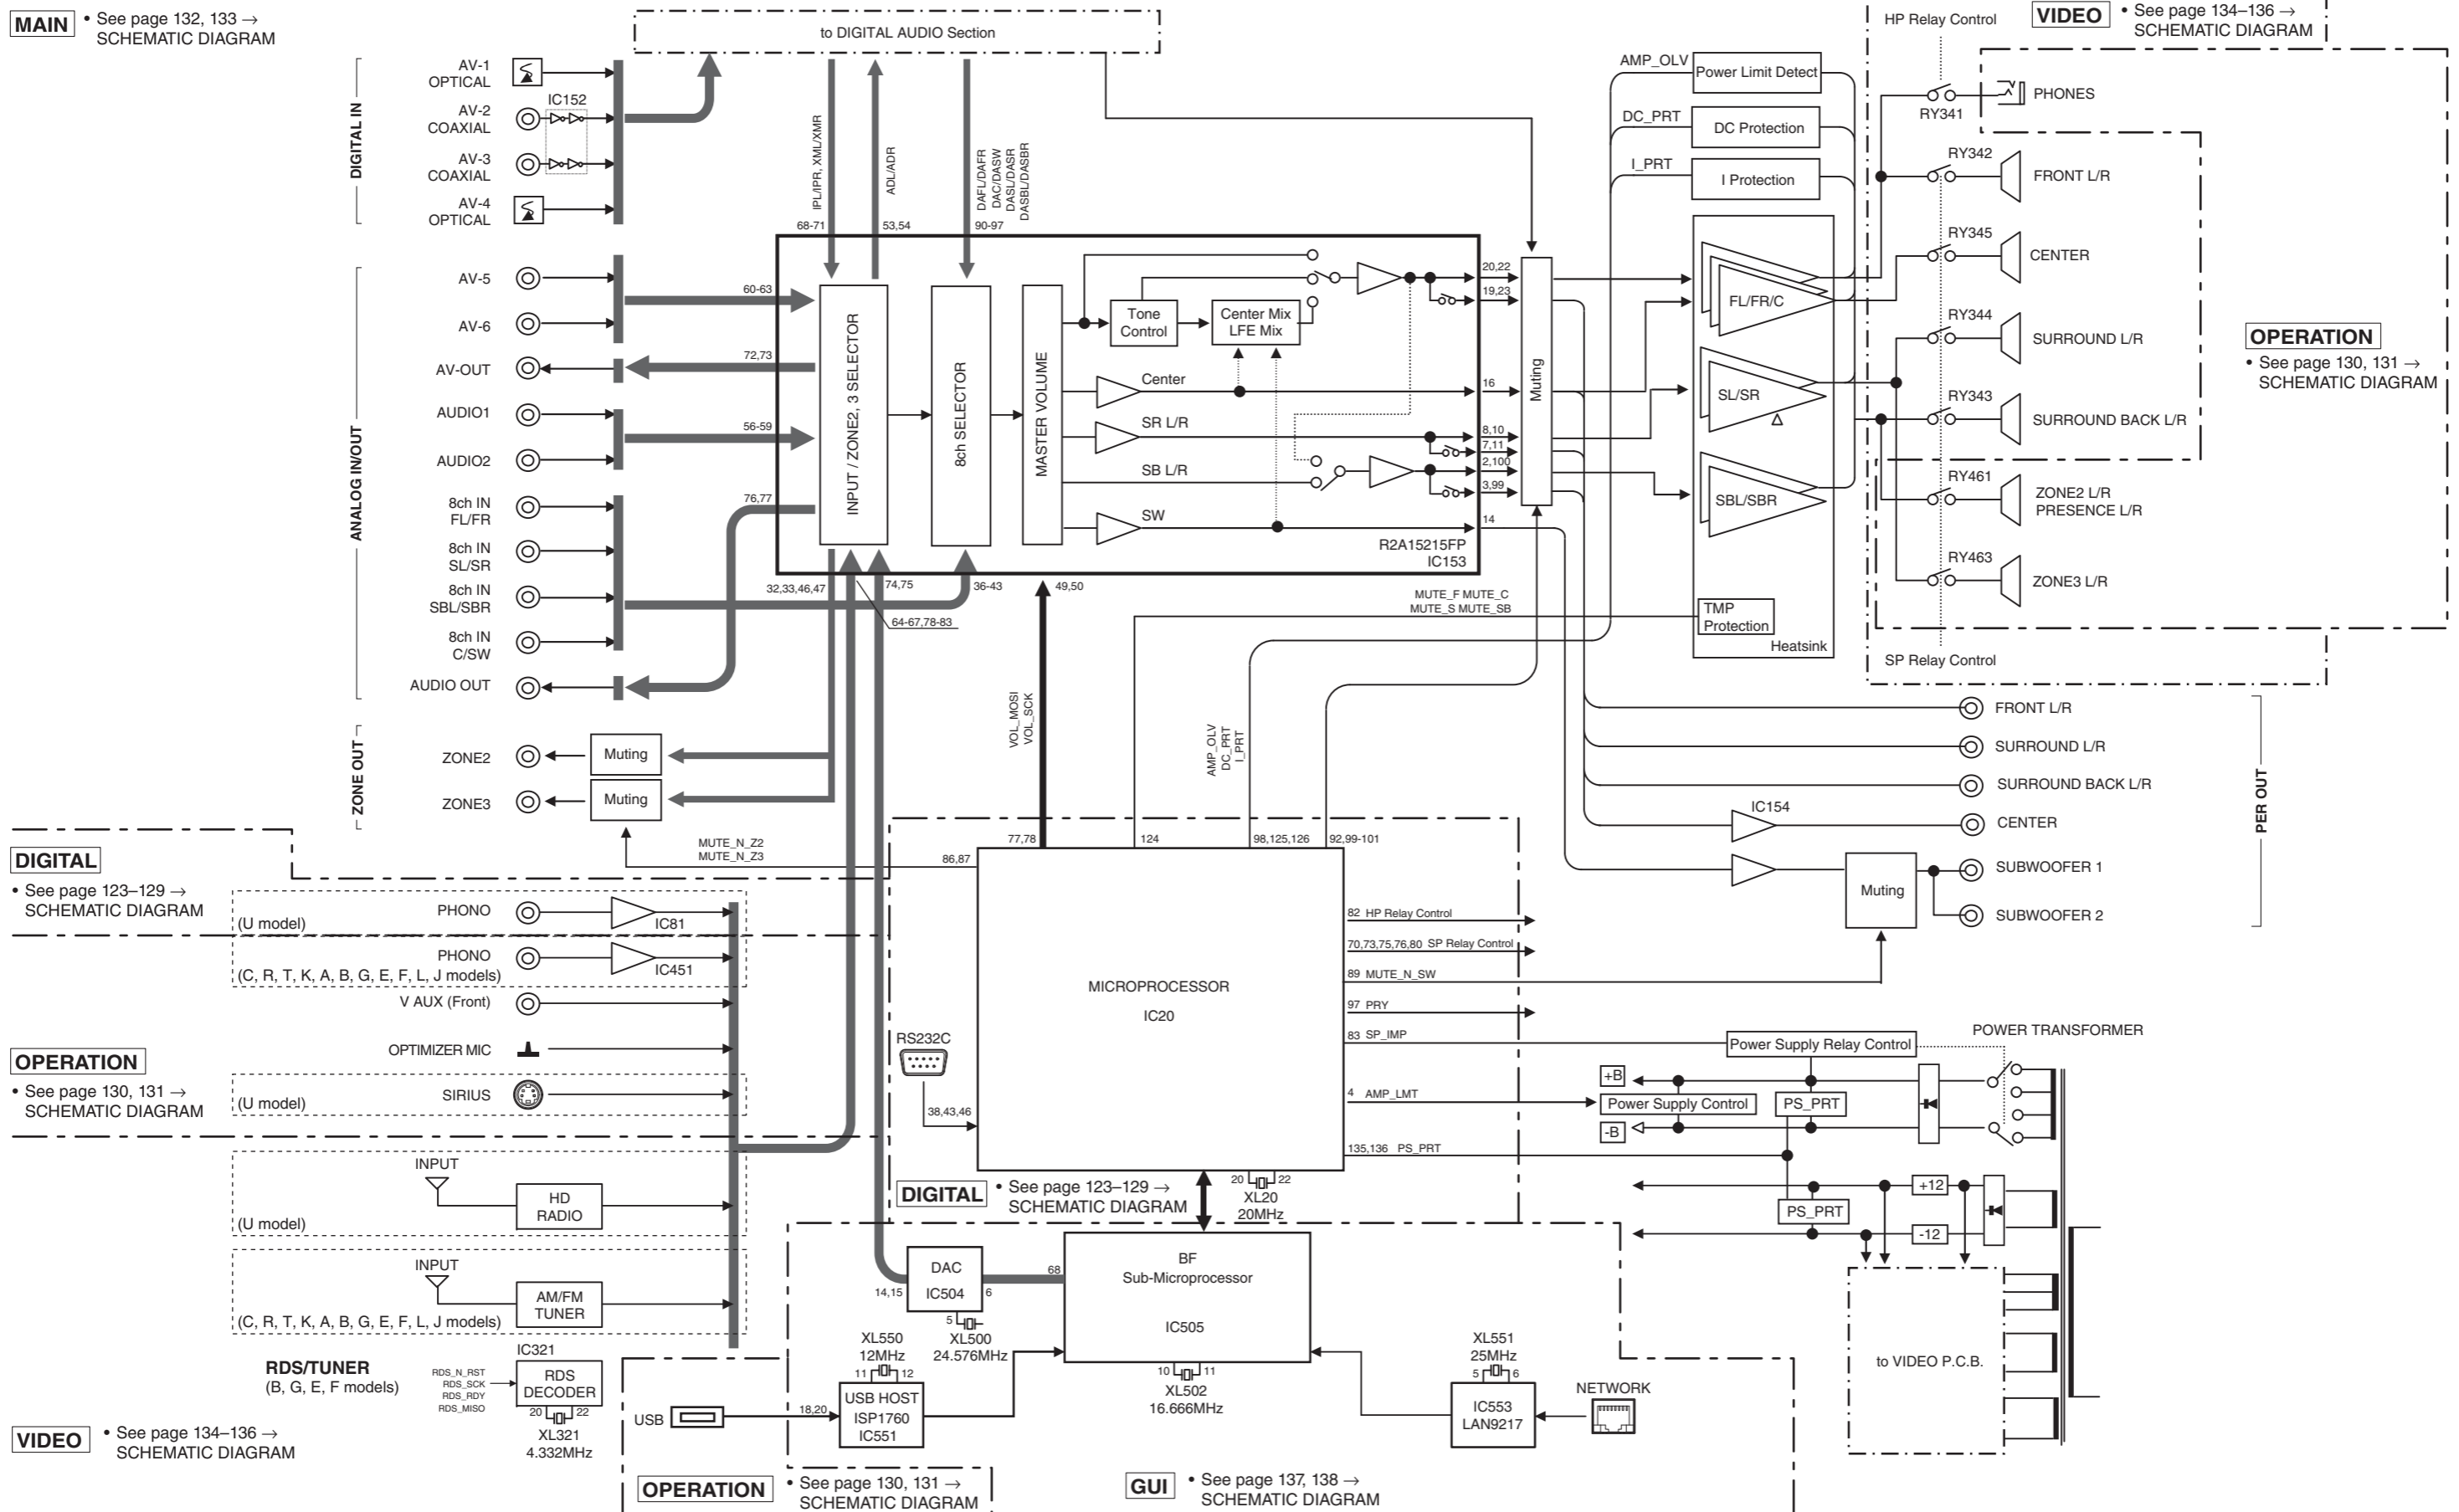


VIDEO • See page 134-136 → SCHEMATIC DIAGRAM

OPERATION • See page 130, 131 → SCHEMATIC DIAGRAM


GUI • See page 137, 138 → SCHEMATIC DIAGRAM

DIGITAL AUDIO Section Block Diagram

1
2
3
4
5
6
7

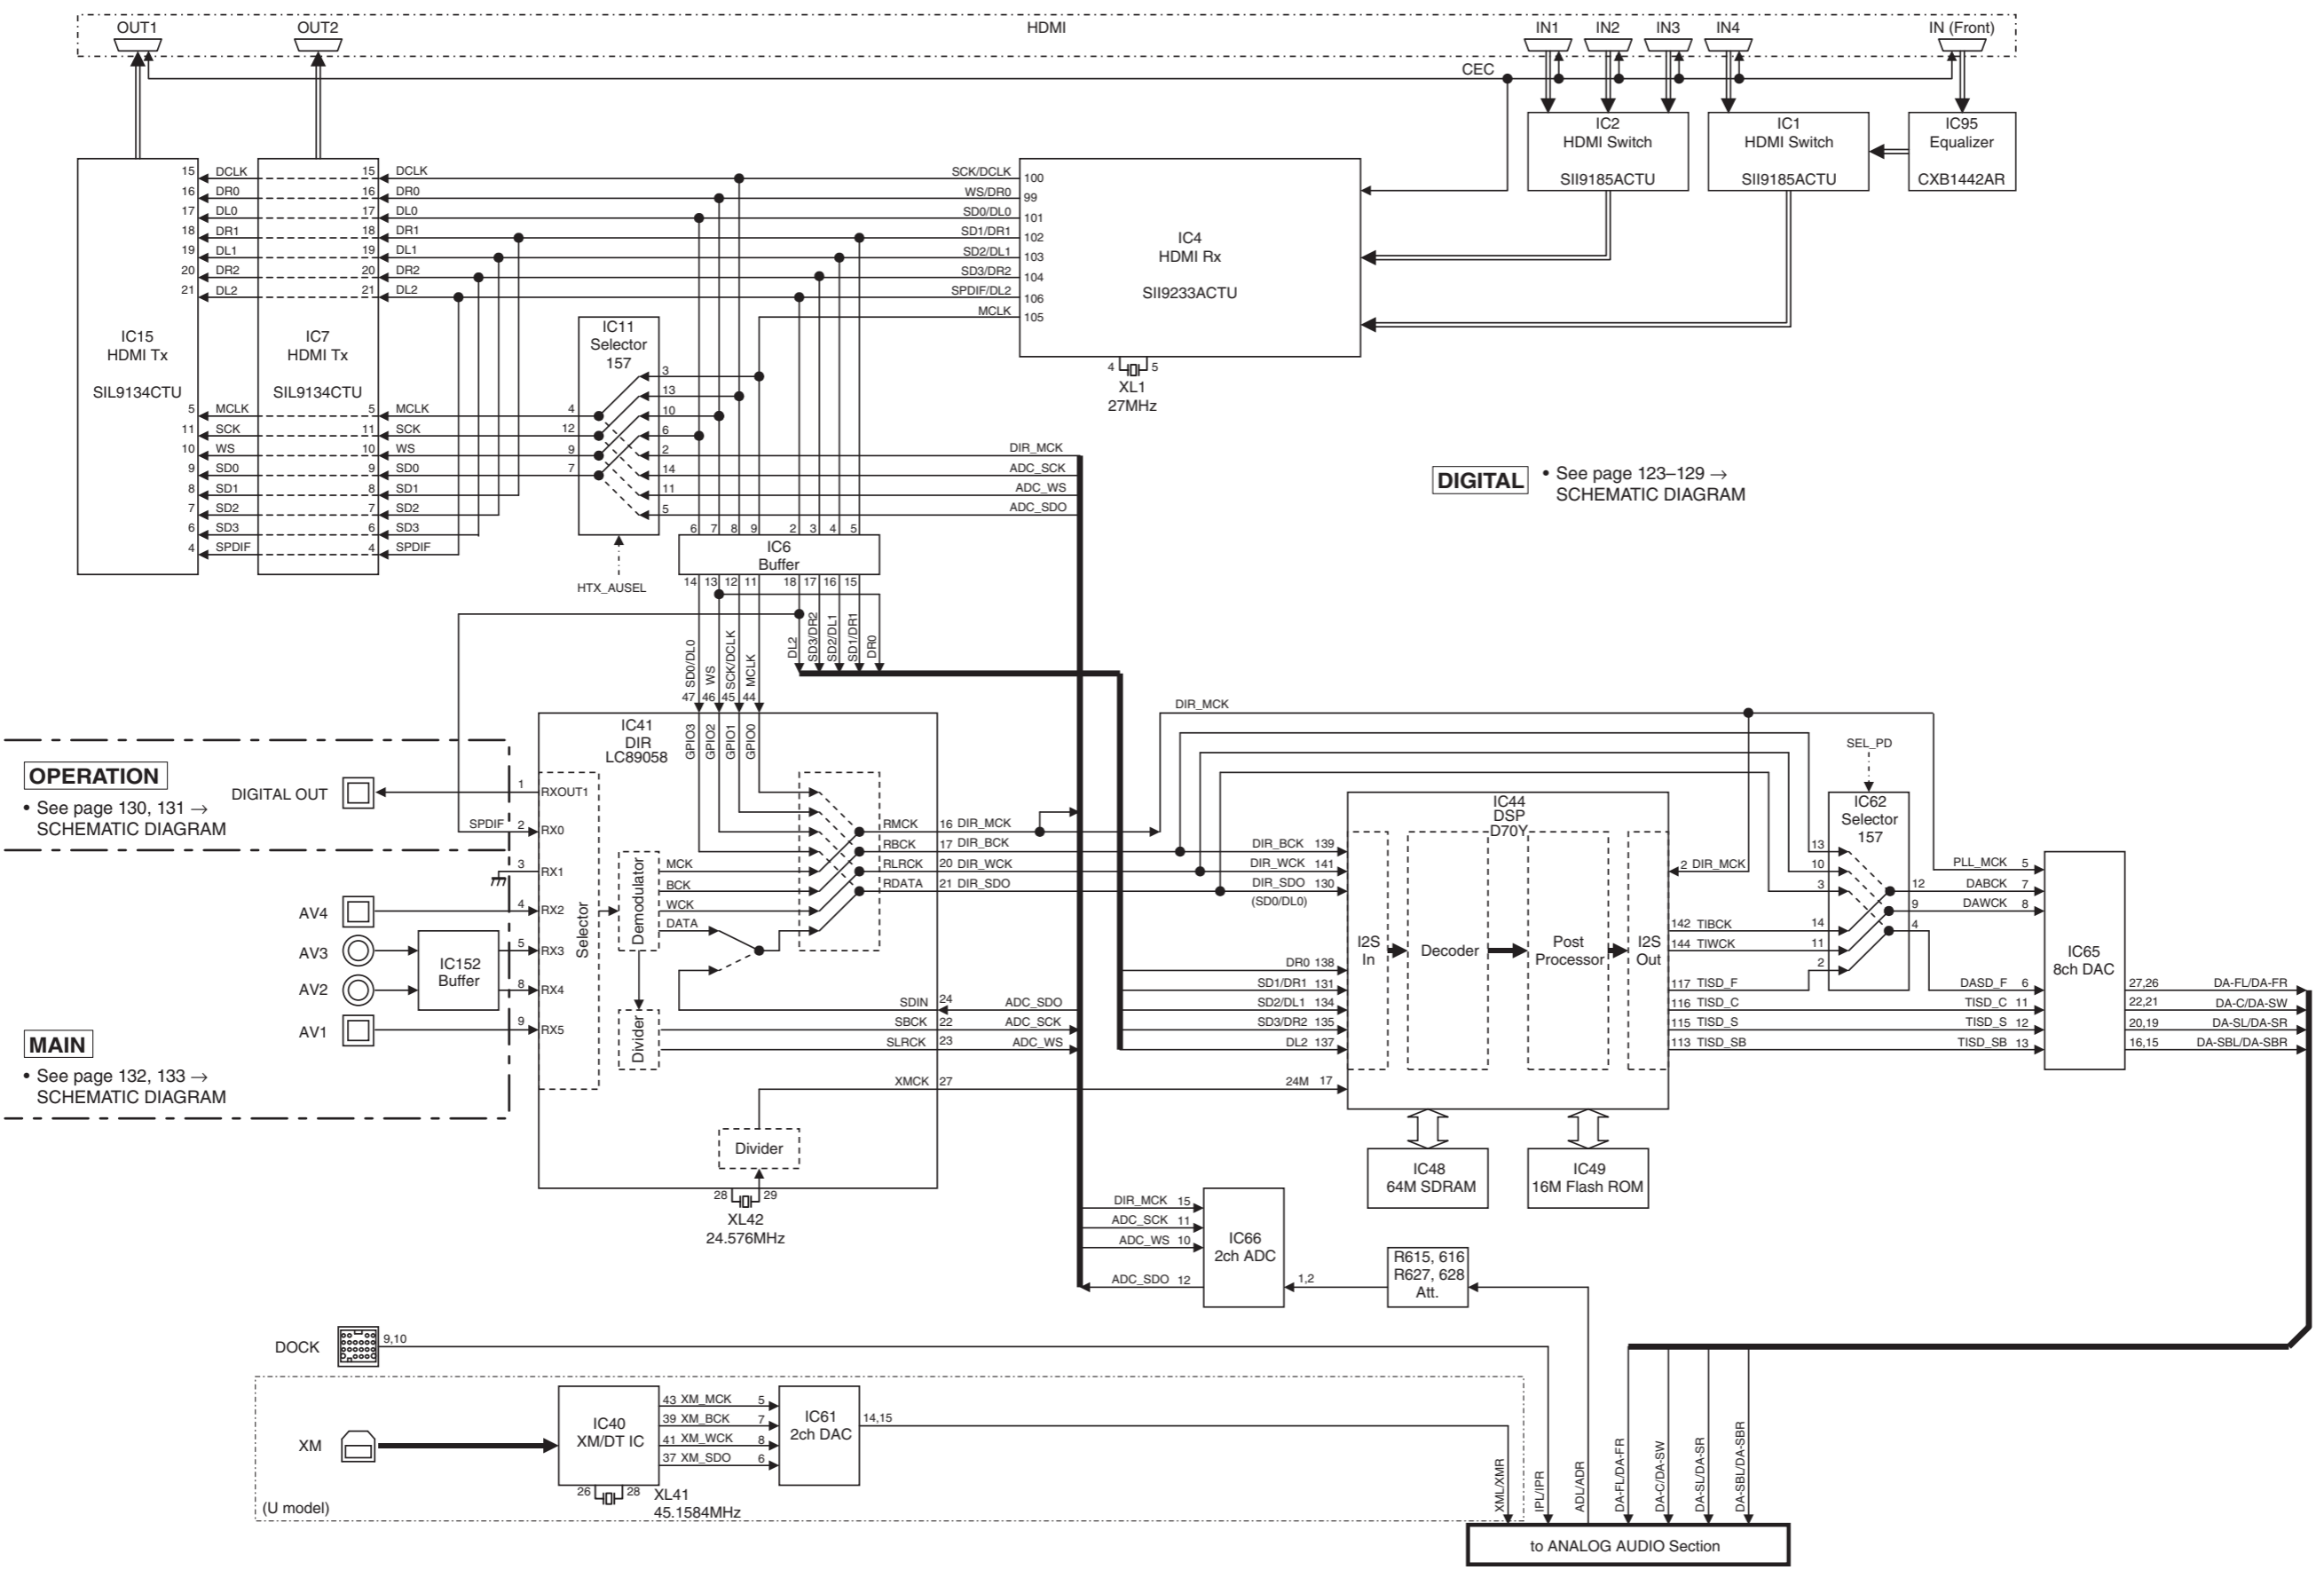

VIDEO Section Block Diagram

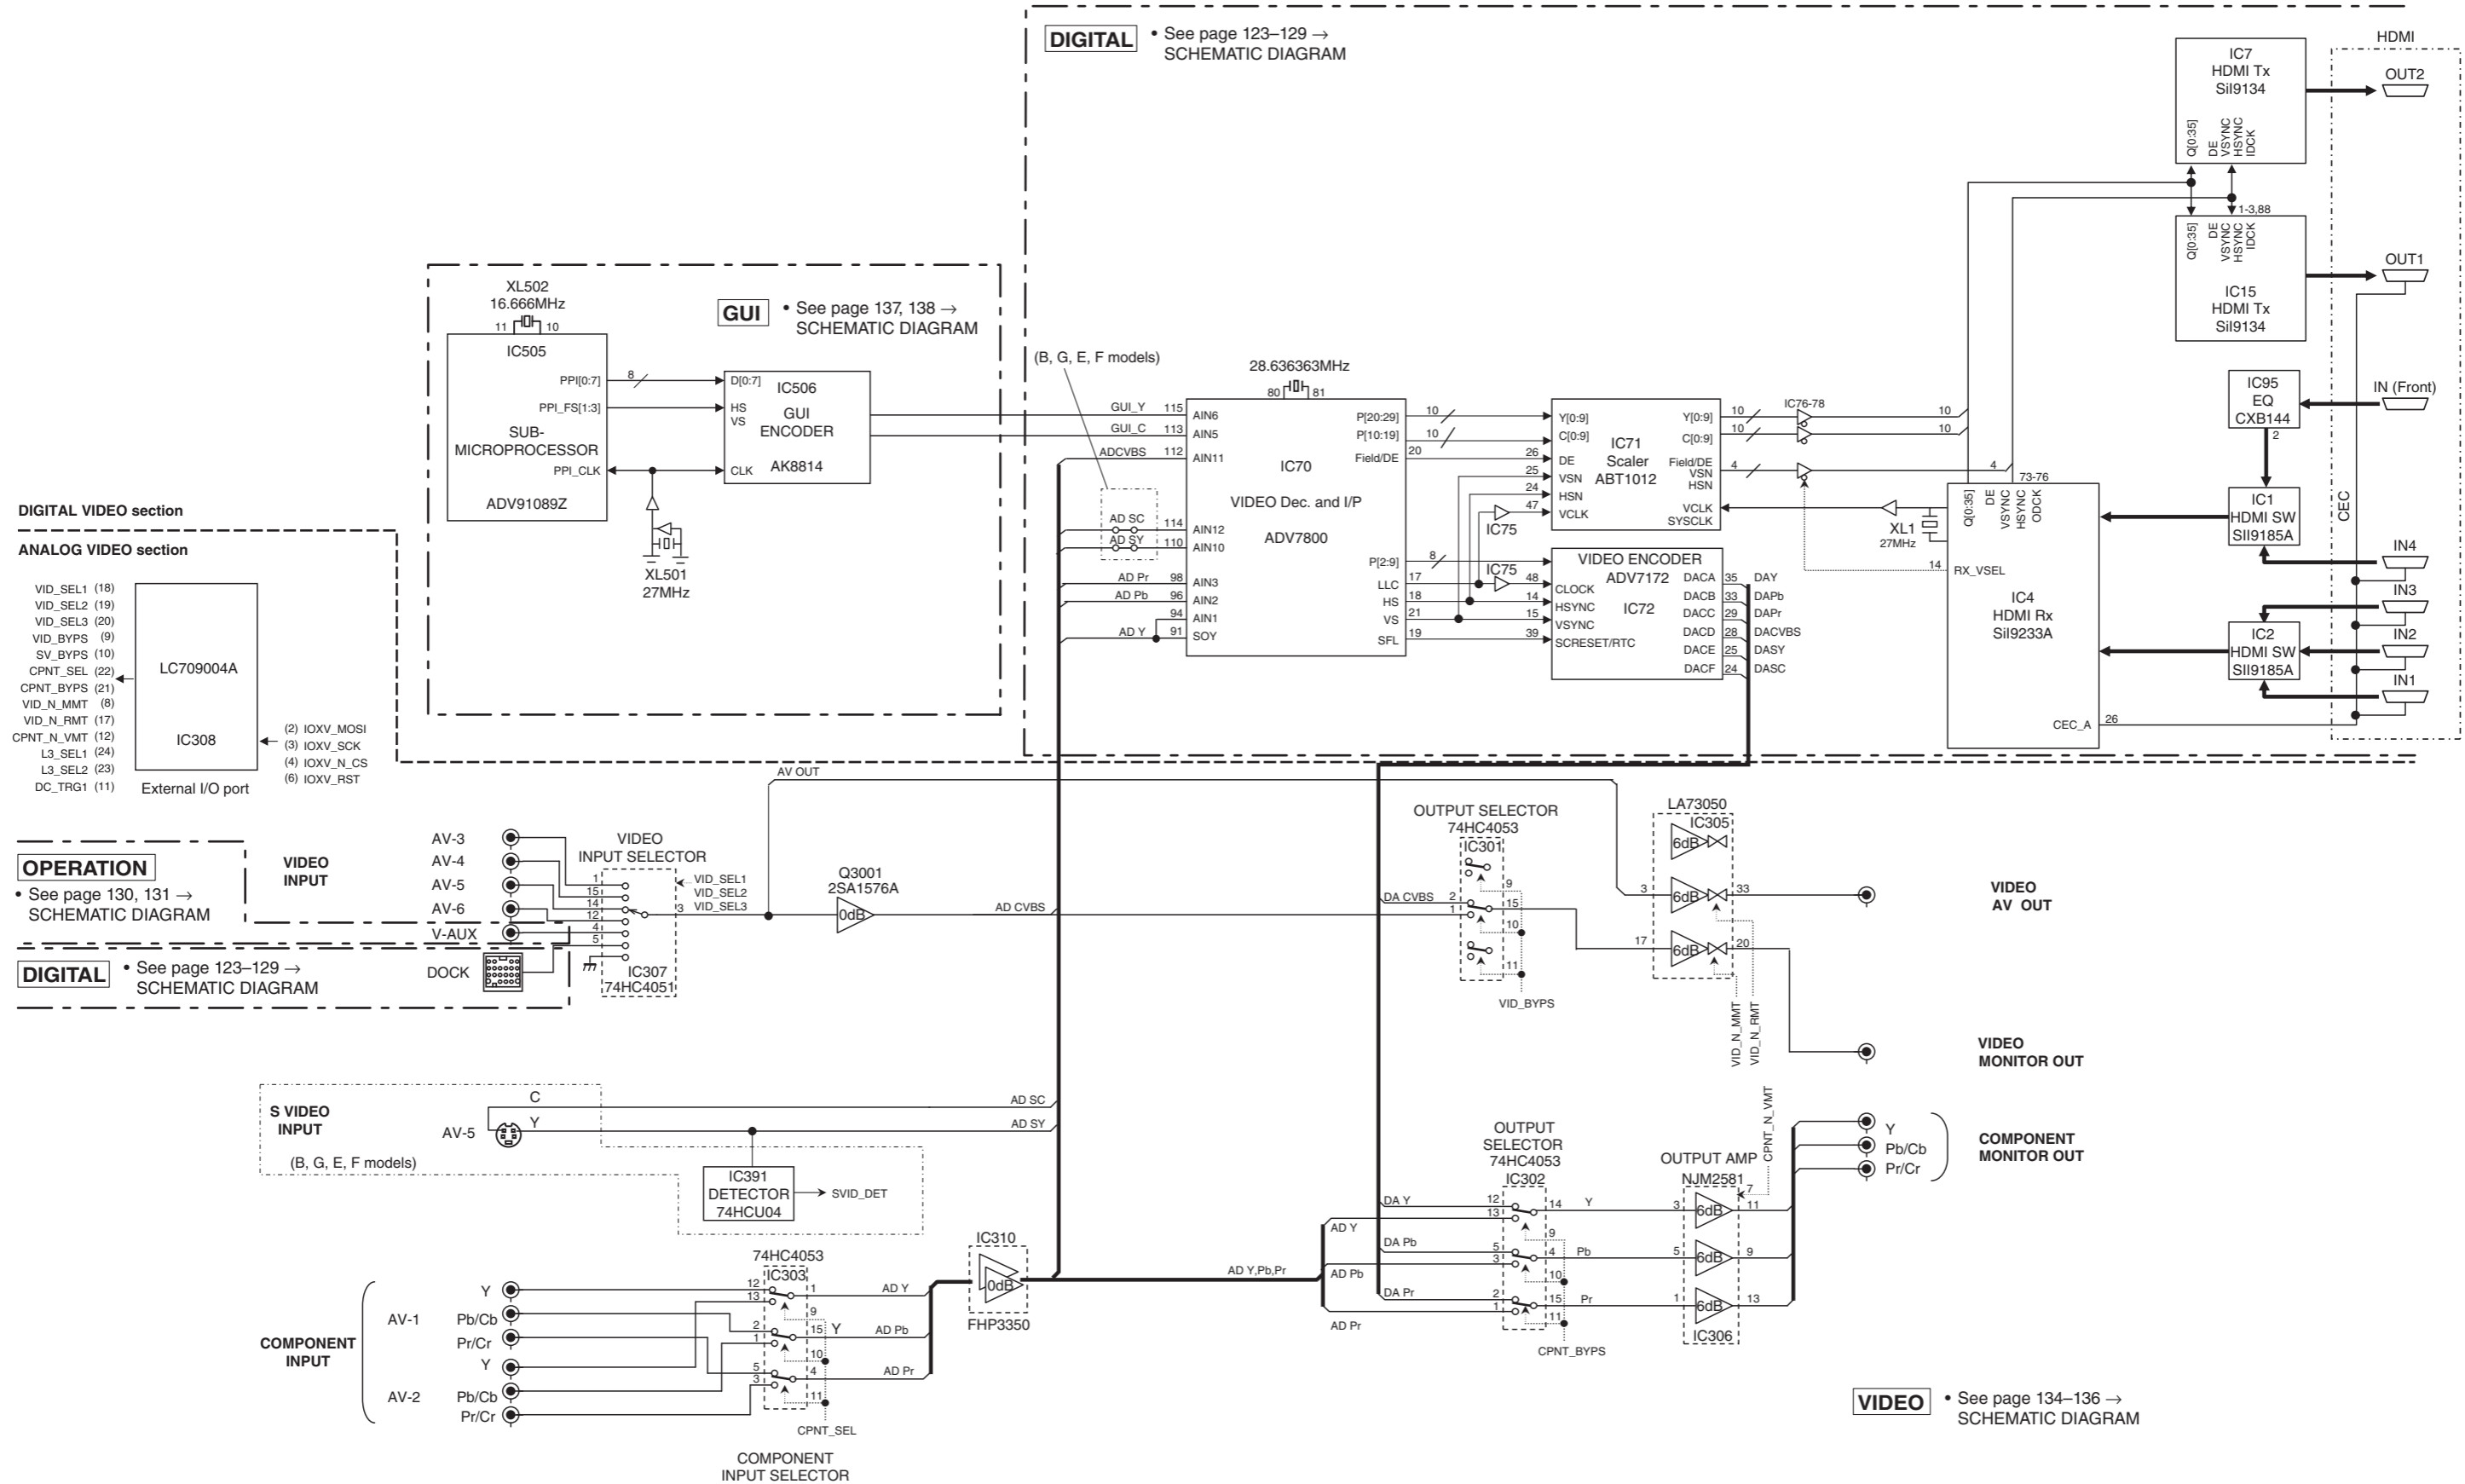


Power Supply Section Block Diagram

1
2
3
4
5
6
7


MAIN • See page 132, 133 → SCHEMATIC DIAGRAM

DIGITAL • See page 123-129 → SCHEMATIC DIAGRAM

ACDC • See page 139 → SCHEMATIC DIAGRAM

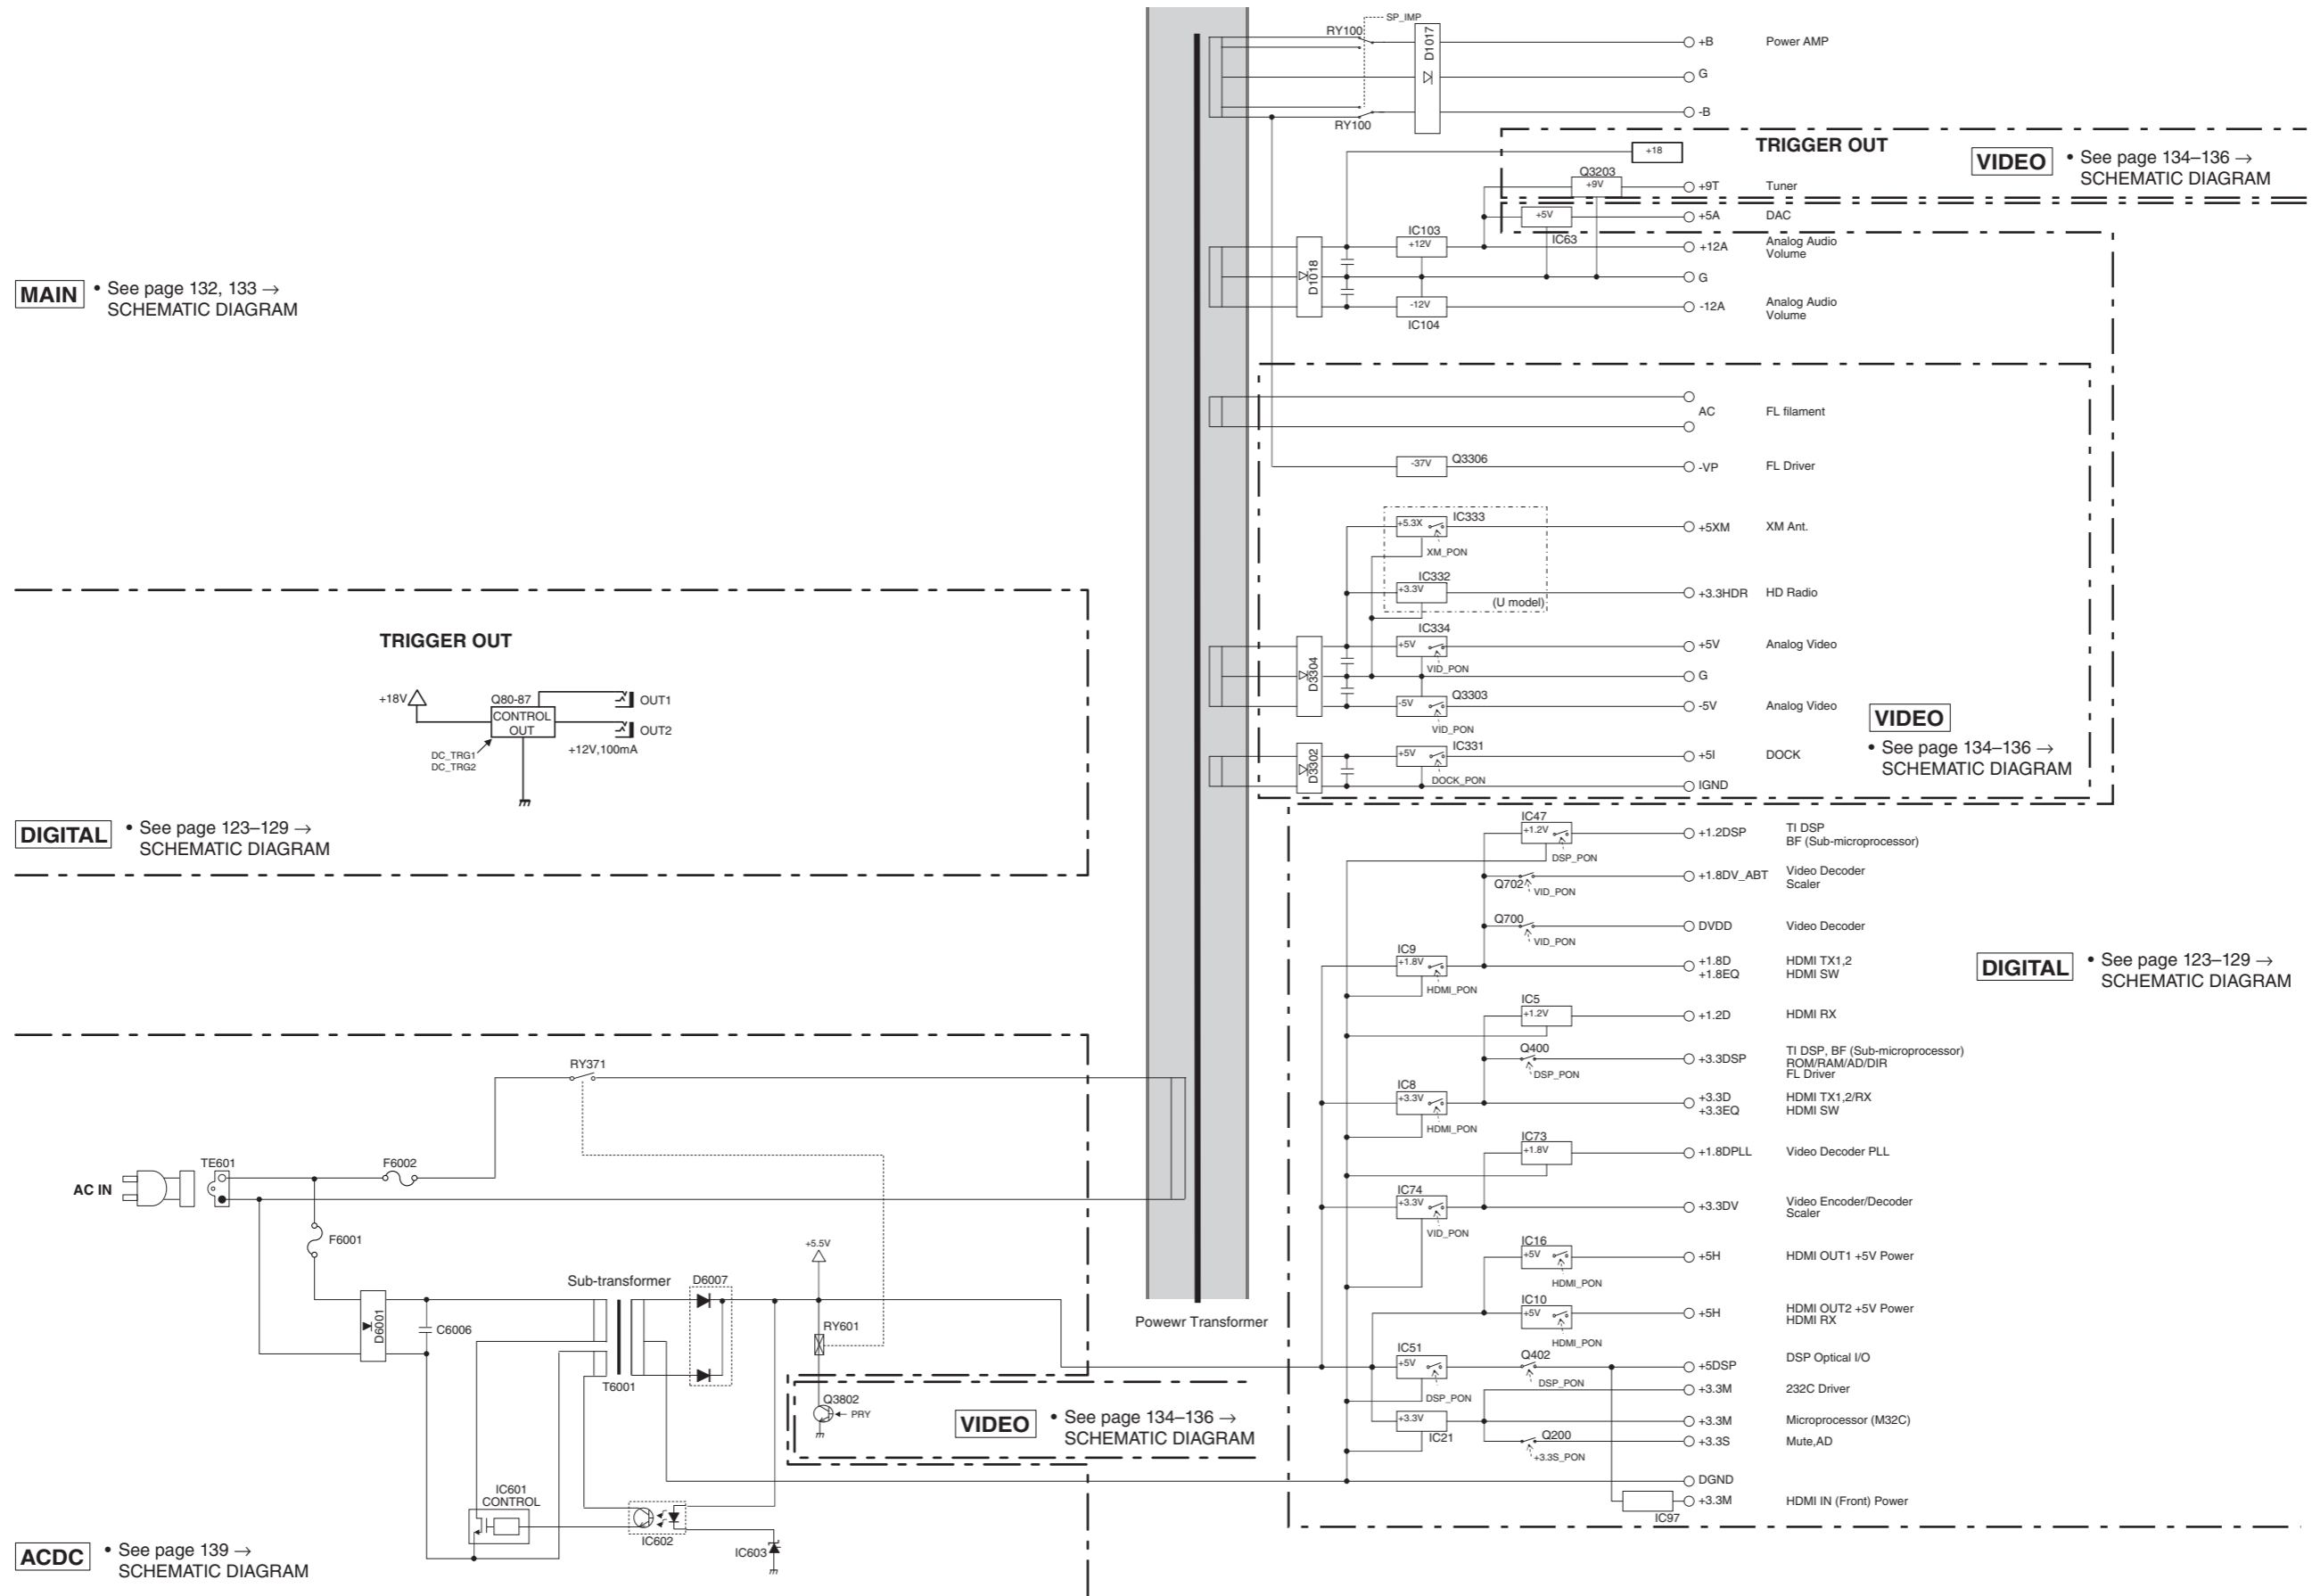

TRIGGER OUT




VIDEO • See page 134-136 → SCHEMATIC DIAGRAM

VIDEO • See page 134-136 → SCHEMATIC DIAGRAM

VIDEO • See page 134-136 → SCHEMATIC DIAGRAM

DIGITAL • See page 123-129 → SCHEMATIC DIAGRAM

DIGITAL (1) P.C.B. (Side B)


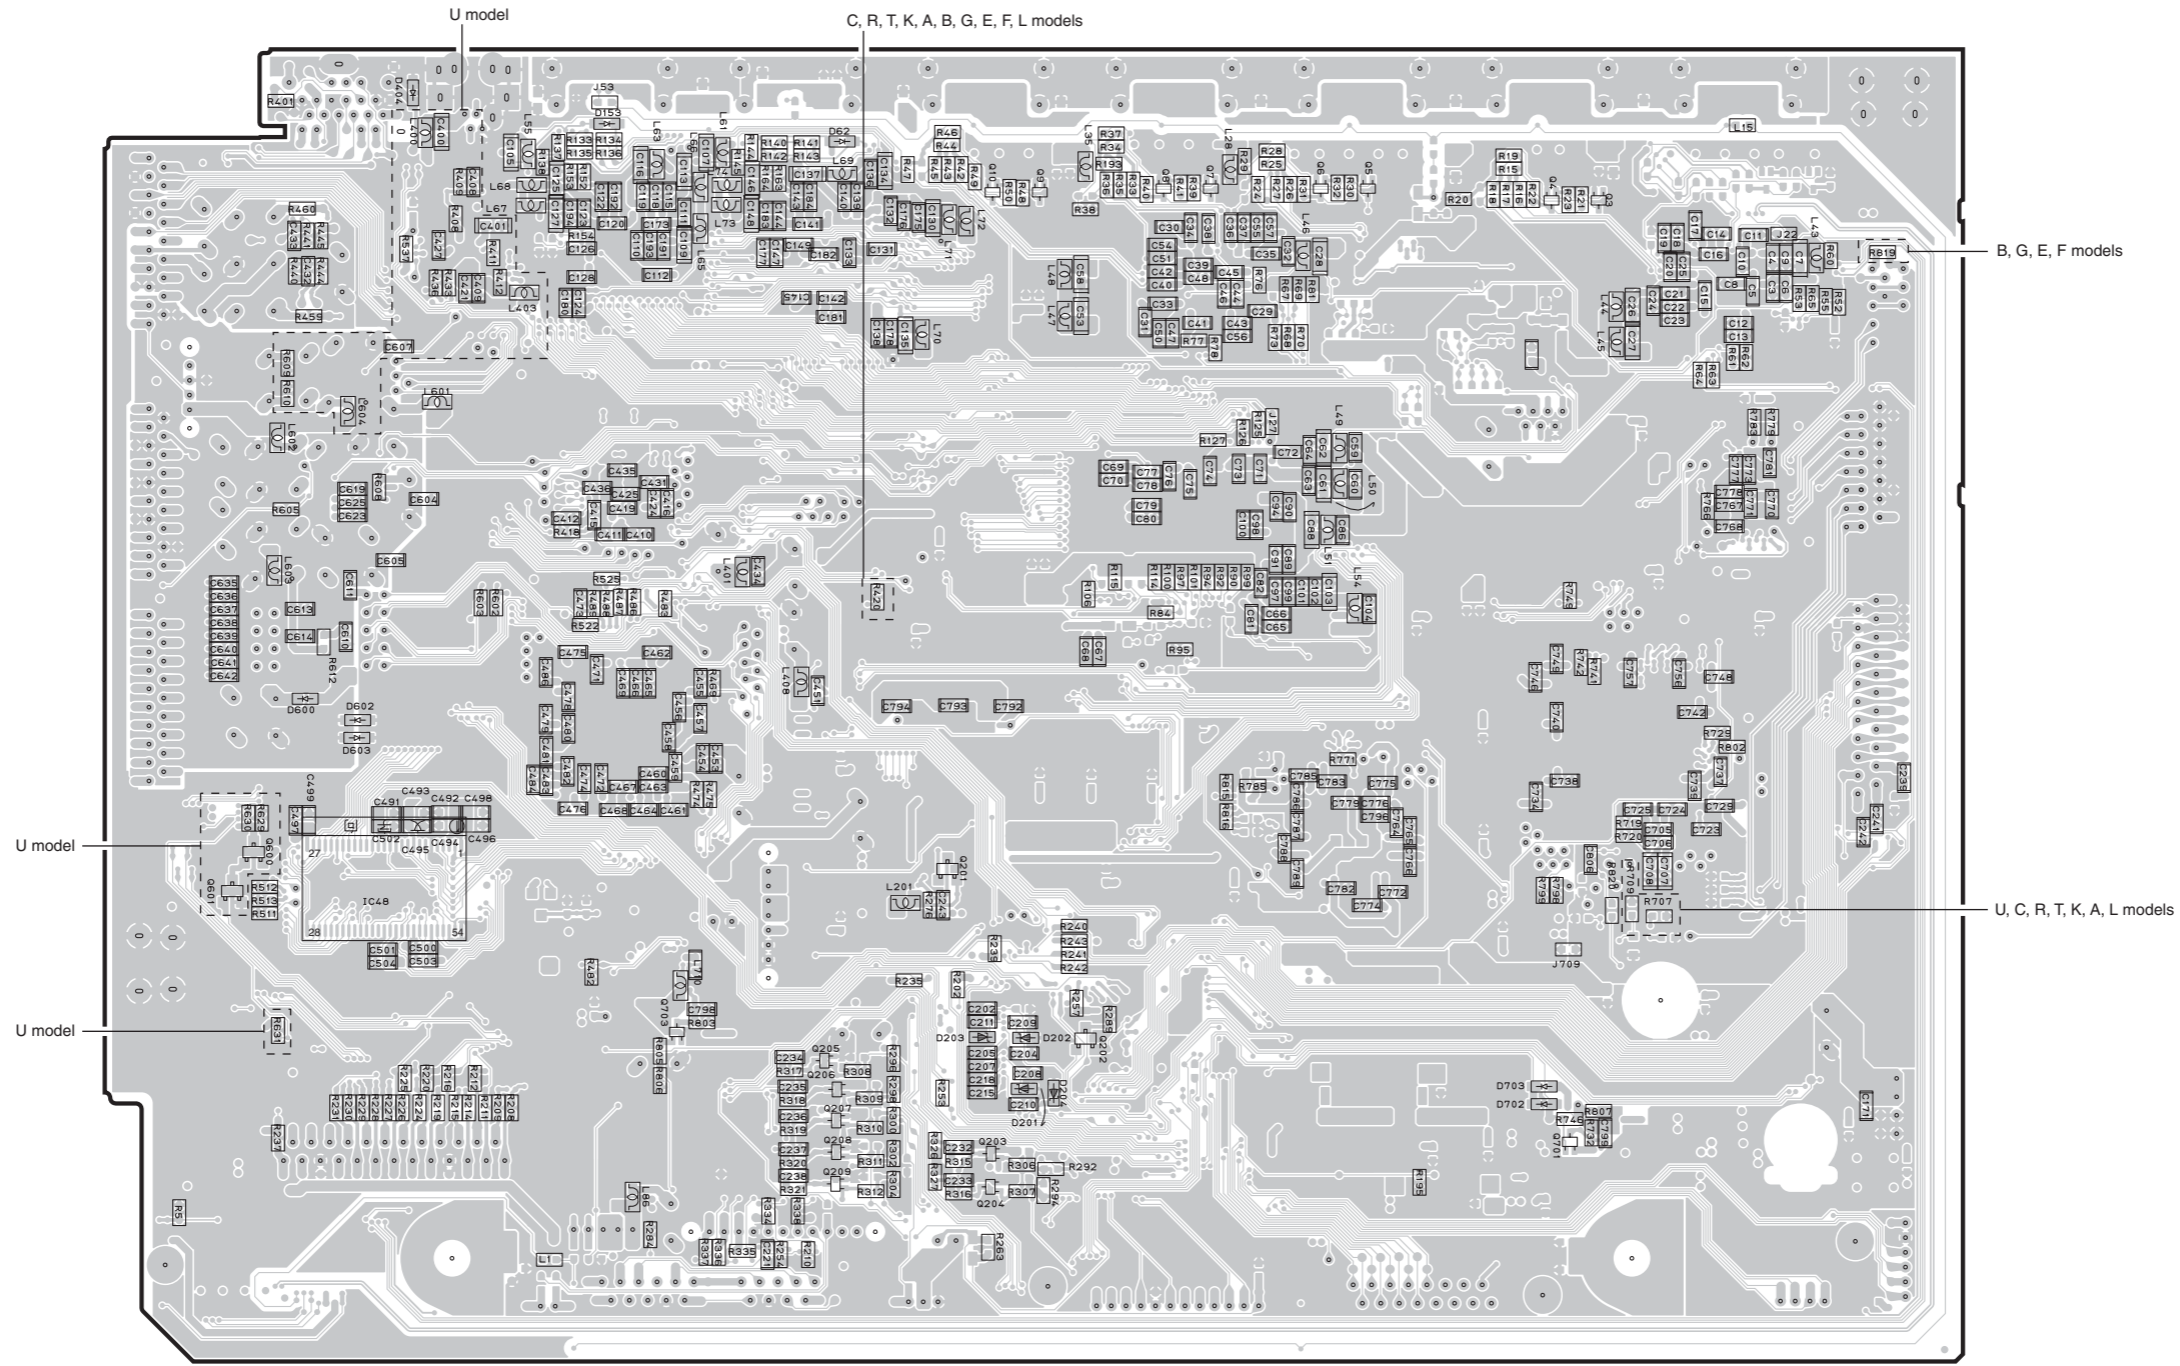


• Semiconductor Location

| Ref no. | Location |
|---------|----------|
| D62 | D2 |
| D153 | D2 |
| D201 | E5 |
| D202 | E5 |
| D203 | E5 |
| D204 | E6 |
| D404 | C2 |
| D600 | C4 |
| D602 | C4 |
| D603 | C4 |
| D702 | G6 |
| D703 | G5 |
| IC48 | C5 |
| Q3 | G3 |
| Q4 | G3 |
| Q5 | F3 |
| Q6 | F3 |
| Q7 | F3 |
| Q8 | E3 |
| Q9 | E3 |
| Q10 | E3 |
| Q201 | E5 |
| Q202 | E5 |
| Q203 | E6 |
| Q204 | E6 |
| Q205 | D5 |
| Q206 | D5 |
| Q207 | D6 |
| Q208 | D6 |
| Q209 | D6 |
| Q600 | B5 |
| Q601 | B5 |
| Q701 | G6 |
| Q703 | B5 |

DIGITAL (2) P.C.B. (Side A)

DIGITAL (3) P.C.B. (Side A)

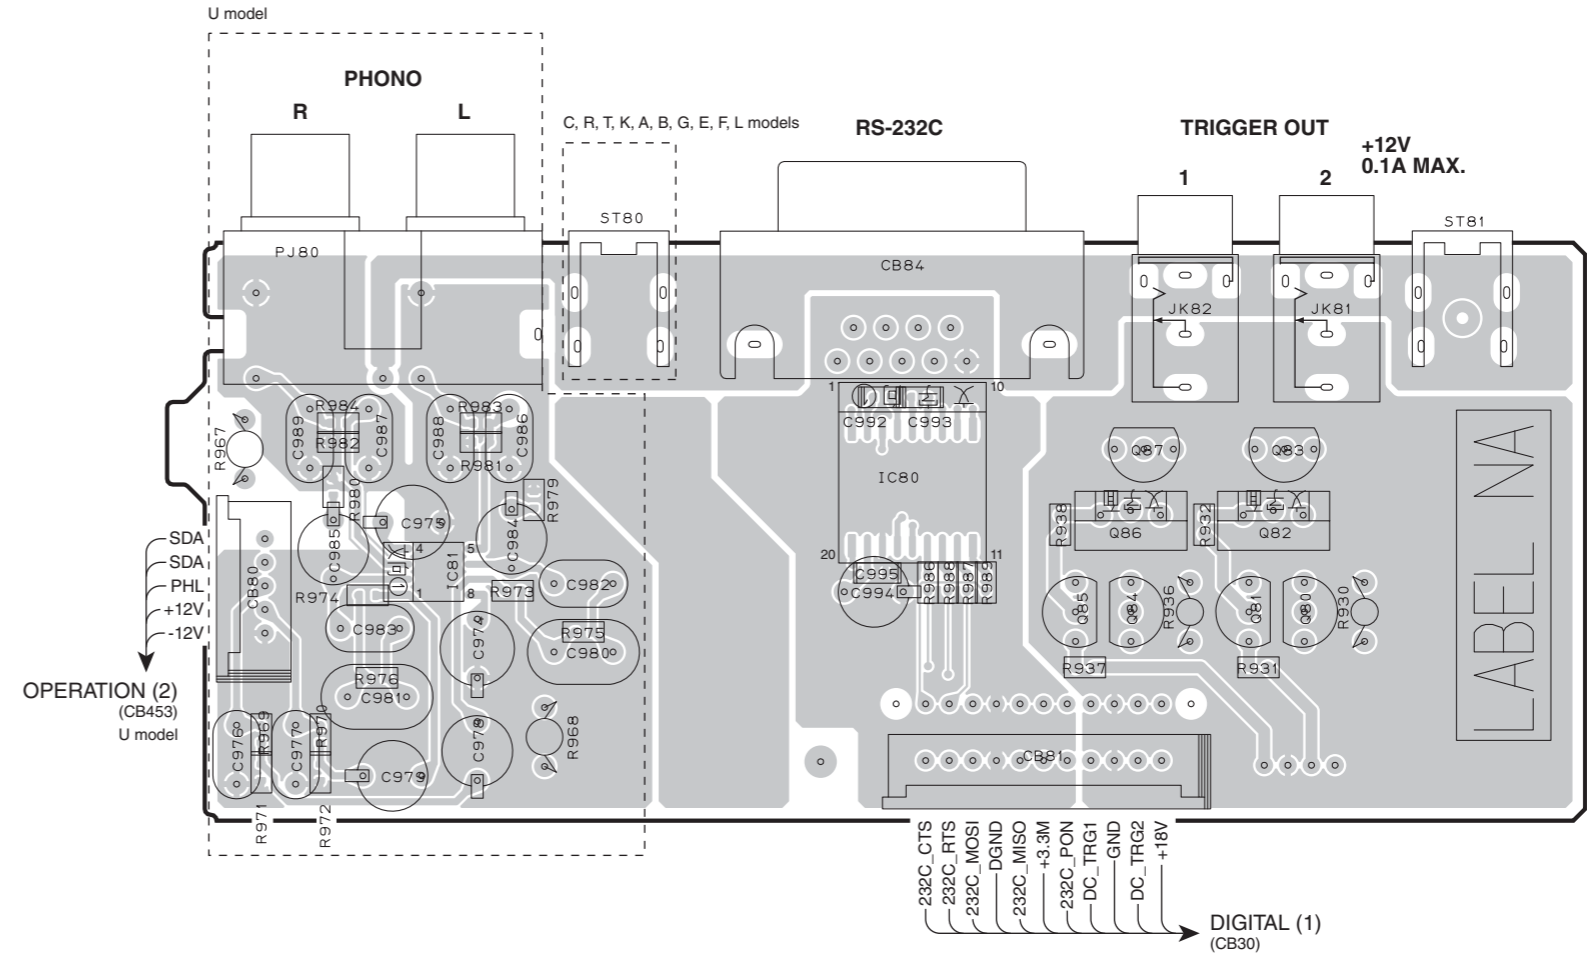
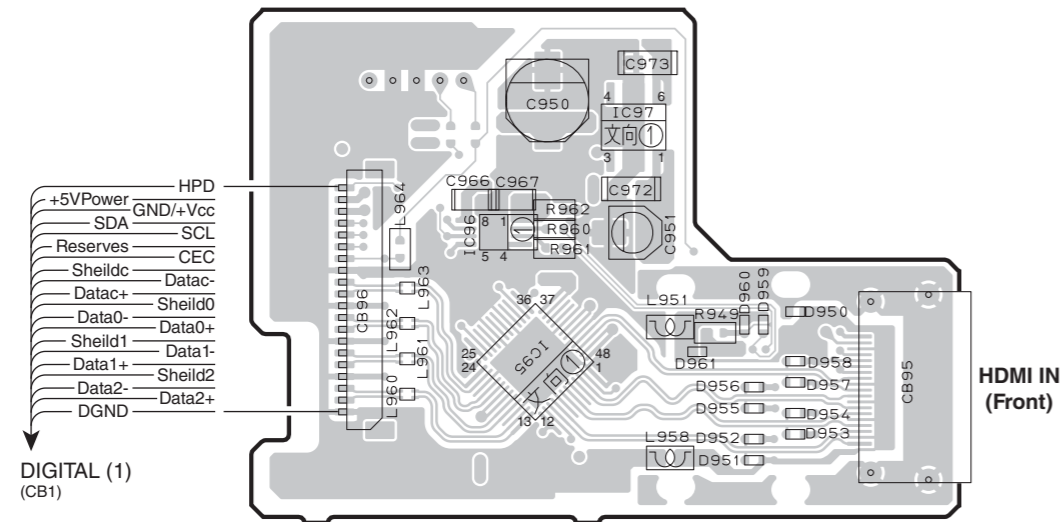


• Semiconductor Location

| Ref no. | Location | Ref no. | Location |
|---------|----------|---------|----------|
| D950 | D4 | IC81 | F4 |
| D951 | D4 | IC95 | C4 |
| D952 | D4 | IC96 | C4 |
| D953 | D4 | IC97 | D3 |
| D954 | D4 | Q80 | I4 |
| D955 | D4 | Q81 | I4 |
| D956 | D4 | Q82 | I4 |
| D957 | D4 | Q83 | I4 |
| D958 | D4 | Q84 | I4 |
| D959 | D4 | Q85 | I4 |
| D960 | D4 | Q86 | I4 |
| D961 | D4 | Q87 | I4 |
| IC80 | H4 | | |

DIGITAL (2) P.C.B. (Side B)


DIGITAL (3) P.C.B. (Side B)

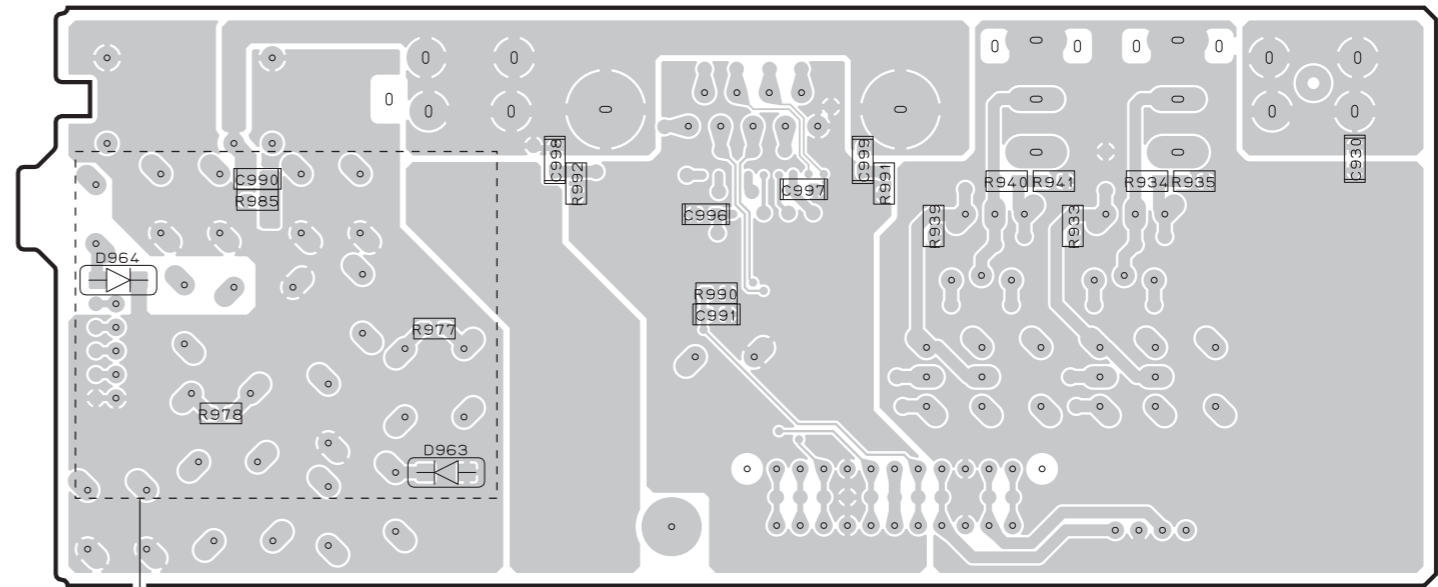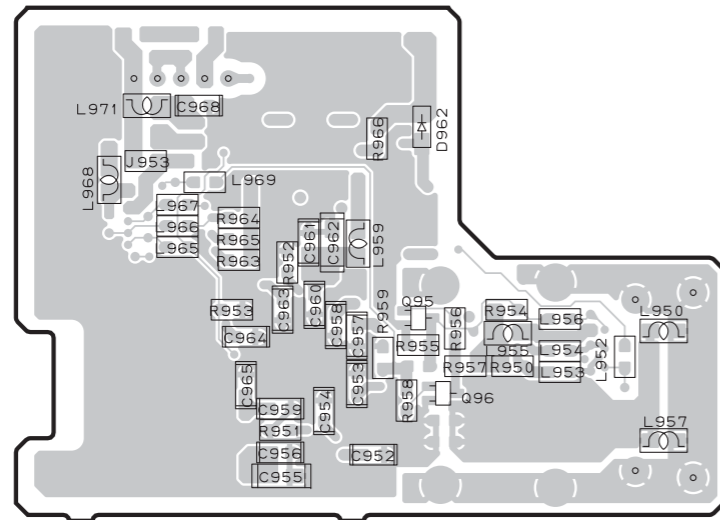

• Semiconductor Location

| Ref no. | Location |
|---------|----------|
| D962 | C3 |
| D963 | G4 |
| D964 | F4 |
| Q95 | C4 |
| Q96 | C4 |


OPERATION (1) P.C.B. (Side A)

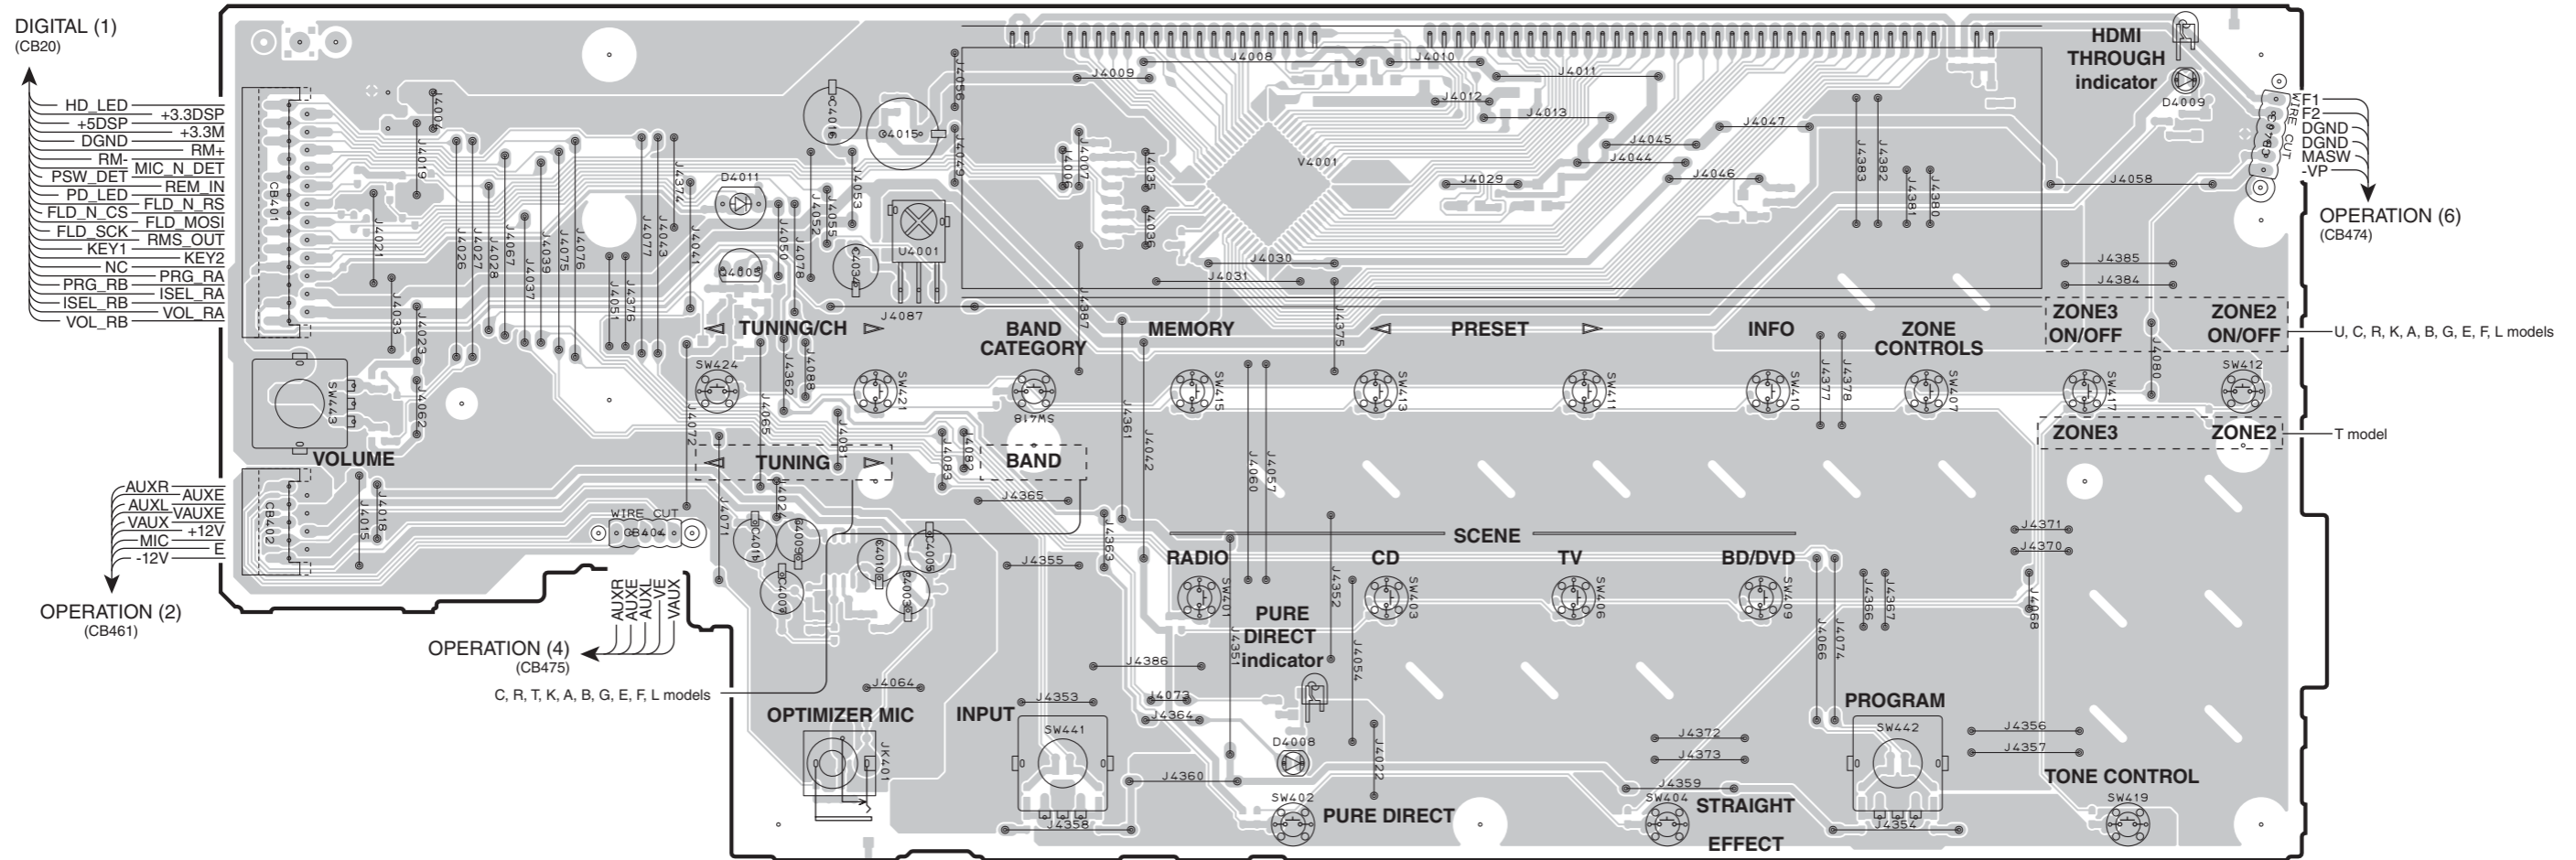

• Semiconductor Location

| Ref no. | Location |
|---------|----------|
| D4008 | F5 |
| D4009 | I3 |
| D4011 | D3 |
| Q4005 | D3 |


OPERATION (1) P.C.B. (Side B)

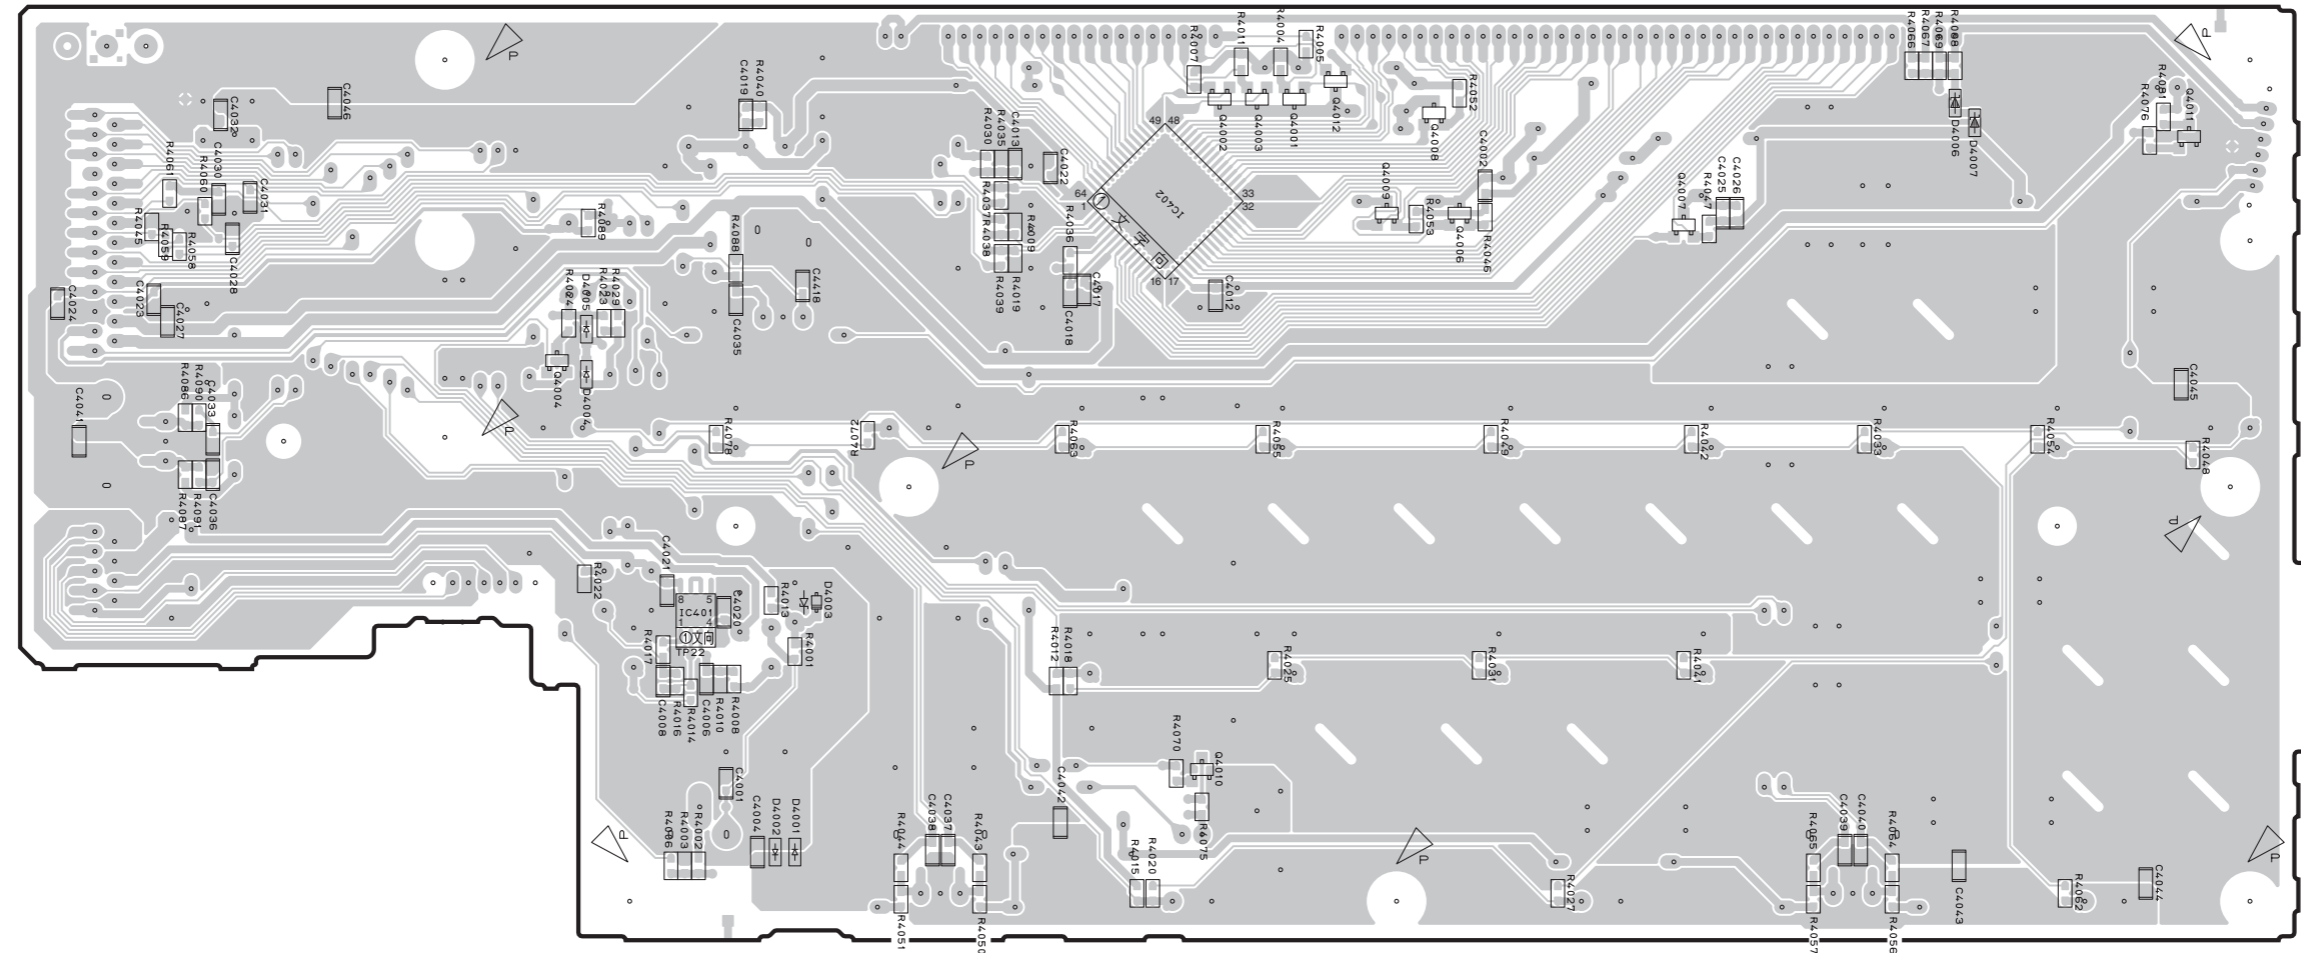

• Semiconductor Location

| Ref no. | Location |
|---------|----------|
| D4001 | D5 |
| D4002 | D5 |
| D4003 | D4 |
| D4004 | C4 |
| D4005 | C4 |
| D4006 | H3 |
| D4007 | H3 |
| IC401 | D5 |
| IC402 | E3 |
| Q4001 | F3 |
| Q4002 | F3 |
| Q4003 | F3 |
| Q4004 | C4 |
| Q4006 | F3 |
| Q4007 | G3 |
| Q4008 | F3 |
| Q4009 | F3 |
| Q4010 | E5 |
| Q4011 | I3 |
| Q4012 | F3 |

OPERATION (2) P.C.B. (Side B)

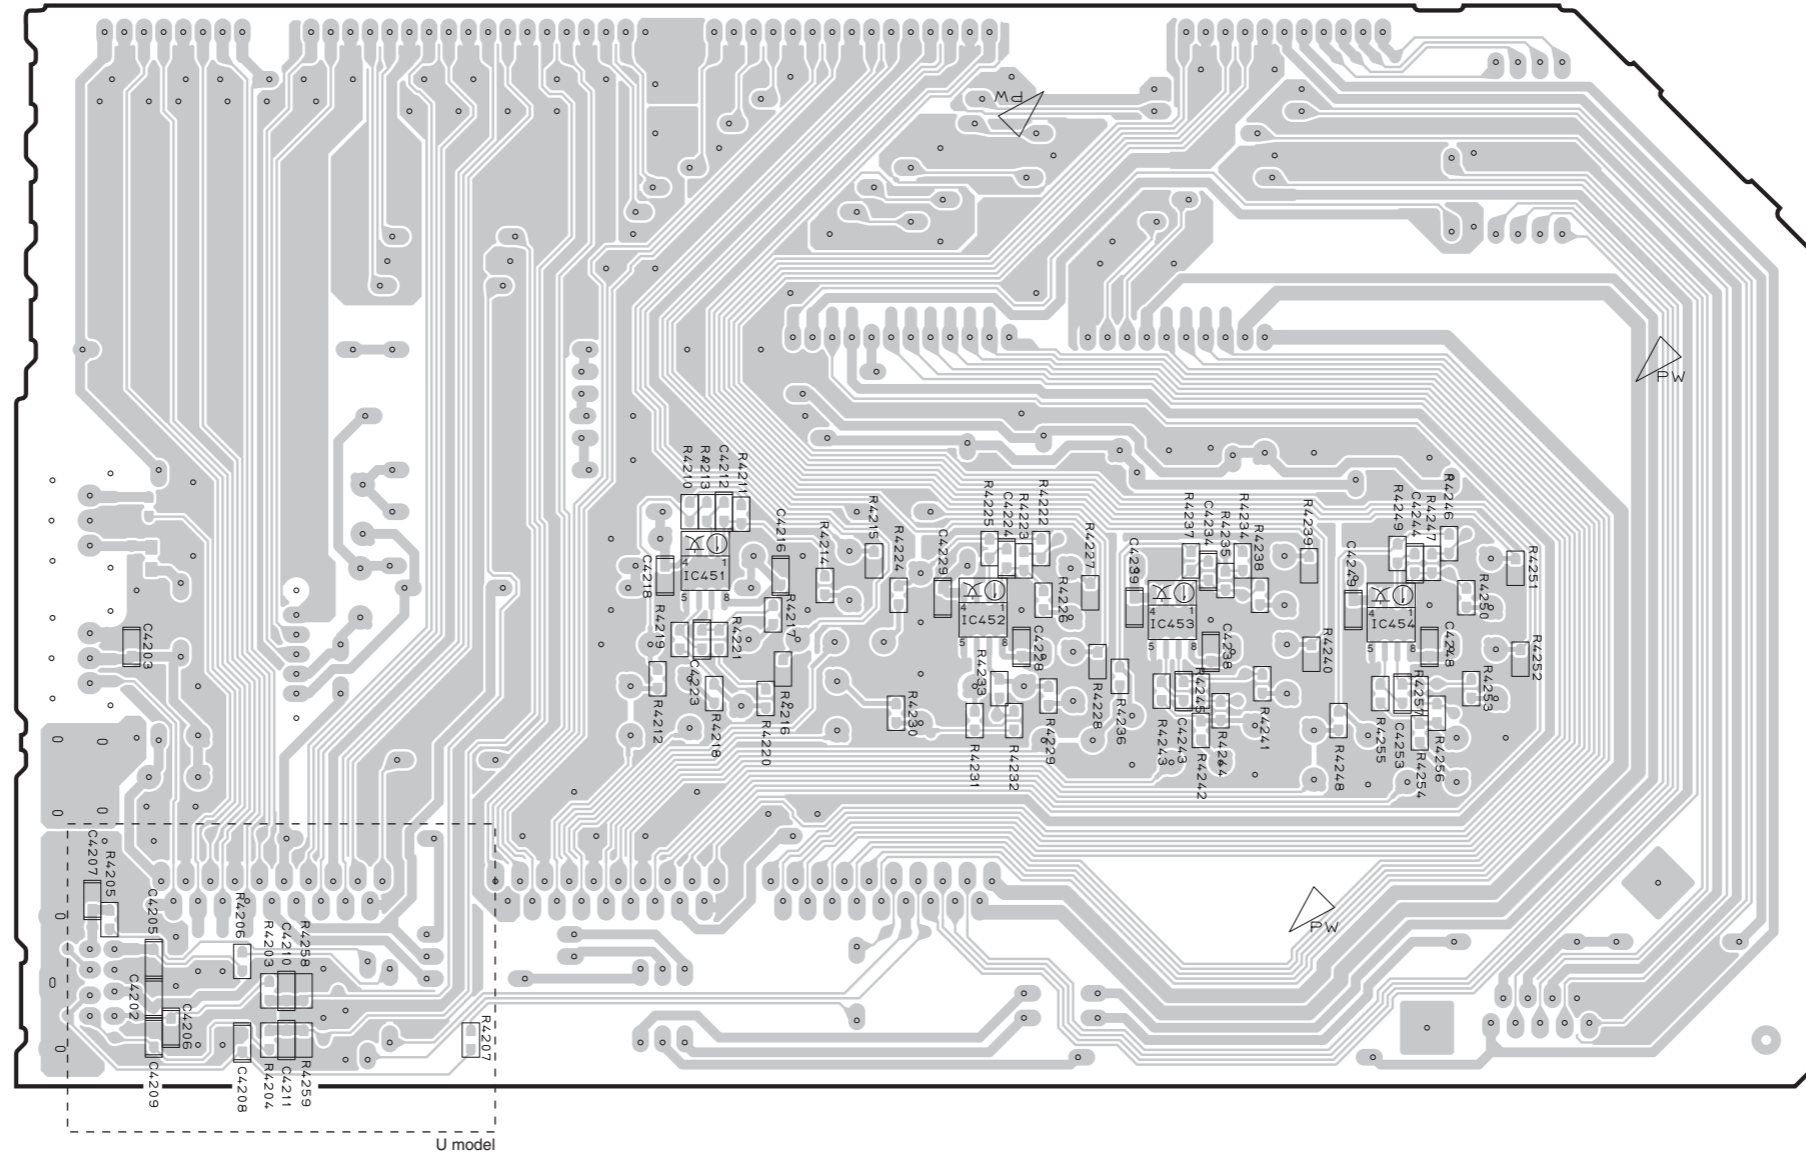


• Semiconductor Location


| Ref no. | Location |
|---------|----------|
| IC451 | E4 |
| IC452 | F4 |
| IC453 | F4 |
| IC454 | G4 |

1
2
3
4
5
6
7


OPERATION (3) P.C.B. (Side B)




OPERATION (4) P.C.B. (Side B)

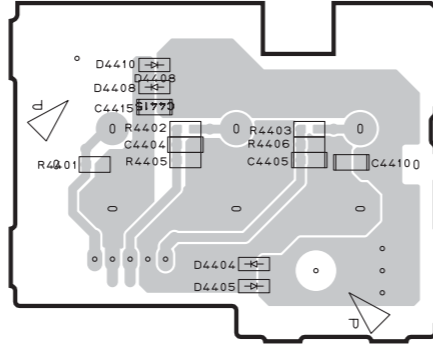


OPERATION (5) P.C.B. (Side B)



OPERATION (6) P.C.B. (Side B)

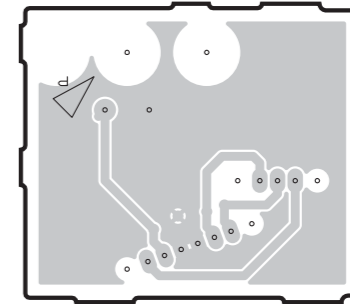


OPERATION (8) P.C.B. (Side B)

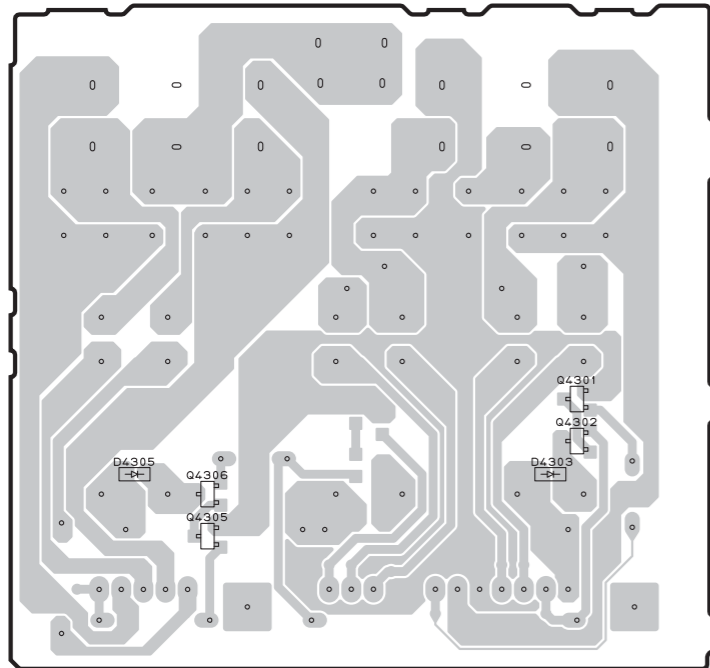


OPERATION (9) P.C.B. (Side B)

C, R, T, K, A, B, G, E, F, L models

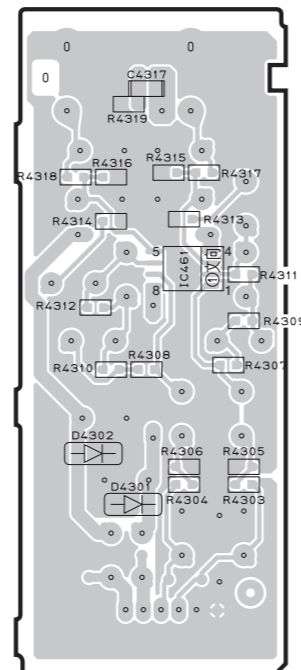


OPERATION (10) P.C.B. (Side B)

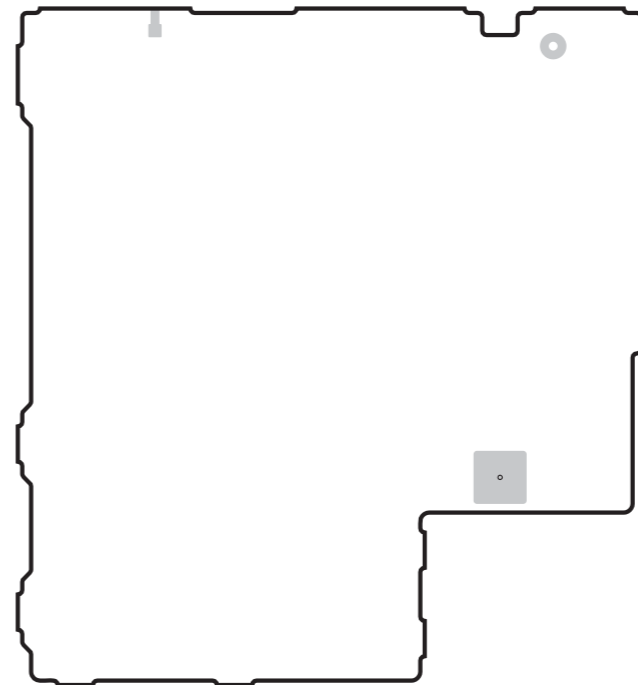

• Semiconductor Location

| Ref no. | Location |
|---------|----------|
| D4301 | D6 |
| D4302 | D6 |
| D4303 | C6 |
| D4305 | A6 |
| D4401 | B2 |
| D4402 | B2 |
| D4404 | D3 |
| D4405 | D3 |
| D4408 | D2 |
| D4410 | D2 |
| IC461 | D5 |
| Q4301 | C6 |
| Q4302 | C6 |
| Q4305 | A6 |
| Q4306 | A6 |

MAIN (1) P.C.B. (Side A)

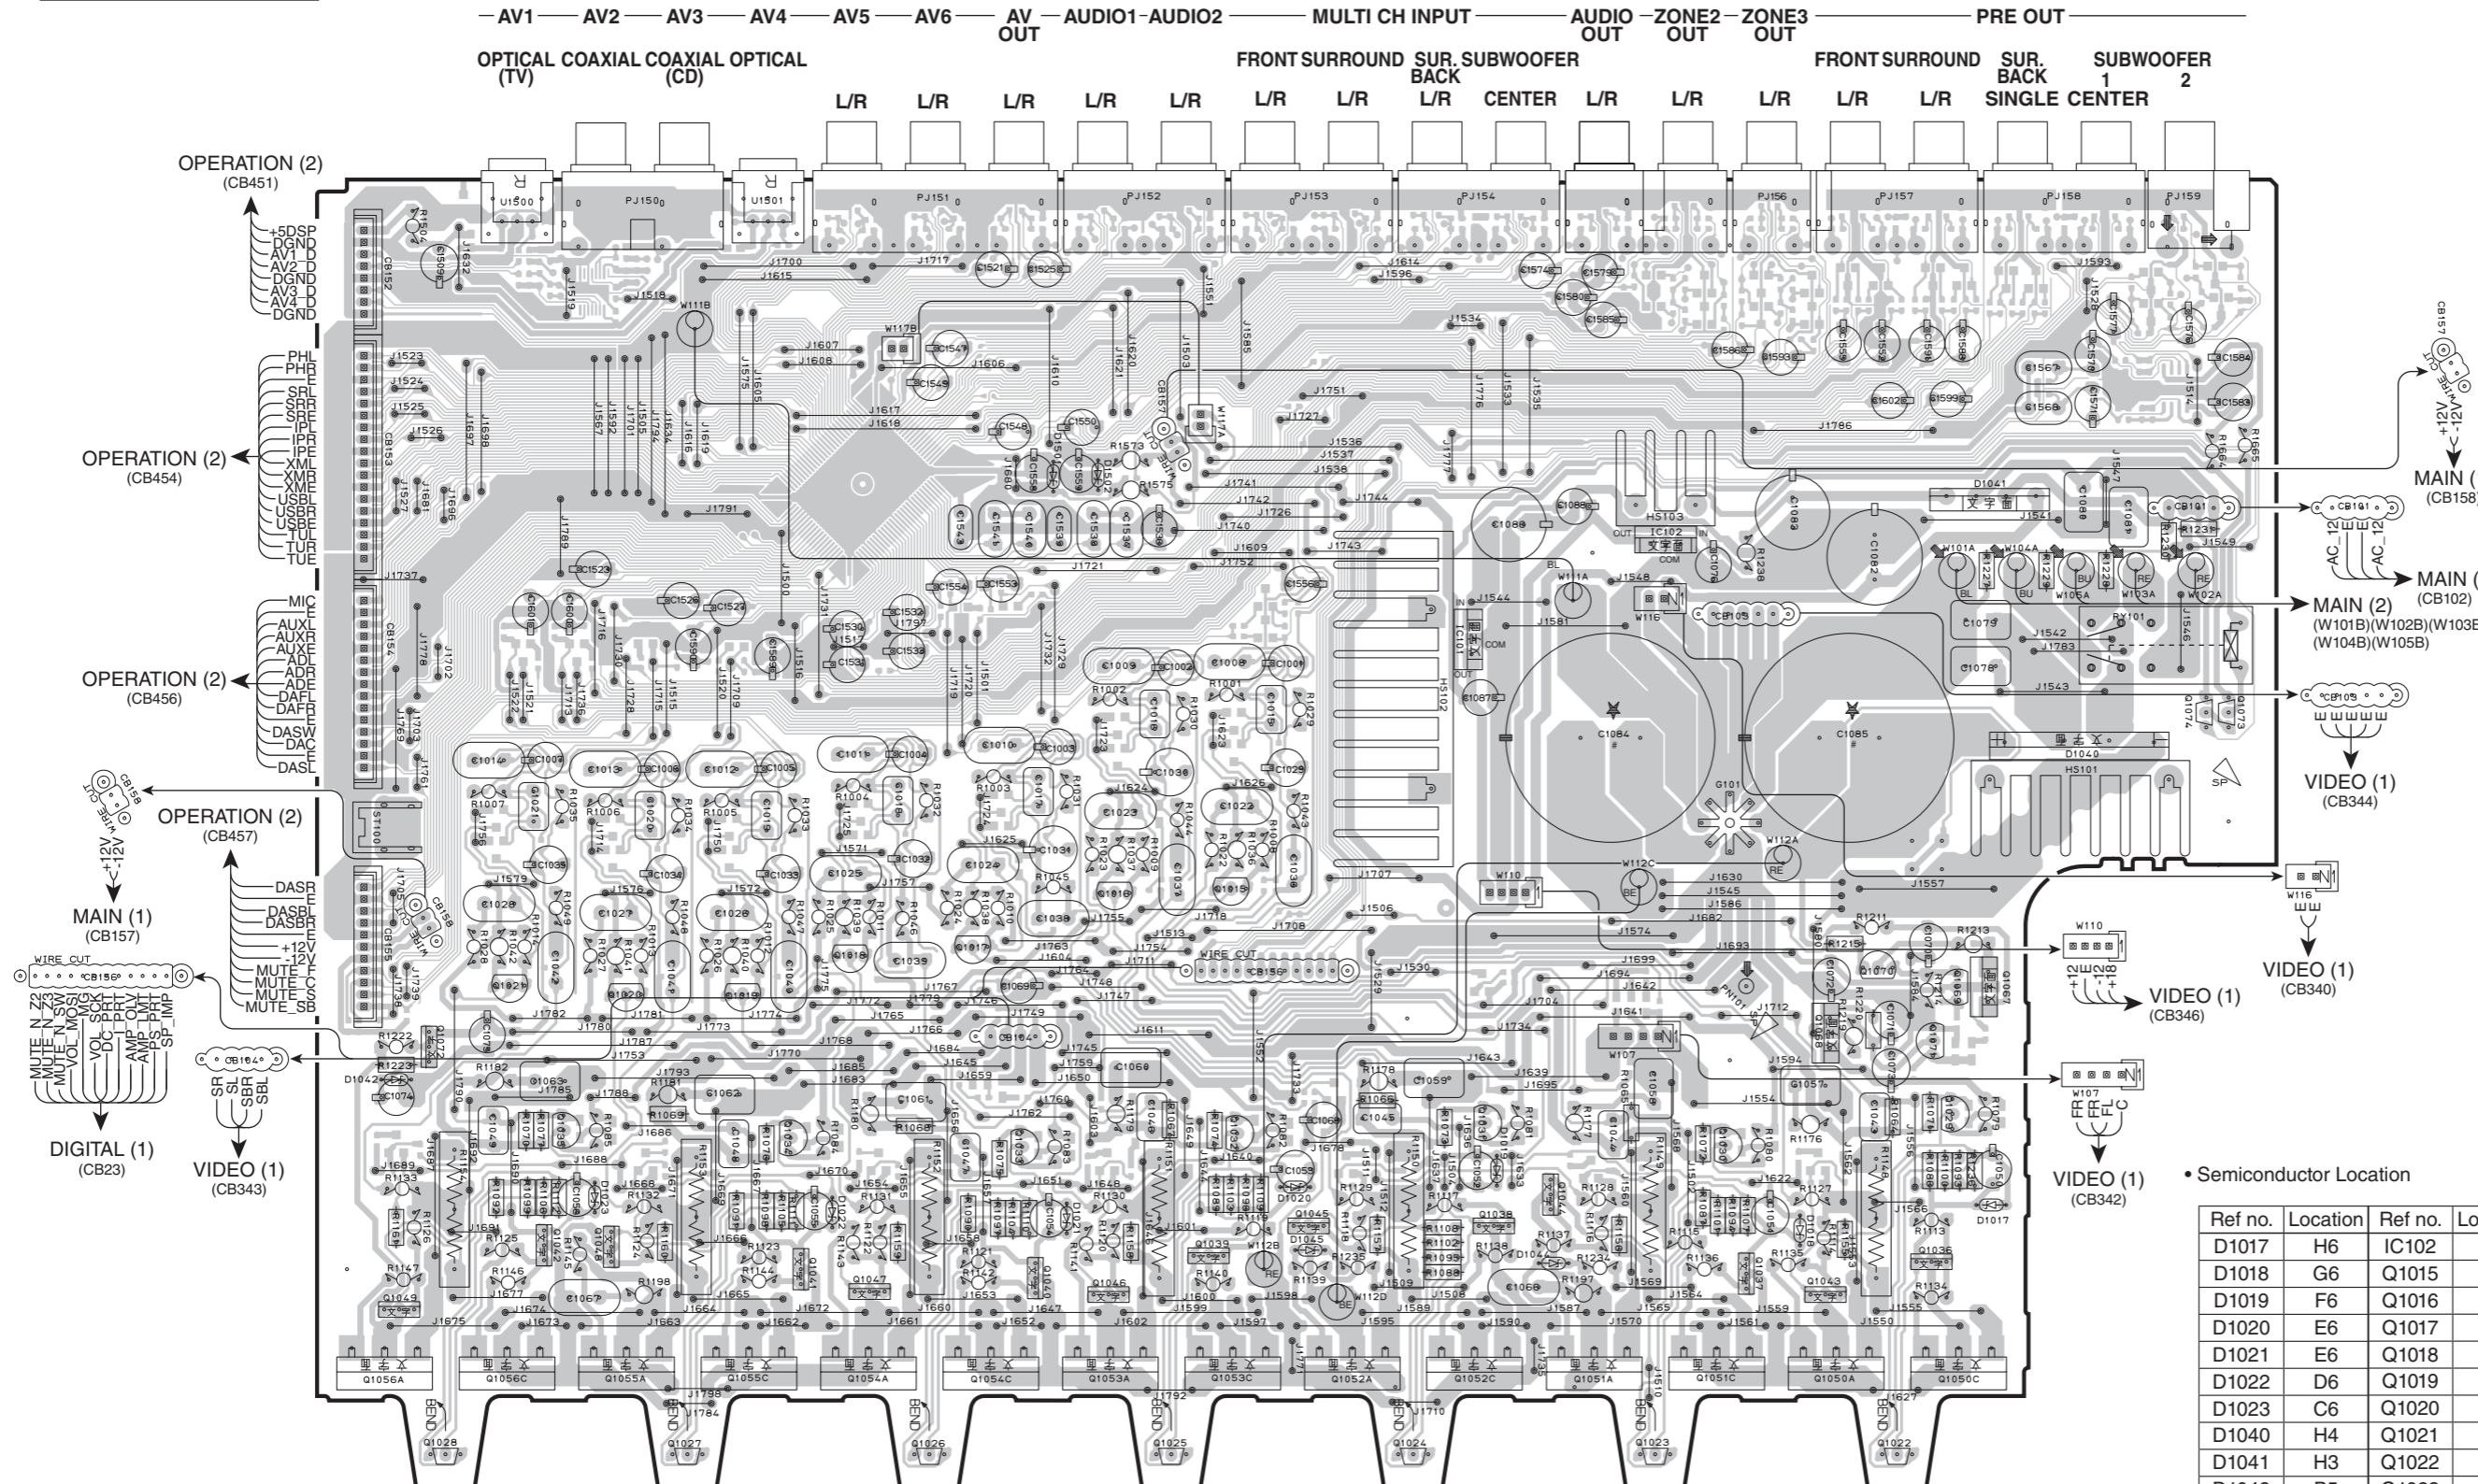


| Ref no. | Location |
|---------|----------|
| Q1029 | H5 |
| Q1030 | G5 |
| Q1031 | F5 |
| Q1032 | E5 |
| Q1033 | D5 |
| Q1034 | D5 |
| Q1035 | C5 |
| Q1036 | H6 |
| Q1037 | G6 |
| Q1038 | F6 |
| Q1039 | E6 |
| Q1040 | E6 |
| Q1041 | D6 |
| Q1042 | C6 |
| Q1043 | G6 |
| Q1044 | F6 |
| Q1045 | E6 |
| Q1046 | E6 |
| Q1047 | D6 |
| Q1048 | C6 |
| Q1049 | B6 |
| Q1050A | G6 |
| Q1050C | H6 |
| Q1051A | G6 |
| Q1051C | G6 |
| Q1052A | F6 |
| Q1052C | F6 |
| Q1053A | E6 |
| Q1053C | E6 |
| Q1054A | D6 |
| Q1054C | D6 |
| Q1055A | C6 |
| Q1055C | D6 |
| Q1056A | B6 |
| Q1056C | C6 |
| Q1067 | H5 |
| Q1068 | G5 |
| Q1069 | H5 |
| Q1070 | H5 |
| Q1071 | H5 |
| Q1072 | B5 |
| Q1073 | I4 |
| Q1074 | I4 |

• Semiconductor Location

| Ref no. | Location | Ref no. | Location | Ref no. | Location |
|---------|----------|---------|----------|---------|----------|
| D1017 | H6 | IC102 | G3 | Q1053A | E6 |
| D1018 | G6 | Q1015 | E5 | Q1053C | E6 |
| D1019 | F6 | Q1016 | E5 | Q1054A | D6 |
| D1020 | E6 | Q1017 | D5 | Q1054C | D6 |
| D1021 | E6 | Q1018 | D5 | Q1055A | C6 |
| D1022 | D6 | Q1019 | C5 | Q1055C | D6 |
| D1023 | C6 | Q1020 | C5 | Q1056A | B6 |
| D1040 | H4 | Q1021 | C5 | Q1056C | C6 |
| D1041 | H3 | Q1022 | H7 | Q1067 | H5 |
| D1042 | B5 | Q1023 | G7 | Q1068 | G5 |
| D1044 | F6 | Q1024 | F7 | Q1069 | H5 |
| D1045 | F6 | Q1025 | E7 | Q1070 | H5 |
| D1501 | E3 | Q1026 | D7 | Q1071 | H5 |
| D1502 | E3 | Q1027 | C7 | Q1072 | B5 |
| IC101 | F4 | Q1028 | B7 | Q1073 | I4 |
| | | | | Q1074 | I4 |

MAIN (1) P.C.B. (Side B)

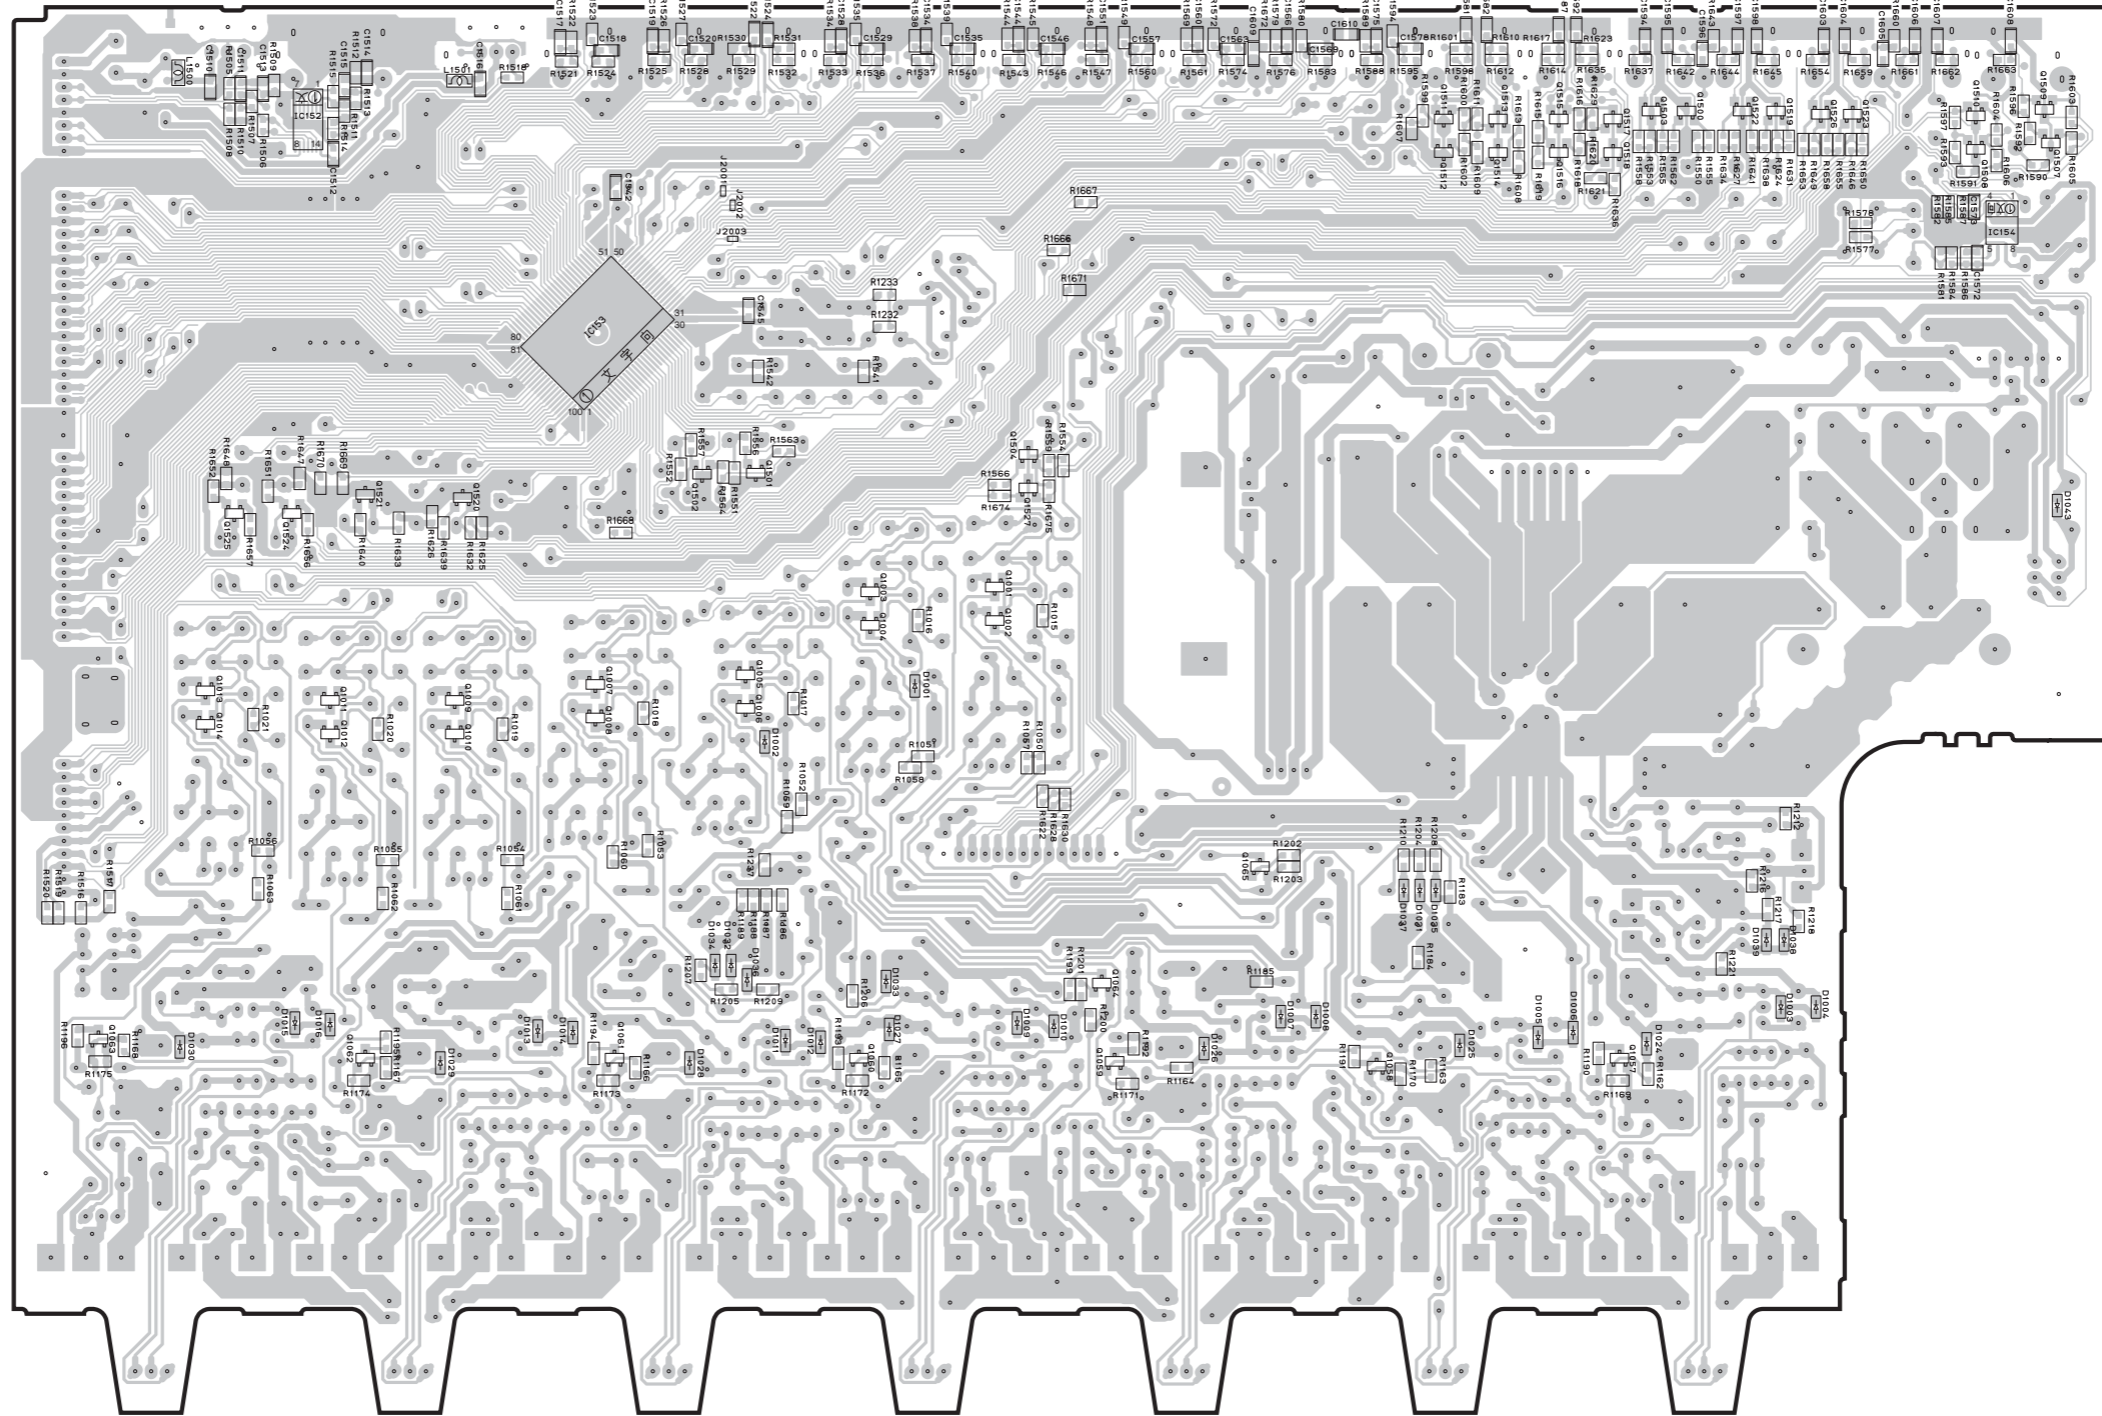

• Semiconductor Location

| Ref no. | Location | Ref no. | Location |
|---------|----------|---------|----------|
| D1001 | E4 | Q1008 | D4 |
| D1002 | D4 | Q1009 | C4 |
| D1003 | H5 | Q1010 | C4 |
| D1004 | H5 | Q1011 | C4 |
| D1005 | G5 | Q1012 | C4 |
| D1006 | G5 | Q1013 | C4 |
| D1007 | F5 | Q1014 | C4 |
| D1008 | F5 | Q1057 | G6 |
| D1009 | E5 | Q1058 | F6 |
| D1010 | E5 | Q1059 | F6 |
| D1011 | E5 | Q1060 | E6 |
| D1012 | E5 | Q1061 | D6 |
| D1013 | D5 | Q1062 | C6 |
| D1014 | D5 | Q1063 | B5 |
| D1015 | C5 | Q1064 | F5 |
| D1016 | C5 | Q1065 | F5 |
| D1024 | G5 | Q1500 | G2 |
| D1025 | G5 | Q1501 | D4 |
| D1026 | F5 | Q1502 | D4 |
| D1027 | E5 | Q1503 | G2 |
| D1028 | D6 | Q1504 | E4 |
| D1029 | C6 | Q1507 | I2 |
| D1030 | C5 | Q1508 | H3 |
| D1031 | G5 | Q1509 | I2 |
| D1032 | D5 | Q1510 | H2 |
| D1033 | E5 | Q1511 | G2 |
| D1034 | D5 | Q1512 | G3 |
| D1035 | G5 | Q1513 | G2 |
| D1036 | D5 | Q1514 | G3 |
| D1037 | G5 | Q1515 | G2 |
| D1038 | H5 | Q1516 | G3 |
| D1039 | H5 | Q1517 | G2 |
| D1043 | I4 | Q1518 | G3 |
| IC152 | C2 | Q1519 | H2 |
| IC153 | D3 | Q1520 | C4 |
| IC154 | I3 | Q1521 | C4 |
| Q1001 | E4 | Q1522 | H2 |
| Q1002 | E4 | Q1523 | H2 |
| Q1003 | E4 | Q1524 | C4 |
| Q1004 | E4 | Q1525 | C4 |
| Q1005 | D4 | Q1526 | H2 |
| Q1006 | D4 | Q1527 | E4 |
| Q1007 | D4 | | |

1

MAIN (2) P.C.B. (Side B)




MAIN (3) P.C.B. (Side B)

MAIN (4) P.C.B. (Side B)

R, L models

R, L models

2

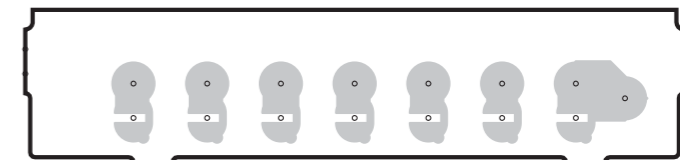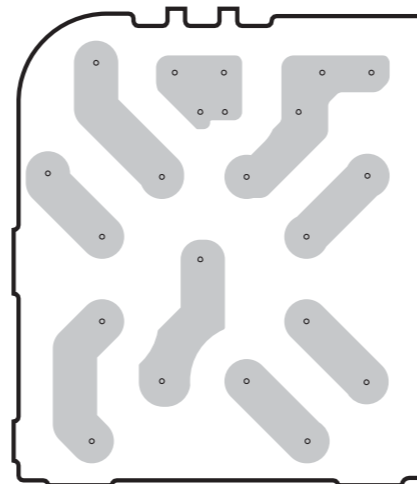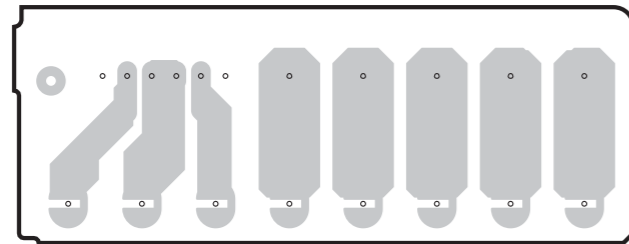


3

4

MAIN (6) P.C.B. (Side B)


5

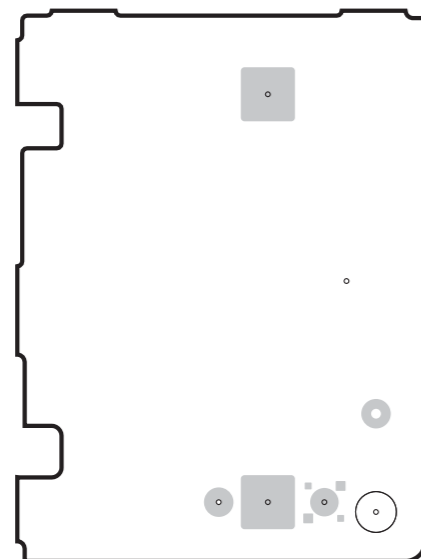

6

7


VIDEO (1) P.C.B. (Side A)

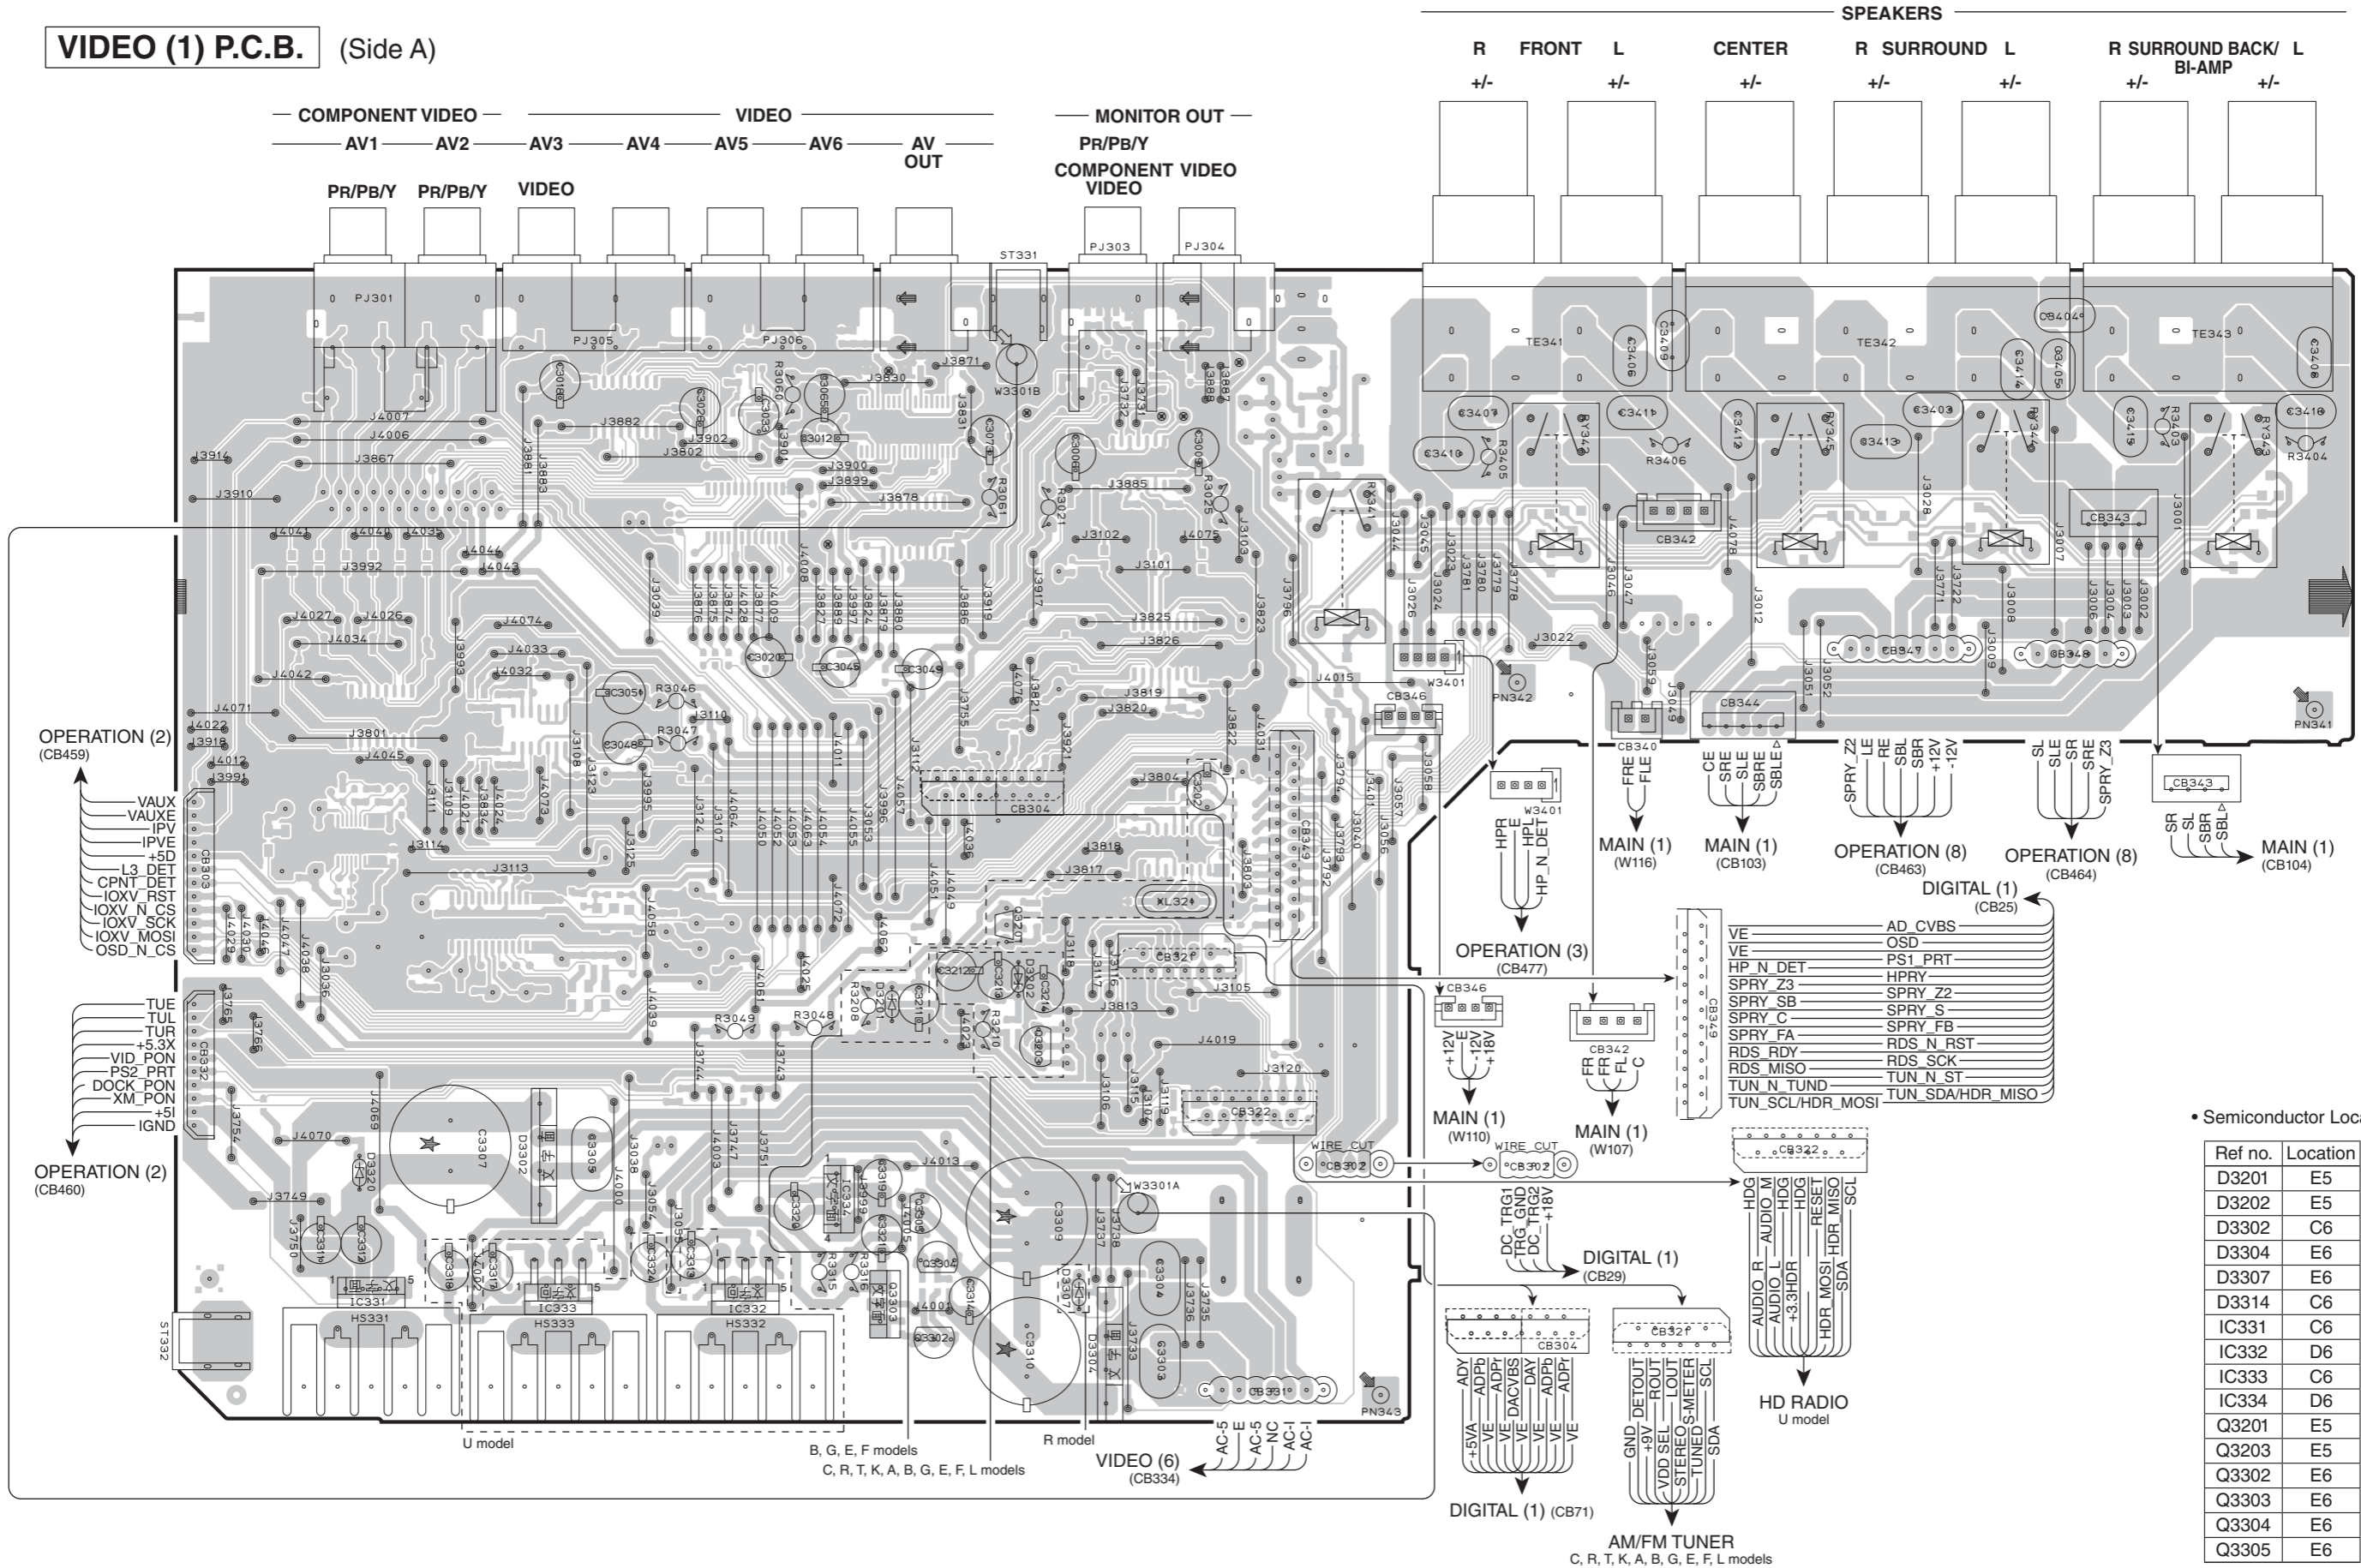

• Semiconductor Location

| Ref no. | Location |
|---------|----------|
| D3201 | E5 |
| D3202 | E5 |
| D3302 | C6 |
| D3304 | E6 |
| D3307 | E6 |
| D3314 | C6 |
| IC331 | C6 |
| IC332 | D6 |
| IC333 | C6 |
| IC334 | D6 |
| Q3201 | E5 |
| Q3302 | E6 |
| Q3303 | E6 |
| Q3304 | E6 |
| Q3305 | E6 |

VIDEO (1) P.C.B. (Side B)

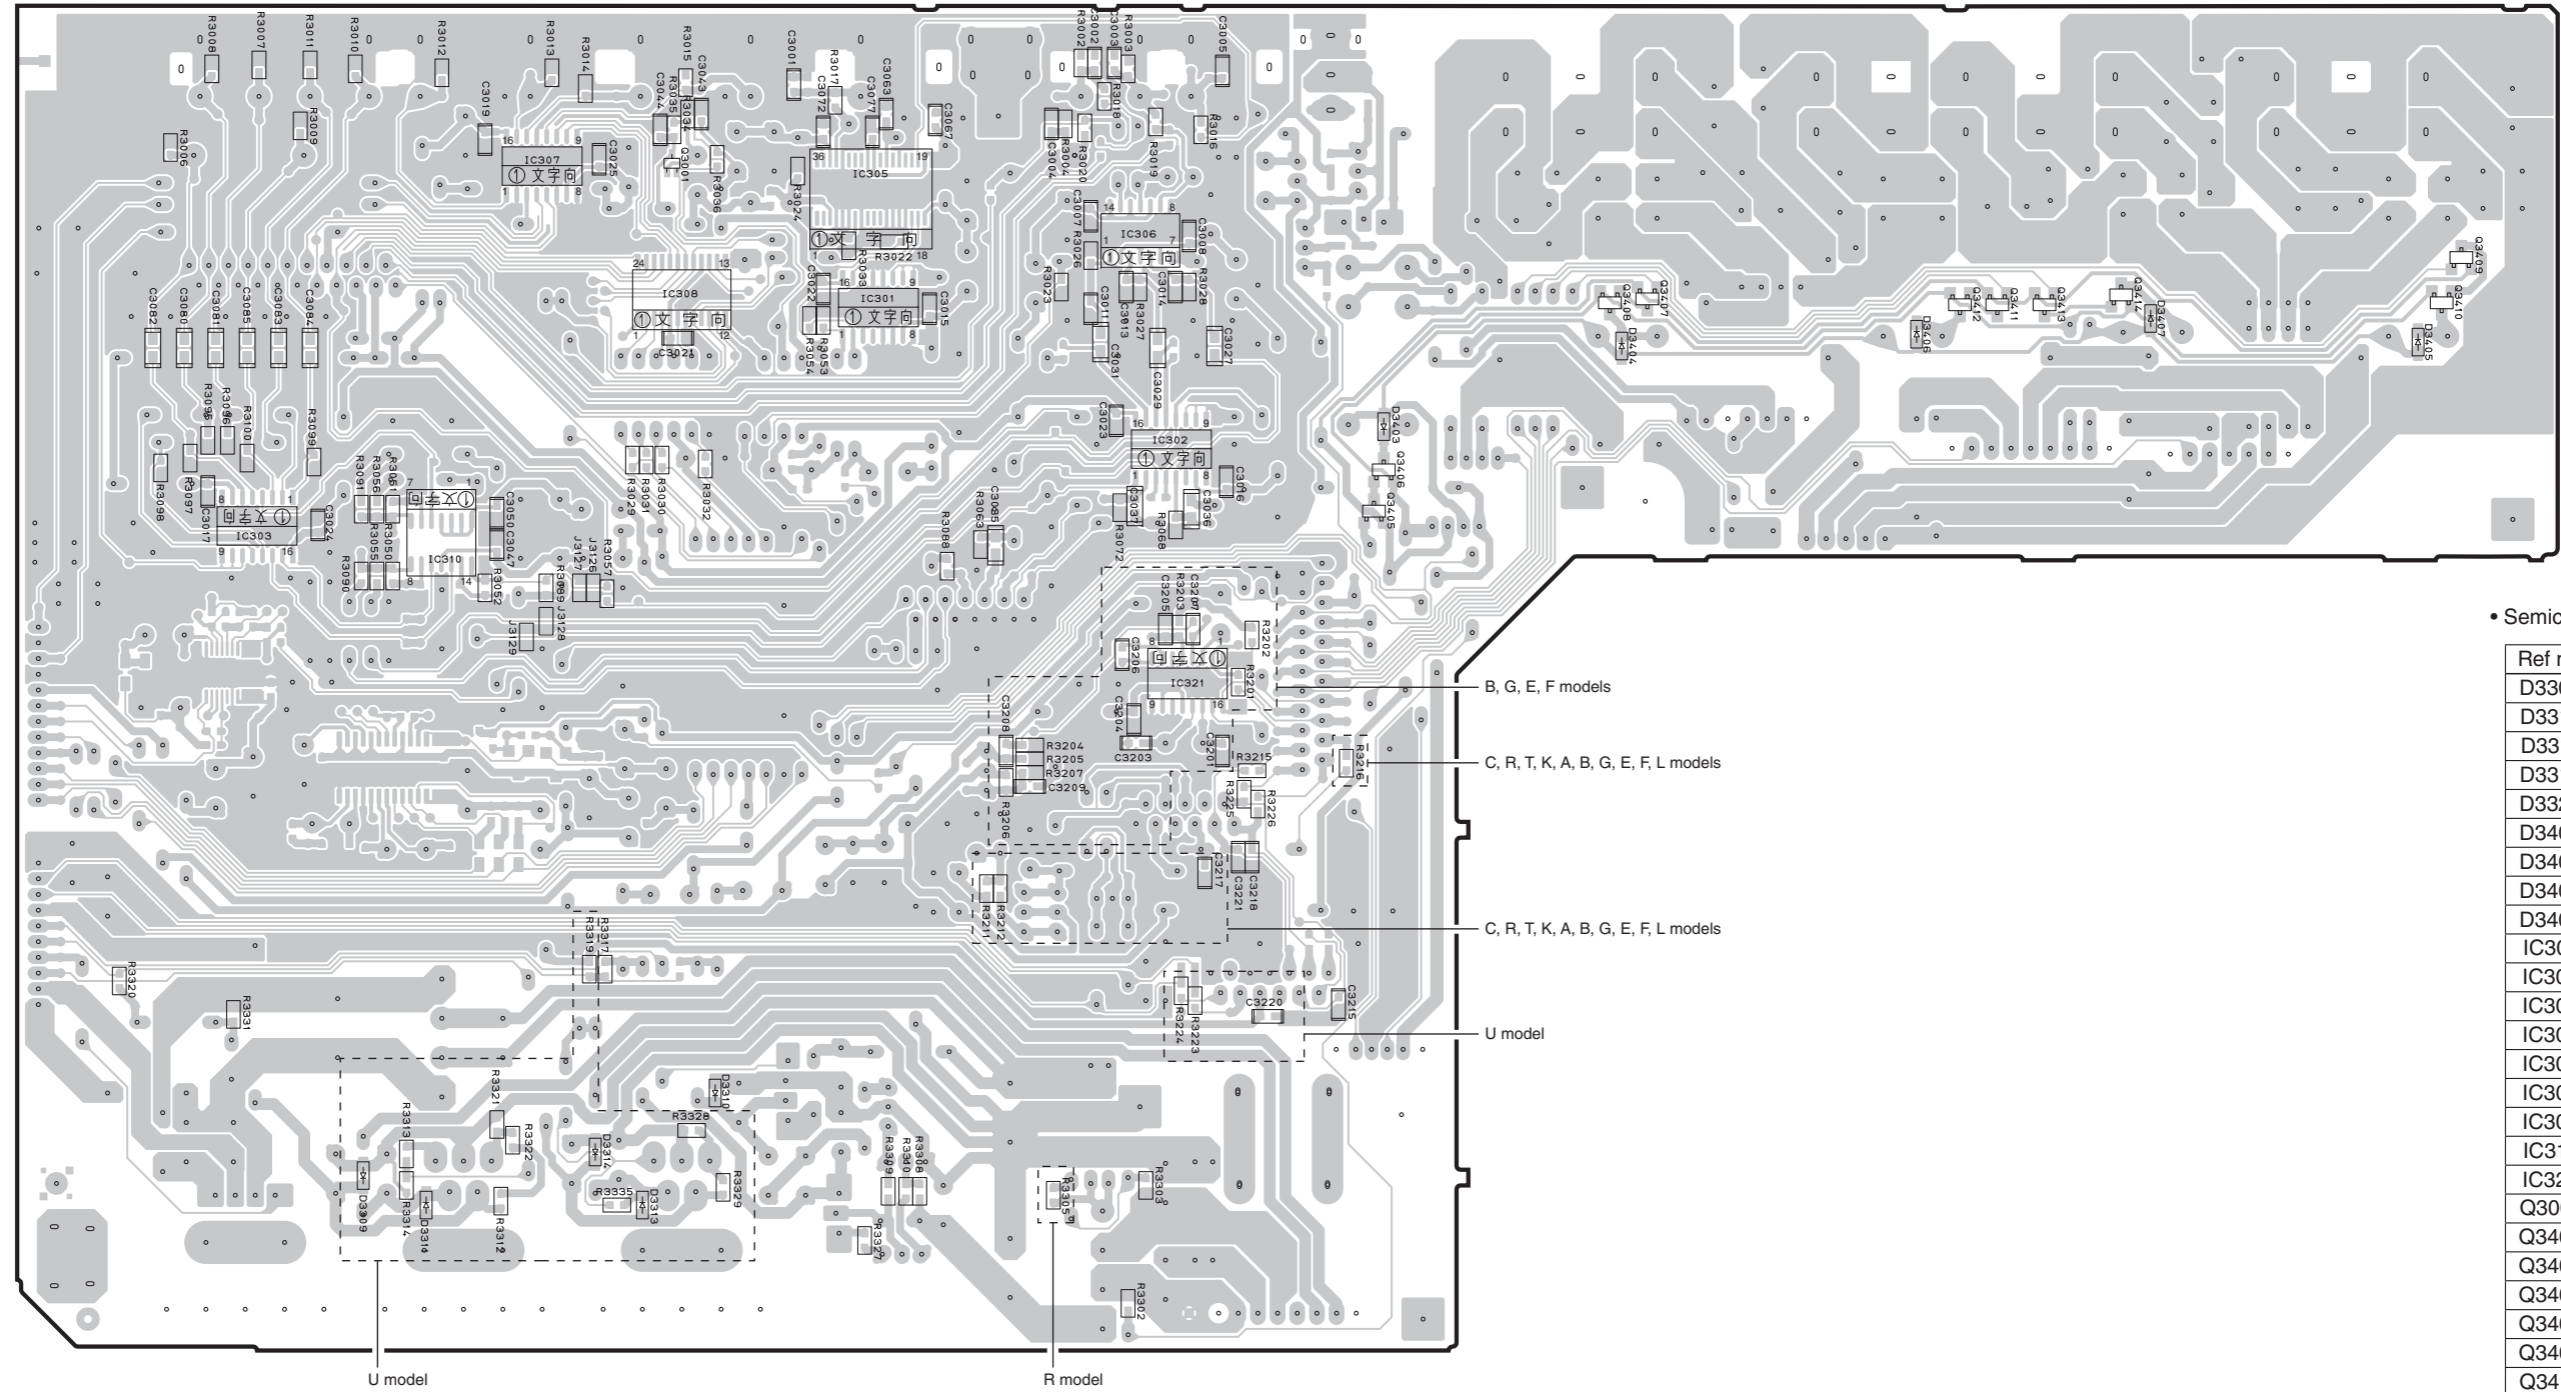

• Semiconductor Location

| Ref no. | Location |
|---------|----------|
| D3309 | B6 |
| D3310 | D6 |
| D3311 | C6 |
| D3313 | C6 |
| D3320 | F4 |
| D3403 | G3 |
| D3404 | I3 |
| D3405 | H3 |
| D3406 | H3 |
| IC301 | D3 |
| IC302 | E4 |
| IC303 | B4 |
| IC305 | D3 |
| IC306 | E3 |
| IC307 | C3 |
| IC308 | C3 |
| IC310 | C4 |
| IC321 | E4 |
| Q3001 | C3 |
| Q3405 | F4 |
| Q3406 | F4 |
| Q3407 | G3 |
| Q3408 | G3 |
| Q3409 | I3 |
| Q3410 | I3 |
| Q3411 | H3 |
| Q3412 | H3 |
| Q3413 | H3 |
| Q3414 | H3 |

B, G, E, F models

C, R, T, K, A, B, G, E, F, L models

C, R, T, K, A, B, G, E, F, L models


U model

U model


R model

1
2
3
4
5
6
7

VIDEO (3) P.C.B. (Side A)

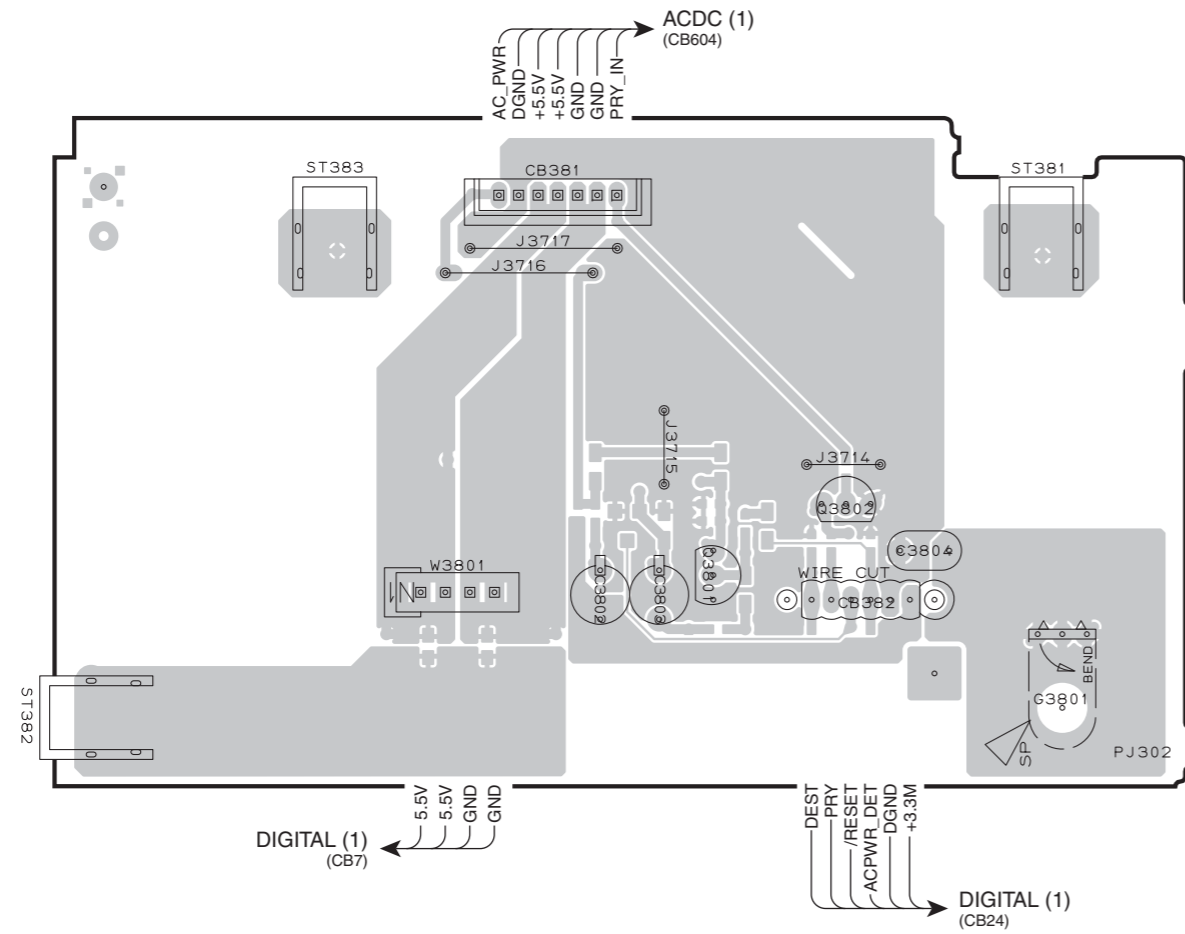


VIDEO (4) P.C.B. (Side A)

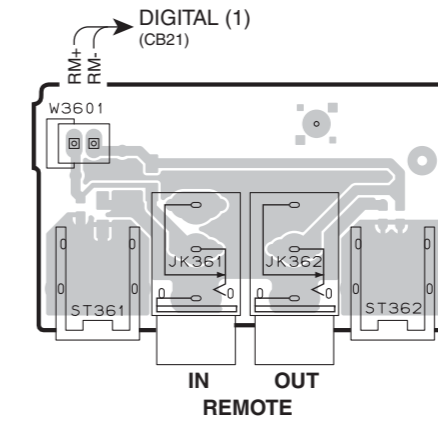


VIDEO (9) P.C.B. (Side A)

B, G, E, F models

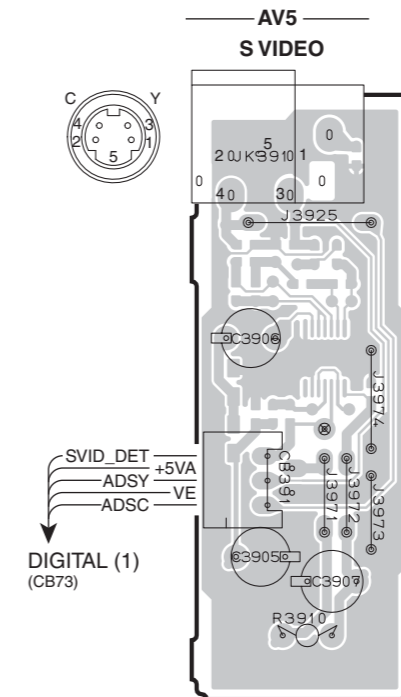


VIDEO (6) P.C.B. (Side A)

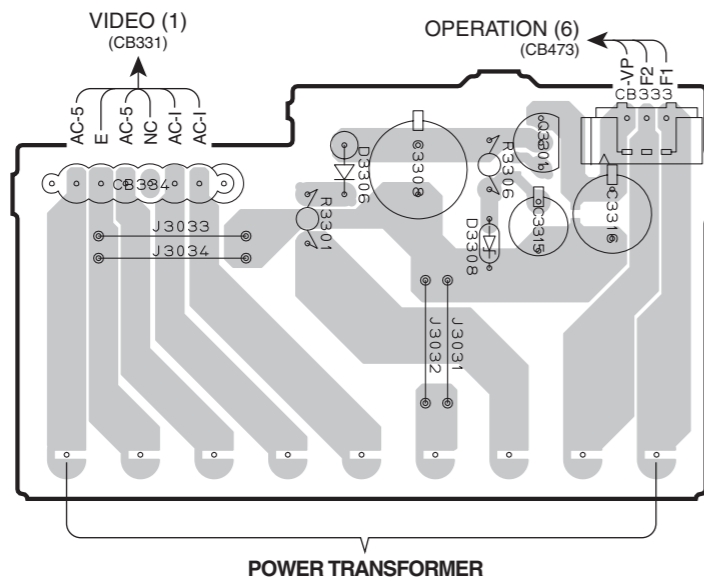


• Semiconductor Location

| Ref no. | Location |
|---------|----------|
| D3306 | C6 |
| D3308 | C6 |
| Q3301 | D6 |
| Q3801 | D3 |
| Q3802 | E3 |


VIDEO (3) P.C.B. (Side B)

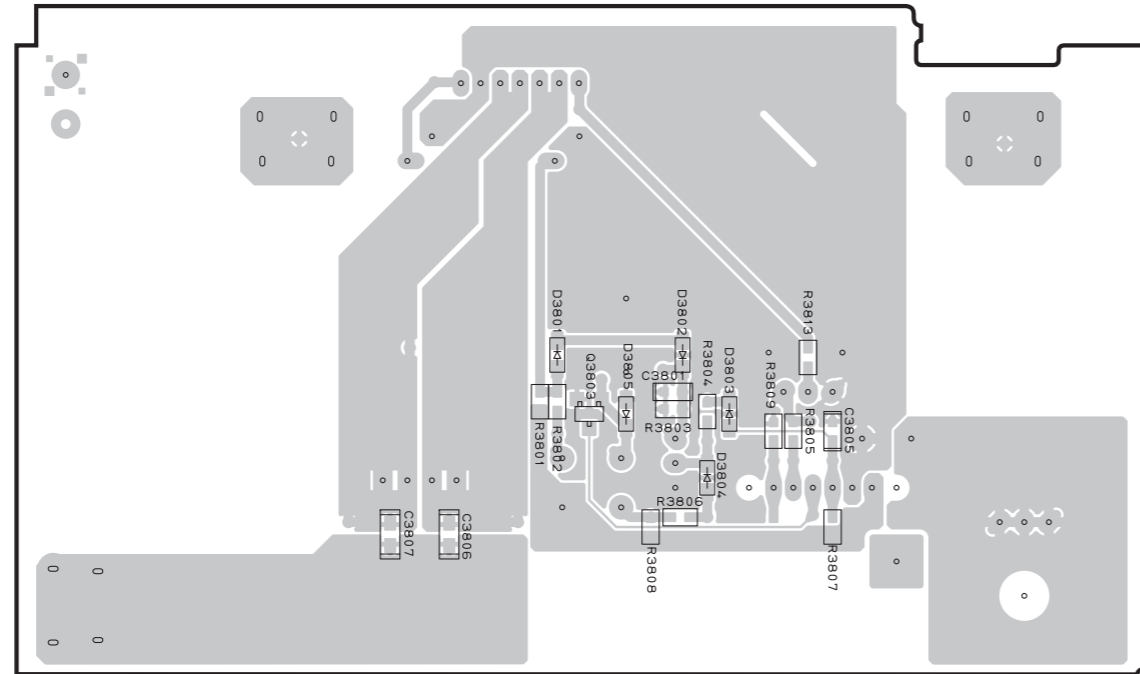


VIDEO (4) P.C.B. (Side B)

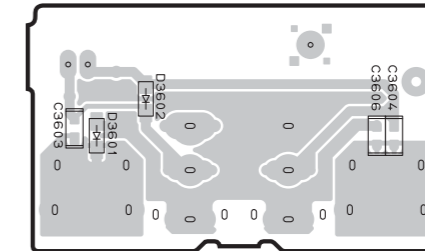

VIDEO (9) P.C.B. (Side B)
B, G, E, F models

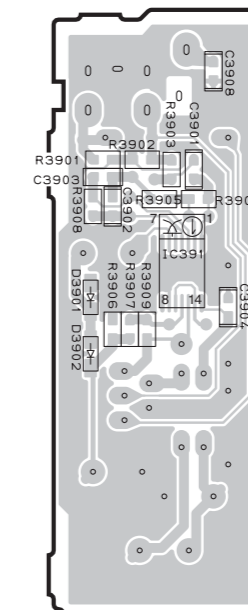

VIDEO (6) P.C.B. (Side B)


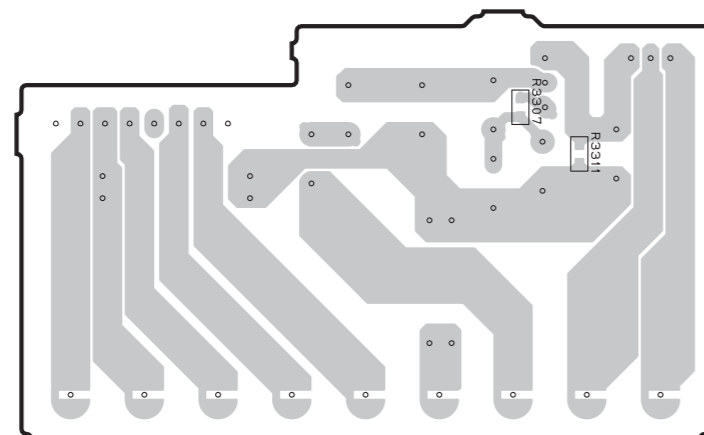


• Semiconductor Location

| Ref no. | Location |
|---------|----------|
| D3601 | H2 |
| D3602 | H2 |
| D3801 | D3 |
| D3802 | D3 |
| D3803 | D3 |
| D3804 | D3 |
| D3805 | D3 |
| D3901 | H6 |
| D3902 | H6 |
| IC391 | H6 |
| Q3803 | D3 |

ACDC (1) P.C.B. (Side A)

ACDC (1) P.C.B. (Side B)

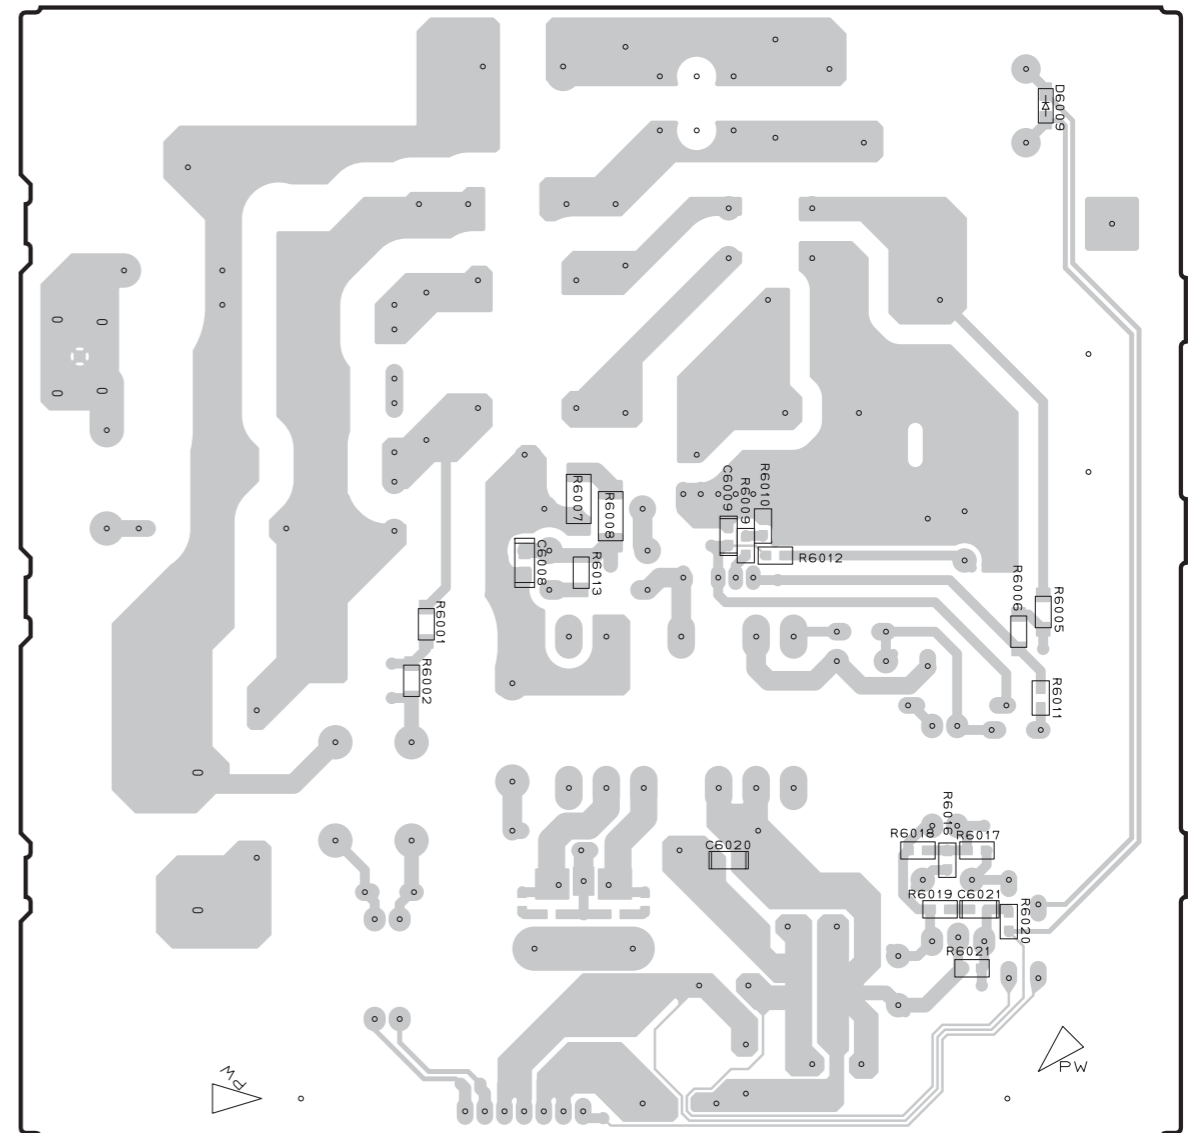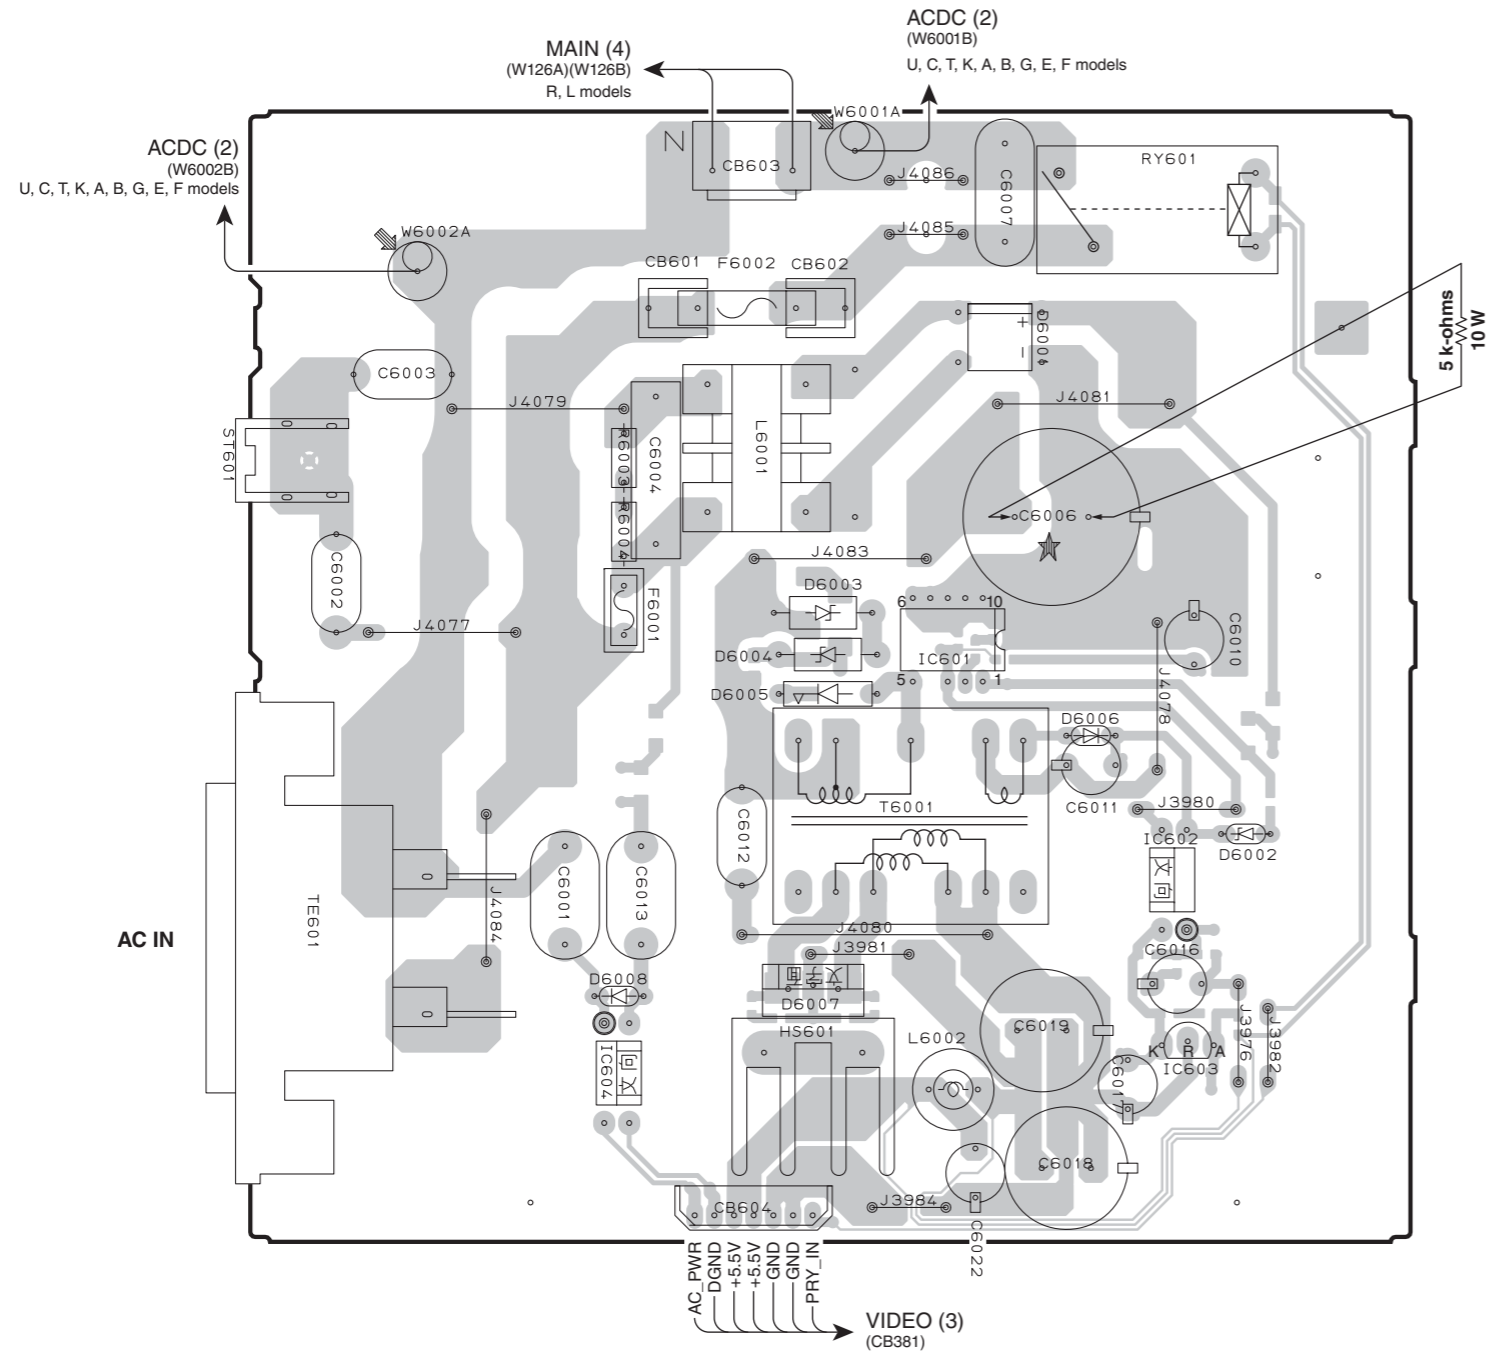

5 k-ohms
10 W

Notes)

Safety measures


- Some internal parts in this product contain high voltages and are dangerous. Be sure to take safety measures during servicing, such as wearing insulating gloves.
- Note that positions indicated below are dangerous even after the power is turned off because an electric charge remains and a high voltage continues to exist there. Before starting any repair work, perform discharge by connecting a discharge resistor (5k-ohms/10W) between terminals at following positions. The time required for discharging is about 30 seconds.
C6006 on ACDC (1) P.C.B.

• Semiconductor Location

| Ref no. | Location |
|---------|----------|
| D6001 | D3 |
| D6002 | E4 |
| D6003 | C4 |
| D6004 | D4 |
| D6005 | C4 |
| D6006 | D4 |
| D6007 | C5 |
| D6008 | C5 |
| D6009 | J2 |
| IC601 | D4 |
| IC602 | E4 |
| IC603 | E5 |
| IC604 | C5 |


ACDC (2) P.C.B. (Side A)

U, C, T, K, A, B, G, E, F models

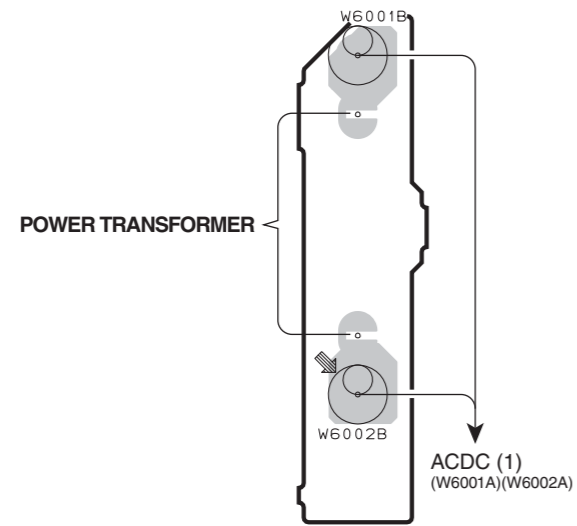


ACDC (2) P.C.B. (Side B)


U, C, T, K, A, B, G, E, F models

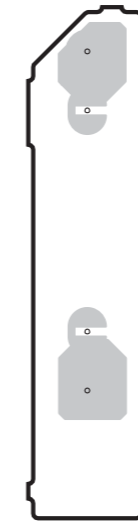

ACDC (3) P.C.B. (Side A)


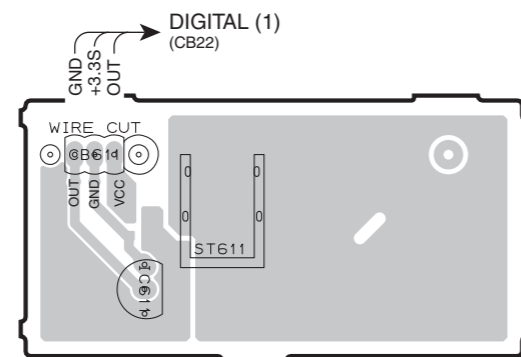


ACDC (3) P.C.B. (Side B)

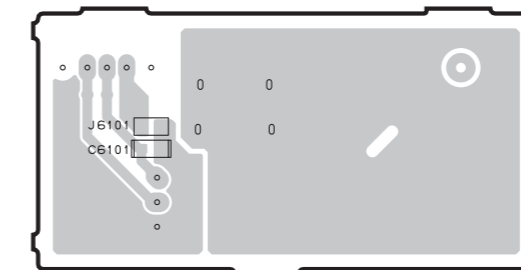

• Semiconductor Location

| Ref no. | Location |
|---------|----------|
| IC611 | C6 |

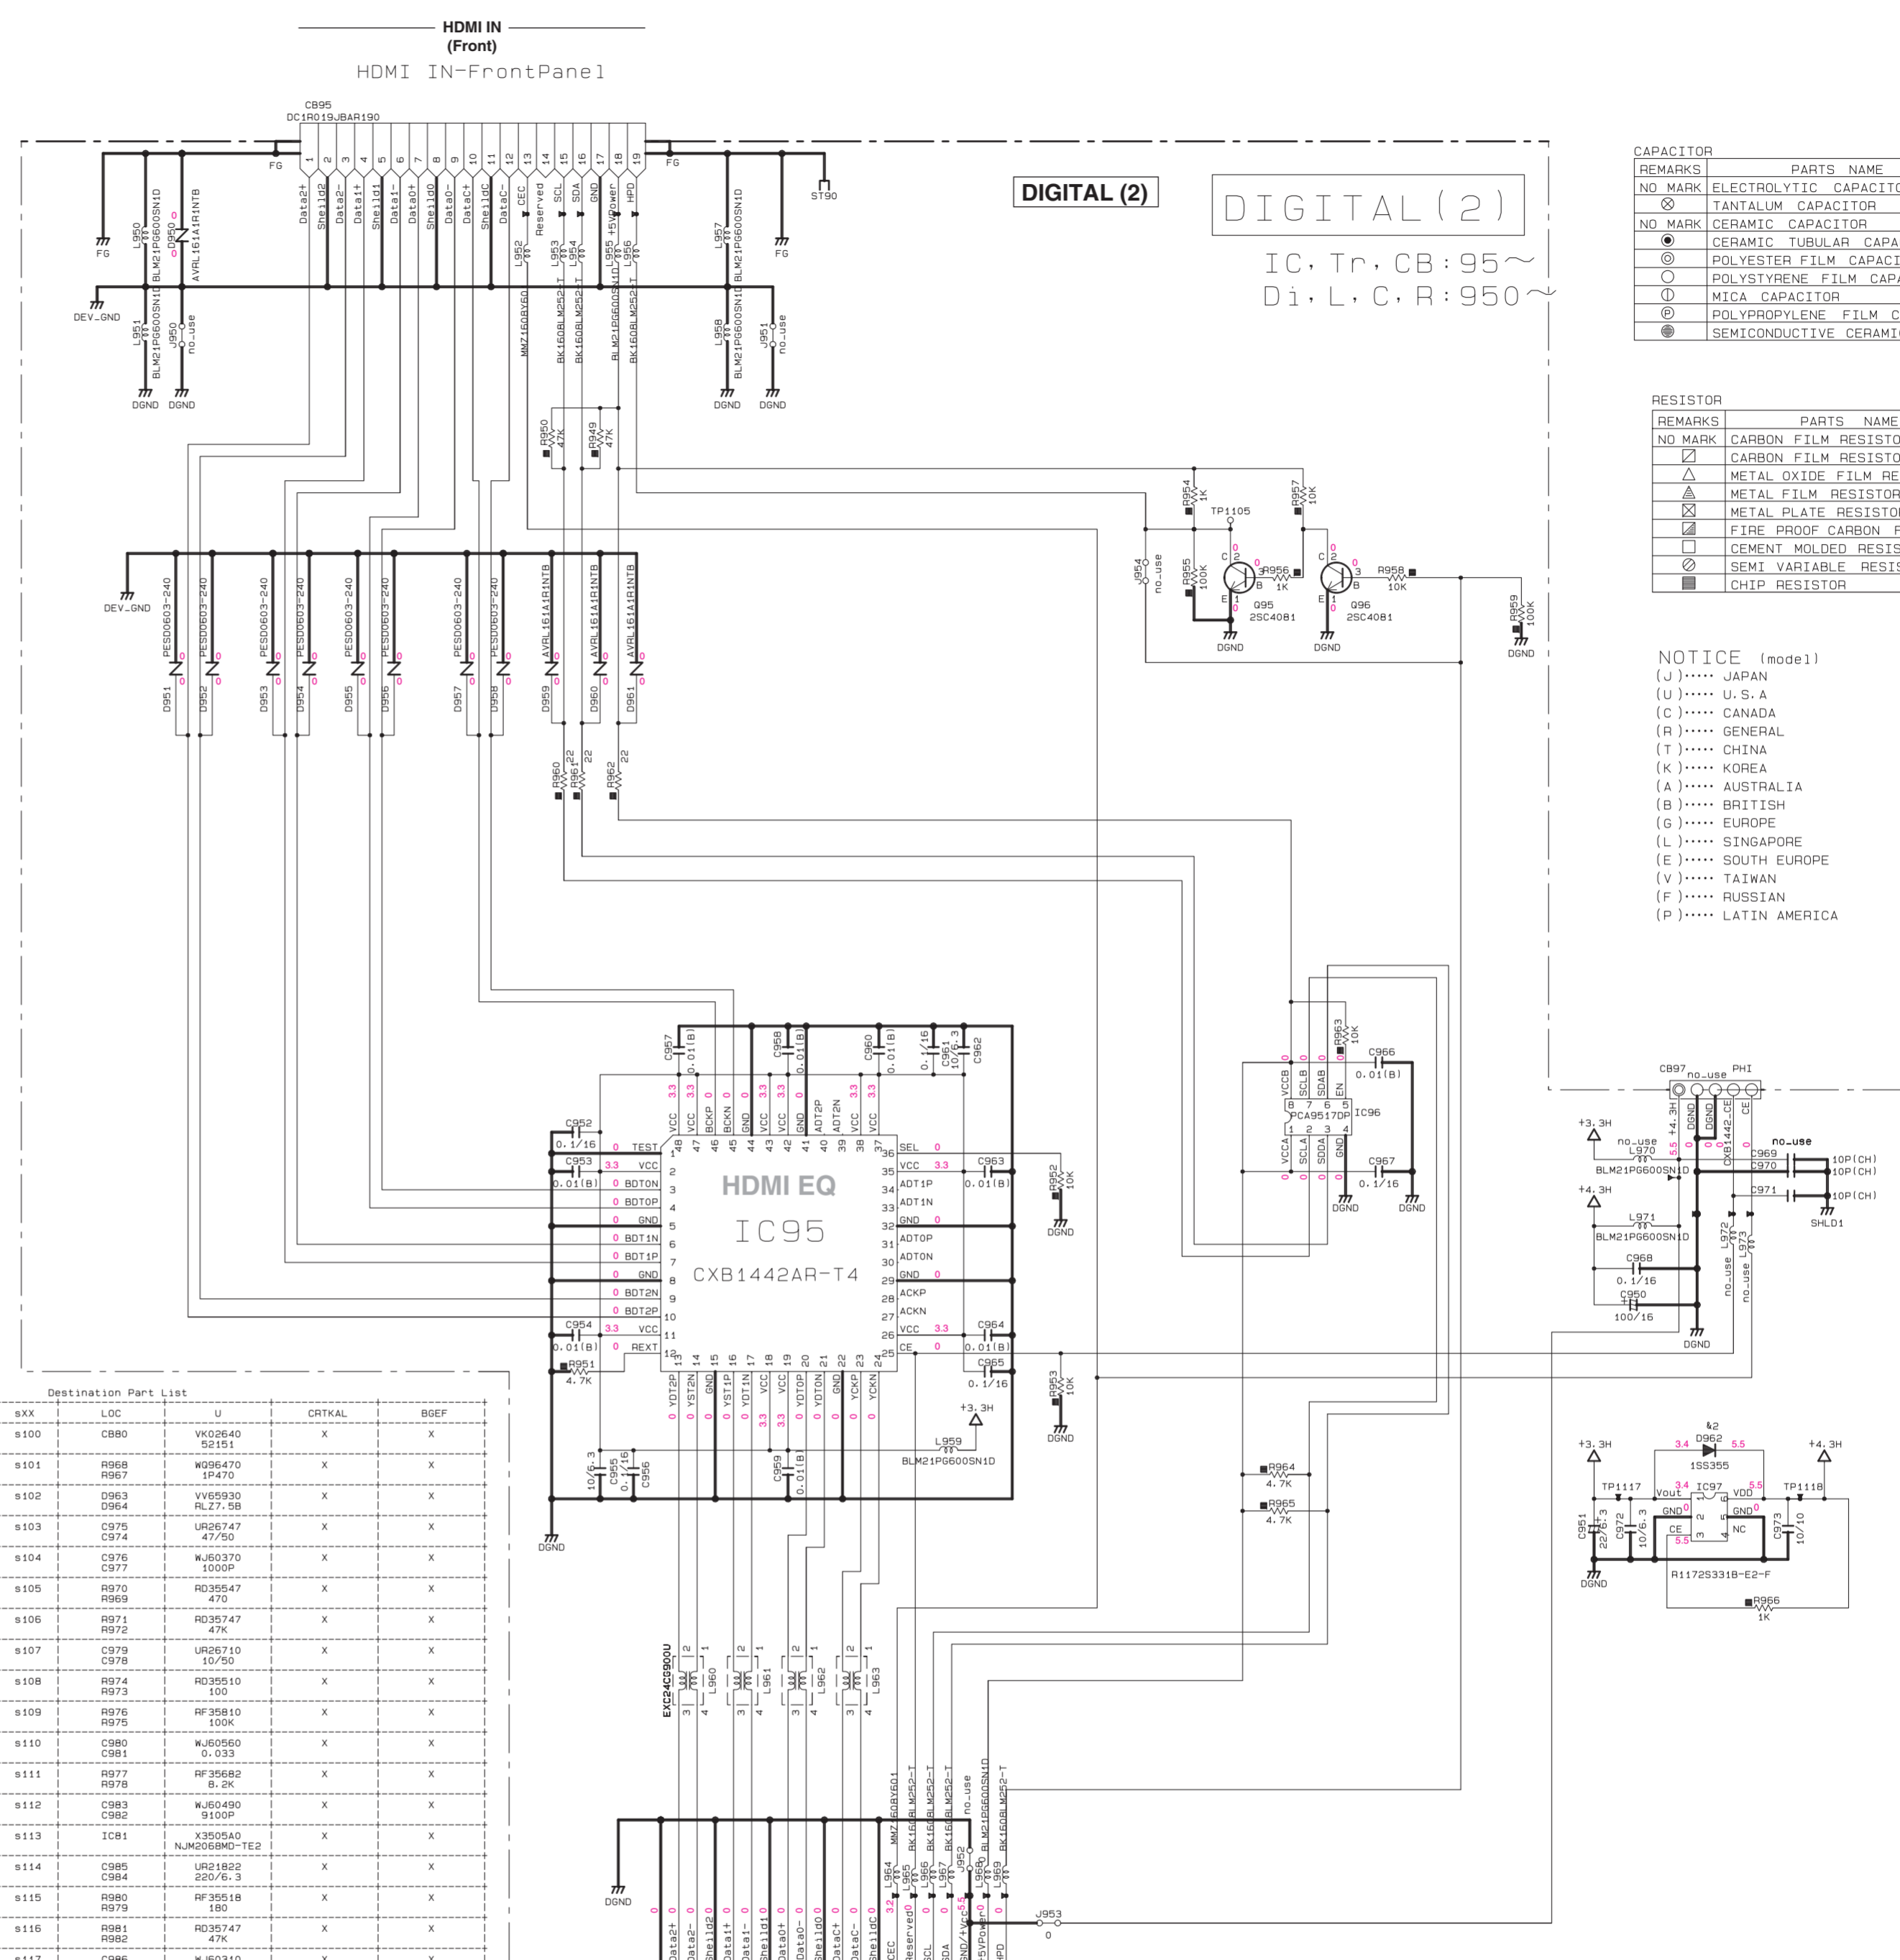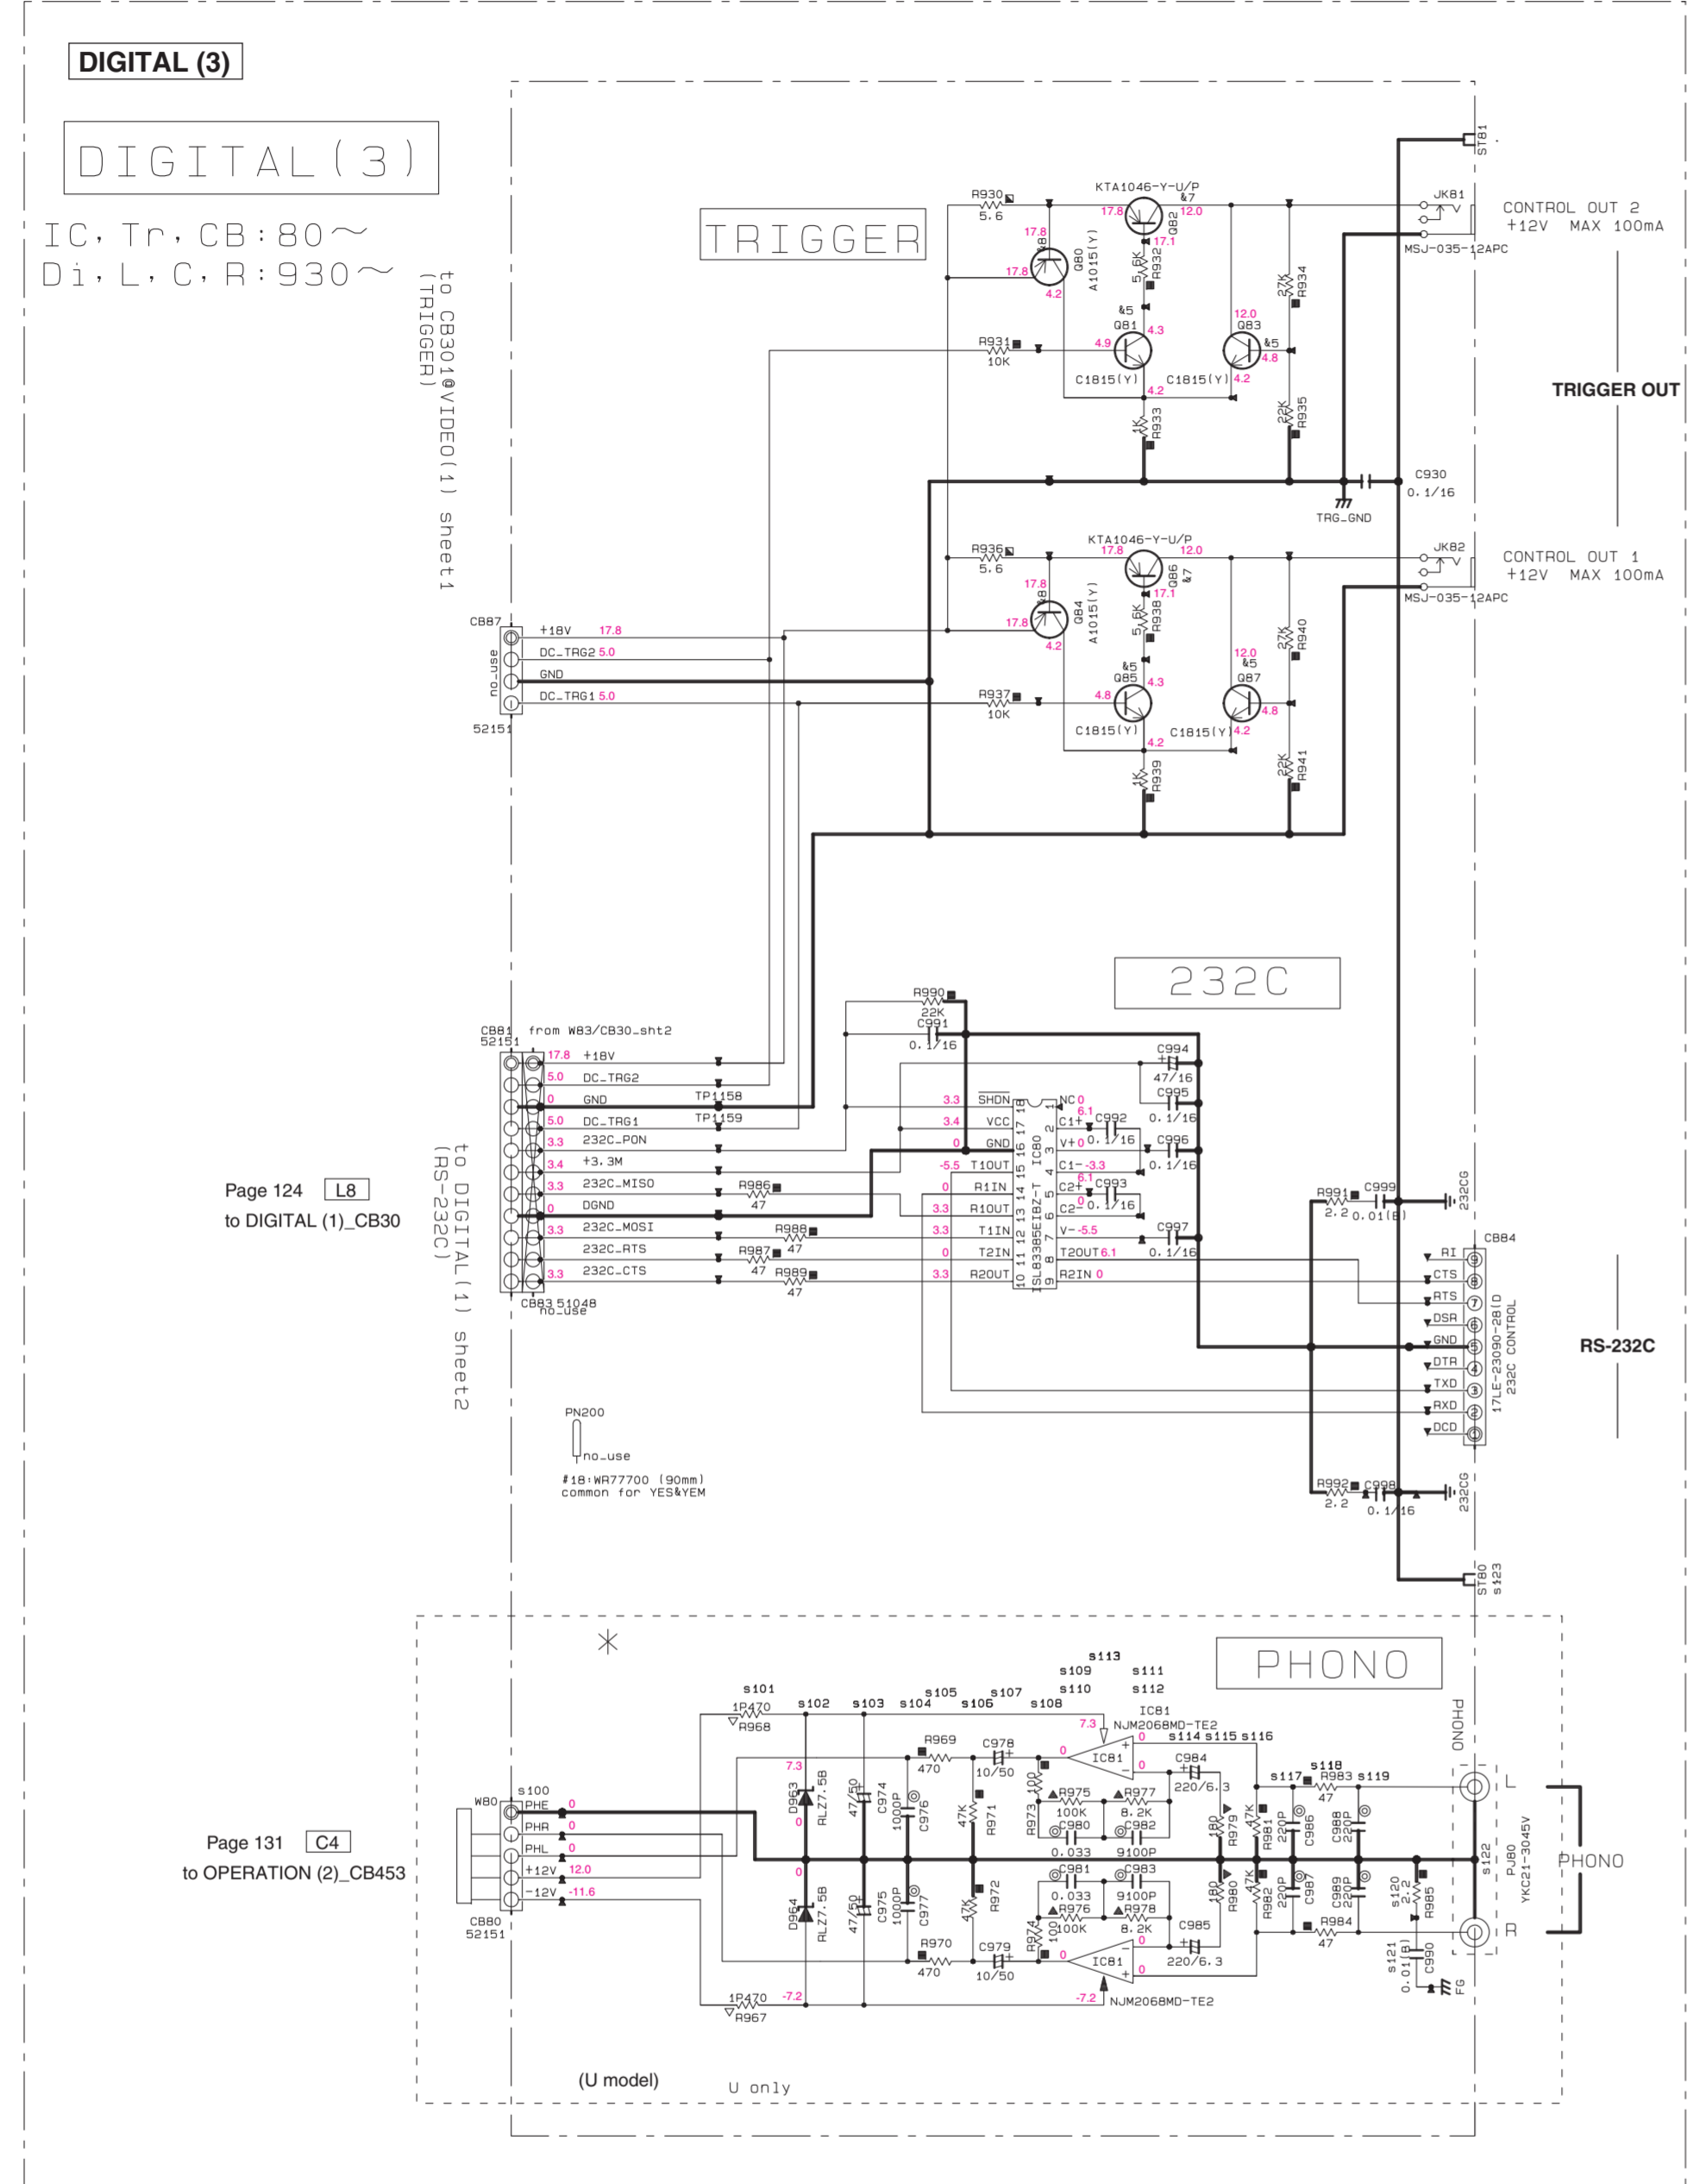

Destination Part List

| sXX | LOC | U | CRITICAL | BOEP |
|------|------|---------------|----------|------|
| s100 | CB80 | VX02640 | X | X |
| s101 | R866 | W686470 | | |
| s102 | D963 | W686470 | X | X |
| s103 | CB75 | UR26747 | X | X |
| s104 | CB74 | W686370 | X | X |
| s105 | R970 | RD35447 | X | X |
| s106 | R971 | RD35447 | X | X |
| s107 | CB79 | UR26740 | X | X |
| s108 | R974 | RD35410 | X | X |
| s109 | R976 | RF35810 | X | X |
| s110 | CB80 | WJ60950 | X | X |
| s111 | R977 | RF35810 | X | X |
| s112 | CB83 | WJ60490 | X | X |
| s113 | IC81 | NJM2068MD-TE2 | X | X |
| s114 | CB85 | UR21822 | X | X |
| s115 | CB86 | RF35818 | X | X |
| s116 | R981 | RD35747 | X | X |
| s117 | CB86 | WJ60310 | X | X |
| s118 | R984 | RD35447 | X | X |
| s119 | CB89 | WJ60310 | X | X |
| s120 | R985 | RD35322 | X | X |
| s121 | CB90 | US06410 | X | X |
| s122 | PJ80 | W725650 | | |
| s123 | S190 | YK2213045V | X | X |

CAPACITOR






| REMARKS | PARTS NAME |
|---------|----------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| ⊗ | TANTALUM CAPACITOR |
| ⊙ | CERAMIC TUBULAR CAPACITOR |
| ⊖ | POLYESTER FILM CAPACITOR |
| ⊕ | POLYSTYRENE FILM CAPACITOR |
| ⊖ | MICA CAPACITOR |
| ⊕ | POLYPROPYLENE FILM CAPACITOR |
| ⊙ | SEMICONDUCTIVE CERAMIC CAPACITOR |

RESISTOR

| REMARKS | PARTS NAME |
|---------|---------------------------------|
| NO MARK | CARBON FILM RESISTOR (P=5) |
| □ | CARBON FILM RESISTOR (P=10) |
| △ | METAL OXIDE FILM RESISTOR |
| ▲ | METAL FILM RESISTOR |
| ⊠ | METAL PLATE RESISTOR |
| ⊞ | FIRE PROOF CARBON FILM RESISTOR |
| ⊞ | CEMENT MOLDED RESISTOR |
| ⊞ | SEMI VARIABLE RESISTOR |
| ■ | CHIP RESISTOR |

NOTICE (mode1)

(J)..... JAPAN
(U)..... U. S. A
(C)..... CANADA
(R)..... GENERAL
(T)..... CHINA
(K)..... KOREA
(A)..... AUSTRALIA
(B)..... BRITISH
(G)..... EUROPE
(L)..... SINGAPORE
(E)..... SOUTH EUROPE
(V)..... TAIWAN
(F)..... RUSSIAN
(P)..... LATIN AMERICA

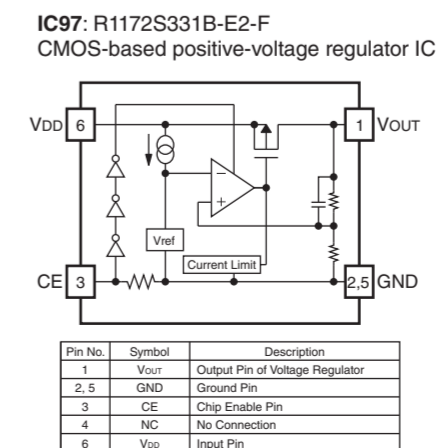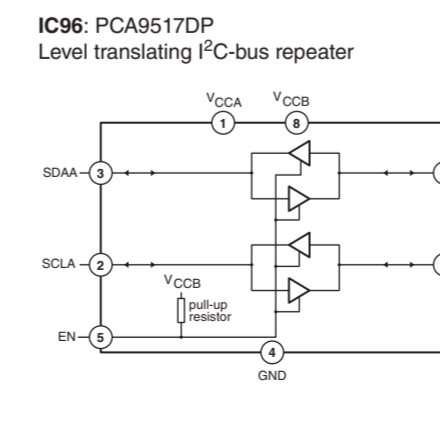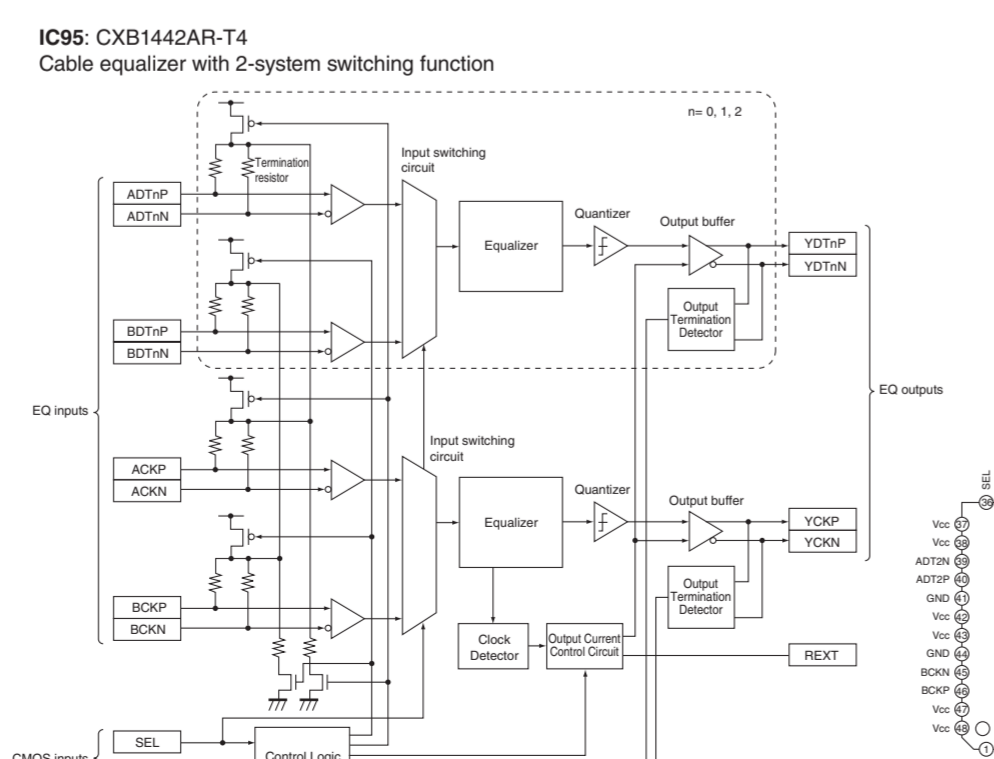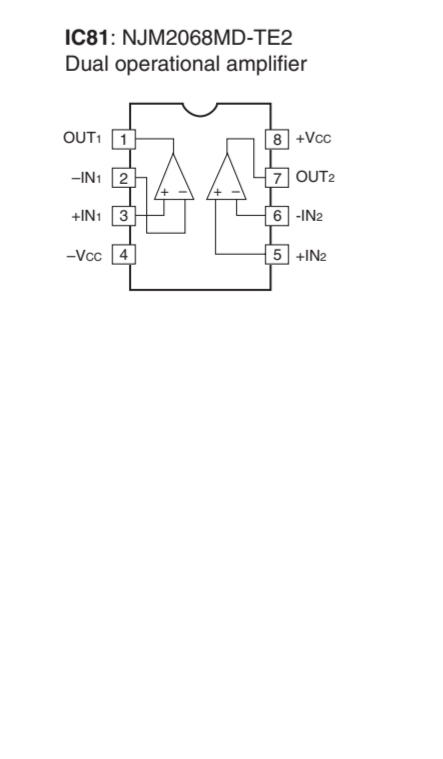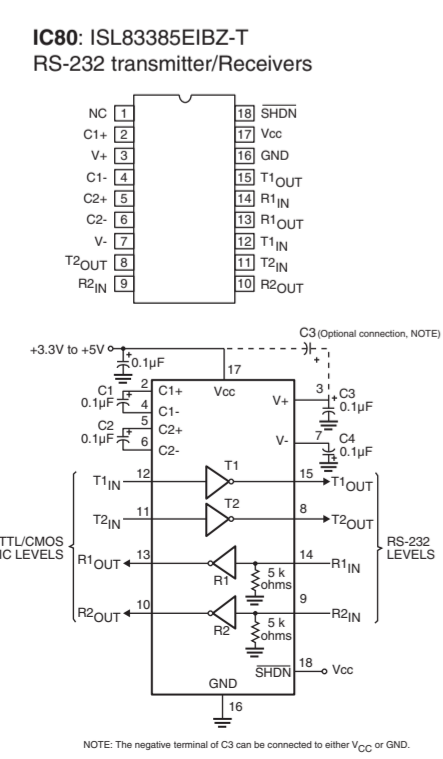

* All voltages are measured with a 10MΩ/V DC electronic voltmeter.
* Components having special characteristics are marked Δ, and must be replaced with parts having specifications equal to those originally installed.
* Schematic diagram is subject to change without notice.

DIGITAL 2/7

Page 130 [E10] to OPERATION (1)_CB401

Page 136 [C2] to VIDEO (4)_W3601

Page 139 [K9] to ACCDC (3)_CB611

Page 133 [K6] to MAIN (1)_CB156


Page 136 [I9] to VIDEO (3)_CB382

Page 135 [F6] to VIDEO (1)_CB349







| RESISTOR | PARTS NAME | REMARKS |
|----------|---------------------------------|---------|
| NO MARK | CARBON FILM RESISTOR (F=5) | |
| NO MARK | CARBON FILM RESISTOR (F=10) | |
| NO MARK | METAL FILM RESISTOR | |
| NO MARK | FINE PRINT CARBON FILM RESISTOR | |
| NO MARK | CEMENT MOLDED RESISTOR | |
| NO MARK | THIN FILM RESISTOR | |
| NO MARK | IMP. RESISTOR | |

| CAPACITOR | PARTS NAME | REMARKS |
|-----------|----------------------------------|---------|
| NO MARK | ELECTROLYTIC CAPACITOR | |
| NO MARK | TANTALUM CAPACITOR | |
| NO MARK | CERAMIC CAPACITOR | |
| NO MARK | CERAMIC TUBULAR CAPACITOR | |
| NO MARK | POLYESTER FILM CAPACITOR | |
| NO MARK | POLYETHYLENE FILM CAPACITOR | |
| NO MARK | POLYPROPYLENE FILM CAPACITOR | |
| NO MARK | MICA CAPACITOR | |
| NO MARK | SEMICONDUCTIVE CERAMIC CAPACITOR | |

NOTICE (Node1)
 (J) JAPAN
 (U) U.S.A.
 (C) CANADA
 (S) SWITZERLAND
 (I) INDIA
 (K) KOREA
 (A) AUSTRALIA
 (B) BRITISH
 (E) EUROPE
 (L) SINGAPORE
 (H) HONG KONG
 (Y) YAMEN
 (R) RUSSIAN
 (M) LATIN AMERICA

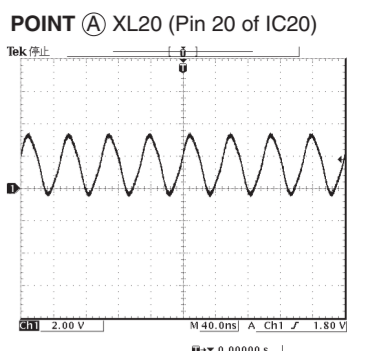


POINT (B) CB24 (+3.3M), CB24 (/RESET)

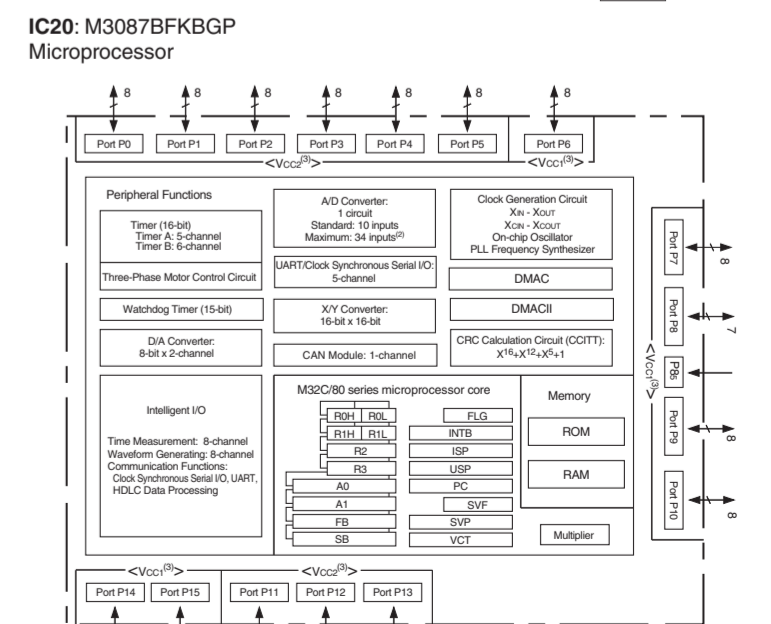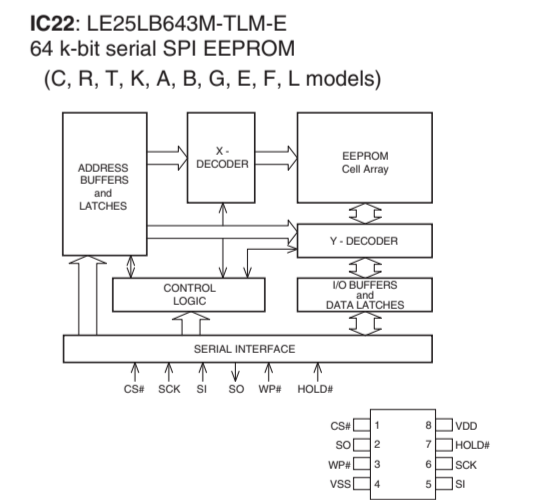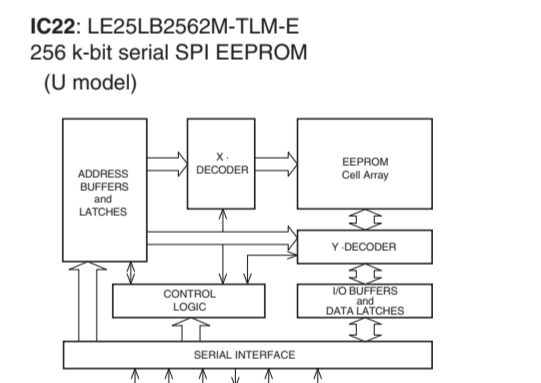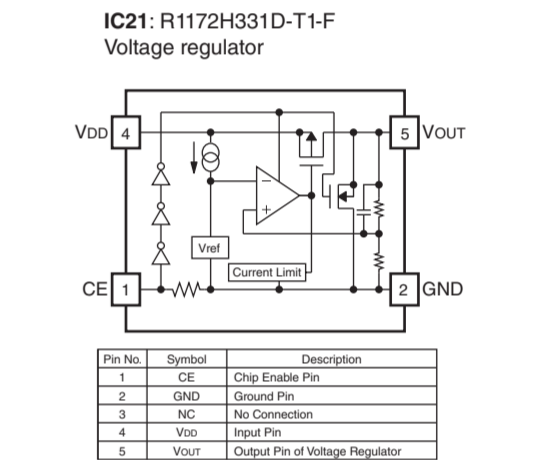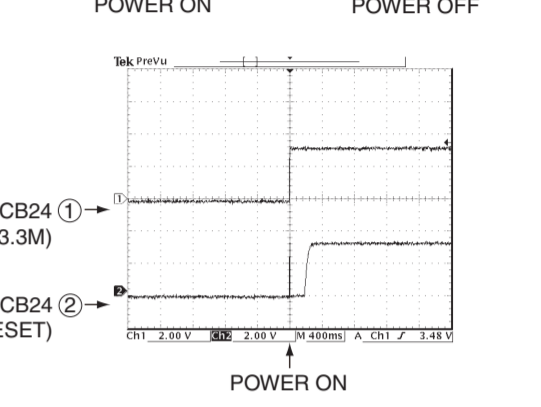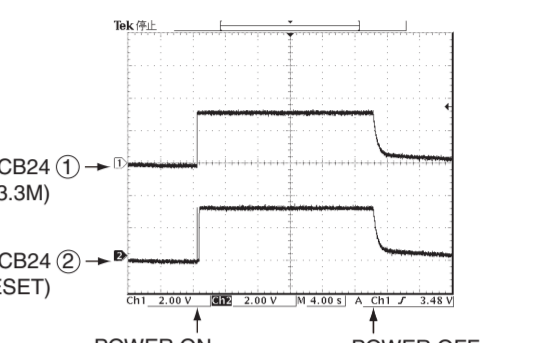

Key detection for A/D port
 Key input (A/D) pull-up resistance 10 k-ohms
 RX-V2065/HTR-6295


| Ohm | +10k | +10k | +15k | +15k | +20k | +30k | +47k | +220k | +330k | |
|---------------------|-------------|-----------------|-----------------|--------------|--------------|------------------|----------------|------------|-------------|-------------|
| V | 0 - 0.15 | 0.15 - 0.42 | 0.43 - 0.70 | 0.71 - 0.97 | 0.98 - 1.24 | 1.25 - 1.51 | 1.54 - 1.84 | 1.84 - 2.1 | 2.34 - 2.55 | 2.55 - 2.97 |
| AD value (3.3V-255) | 0 - 11 | 12 - 32 | 33 - 54 | 55 - 75 | 76 - 95 | 96 - 118 | 119 - 142 | 143 - 162 | 161 - 197 | 198 - 229 |
| KEY1 (133 pin) | SCENE RADIO | SCENE CD | SCENE DVD/VIDEO | ZONE2 ON/OFF | ZONE3 ON/OFF | MAIN ZONE ON/OFF | — | — | — | — |
| KEY2 (134 pin) | PURE DIRECT | STRAIGHT EFFECT | ZONE CONTROLS | INFO | PRESET | MEMORY | BANDY CATEGORY | TUNING CH | TUNING CH | TUNING CH |

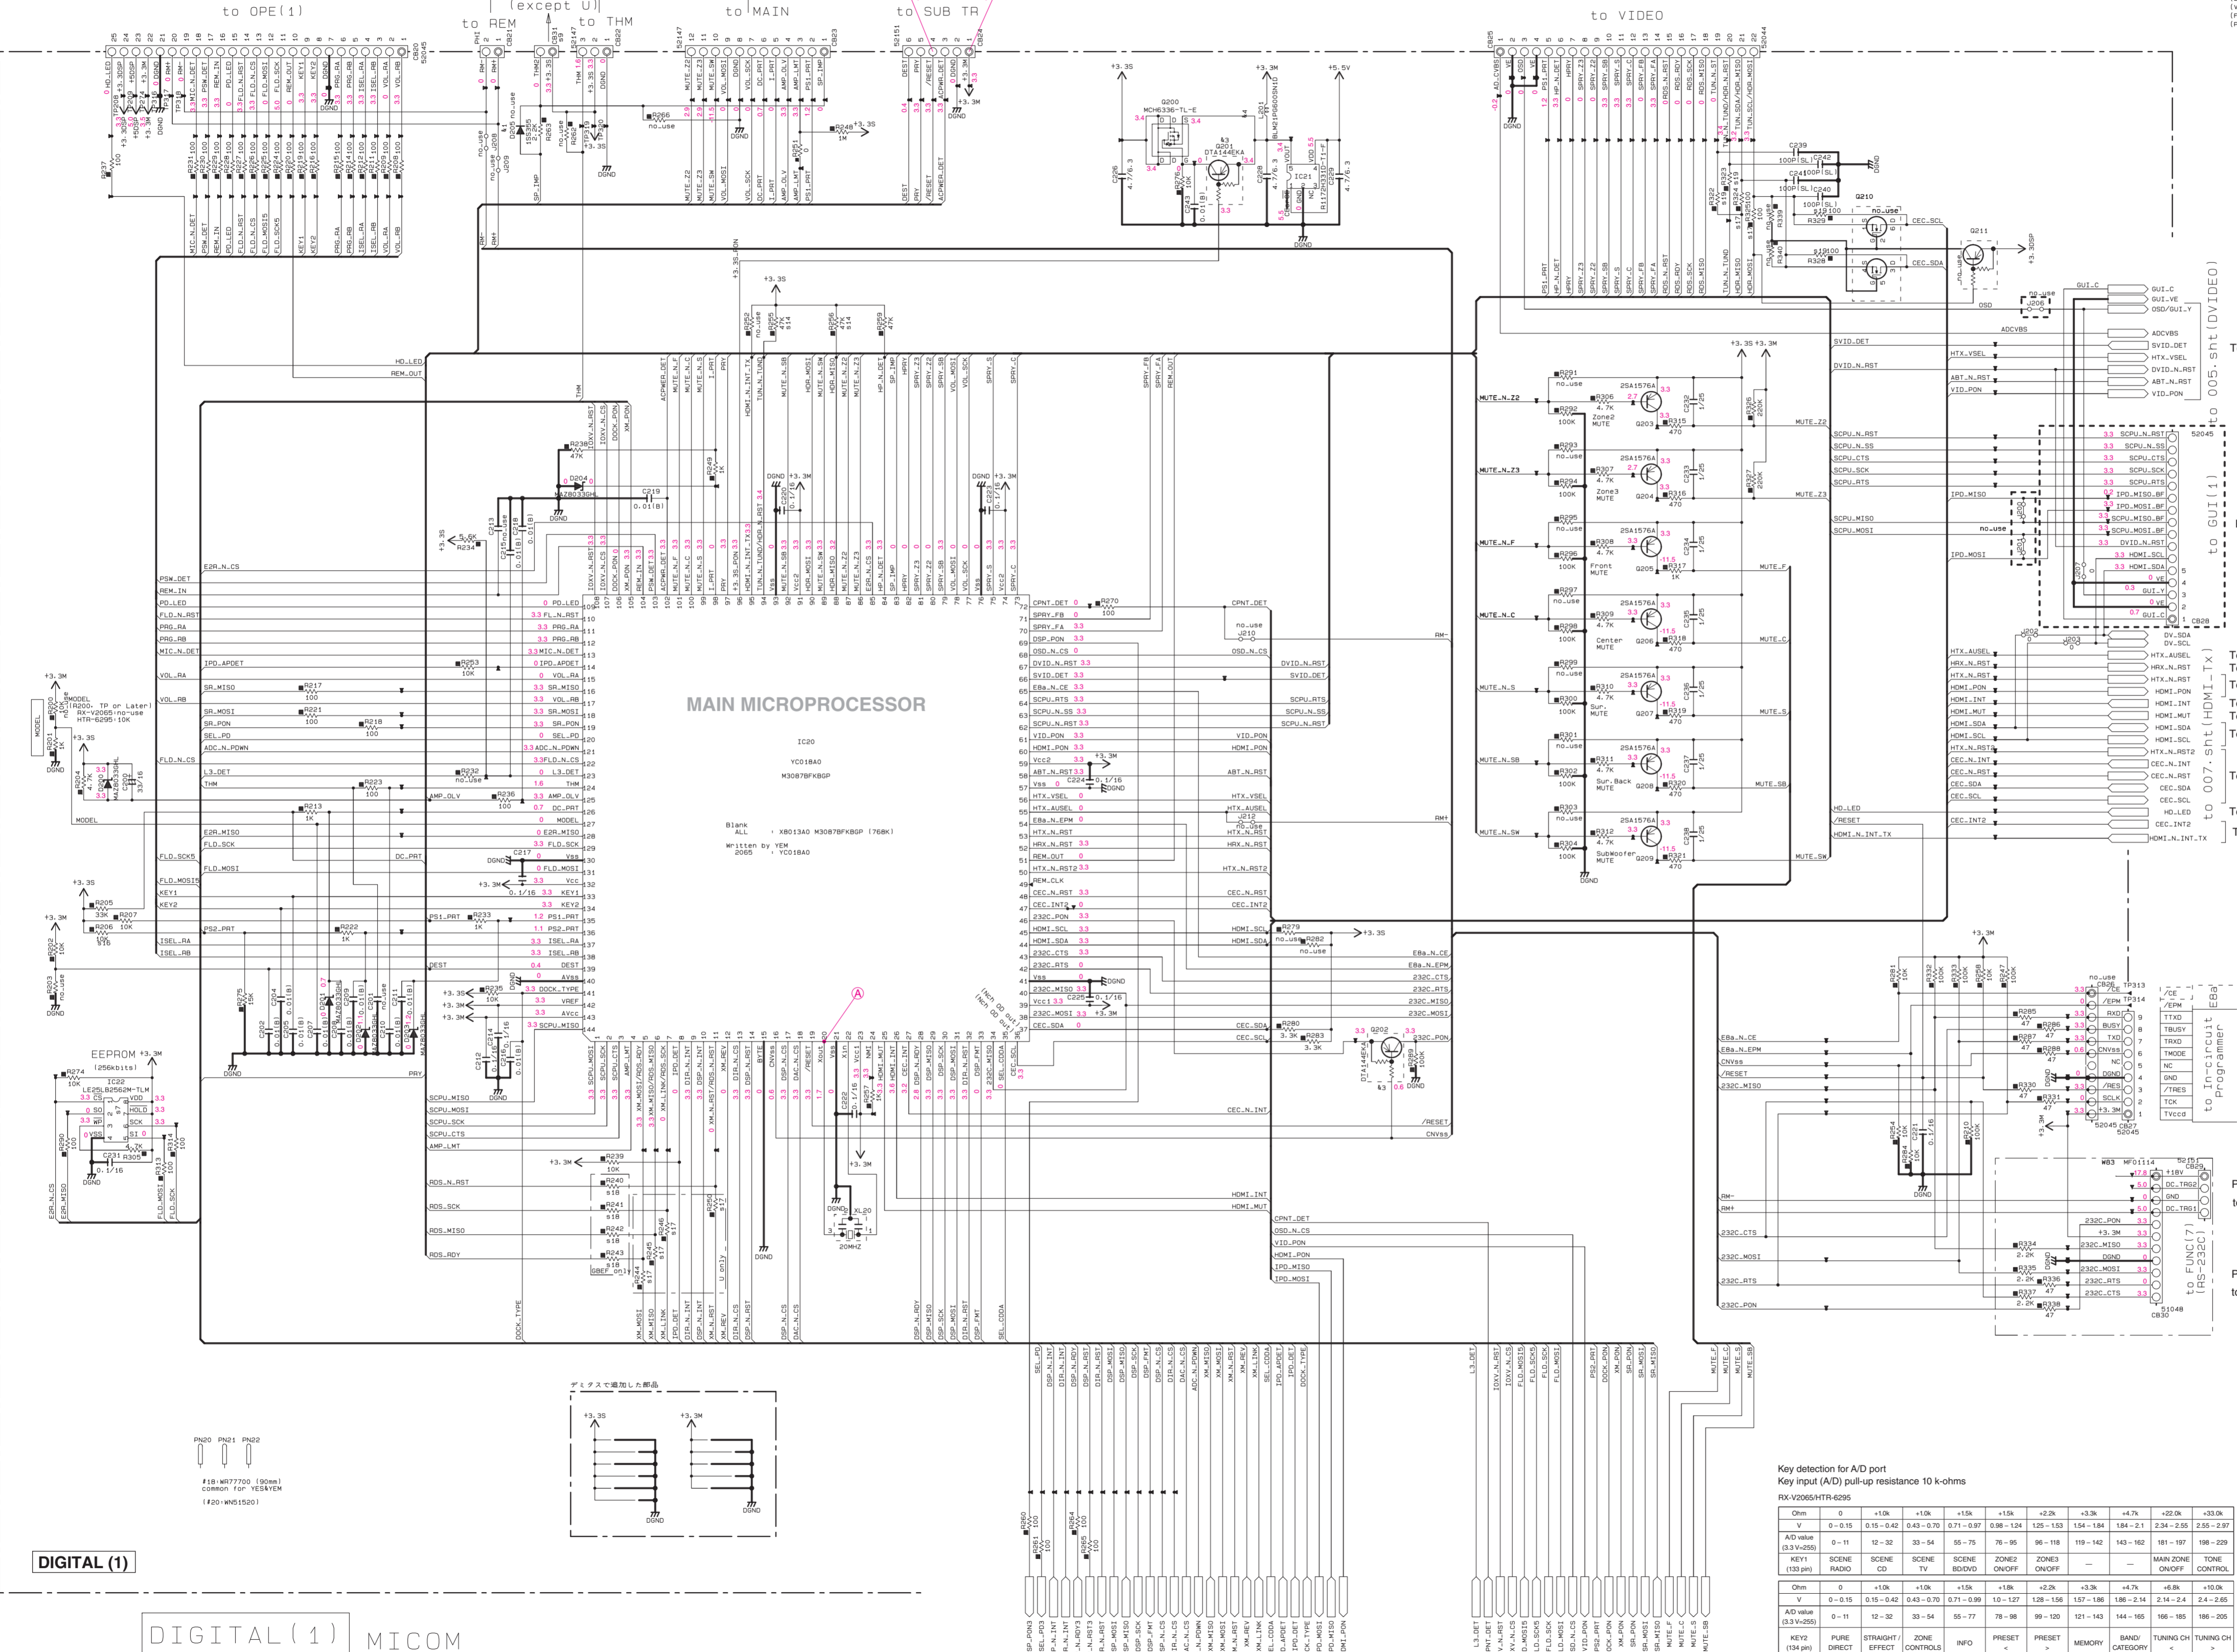

MAIN MICROPROCESSOR

IC20
 YC1840
 M3087BFK8GP
 Blank ALL X801340 M3087BFK8GP 1768K1
 M3087BFK8GP YC1840

デジタルで追加した部品

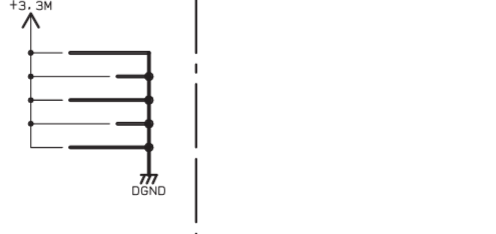

DIGITAL (1)

DIGITAL (1) MICOM


★ All voltages are measured with a 10MΩ/V DC electronic voltmeter.
 ★ Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.
 ★ Schematic diagram is subject to change without notice.

NOTES
 1. Parts P11 to P15 are provided in the 144 pin package only.
 2. Included in the 144 pin package only.
 3. The supply voltage of M3087BFK8GP-relay requires must be Vcc=VDD.

DIGITAL 3/7


Page 137 B2 to GUI_CB500

No replacement part available.





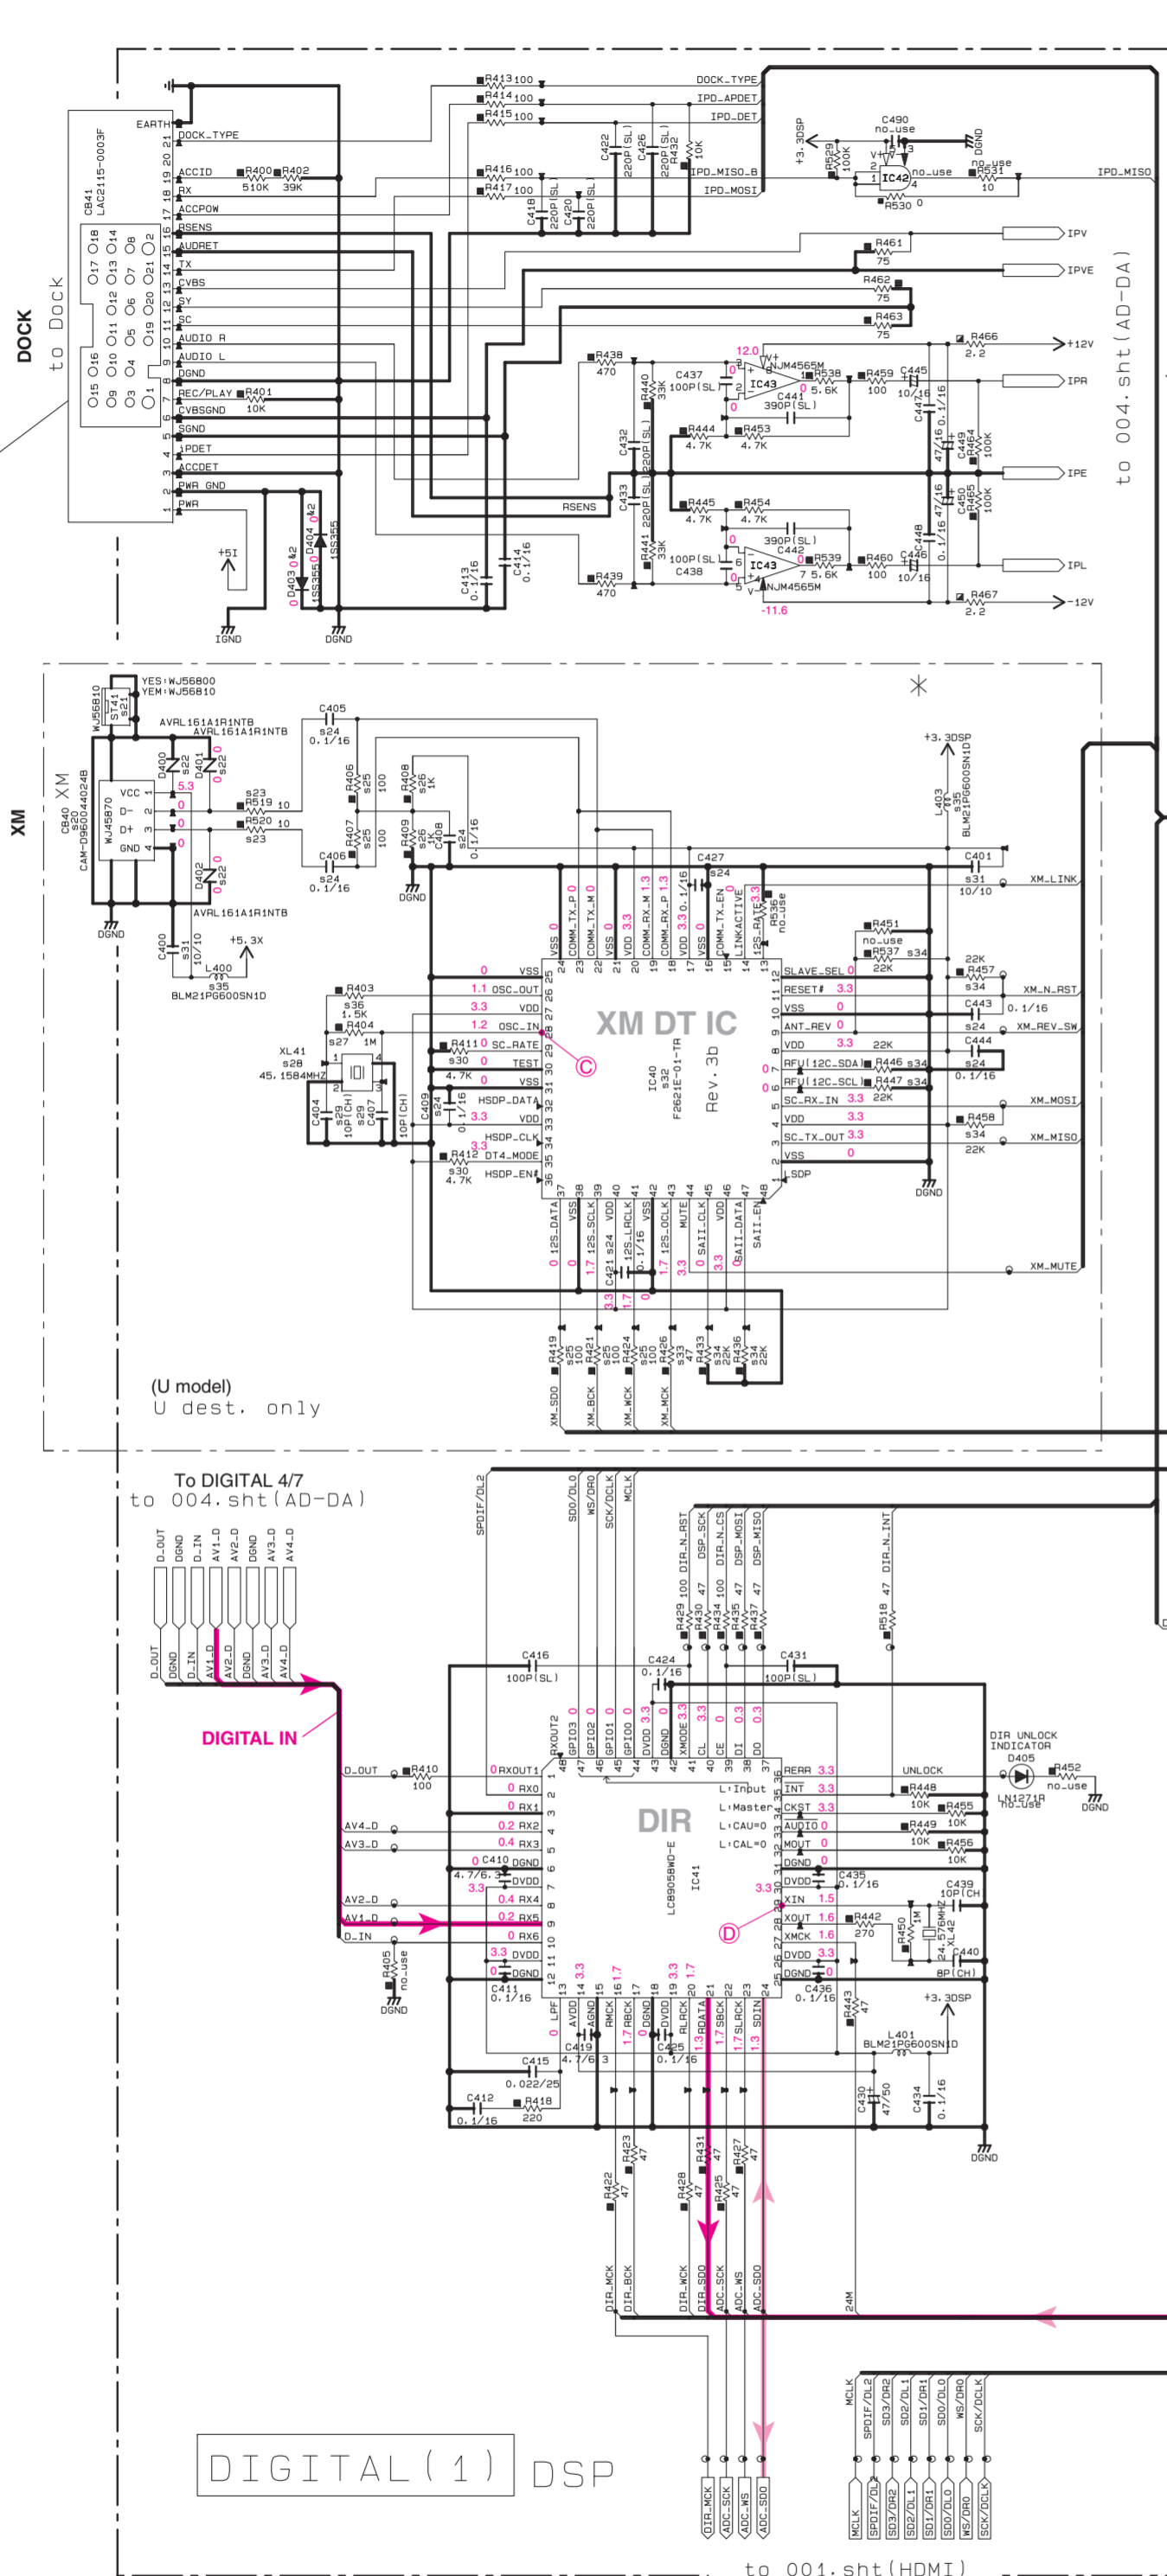


To DIGITAL 4/7

To DIGITAL 7/7

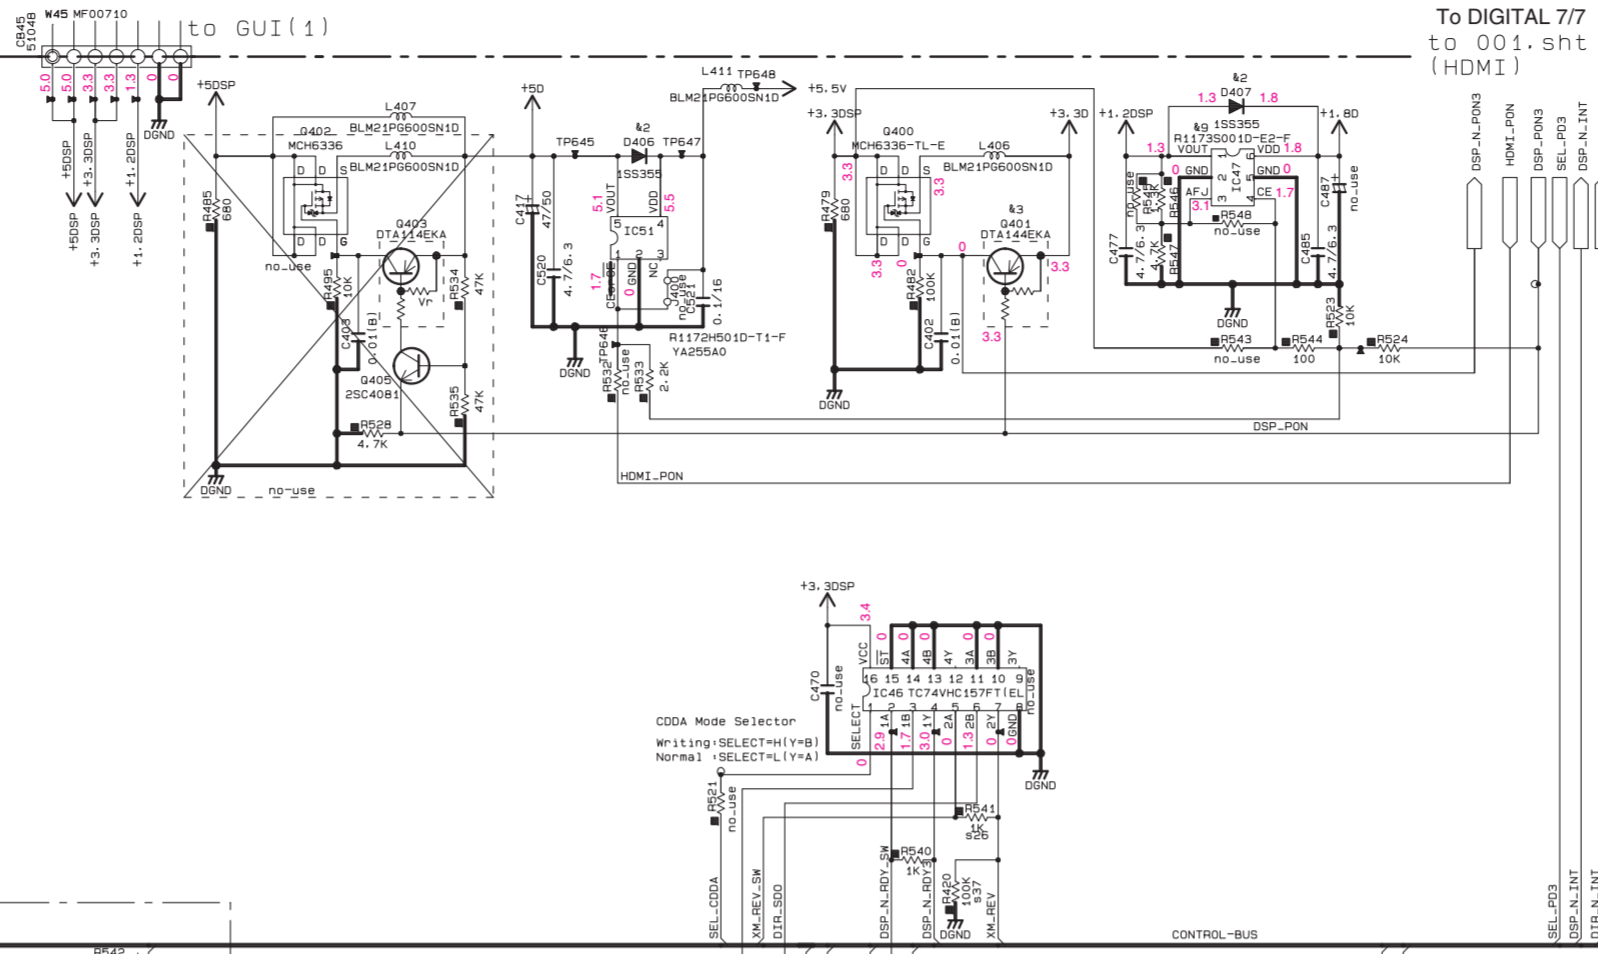








DSP No replacement part available.

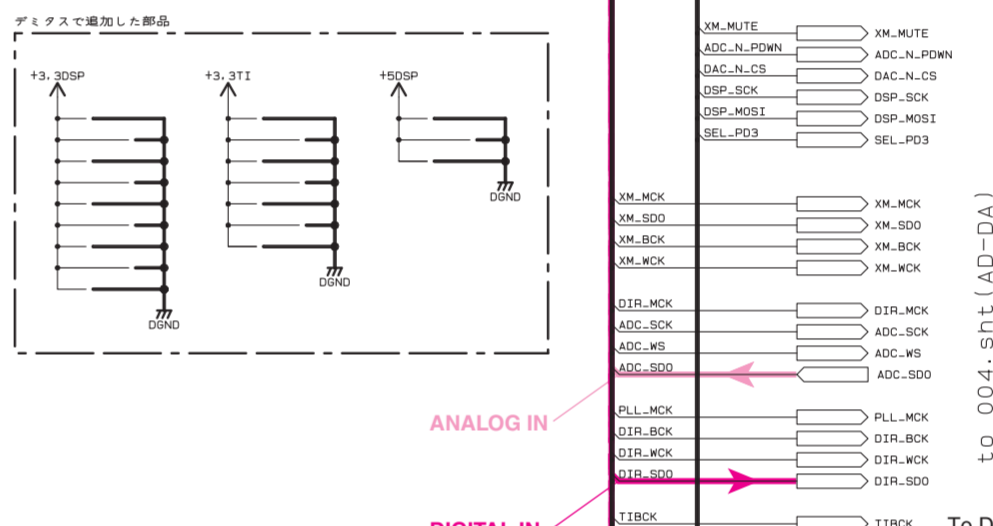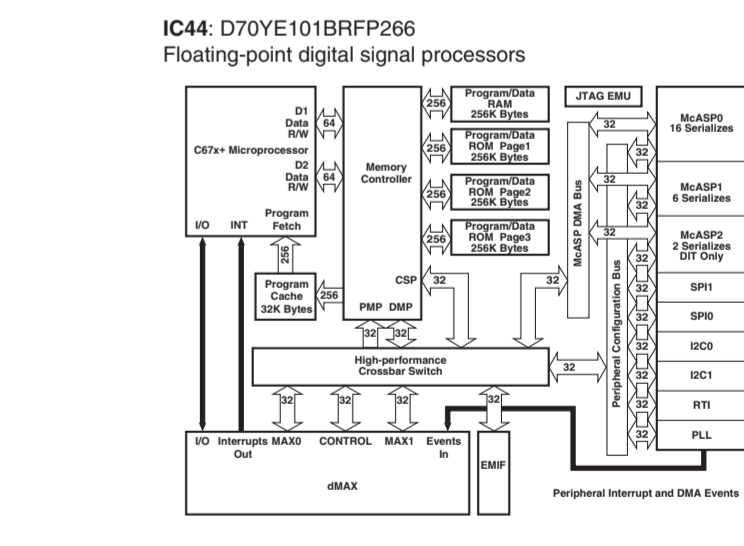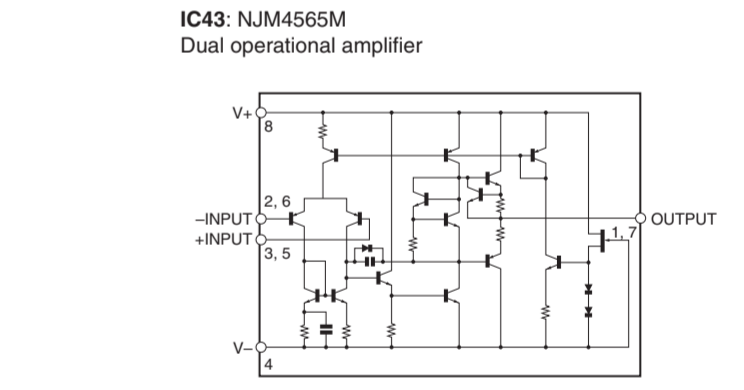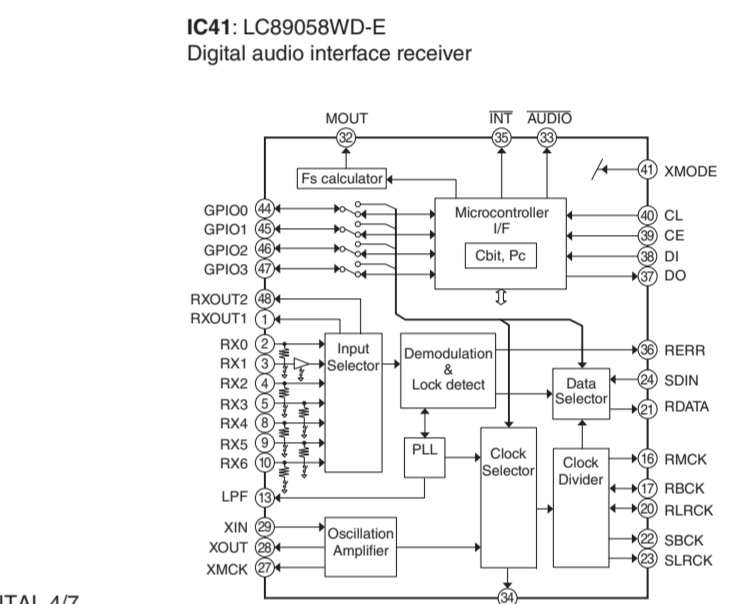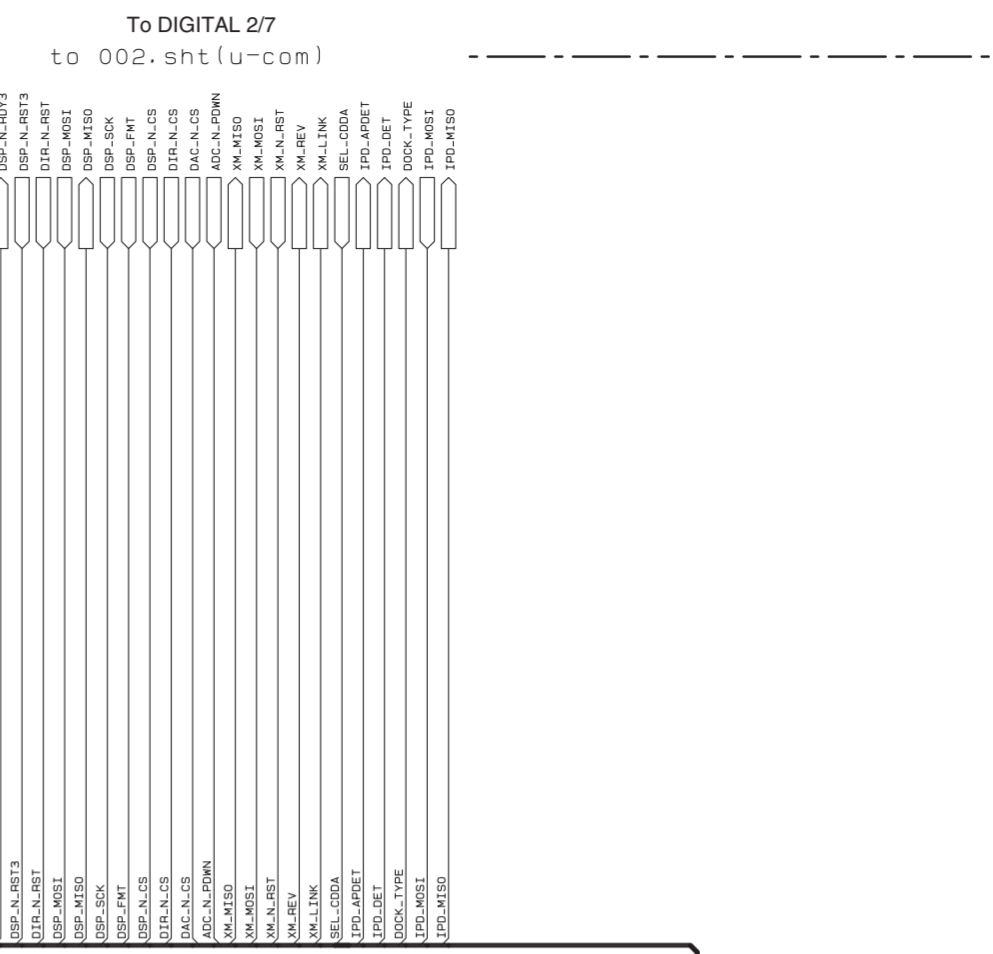

IC47: R1173S001D-E2-F Voltage regulator

IC48: K45641632N-LC60000 64 M synchronous DRAM


Table with columns: RESISTOR, CAPACITOR, and NOTICE. Lists various electronic components and their specifications.

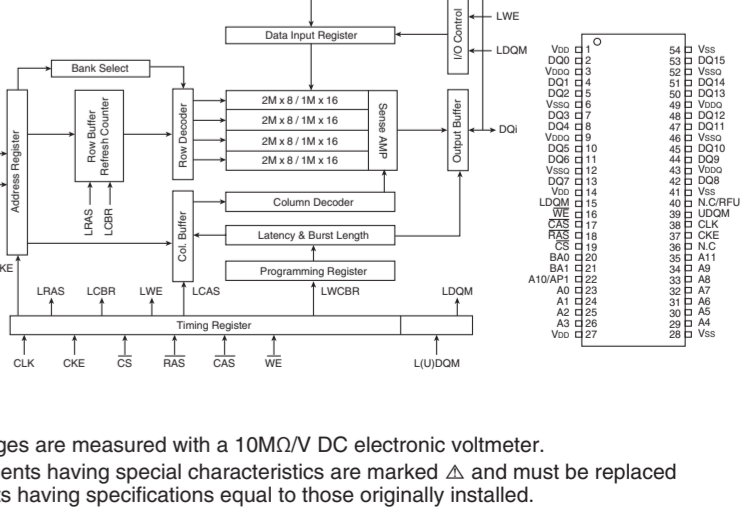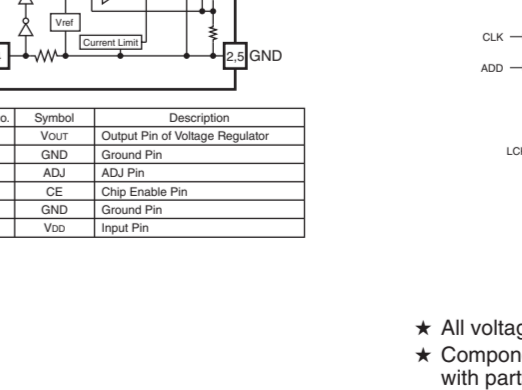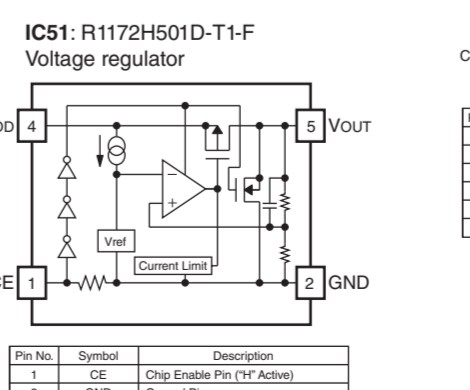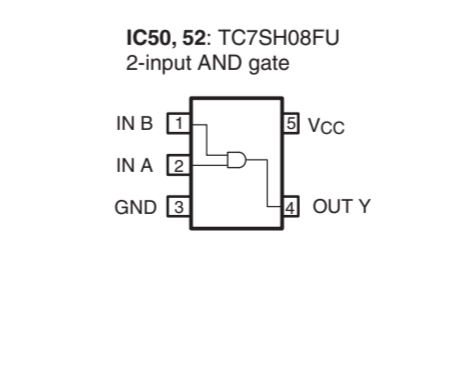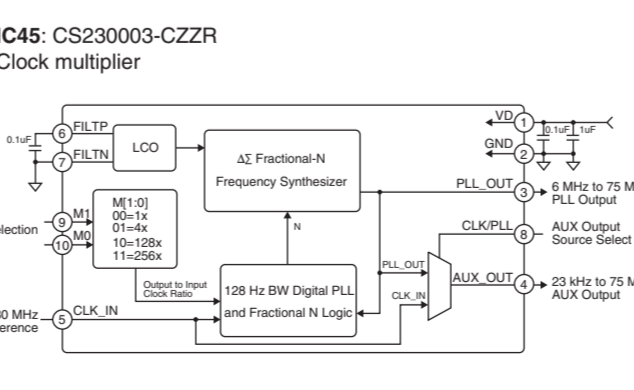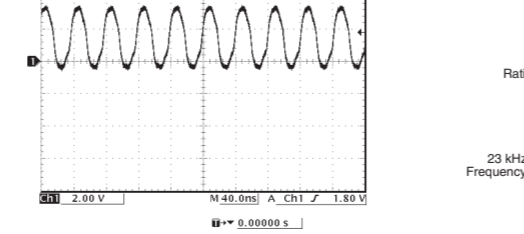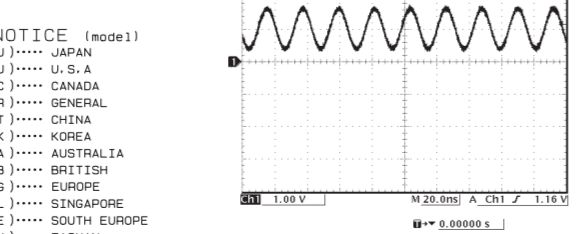

* All voltages are measured with a 10MΩ/V DC electronic voltmeter. * Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed. * Schematic diagram is subject to change without notice.

DIGITAL 4/7

DIGITAL (1)

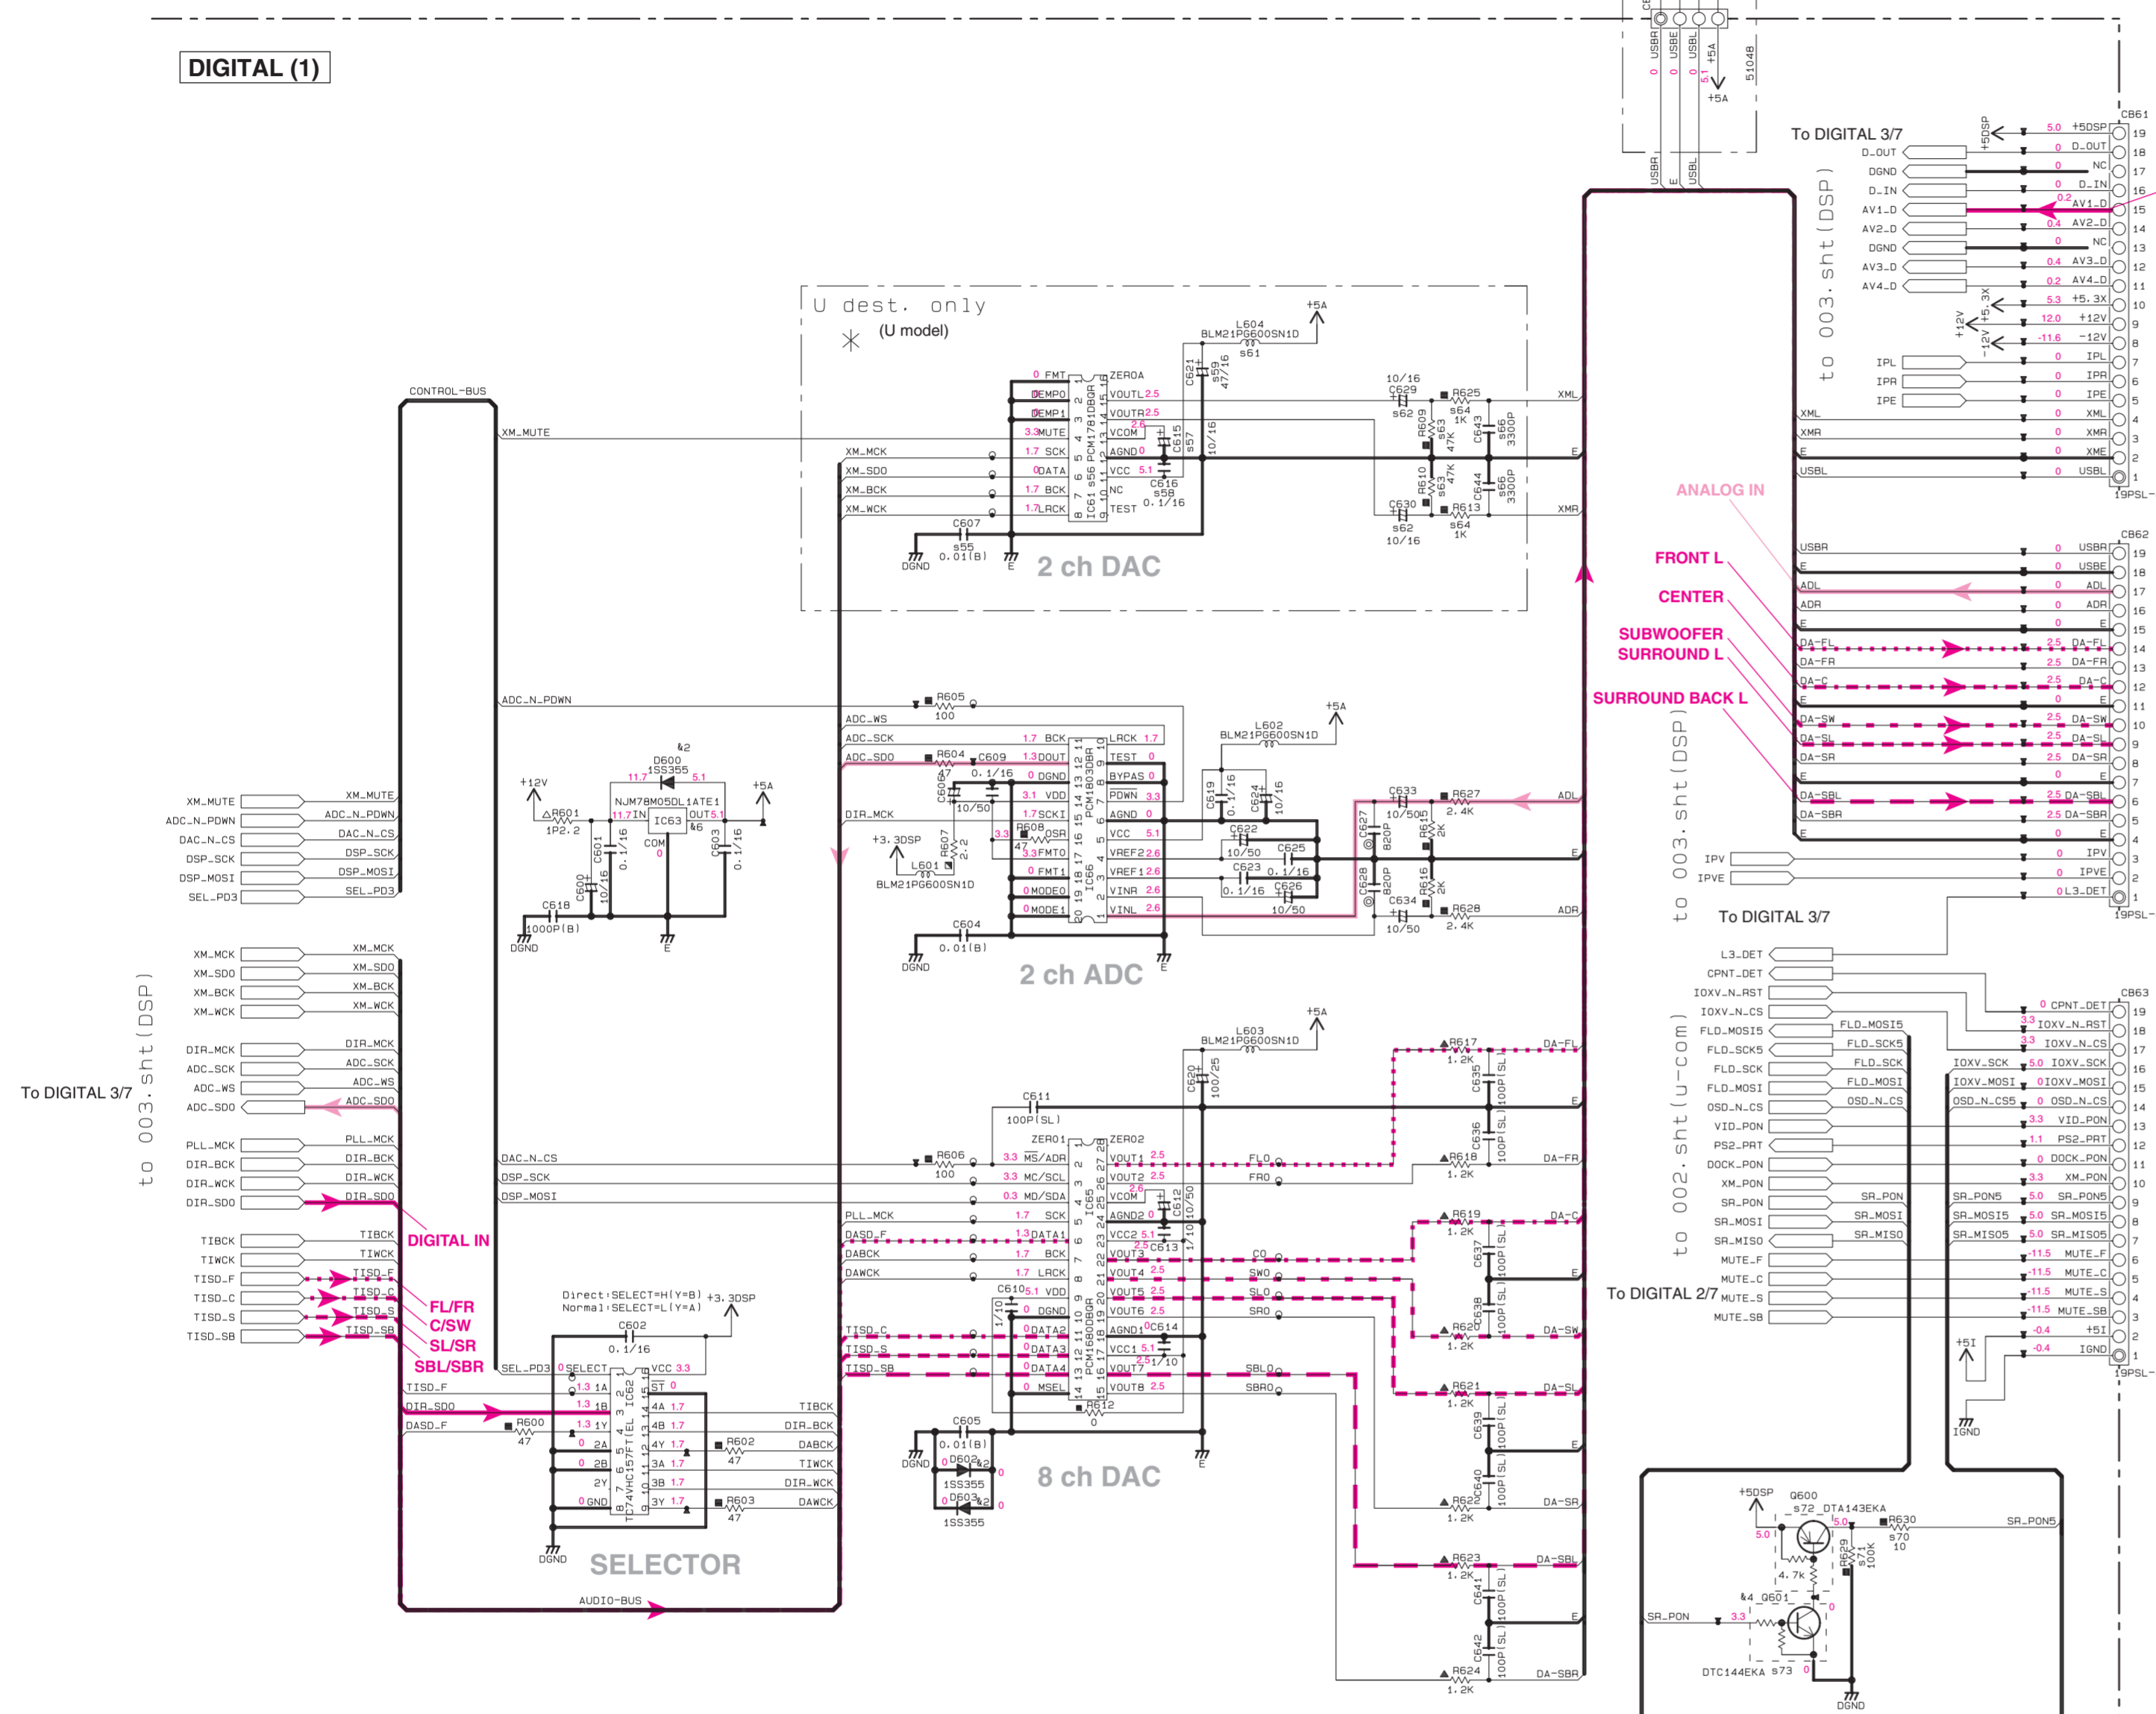

Page 137 [F1] to GUI_CB503

Page 131 [B3] to OPERATION (2)_CB452

Page 131 [D3] to OPERATION (2)_CB455

Page 131 [E3] to OPERATION (2)_CB458

| REMARKS | PARTS NAME |
|---------|--------------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| ⊗ | TANTALUM CAPACITOR |
| NO MARK | CERAMIC CAPACITOR |
| ● | CERAMIC TUBULAR CAPACITOR |
| ○ | POLYESTER FILM CAPACITOR |
| ○ | POLYSTYRENE FILM CAPACITOR |
| ⊖ | MICA CAPACITOR |
| ⊖ | POLYPROPYLENE FILM CAPACITOR |
| ⊖ | SEMICONDUCTIVE CERAMIC CAPACITOR |
| ⊖ | POLYPHENYLENE SULFIDE FILM CAPACITOR |

| REMARKS | PARTS NAME |
|---------|---------------------------------|
| NO MARK | CARBON FILM RESISTOR [P#5] |
| ⊠ | CARBON FILM RESISTOR [P#10] |
| Δ | METAL OXIDE FILM RESISTOR |
| ⊠ | METAL FILM RESISTOR |
| ⊠ | METAL PLATE RESISTOR |
| ⊠ | FIRE PROOF CARBON FILM RESISTOR |
| ⊠ | CEMENT MOLDED RESISTOR |
| ⊠ | SEMI VARIABLE RESISTOR |
| ⊠ | CHIP RESISTOR |

NOTICE (model)
 (J)..... JAPAN
 (U)..... U.S.A
 (C)..... CANADA
 (T)..... GENERAL
 (R)..... CHINA
 (K)..... KOREA
 (A)..... AUSTRALIA
 (B)..... BRITISH
 (S)..... EUROPE
 (L)..... SINGAPORE
 (E)..... SOUTH EUROPE
 (V)..... TAIWAN
 (P)..... LATIN AMERICA

DIGITAL (1) ADC/DAC


* All voltages are measured with a 10MΩ/VC electronic voltmeter.
 * Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.
 * Schematic diagram is subject to change without notice.

s1 ~19:002.sht(u-com)
 s20~80:003.sht(DSP)
 s90~99:005.sht(DVIDEO)


| Part No. | LOC | U | QTY | DESCRIPTION |
|----------|-------|---------|-----|--------------|
| 97 | IC22 | 74V7980 | 1 | EEPROM |
| 99 | CB31 | X | 1 | THM2 |
| 814 | R255 | R255 | 1 | TUNER Pullup |
| 816 | R206 | X | 1 | PS2_PRT |
| 817 | R205 | R205 | 1 | XM/HD-Rad10 |
| 818 | R243 | X | 1 | RDS |
| 819 | R322 | X | 1 | AM/FM TUNER |
| 820 | CB40 | X | 1 | |
| 821 | ST41 | X | 1 | |
| 822 | D402 | X | 1 | |
| 823 | R520 | X | 1 | |
| 824 | R519 | X | 1 | |
| 825 | R421 | X | 1 | |
| 826 | R419 | X | 1 | |
| 827 | R404 | X | 1 | |
| 828 | XL41 | X | 1 | |
| 829 | C424 | X | 1 | |
| 830 | R411 | X | 1 | |
| 831 | C400 | X | 1 | |
| 832 | IC400 | X | 1 | |
| 833 | R425 | X | 1 | |
| 834 | R537 | X | 1 | |
| 835 | L403 | X | 1 | |
| 836 | R403 | X | 1 | |
| 837 | R420 | X | 1 | |
| 838 | C607 | X | 1 | |
| 839 | IC051 | X | 1 | |
| 840 | C615 | X | 1 | |
| 841 | C616 | X | 1 | |
| 842 | C621 | X | 1 | |
| 843 | L604 | X | 1 | |
| 844 | C630 | X | 1 | |
| 845 | R610 | X | 1 | |
| 846 | R613 | X | 1 | |
| 847 | C644 | X | 1 | |
| 848 | R630 | X | 1 | |
| 849 | R631 | X | 1 | |
| 850 | G600 | X | 1 | |
| 851 | G601 | X | 1 | |
| 852 | IC68 | X | 1 | |
| 853 | C617 | X | 1 | |
| 854 | CB73 | X | 1 | |
| 855 | R705 | X | 1 | |
| 856 | R707 | X | 1 | |
| 857 | R819 | X | 1 | |

| Mark | Reference Parts Number | Parts Name |
|------|---------------------------------|-------------------------------------|
| 81 | IC48 | K45E14833N-L06000 V54C365164E16 |
| 82 | D403-404-406-407 702-703-962 | 15S355 M45J1106L K05160-RTK/P |
| 83 | 8201-202-401 | DT144EKA KRA104S-RTK/P |
| 84 | 8601 | DT144EKA KRC104S-RTK/P |
| 85 | 881-83-85-87 | 20C1815(F) KTC3198(F)-AT |
| 86 | IC63 | NJM78M05DL1ATE1 K1A78M05F |
| 87 | 882-86 | KT1046-Y-U/P 2881565(E/F) |
| 88 | 880-84 | 2SA1015(F) KT1266(F)-AT |
| 89 | IC47 | R117350010-E2-F R117350018-E2-F |


IC61: PCM1781DBQR

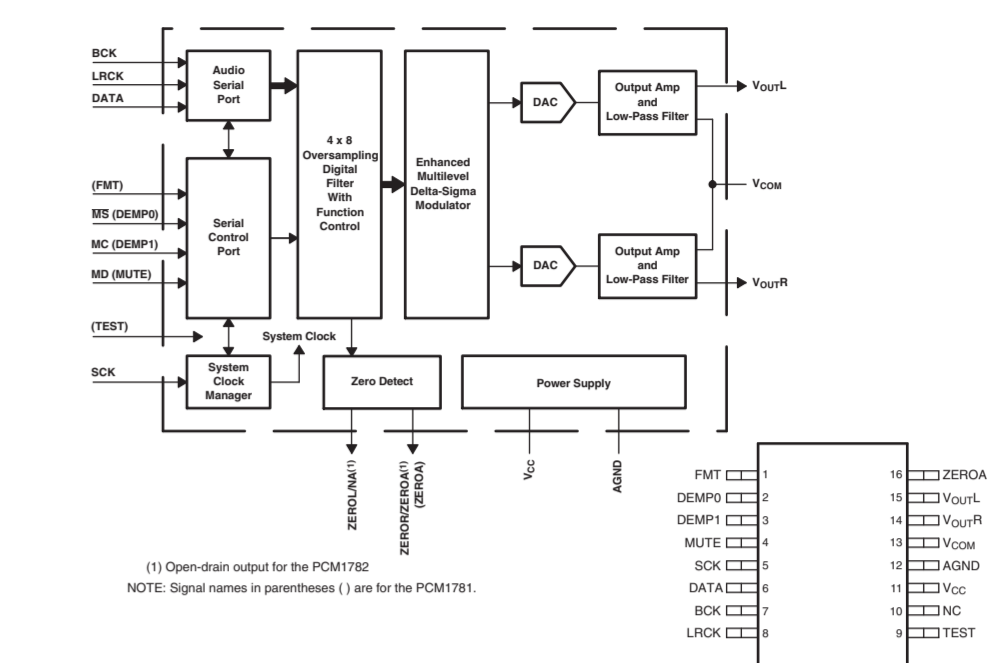


IC62: TC74VHC157FT

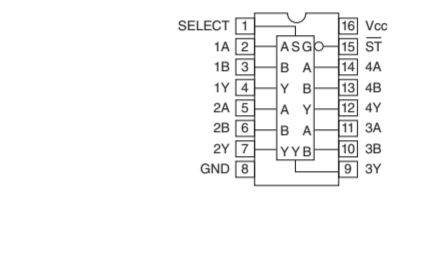


IC63: NUM78M05DL1A (TE1)

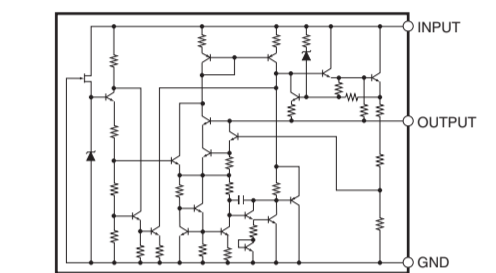


IC65: PCM1680BQR

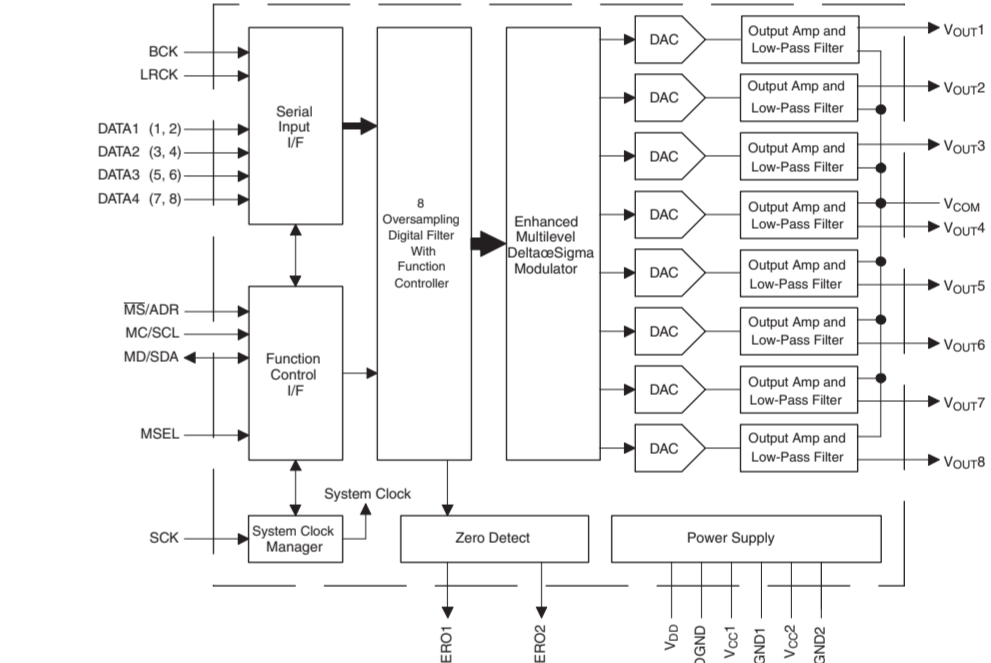


IC66: PCM1803DBR

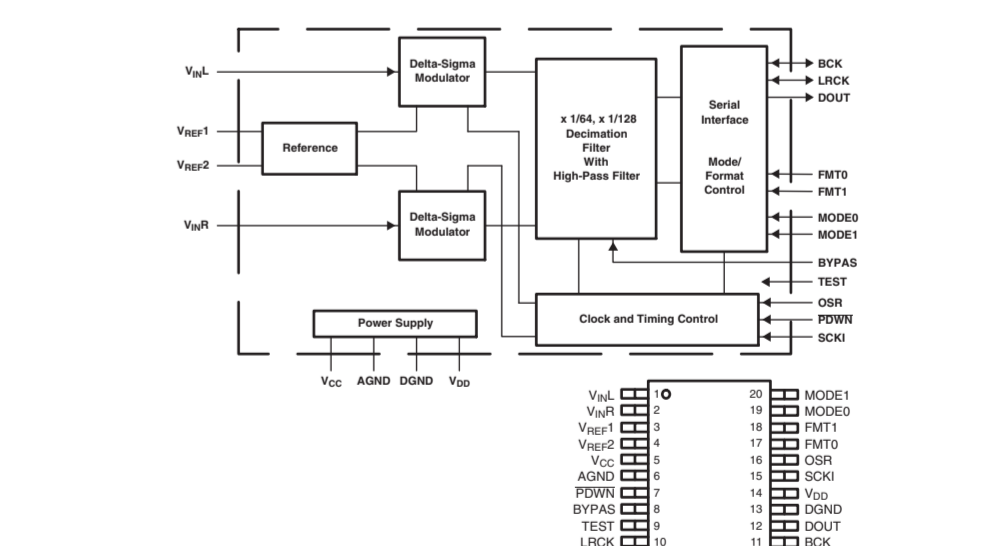

IC67: TC74VHC08AFT

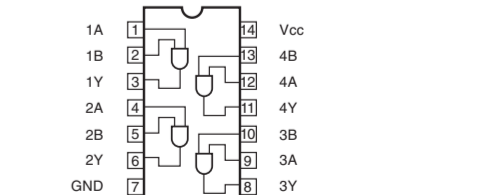


IC68: TC74SH08FU



DIGITAL 5/7

Page 136 [C3] to VIDEO (9)_CB391 (B, G, E, F models)

Page 134 [J9] to VIDEO (1)_CB304

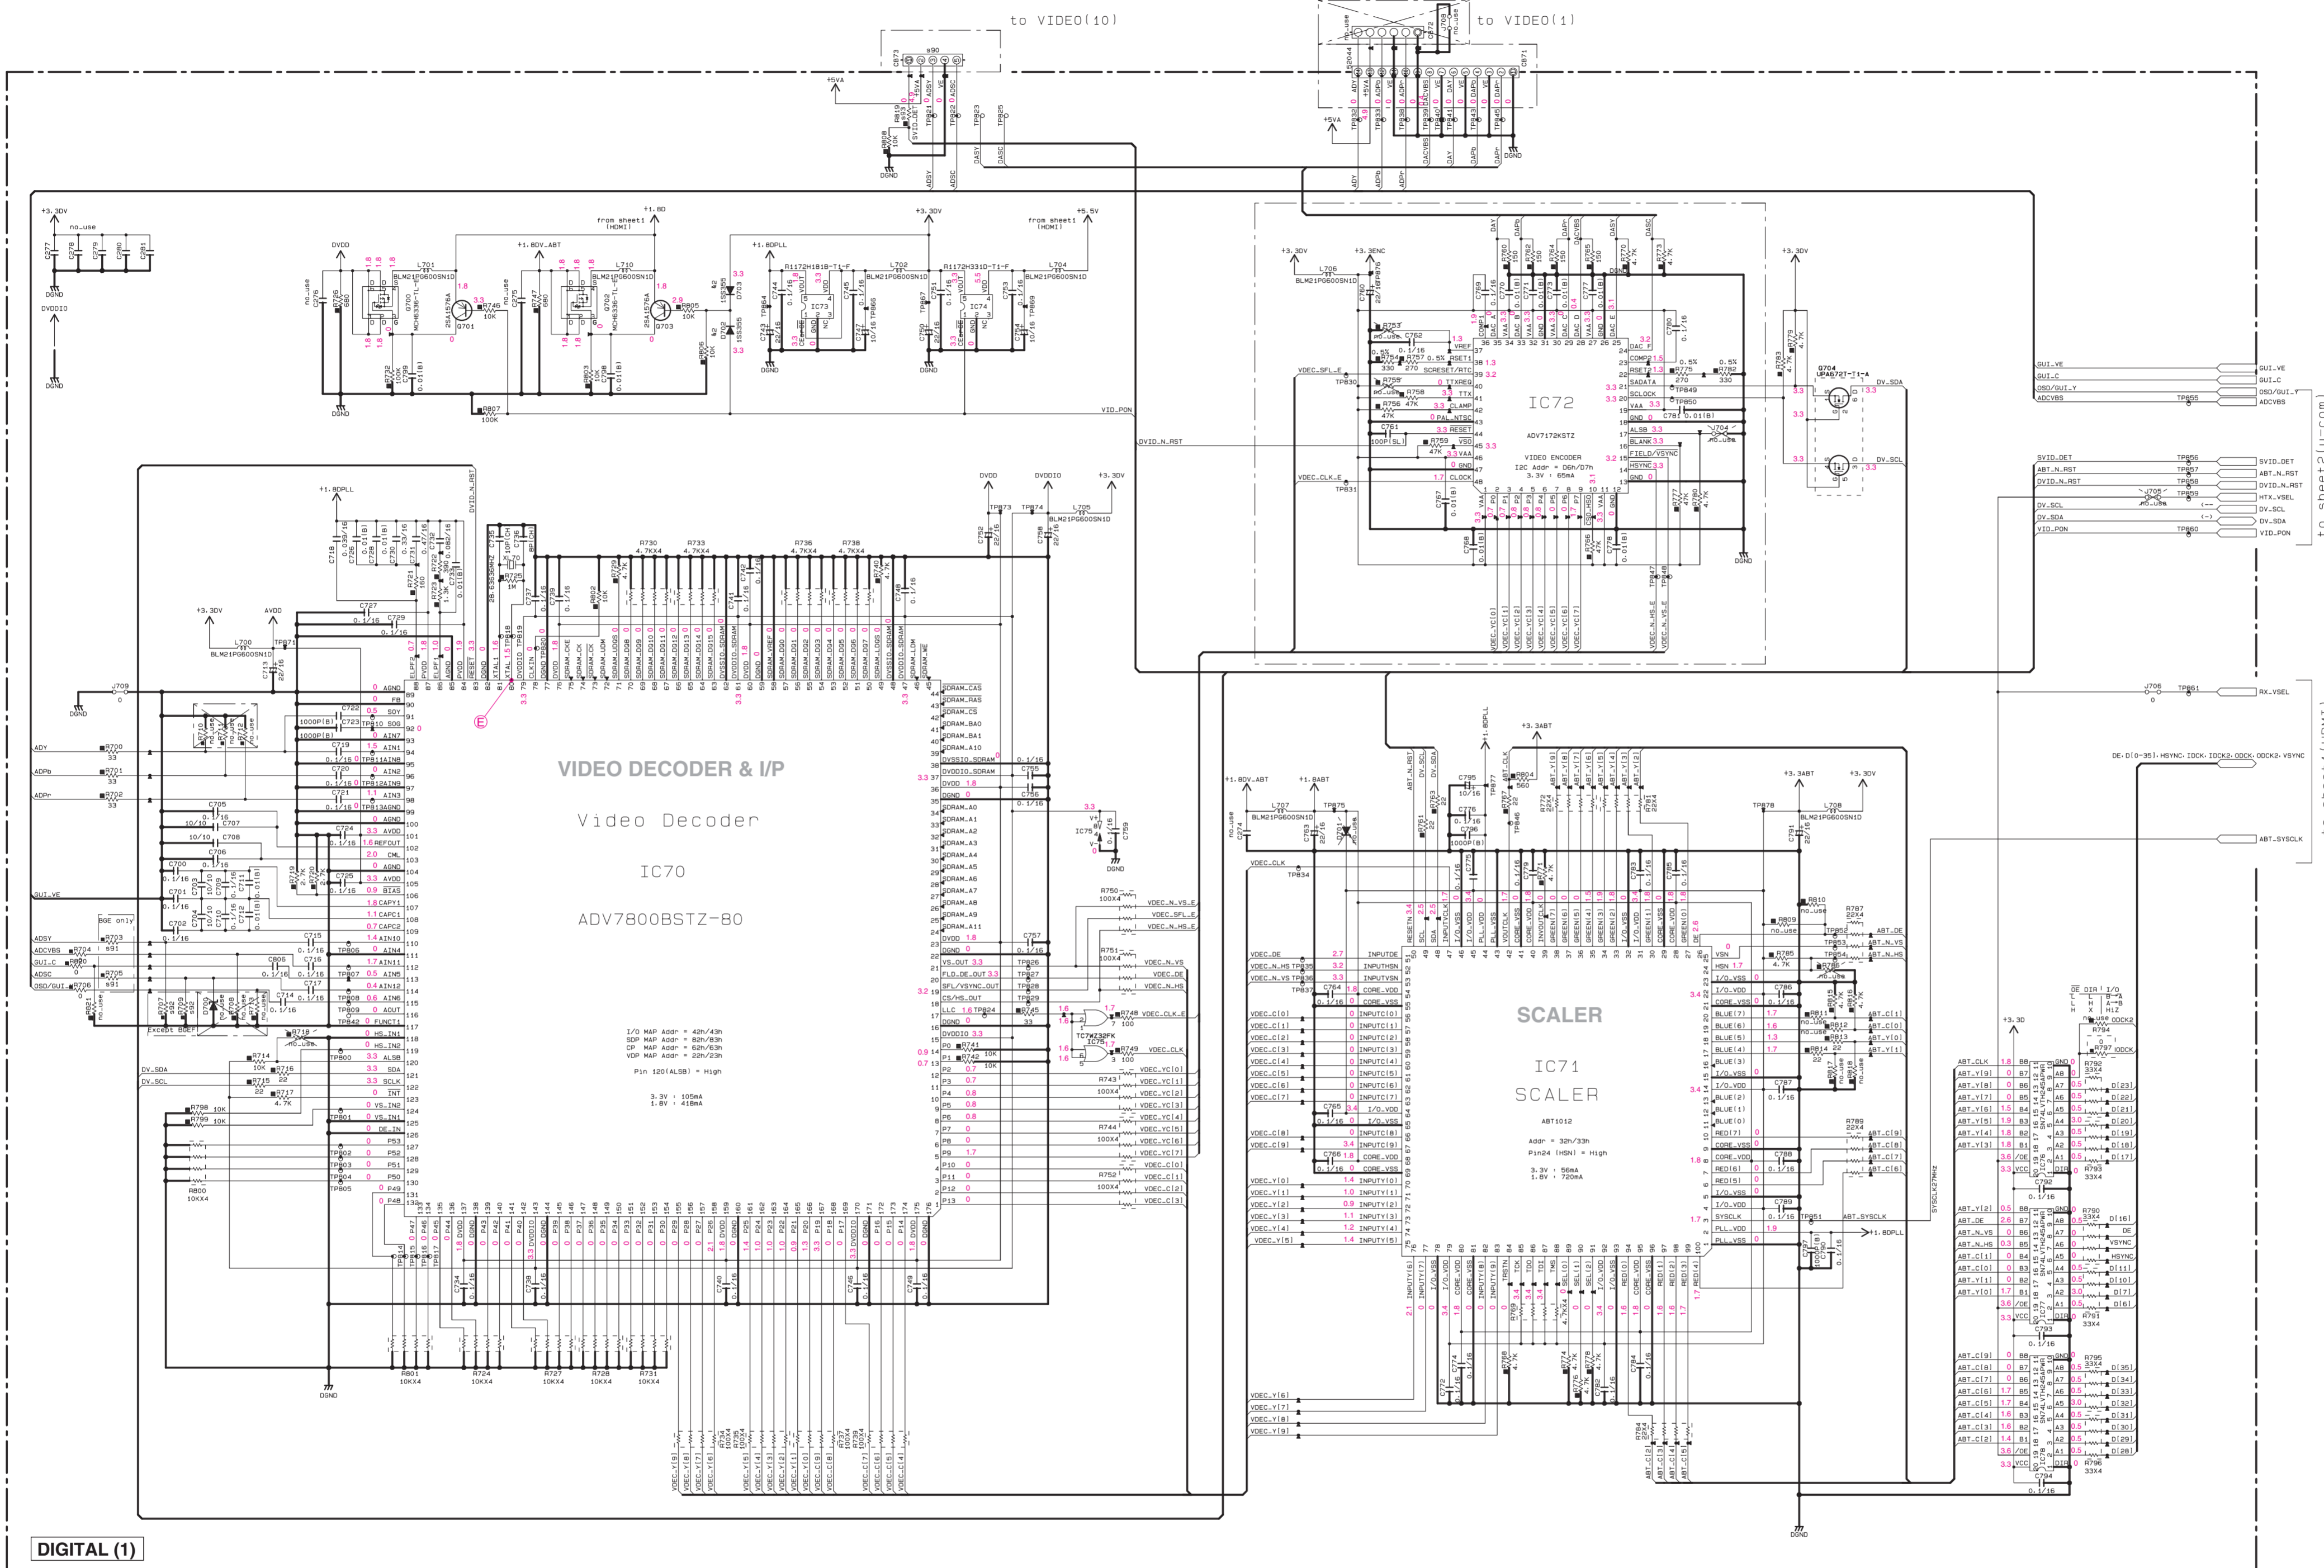


VIDEO DECODER & I/P Video Decoder IC70 ADV7800BSTZ-80


SCALER IC71 SCALER ABT1012

VIDEO ENCODER IC72 ADV7172KSTZ


IC76-78: SN74LVTH245APW 3.3 V ABT octal bus transceivers with 3-state outputs

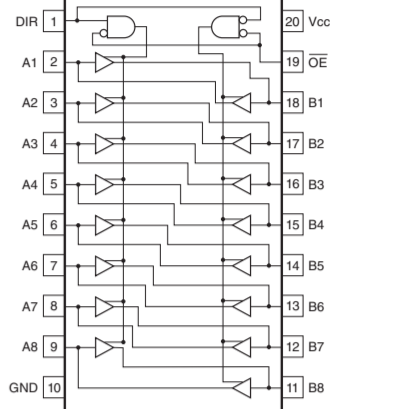


IC75: TC7WZ32FK (TE8SL, F) Dual 2-input OR gate

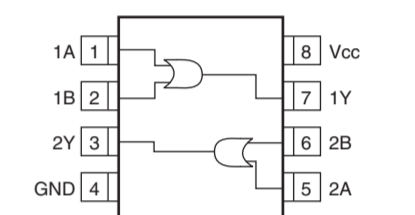


IC74: R1172H31D-T1-F Voltage regulator

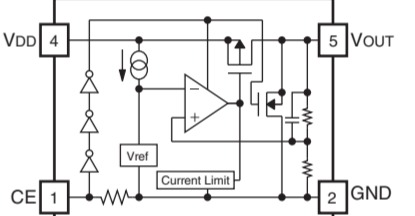

IC73: R1172H181B-T1-F Voltage regulator

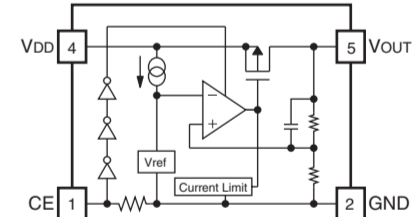

IC71: ABT1012Q100 Advanced video processor device

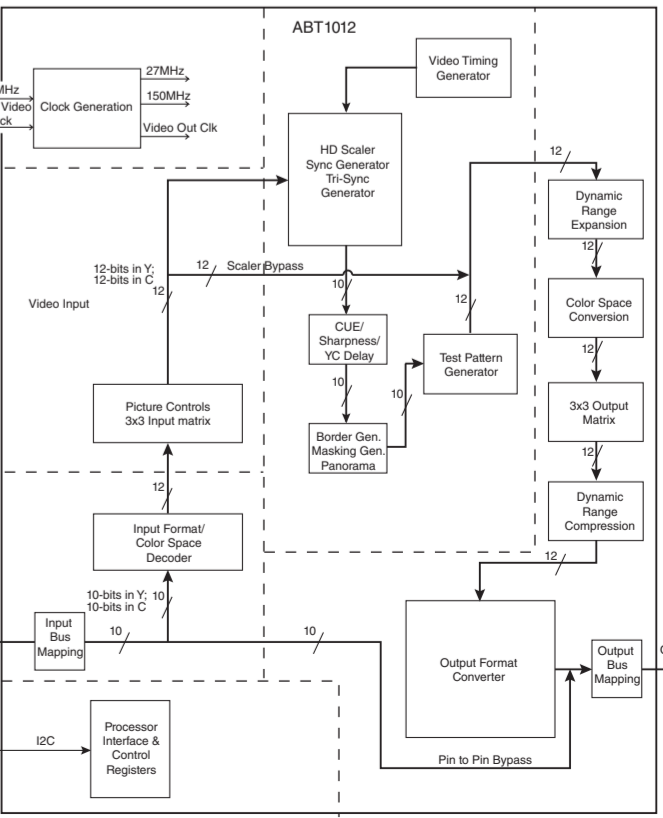

DIGITAL (1)

POINT (E) XL70 (Pin 80 of IC70)

IC72: ADV7172KSTZ Digital PAL/NTSC video encoder

DVIDEO CB/TC/XL: 70-B4 OTHER : 700-B49

IC70: ADV7800BSTZ-80 10-bit, SDTV/HDTV 3D comb filter, video decoder and graphics digitizer

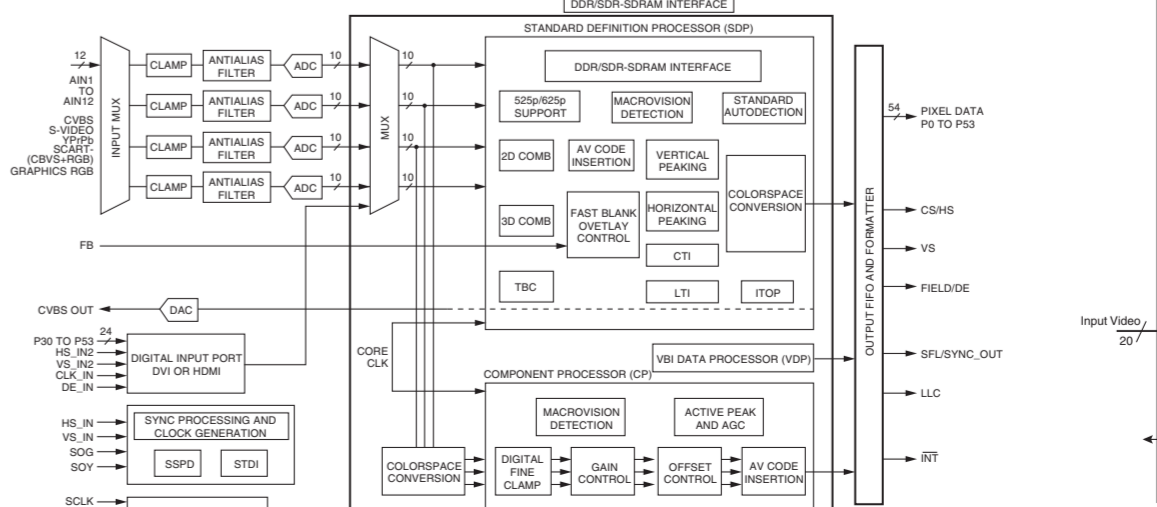
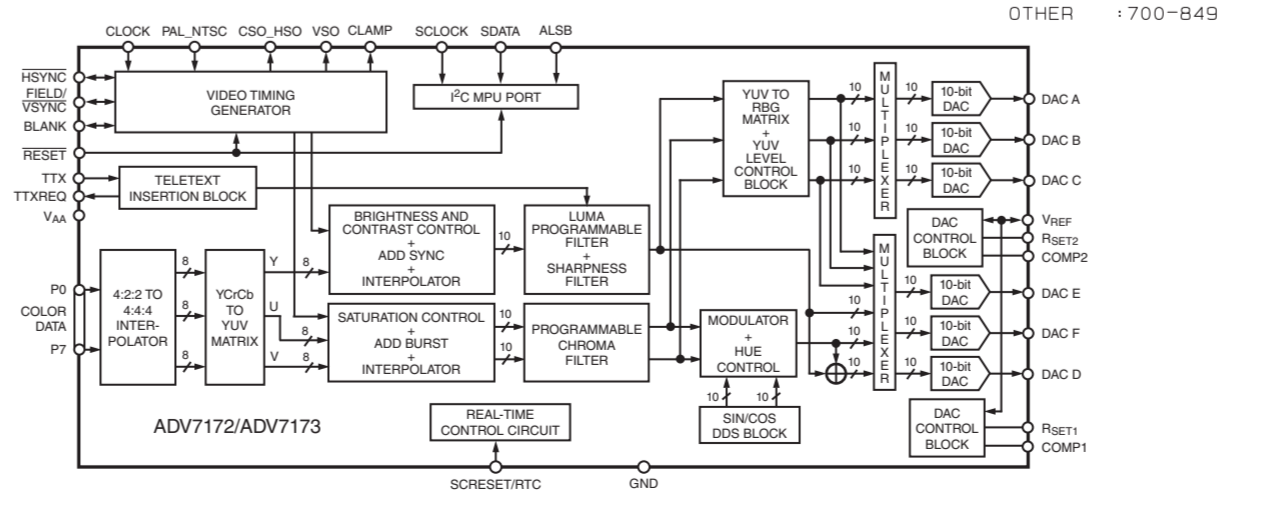



Table with 2 columns: CAPACITOR and RESISTOR. Lists various capacitor and resistor types and their part names.

NOTICE (model) (U) JAPAN (C) U.S.A. (D) CANADA (R) GENERAL (T) CHINA (K) KOREA (A) AUSTRALIA (B) BRITISH (G) EUROPE (L) SINGAPORE (E) SOUTH EUROPE (V) TAIWAN (F) RUSSIAN (P) LATIN AMERICA

- * All voltages are measured with a 10MΩ DC electronic voltmeter.
* Components having special characteristics are marked A and must be replaced with parts having specifications equal to those originally installed.
* Schematic diagram is subject to change without notice.


DREAR

HDMI IN-Front

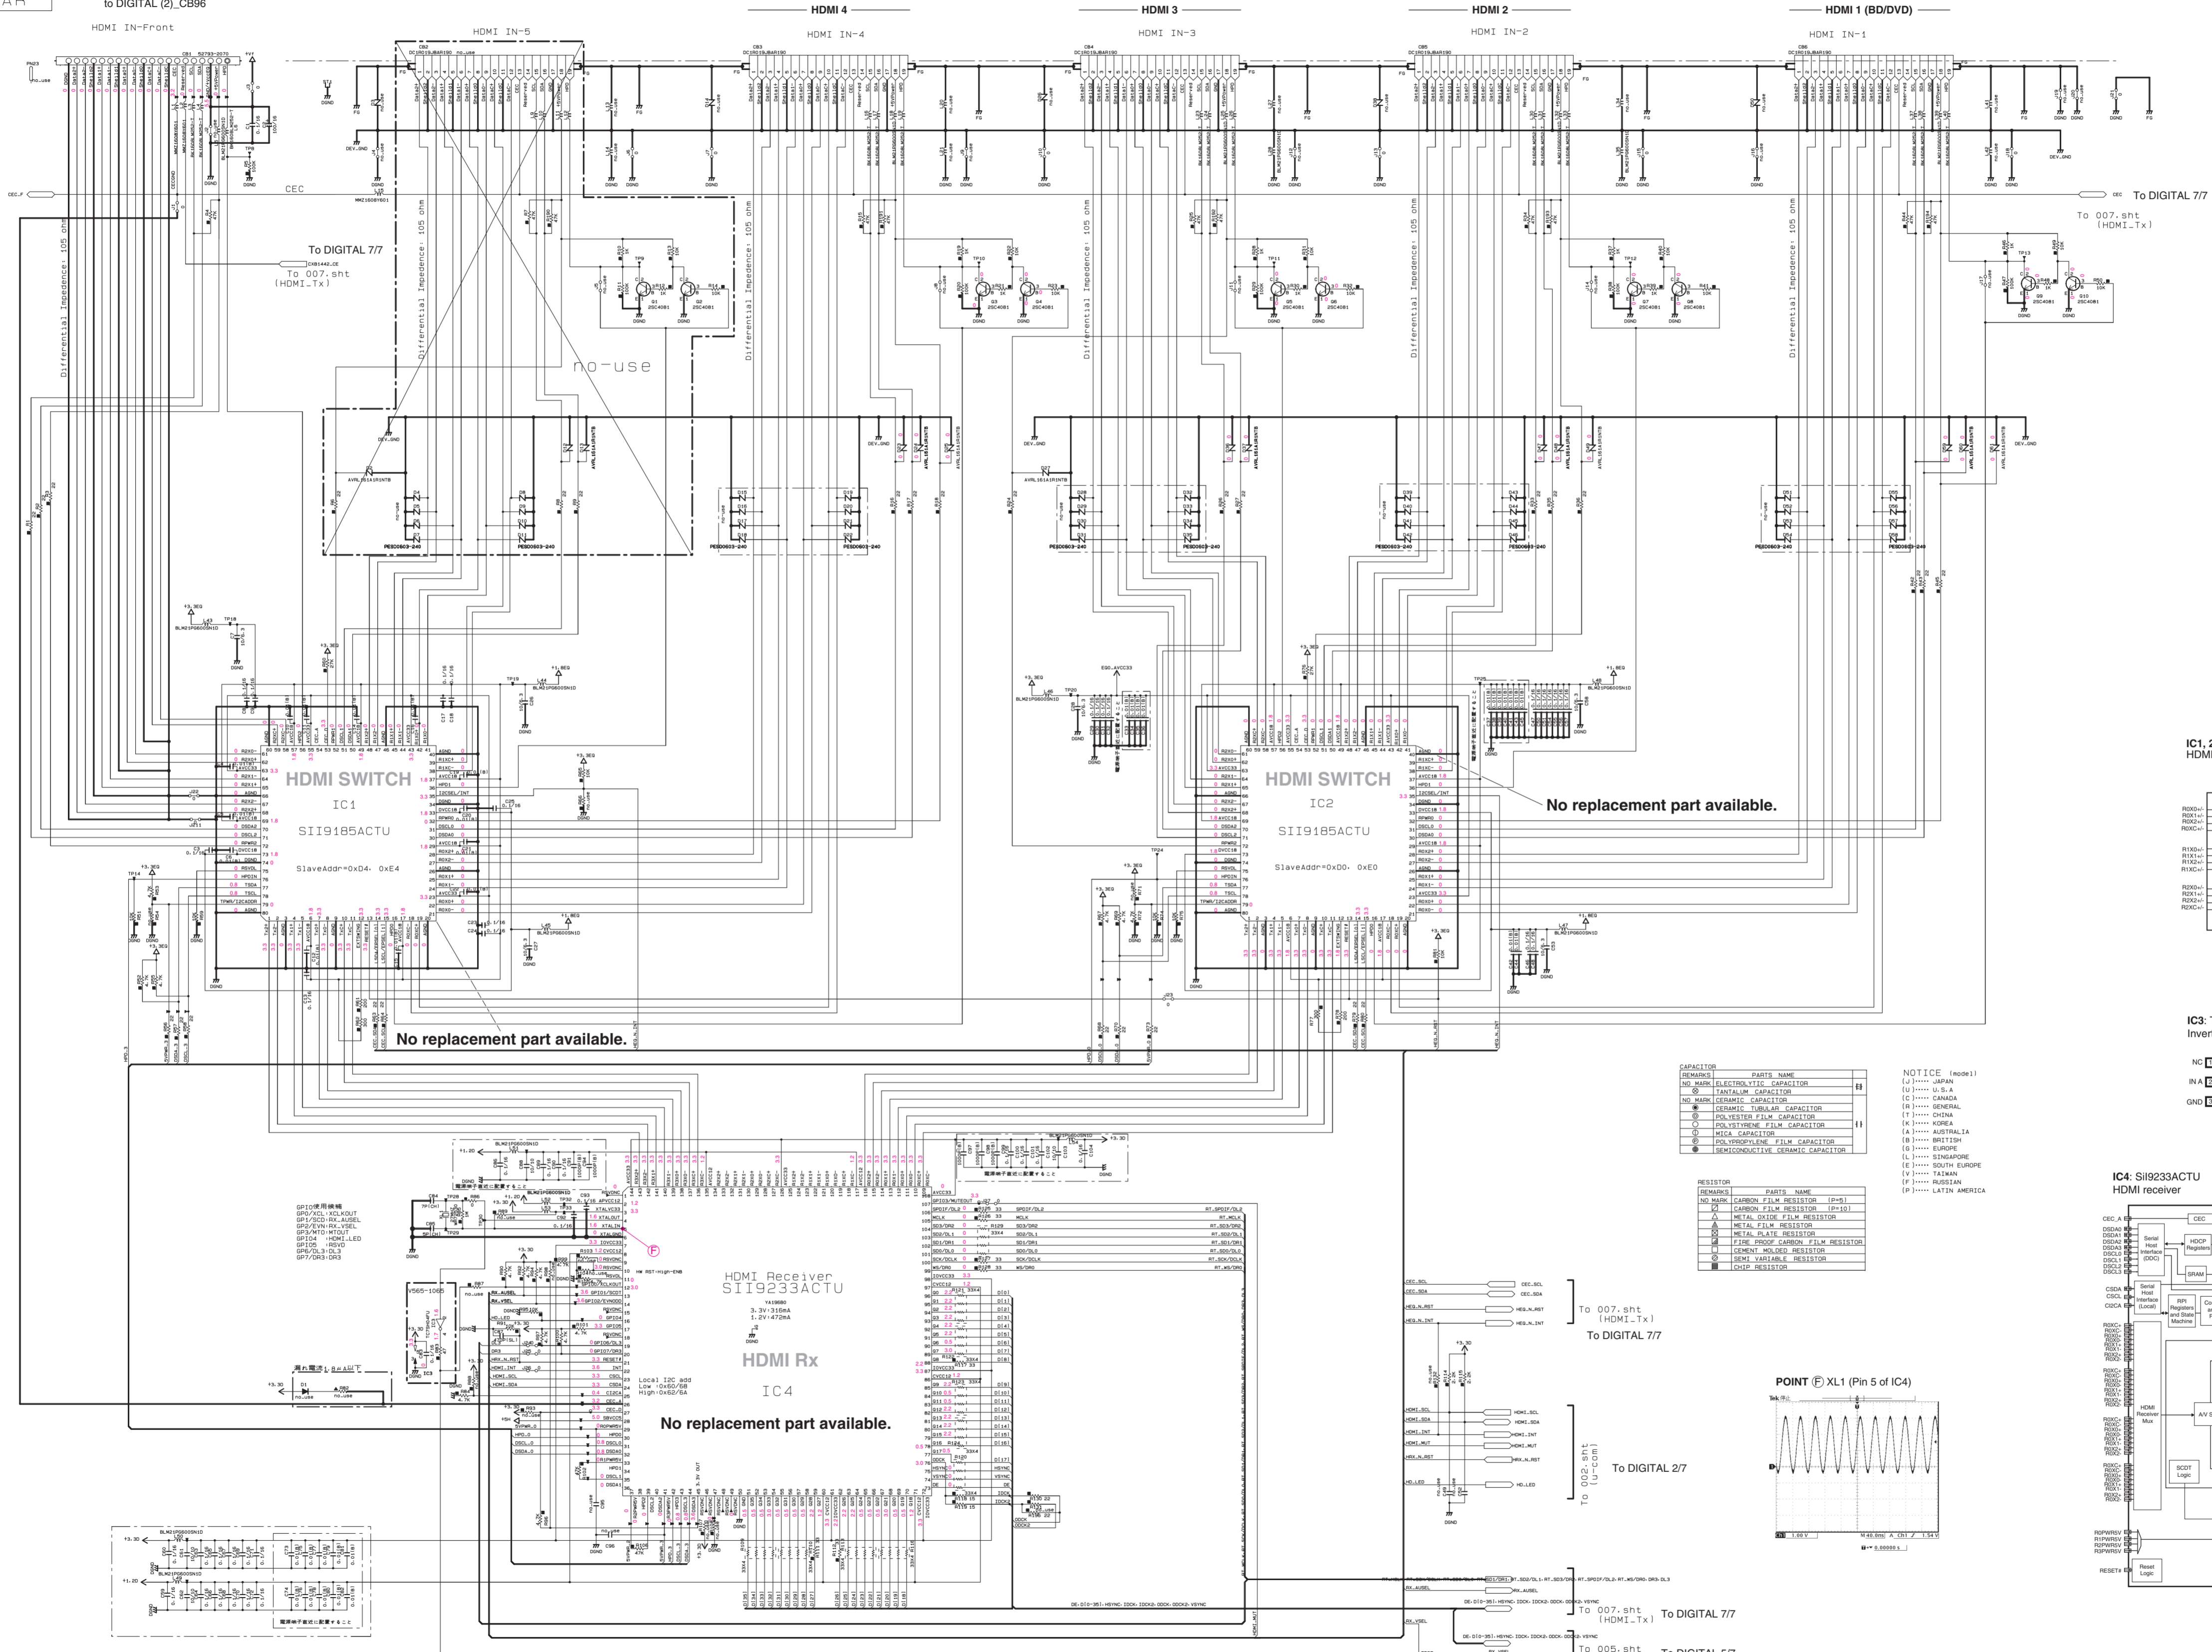


IC1: SII9185ACTU
HDMI switch

SlaveAddr=0x04, 0xE4




IC2: SII9185ACTU
HDMI switch


SlaveAddr=0xD0, 0xE0

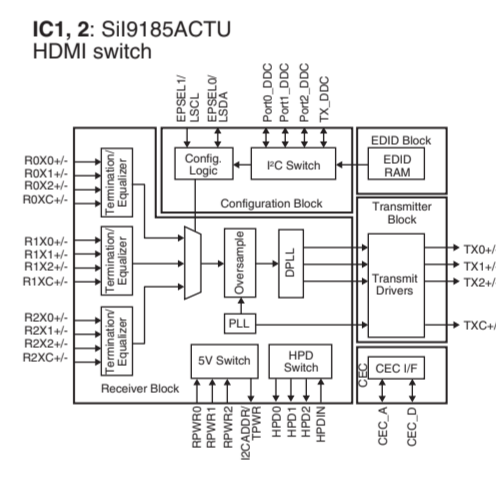

IC3: TC7SH04FU-TE85L
Inverter



IC4: SII9233ACTU
HDMI receiver

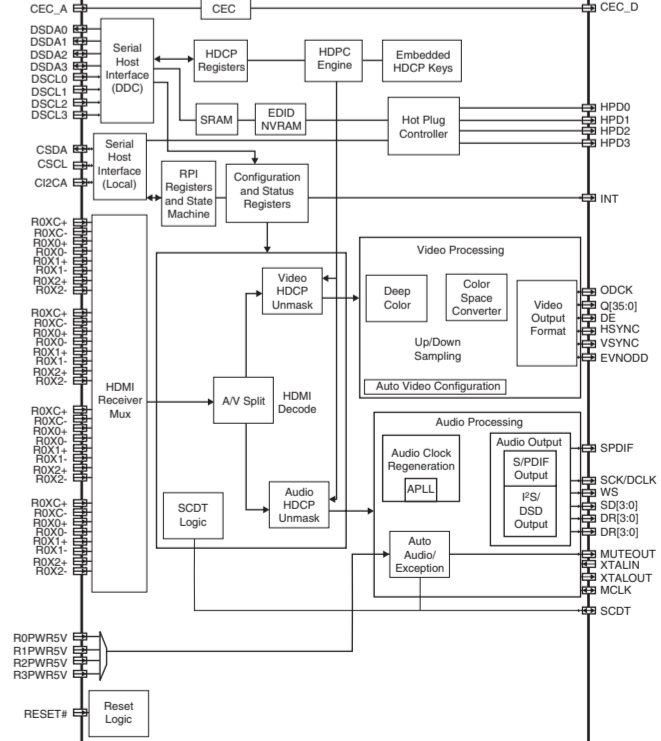

CAPACITOR


| MARK | PARTS NAME |
|---------|----------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| NO MARK | TANTALUM CAPACITOR |
| NO MARK | CERAMIC CAPACITOR |
| NO MARK | CERAMIC TUBULAR CAPACITOR |
| NO MARK | POLYESTER FILM CAPACITOR |
| NO MARK | POLYPROPYLENE FILM CAPACITOR |
| NO MARK | MICA CAPACITOR |
| NO MARK | POLYPROPYLENE FILM CAPACITOR |
| NO MARK | SEMICONDUCTIVE CERAMIC CAPACITOR |

RESISTOR

| MARK | PARTS NAME |
|---------|--------------------------------|
| NO MARK | CARBON FILM RESISTOR (P=1) |
| NO MARK | CARBON FILM RESISTOR (P=10) |
| NO MARK | METAL OXIDE FILM RESISTOR |
| NO MARK | METAL FILM RESISTOR |
| NO MARK | METAL PLATE RESISTOR |
| NO MARK | FINE PORE CARBON FILM RESISTOR |
| NO MARK | CURRENT HOLDING RESISTOR |
| NO MARK | SEMI-VARIABLE RESISTOR |
| NO MARK | TEMP. RESISTOR |

NOTICE [note1]

(J)..... JAPAN
(U)..... U.S.A.
(C)..... CANADA
(B)..... GENERAL
(T)..... CHINA
(K)..... KOREA
(A)..... AUSTRALIA
(B)..... BRITISH
(E)..... EUROPE
(L)..... SINGAPORE
(S)..... SOUTH EUROPE
(V)..... TAIWAN
(R)..... RUSSIAN
(O)..... LATIN AMERICA

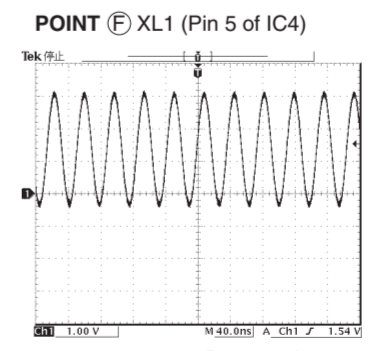

DIGITAL (1)

DIGITAL (1)


HDMI_RX

* All voltages are measured with a 10MΩ/V DC electronic voltmeter.
 * Components having special characteristics are marked Δ, and must be replaced with parts having specifications equal to those originally installed.
 * Schematic diagram is subject to change without notice.

DIGITAL 7/7

HDMI OUT 1 (HDMI CONTROL)

HDMI OUT 2

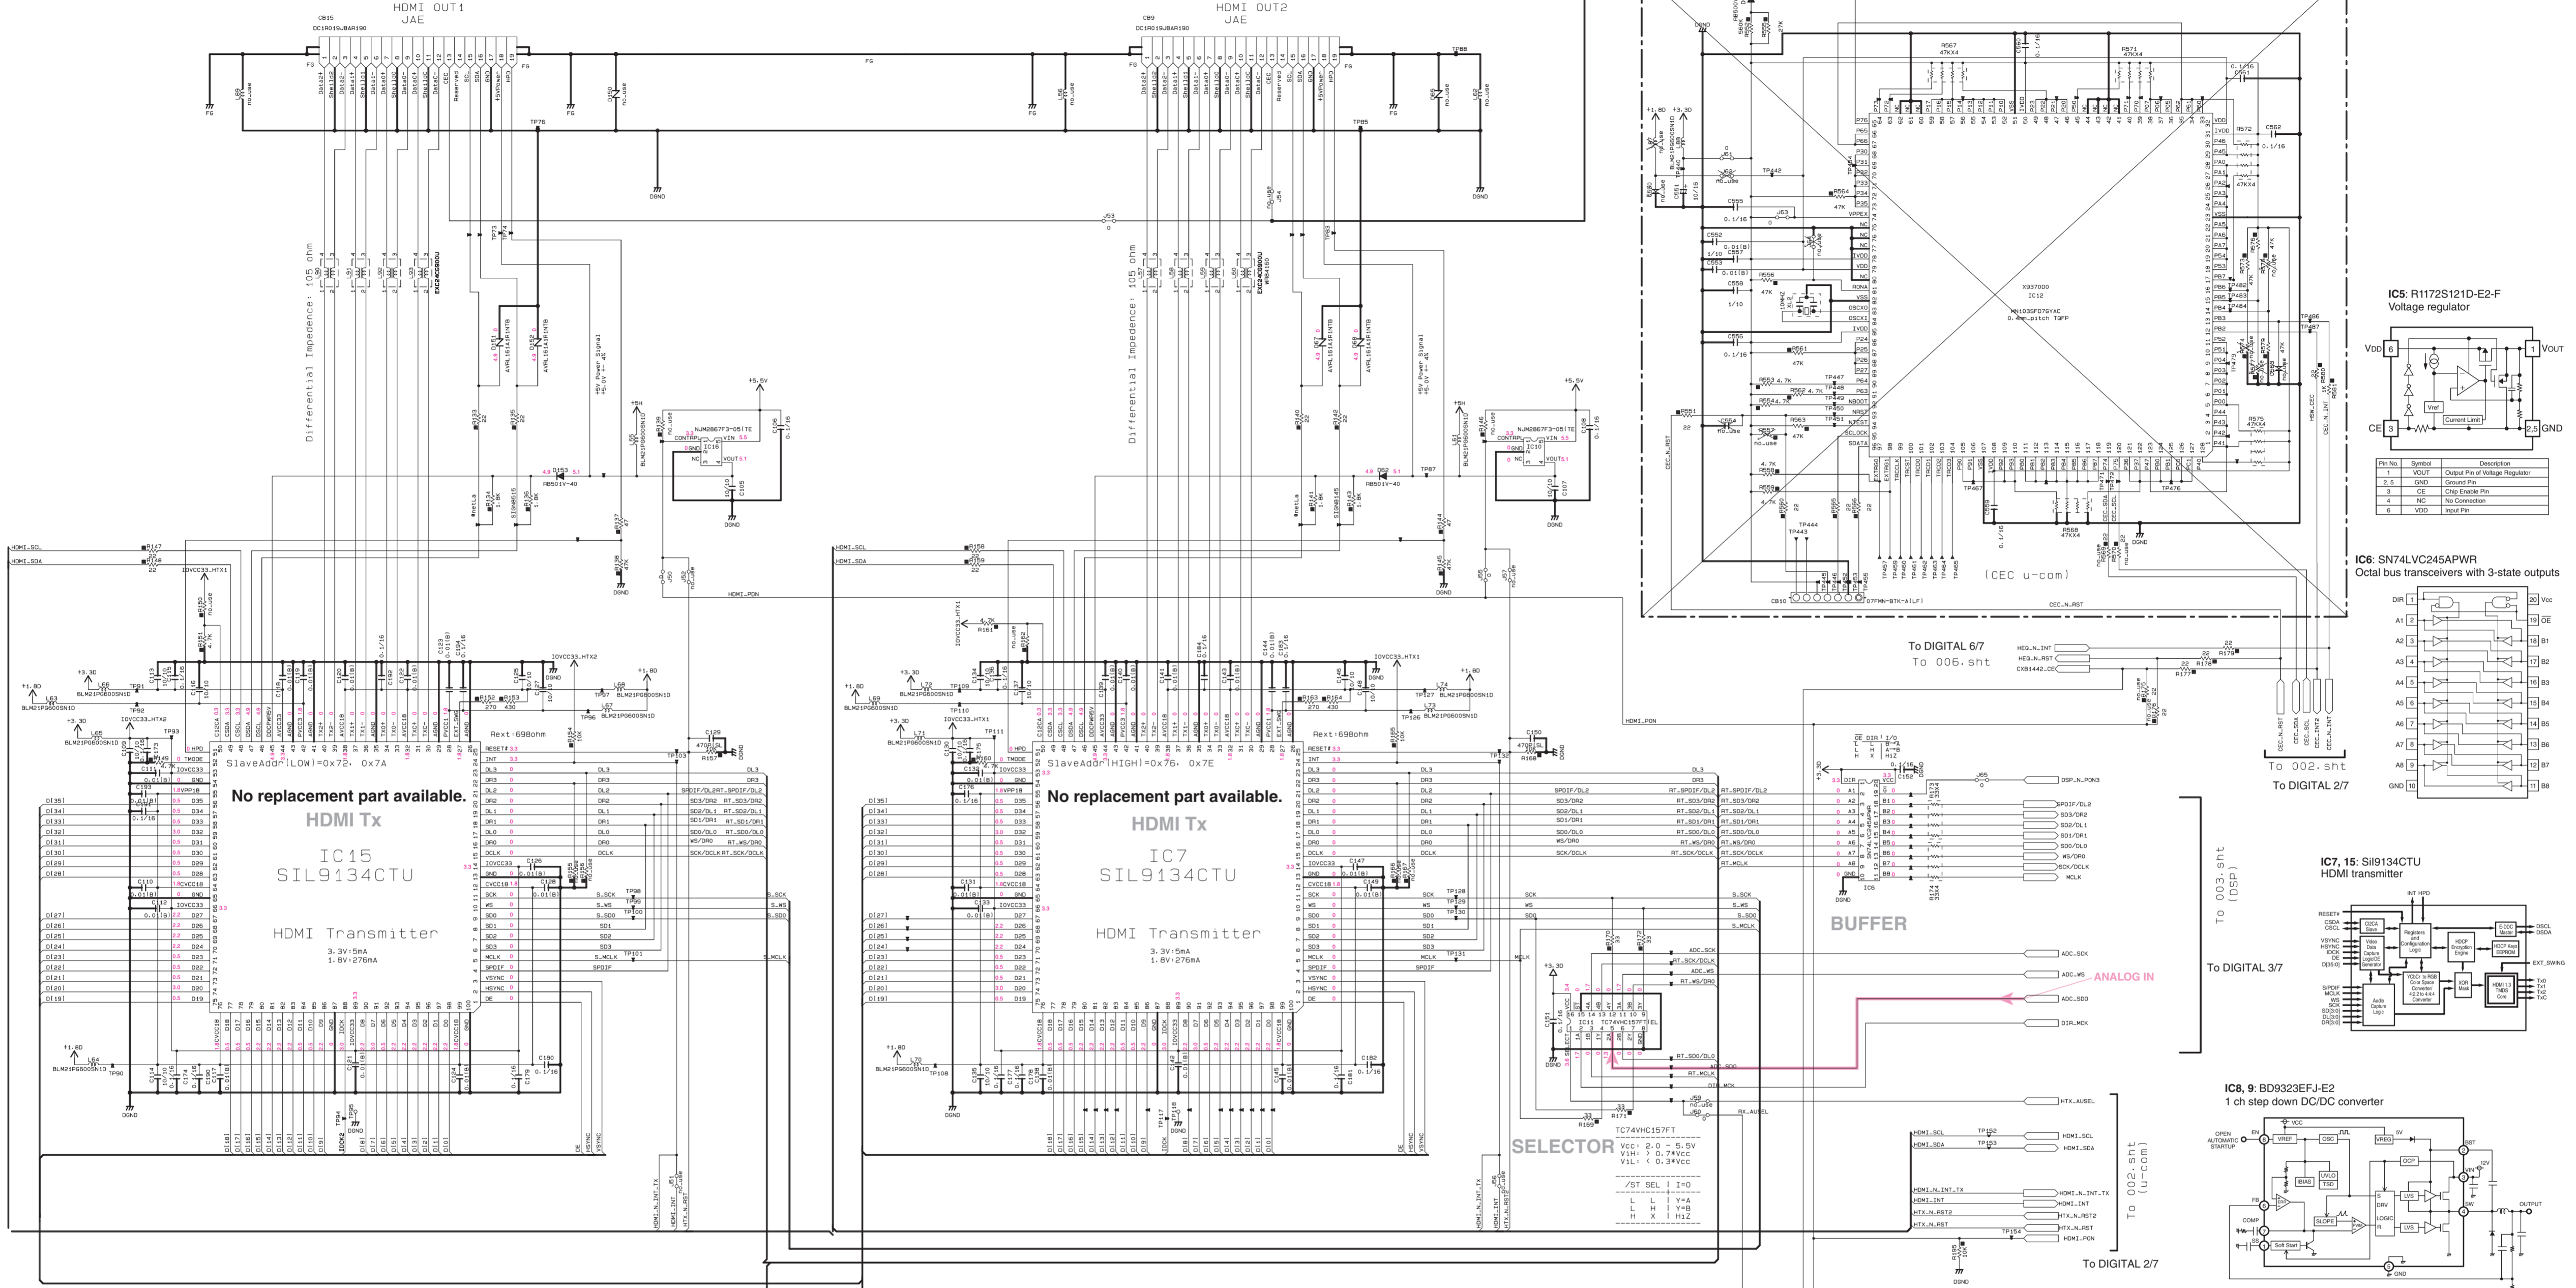




| REMARKS | PARTS NAME |
|---------|--------------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| NO MARK | TANTALUM CAPACITOR |
| NO MARK | CERAMIC CAPACITOR |
| NO MARK | CERAMIC TUBULAR CAPACITOR |
| NO MARK | POLYESTER FILM CAPACITOR |
| NO MARK | POLYPROPYLENE FILM CAPACITOR |
| NO MARK | MICA CAPACITOR |
| NO MARK | POLYPROPYLENE FILM CAPACITOR |
| NO MARK | SEMICONDUCTIVE CERAMIC CAPACITOR |
| NO MARK | POLYPHENYLENE SULFIDE FILM CAPACITOR |
| NO MARK | CAPACITOR |

| REMARKS | PARTS NAME |
|---------|---------------------------------|
| NO MARK | CARBON FILM RESISTOR (P=5) |
| NO MARK | CARBON FILM RESISTOR (P=10) |
| NO MARK | METAL OXIDE FILM RESISTOR |
| NO MARK | METAL FILM RESISTOR |
| NO MARK | METAL PLATE RESISTOR |
| NO MARK | FILM THICK CARBON FILM RESISTOR |
| NO MARK | CEMENT MOUNTED RESISTOR |
| NO MARK | SEMI-VARIABLE RESISTOR |
| NO MARK | CHIP RESISTOR |

- NOTICE (mode1)
- (J)..... JAPAN
 - (U)..... U.S.A
 - (C)..... CANADA
 - (T)..... GENERAL
 - (I)..... CHINA
 - (K)..... KOREA
 - (A)..... AUSTRALIA
 - (B)..... BRITISH
 - (E)..... EUROPE
 - (L)..... SINGAPORE
 - (S)..... SOUTH EUROPE
 - (V)..... TAIWAN
 - (P)..... RUSSIAN
 - (D)..... LATIN AMERICA


DIGITAL (1)

HDMI-TX

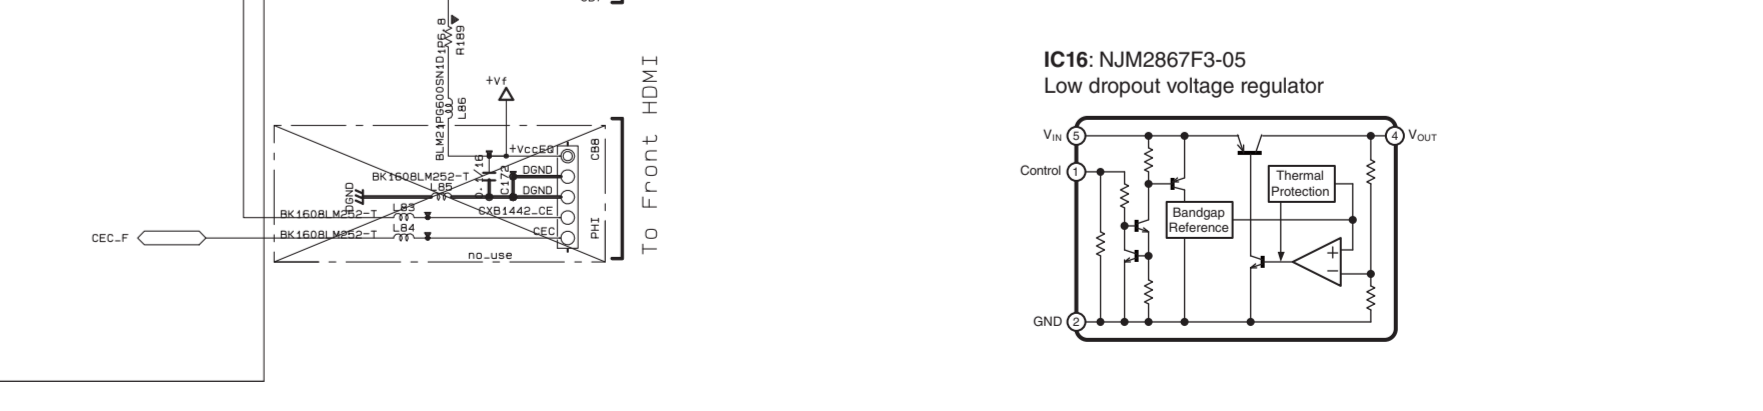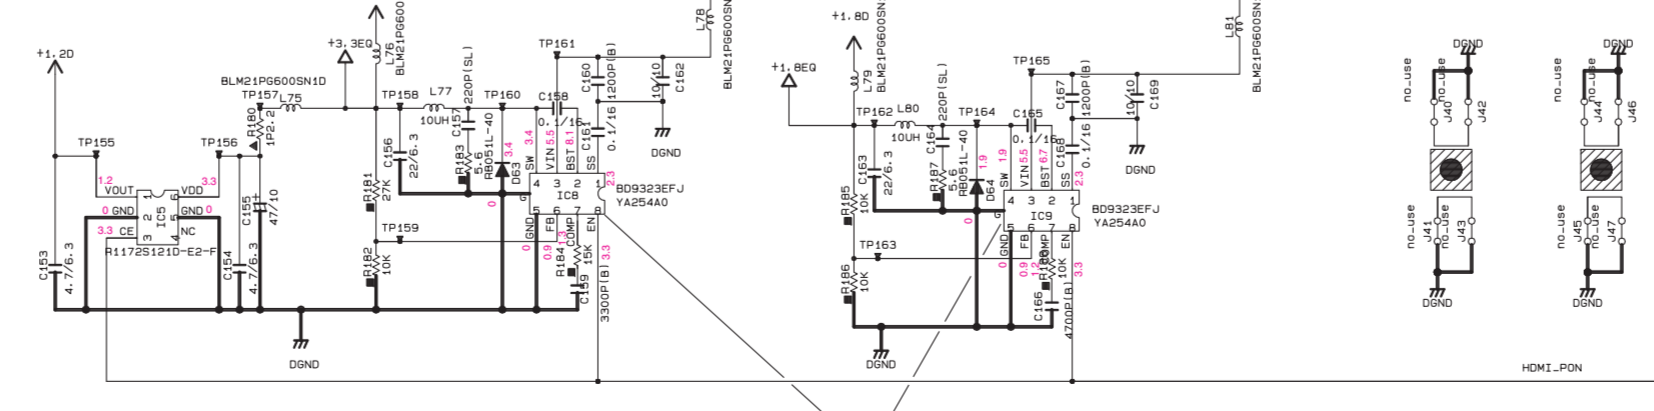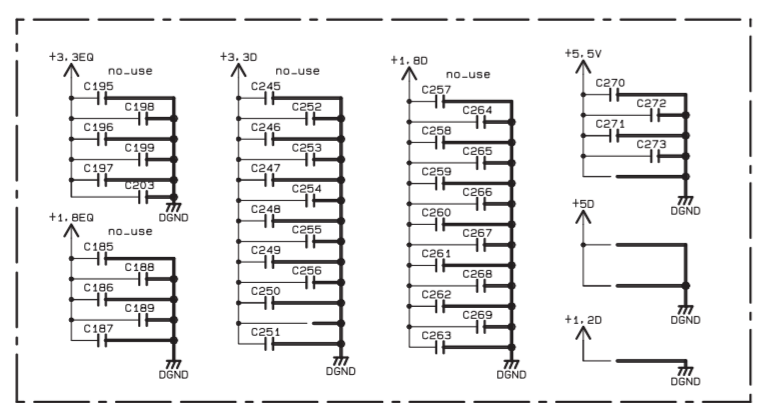


- * All voltages are measured with a 10MΩ/V DC electronic voltmeter.
- * Components having special characteristics are marked Δ, and must be replaced with parts having specifications equal to those originally installed.
- * Schematic diagram is subject to change without notice.

OPERATION 1/2



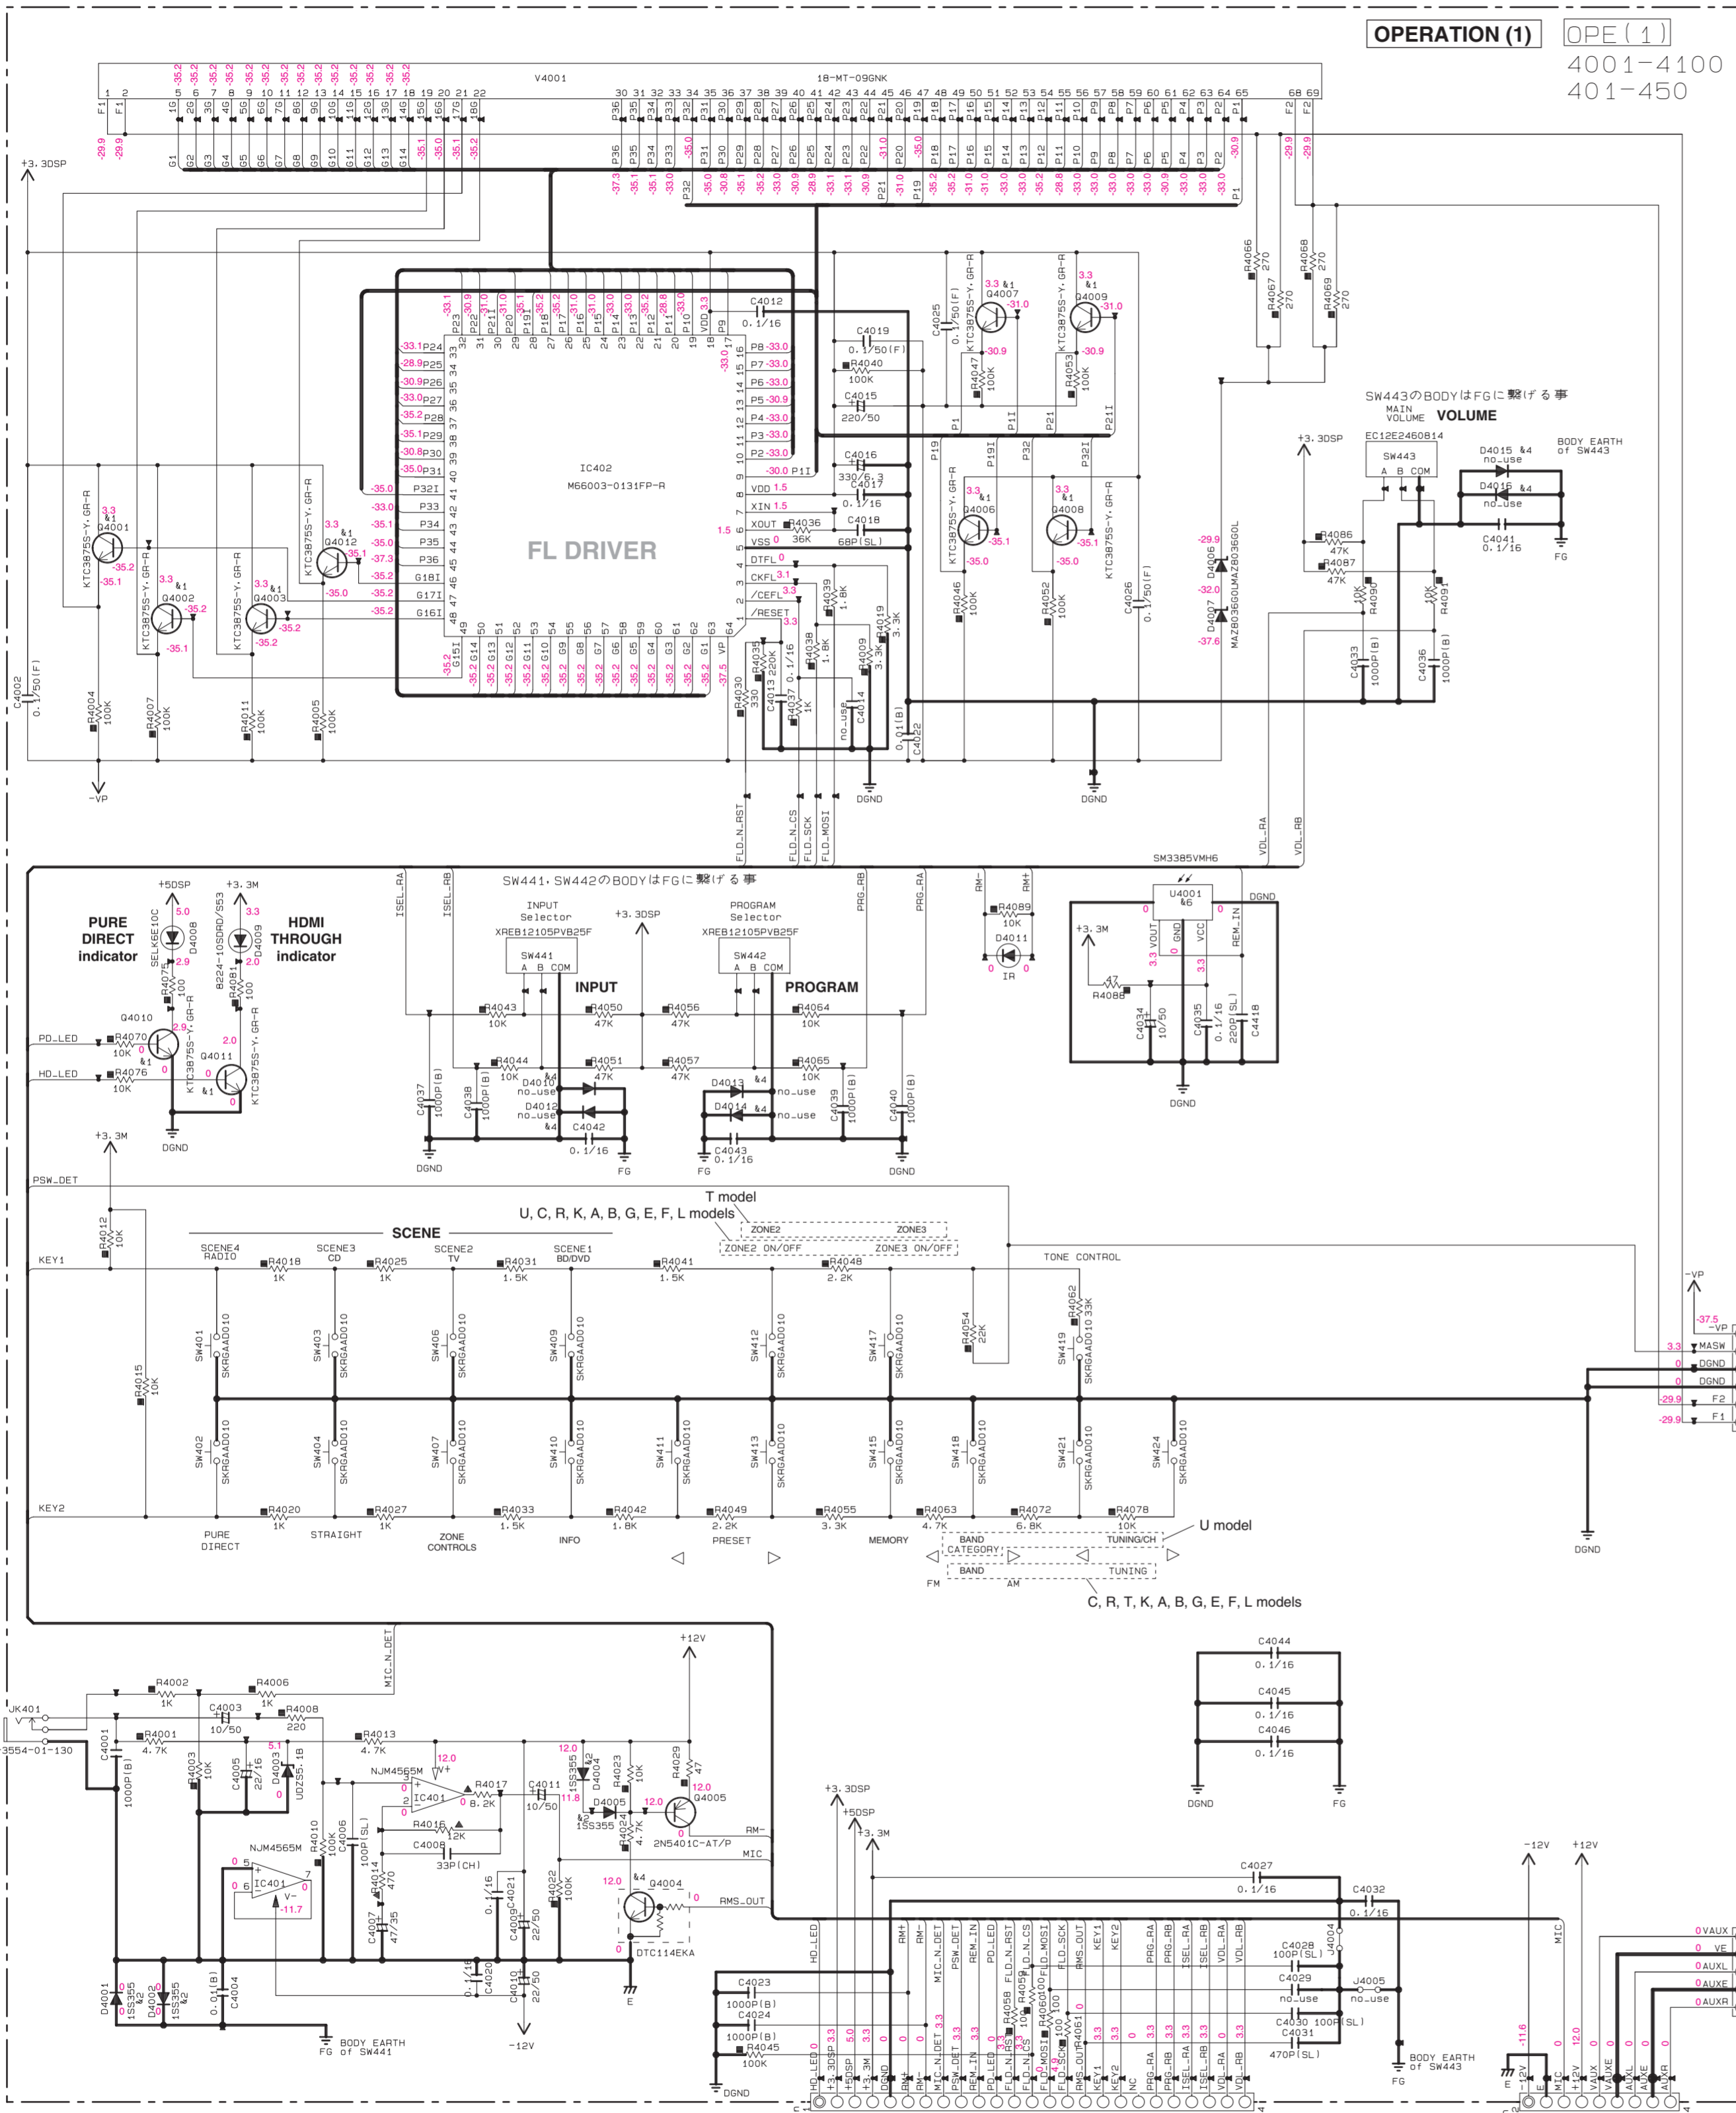


Page 124 B2 to DIGITAL (1)_CB20


Page 131 U5 to OPERATION (2)_CB461

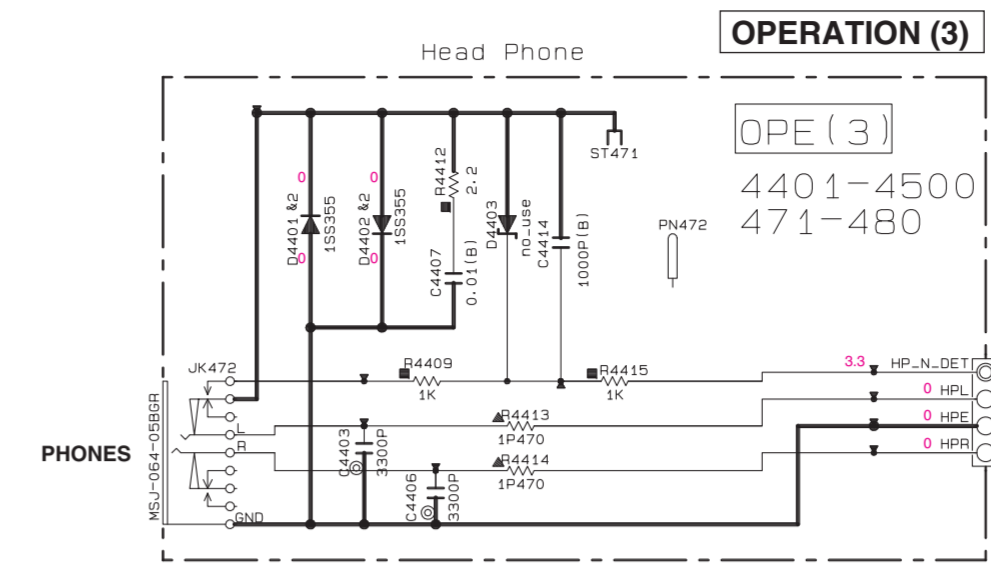

Page 135 A3 to VIDEO (1)_W3401

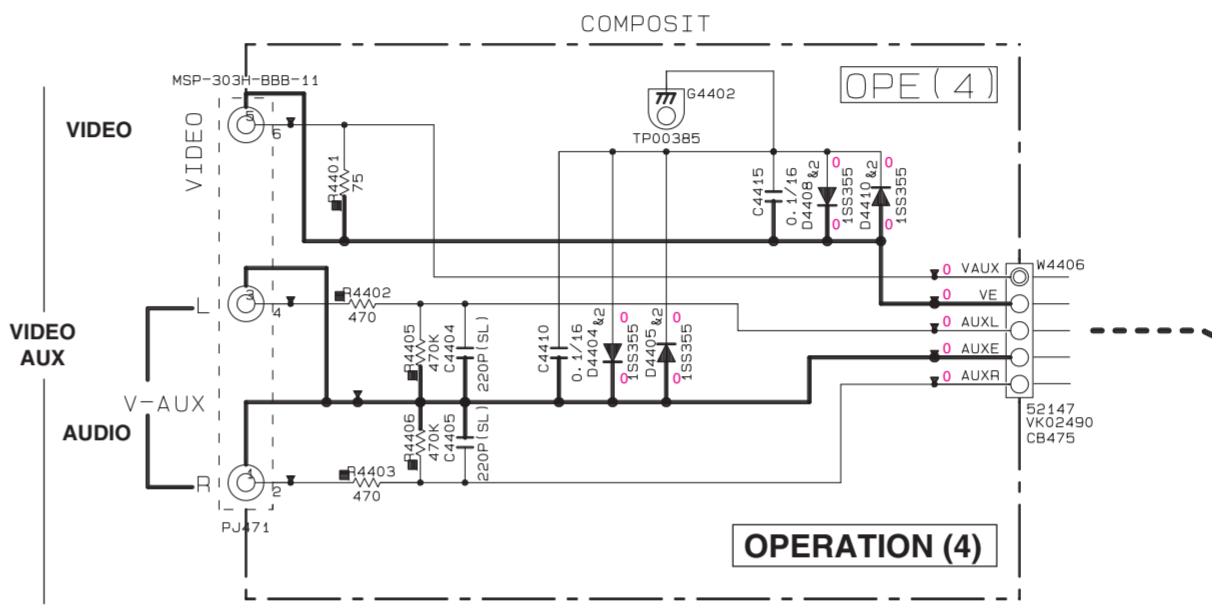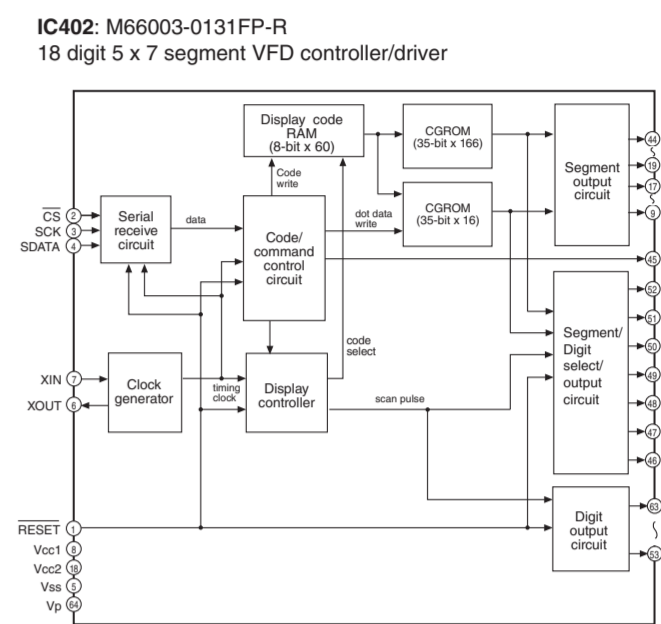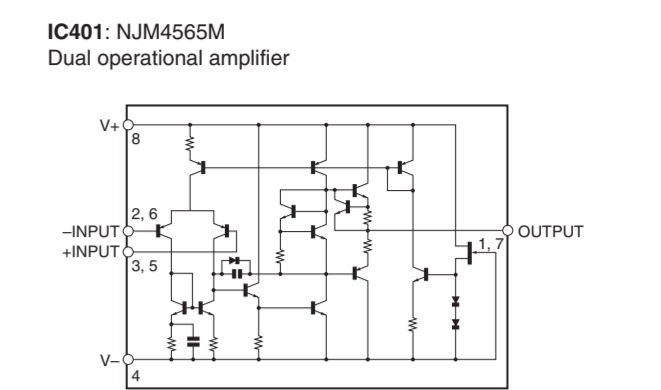

Page 138 D9 to GUL_CB550

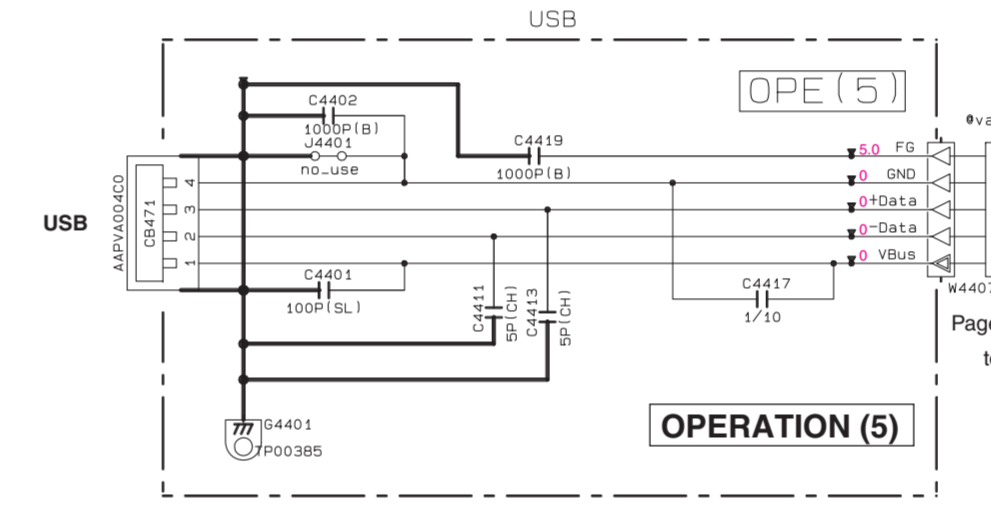

Interchangeable Parts at Manufacture-Stage

| Mark | Reference Parts Number | Parts Name |
|------|--|--|
| A1 | 04001-4003-4006-4012 | KTC3875S-V-GR-RTK/P 3500630NR/ABL Iq/R/S/I 25C2412K Iq/R/S/I |
| A2 | 04001-4002-4004-4005 4303-4305-4401-4402 4404-4405-4406-4410 | 1S5395 MA2J11100L KDS160-RTK/P |
| A3 | 04302-4306 | DTA114EKA KRA102S-RTK/P |
| A4 | 04004-4301-4305 | DTC114EKA KTC102S-RTK/P |

RESISTOR



| REMARKS | PARTS NAME |
|---------|---------------------------------|
| NO MARK | CARBON FILM RESISTOR (P=5) |
| △ | CARBON FILM RESISTOR (P=10) |
| □ | METAL OXIDE FILM RESISTOR |
| ⊠ | METAL FILM RESISTOR |
| ⊞ | METAL PLATE RESISTOR |
| ⊚ | FIRE PROOF CARBON FILM RESISTOR |
| ⊞ | CEMENT MOLDED RESISTOR |
| ⊞ | SEMI VARIABLE RESISTOR |
| ⊞ | CHIP RESISTOR |

CAPACITOR

| REMARKS | PARTS NAME |
|---------|--------------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| ⊞ | TANTALUM CAPACITOR |
| ⊞ | CERAMIC CAPACITOR |
| ⊞ | CERAMIC TUBULAR CAPACITOR |
| ⊞ | POLYESTER FILM CAPACITOR |
| ⊞ | POLYSTYRENE FILM CAPACITOR |
| ⊞ | MICA CAPACITOR |
| ⊞ | POLYPROPYLENE FILM CAPACITOR |
| ⊞ | SEMICONDUCTIVE CERAMIC CAPACITOR |
| ⊞ | POLYPHENYLENE SULFIDE FILM CAPACITOR |

NOTICE (model)

(J)..... JAPAN
(U)..... U.S.A
(C)..... CANADA
(#)..... GENERAL
(T)..... CHINA
(K)..... KOREA
(A)..... AUSTRALIA
(B)..... BRITISH
(G)..... EUROPE
(L)..... SINGAPORE
(E)..... SOUTH EUROPE
(V)..... TAIWAN
(F)..... RUSSIAN
(P)..... LATIN AMERICA

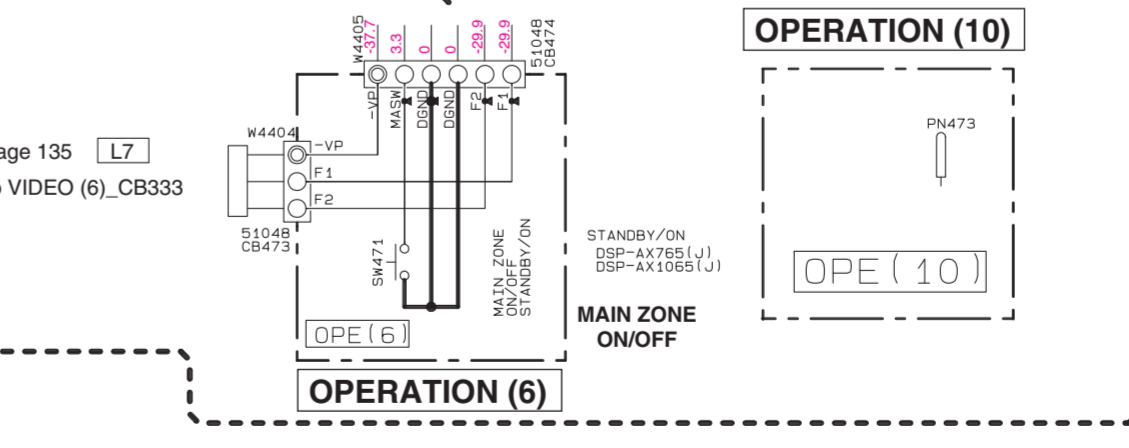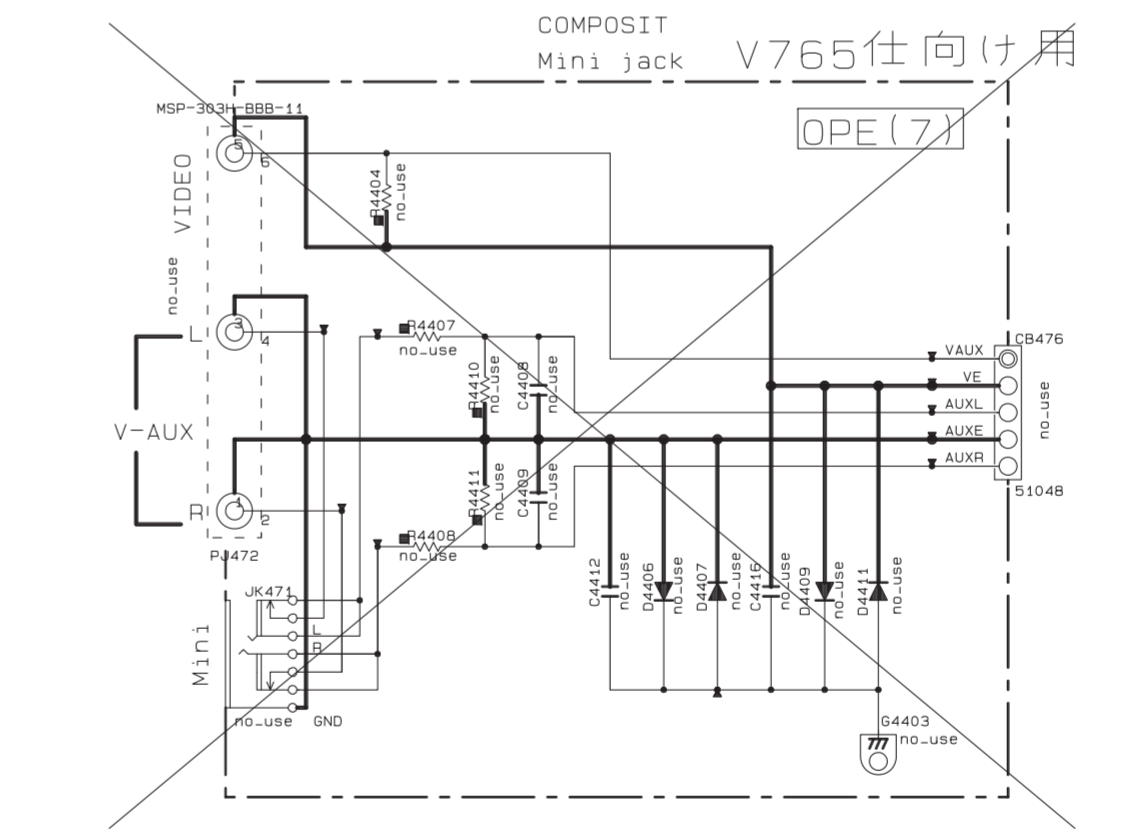







Page 135 L7 to VIDEO (6)_CB333

Key detection for A/D port
Key input (A/D) pull-up resistance 10 k-ohms



| Ohm | 0 | +10k | +10k | +15k | +15k | +20k | +20k | +30k | +4.7k | +22k | +33k |
|---|--|---|---|---|---|---|---|---|---------------------------------|---------|------|
| A0 Wah (3.3V-255) | 0-11 | 12-32 | 33-54 | 55-75 | 76-95 | 96-118 | 119-142 | 143-162 | 181-197 | 198-229 | |
| KEY1 SCENE RADIO | SCENE CD | SCENE DVD | SCENE TV | ZONE2 ON/OFF | ZONE3 ON/OFF | MAIN ZONE ON/OFF | TONE CONTROL | | | | |
| Ohm <td>0 <td>+10k <td>+10k <td>+15k <td>+15k <td>+20k <td>+30k <td>+4.7k <td>+6.8k <td>+10.0k</td> <td></td> </td></td></td></td></td></td></td></td></td> | 0 <td>+10k <td>+10k <td>+15k <td>+15k <td>+20k <td>+30k <td>+4.7k <td>+6.8k <td>+10.0k</td> <td></td> </td></td></td></td></td></td></td></td> | +10k <td>+10k <td>+15k <td>+15k <td>+20k <td>+30k <td>+4.7k <td>+6.8k <td>+10.0k</td> <td></td> </td></td></td></td></td></td></td> | +10k <td>+15k <td>+15k <td>+20k <td>+30k <td>+4.7k <td>+6.8k <td>+10.0k</td> <td></td> </td></td></td></td></td></td> | +15k <td>+15k <td>+20k <td>+30k <td>+4.7k <td>+6.8k <td>+10.0k</td> <td></td> </td></td></td></td></td> | +15k <td>+20k <td>+30k <td>+4.7k <td>+6.8k <td>+10.0k</td> <td></td> </td></td></td></td> | +20k <td>+30k <td>+4.7k <td>+6.8k <td>+10.0k</td> <td></td> </td></td></td> | +30k <td>+4.7k <td>+6.8k <td>+10.0k</td> <td></td> </td></td> | +4.7k <td>+6.8k <td>+10.0k</td> <td></td> </td> | +6.8k <td>+10.0k</td> <td></td> | +10.0k | |
| A0 Wah (3.3V-255) | 0-11 | 12-32 | 33-54 | 55-77 | 78-98 | 99-120 | 121-143 | 144-165 | 166-185 | 186-205 | |
| KEY2 PURE DIRECT | STRAIGHT/EFFECT | ZONE CONTROLS | INFO | PRESET < | PRESET > | MEMORY | BAND CATEGORY | TUNING CH < | TUNING CH > | | |

* All voltages are measured with a 10MΩ DC electronic voltmeter.
* Components having special characteristics are marked A and must be replaced with parts having specifications equal to those originally installed.
* Schematic diagram is subject to change without notice.

OPERATION 2/2

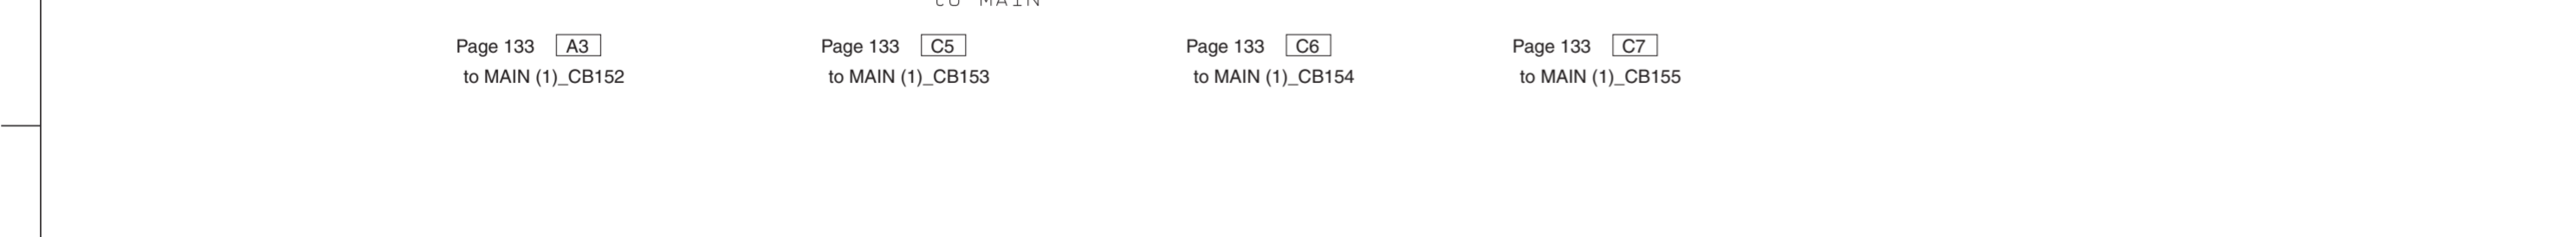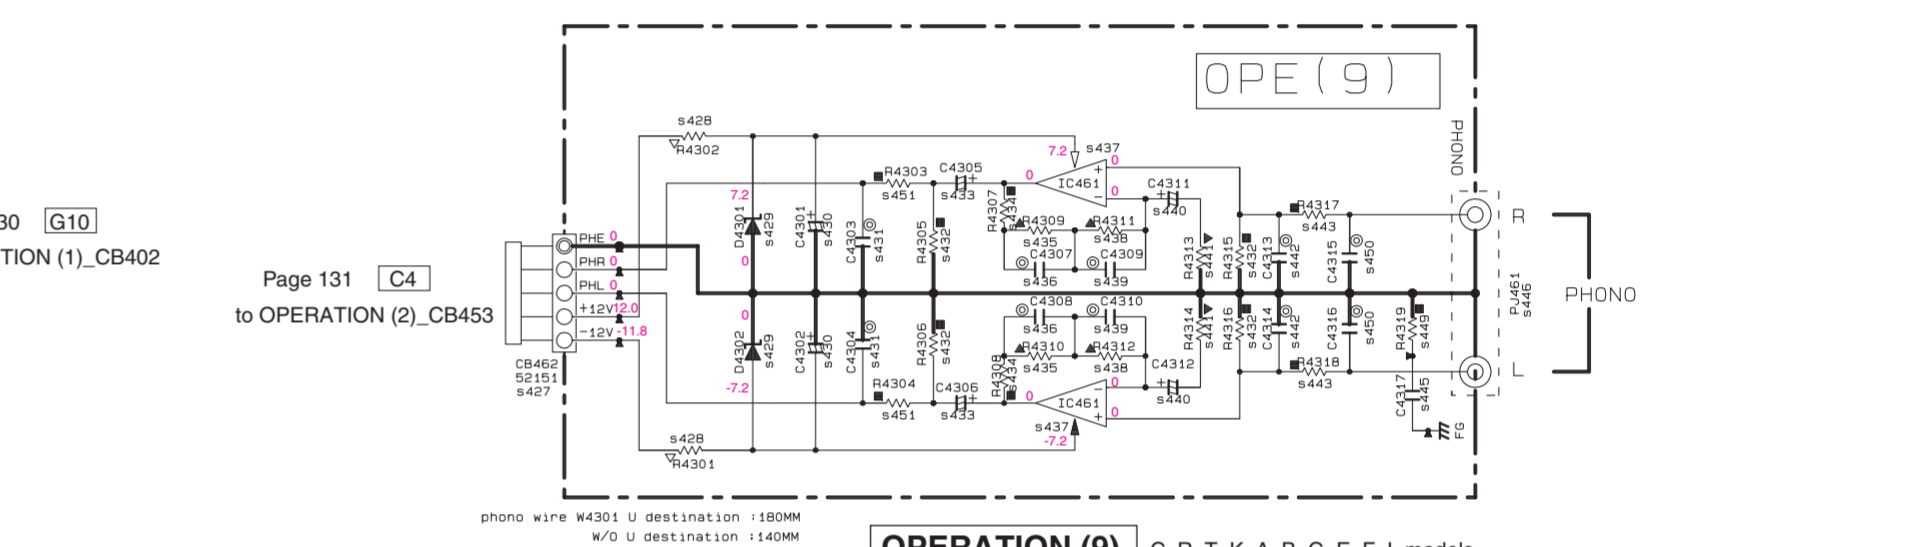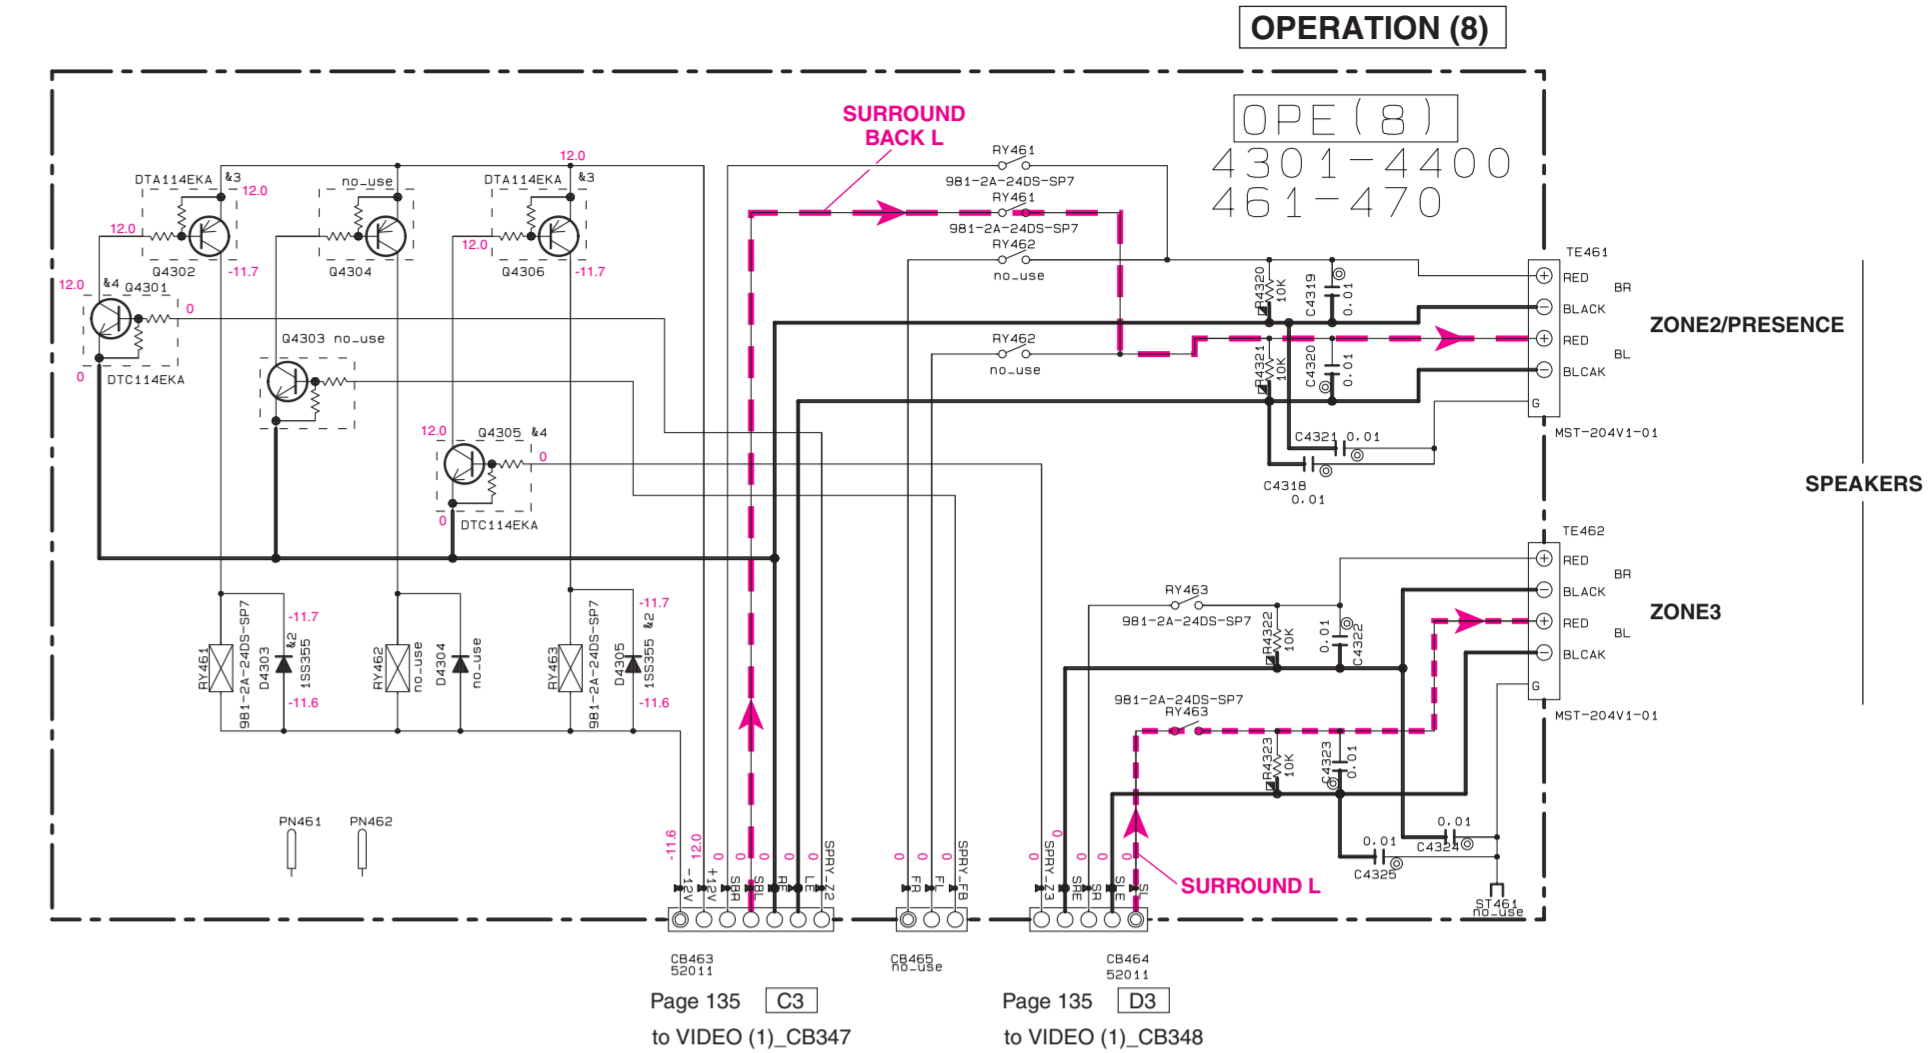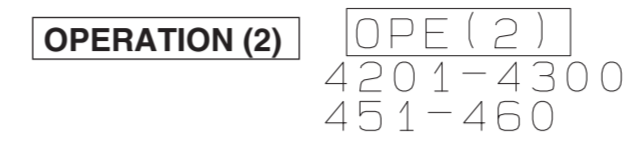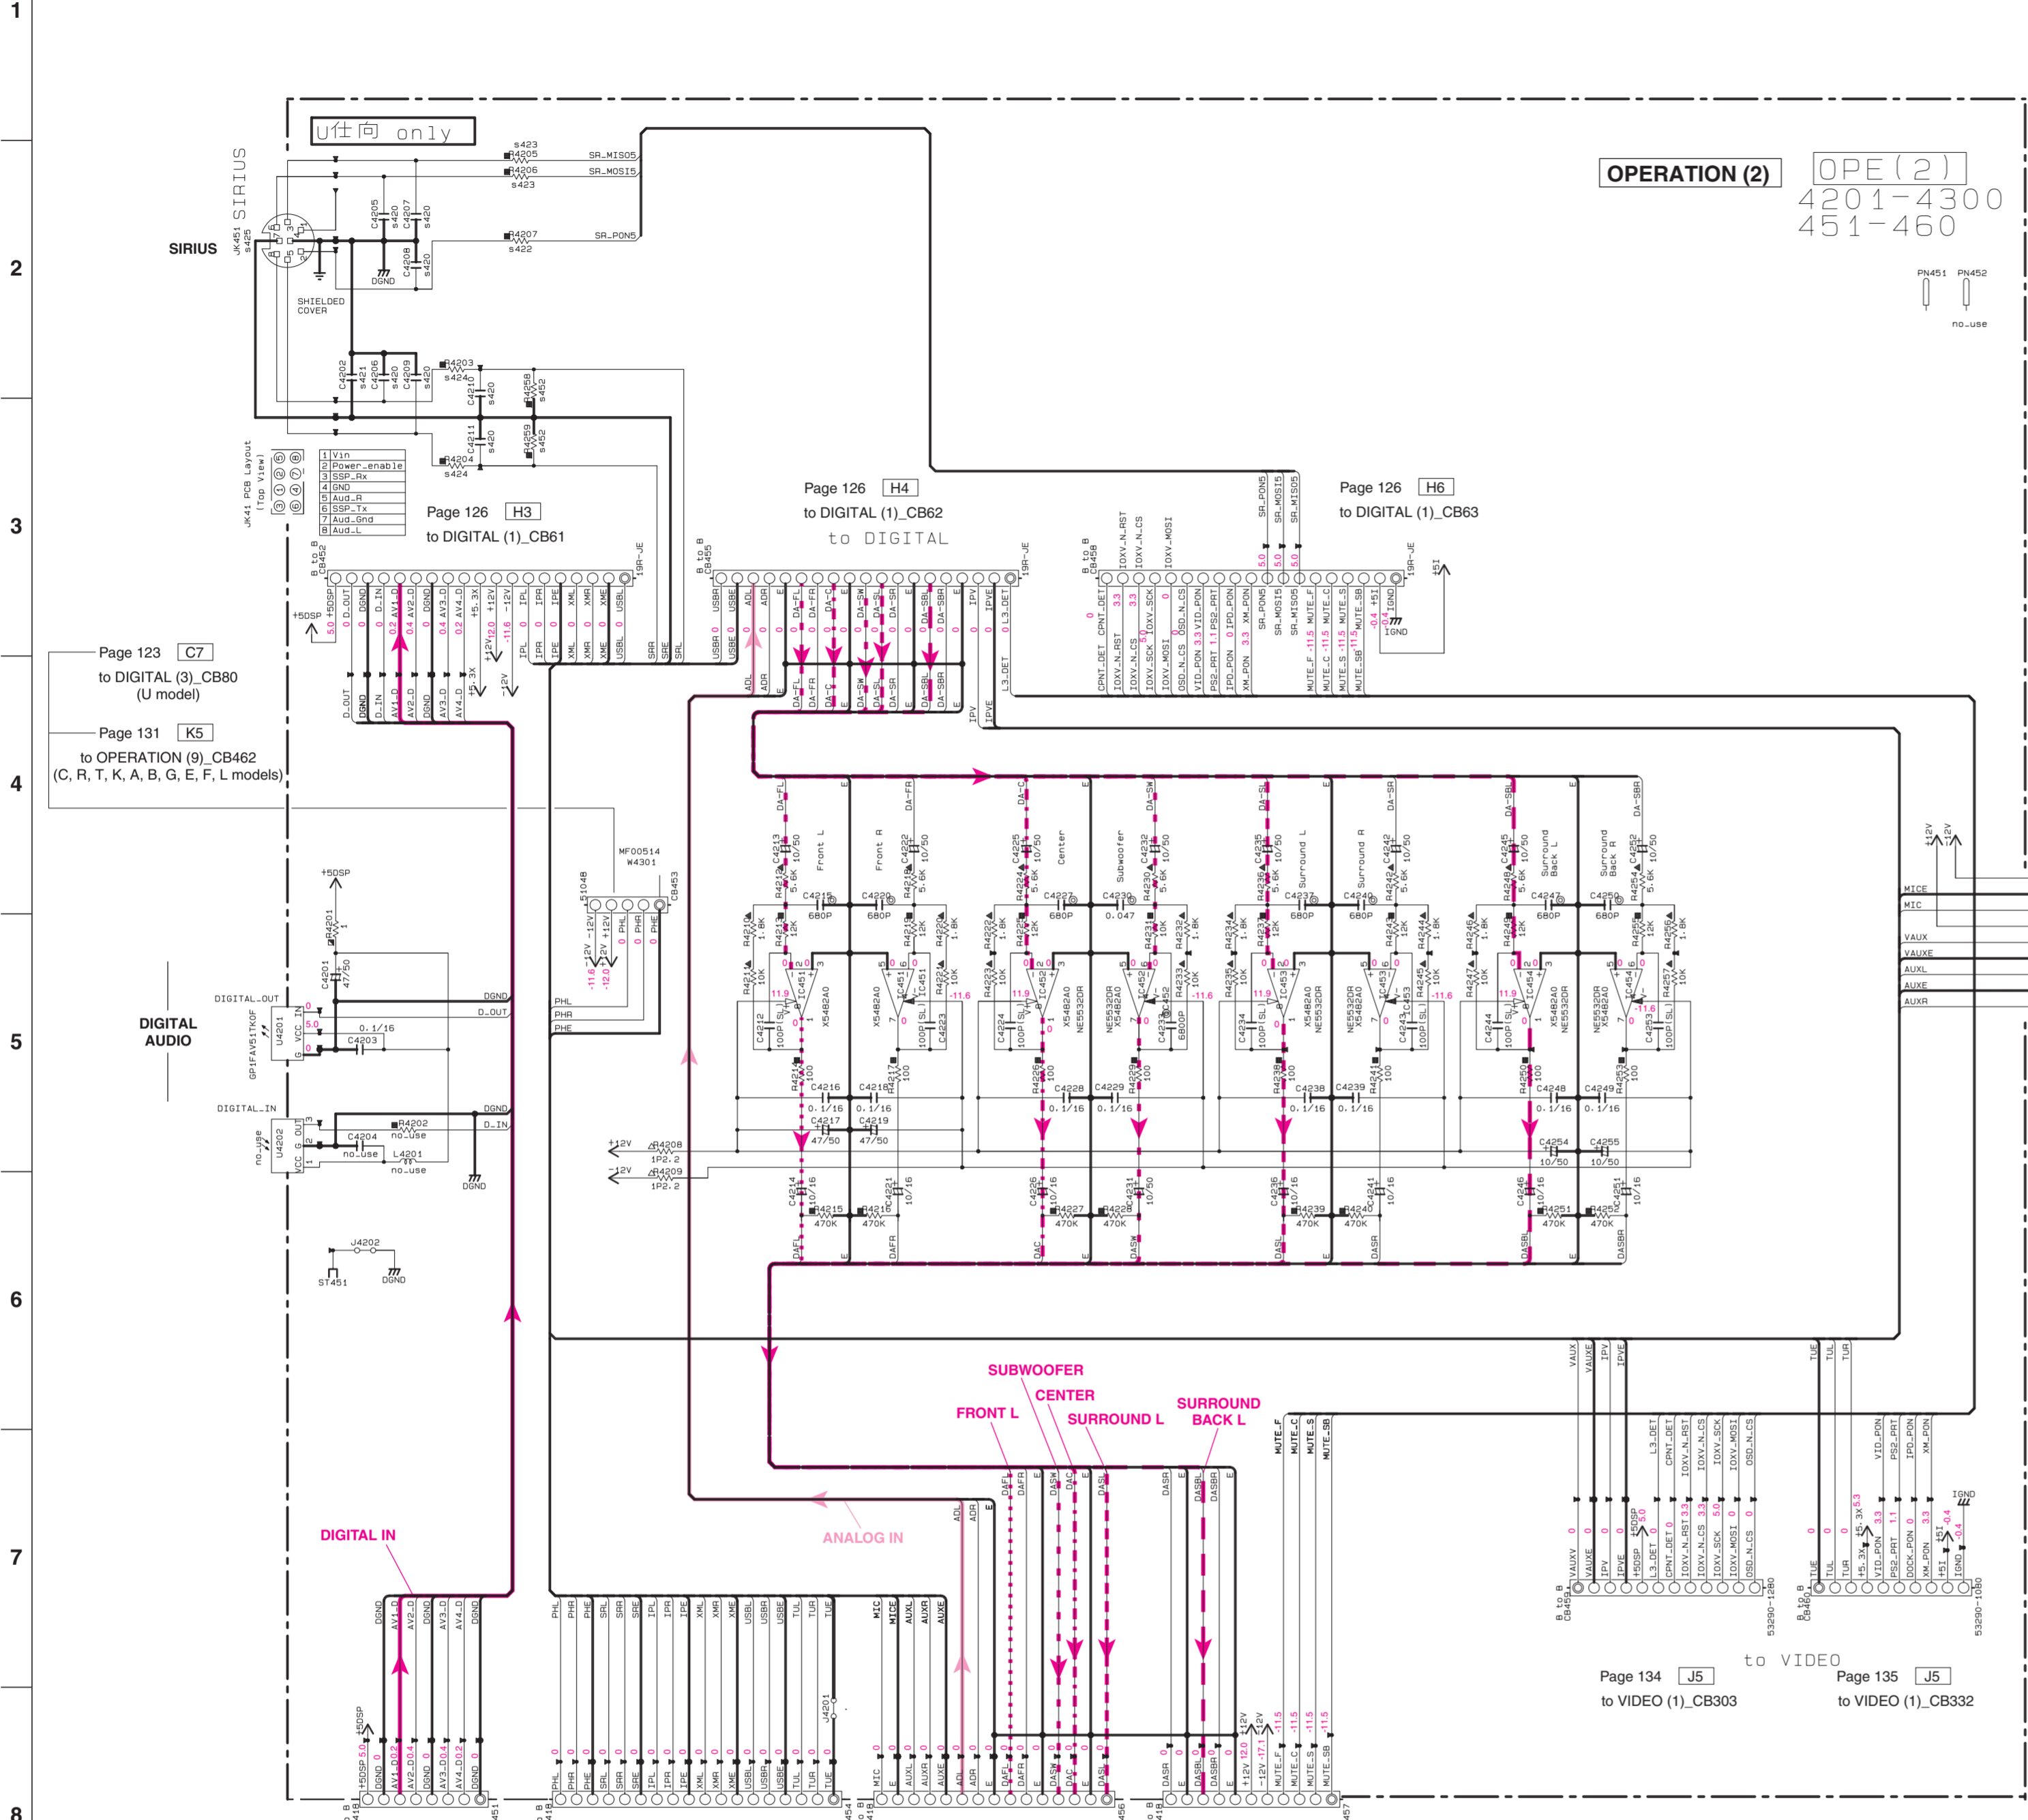

| Destination Part List | | | | Destination Part List | | | |
|-----------------------|-------|-----------|------|-----------------------|-------|---|---------------|
| Part No. | LOC | U | CRTA | Part No. | LOC | U | CRTA |
| 4201 | C4206 | US06232 | X | 4305 | R4309 | X | RP35810 |
| 4210 | C4210 | 220P(SL1) | | 4307 | C4307 | X | WJ05560 |
| 4219 | C4219 | 10 | | 4308 | C4308 | X | WJ05560 |
| 4229 | C4229 | 0.033 | | 4309 | C4309 | X | 0.033 |
| 4231 | C4231 | 10 | | 4311 | C4311 | X | NJM050900-TE2 |
| 4238 | R4238 | 10 | | 4312 | C4312 | X | X356540 |
| 4242 | R4242 | 10 | | 4313 | C4313 | X | NJM050900-TE2 |
| 4243 | R4243 | 10 | | 4314 | C4314 | X | X356540 |
| 4244 | R4244 | 10 | | 4315 | C4315 | X | X356540 |
| 4245 | R4245 | 10 | | 4316 | C4316 | X | X356540 |
| 4246 | R4246 | 10 | | 4317 | C4317 | X | X356540 |
| 4247 | R4247 | 10 | | 4318 | C4318 | X | X356540 |
| 4248 | R4248 | 10 | | 4319 | C4319 | X | X356540 |
| 4249 | R4249 | 10 | | 4320 | C4320 | X | X356540 |
| 4250 | R4250 | 10 | | 4321 | C4321 | X | X356540 |
| 4251 | R4251 | 10 | | 4322 | C4322 | X | X356540 |
| 4252 | R4252 | 10 | | 4323 | C4323 | X | X356540 |
| 4253 | R4253 | 10 | | 4324 | C4324 | X | X356540 |
| 4254 | R4254 | 10 | | 4325 | C4325 | X | X356540 |
| 4255 | R4255 | 10 | | 4326 | C4326 | X | X356540 |
| 4256 | R4256 | 10 | | 4327 | C4327 | X | X356540 |
| 4257 | R4257 | 10 | | 4328 | C4328 | X | X356540 |
| 4258 | R4258 | 10 | | 4329 | C4329 | X | X356540 |
| 4259 | R4259 | 10 | | 4330 | C4330 | X | X356540 |
| 4260 | R4260 | 10 | | 4331 | C4331 | X | X356540 |
| 4261 | R4261 | 10 | | 4332 | C4332 | X | X356540 |
| 4262 | R4262 | 10 | | 4333 | C4333 | X | X356540 |
| 4263 | R4263 | 10 | | 4334 | C4334 | X | X356540 |
| 4264 | R4264 | 10 | | 4335 | C4335 | X | X356540 |
| 4265 | R4265 | 10 | | 4336 | C4336 | X | X356540 |
| 4266 | R4266 | 10 | | 4337 | C4337 | X | X356540 |
| 4267 | R4267 | 10 | | 4338 | C4338 | X | X356540 |
| 4268 | R4268 | 10 | | 4339 | C4339 | X | X356540 |
| 4269 | R4269 | 10 | | 4340 | C4340 | X | X356540 |
| 4270 | R4270 | 10 | | 4341 | C4341 | X | X356540 |
| 4271 | R4271 | 10 | | 4342 | C4342 | X | X356540 |
| 4272 | R4272 | 10 | | 4343 | C4343 | X | X356540 |
| 4273 | R4273 | 10 | | 4344 | C4344 | X | X356540 |
| 4274 | R4274 | 10 | | 4345 | C4345 | X | X356540 |
| 4275 | R4275 | 10 | | 4346 | C4346 | X | X356540 |
| 4276 | R4276 | 10 | | 4347 | C4347 | X | X356540 |
| 4277 | R4277 | 10 | | 4348 | C4348 | X | X356540 |
| 4278 | R4278 | 10 | | 4349 | C4349 | X | X356540 |
| 4279 | R4279 | 10 | | 4350 | C4350 | X | X356540 |
| 4280 | R4280 | 10 | | 4351 | C4351 | X | X356540 |
| 4281 | R4281 | 10 | | 4352 | C4352 | X | X356540 |
| 4282 | R4282 | 10 | | 4353 | C4353 | X | X356540 |
| 4283 | R4283 | 10 | | 4354 | C4354 | X | X356540 |
| 4284 | R4284 | 10 | | 4355 | C4355 | X | X356540 |
| 4285 | R4285 | 10 | | 4356 | C4356 | X | X356540 |
| 4286 | R4286 | 10 | | 4357 | C4357 | X | X356540 |
| 4287 | R4287 | 10 | | 4358 | C4358 | X | X356540 |
| 4288 | R4288 | 10 | | 4359 | C4359 | X | X356540 |
| 4289 | R4289 | 10 | | 4360 | C4360 | X | X356540 |
| 4290 | R4290 | 10 | | 4361 | C4361 | X | X356540 |
| 4291 | R4291 | 10 | | 4362 | C4362 | X | X356540 |
| 4292 | R4292 | 10 | | 4363 | C4363 | X | X356540 |
| 4293 | R4293 | 10 | | 4364 | C4364 | X | X356540 |
| 4294 | R4294 | 10 | | 4365 | C4365 | X | X356540 |
| 4295 | R4295 | 10 | | 4366 | C4366 | X | X356540 |
| 4296 | R4296 | 10 | | 4367 | C4367 | X | X356540 |
| 4297 | R4297 | 10 | | 4368 | C4368 | X | X356540 |
| 4298 | R4298 | 10 | | 4369 | C4369 | X | X356540 |
| 4299 | R4299 | 10 | | 4370 | C4370 | X | X356540 |
| 4300 | R4300 | 10 | | 4371 | C4371 | X | X356540 |

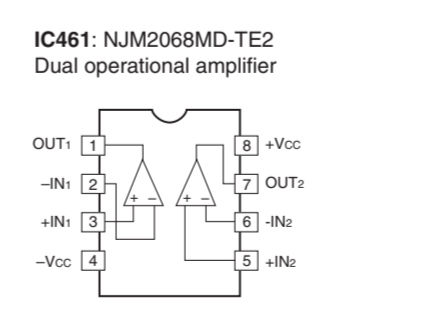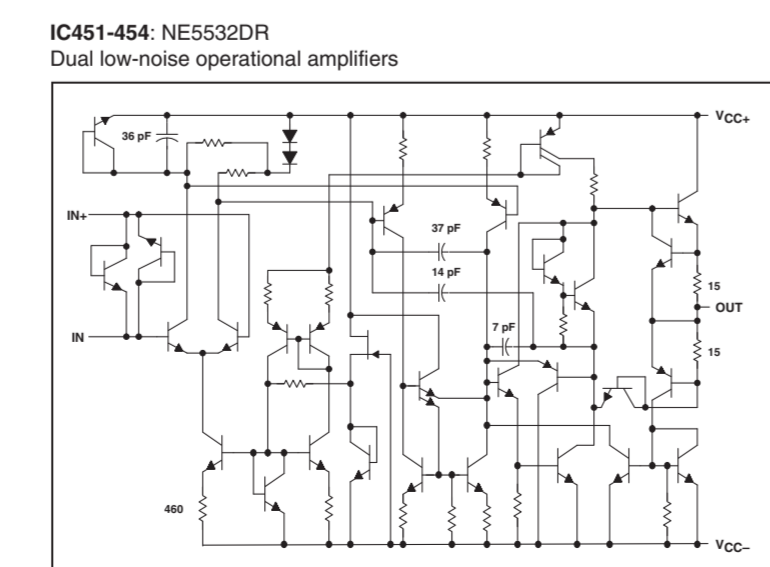


| REMARKS | PARTS NAME |
|---------|--------------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| NO MARK | TANTALUM CAPACITOR |
| NO MARK | CERAMIC CAPACITOR |
| NO MARK | CERAMIC TUBULAR CAPACITOR |
| NO MARK | POLYESTER FILM CAPACITOR |
| NO MARK | POLYSTYRENE FILM CAPACITOR |
| NO MARK | MICA CAPACITOR |
| NO MARK | POLYPROPYLENE FILM CAPACITOR |
| NO MARK | SEMICONDUCTIVE CERAMIC CAPACITOR |
| NO MARK | POLYPHENYLENE SULFIDE FILM CAPACITOR |

| REMARKS | PARTS NAME |
|---------|---------------------------------|
| NO MARK | CARBON FILM RESISTOR [P=5] |
| NO MARK | CARBON FILM RESISTOR [P=10] |
| NO MARK | METAL OXIDE FILM RESISTOR |
| NO MARK | METAL FILM RESISTOR |
| NO MARK | METAL PLATE RESISTOR |
| NO MARK | FIRE PROOF CARBON FILM RESISTOR |
| NO MARK | CEMENT MOLDED RESISTOR |
| NO MARK | SEMI-VARIABLE RESISTOR |
| NO MARK | CHIP RESISTOR |

NOTICE (mode1)

(J)..... JAPAN
(U)..... U.S.A.
(C)..... CANADA
(R)..... GENERAL
(I)..... CHINA
(K)..... KOREA
(A)..... AUSTRALIA
(B)..... BRITISH
(G)..... EUROPE
(S)..... SINGAPORE
(E)..... SOUTH EUROPE
(V)..... TAIWAN
(F)..... RUSSIAN
(P)..... LATIN AMERICA

* All voltages are measured with a 10MΩ/V DC electronic voltmeter.
* Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.
* Schematic diagram is subject to change without notice.

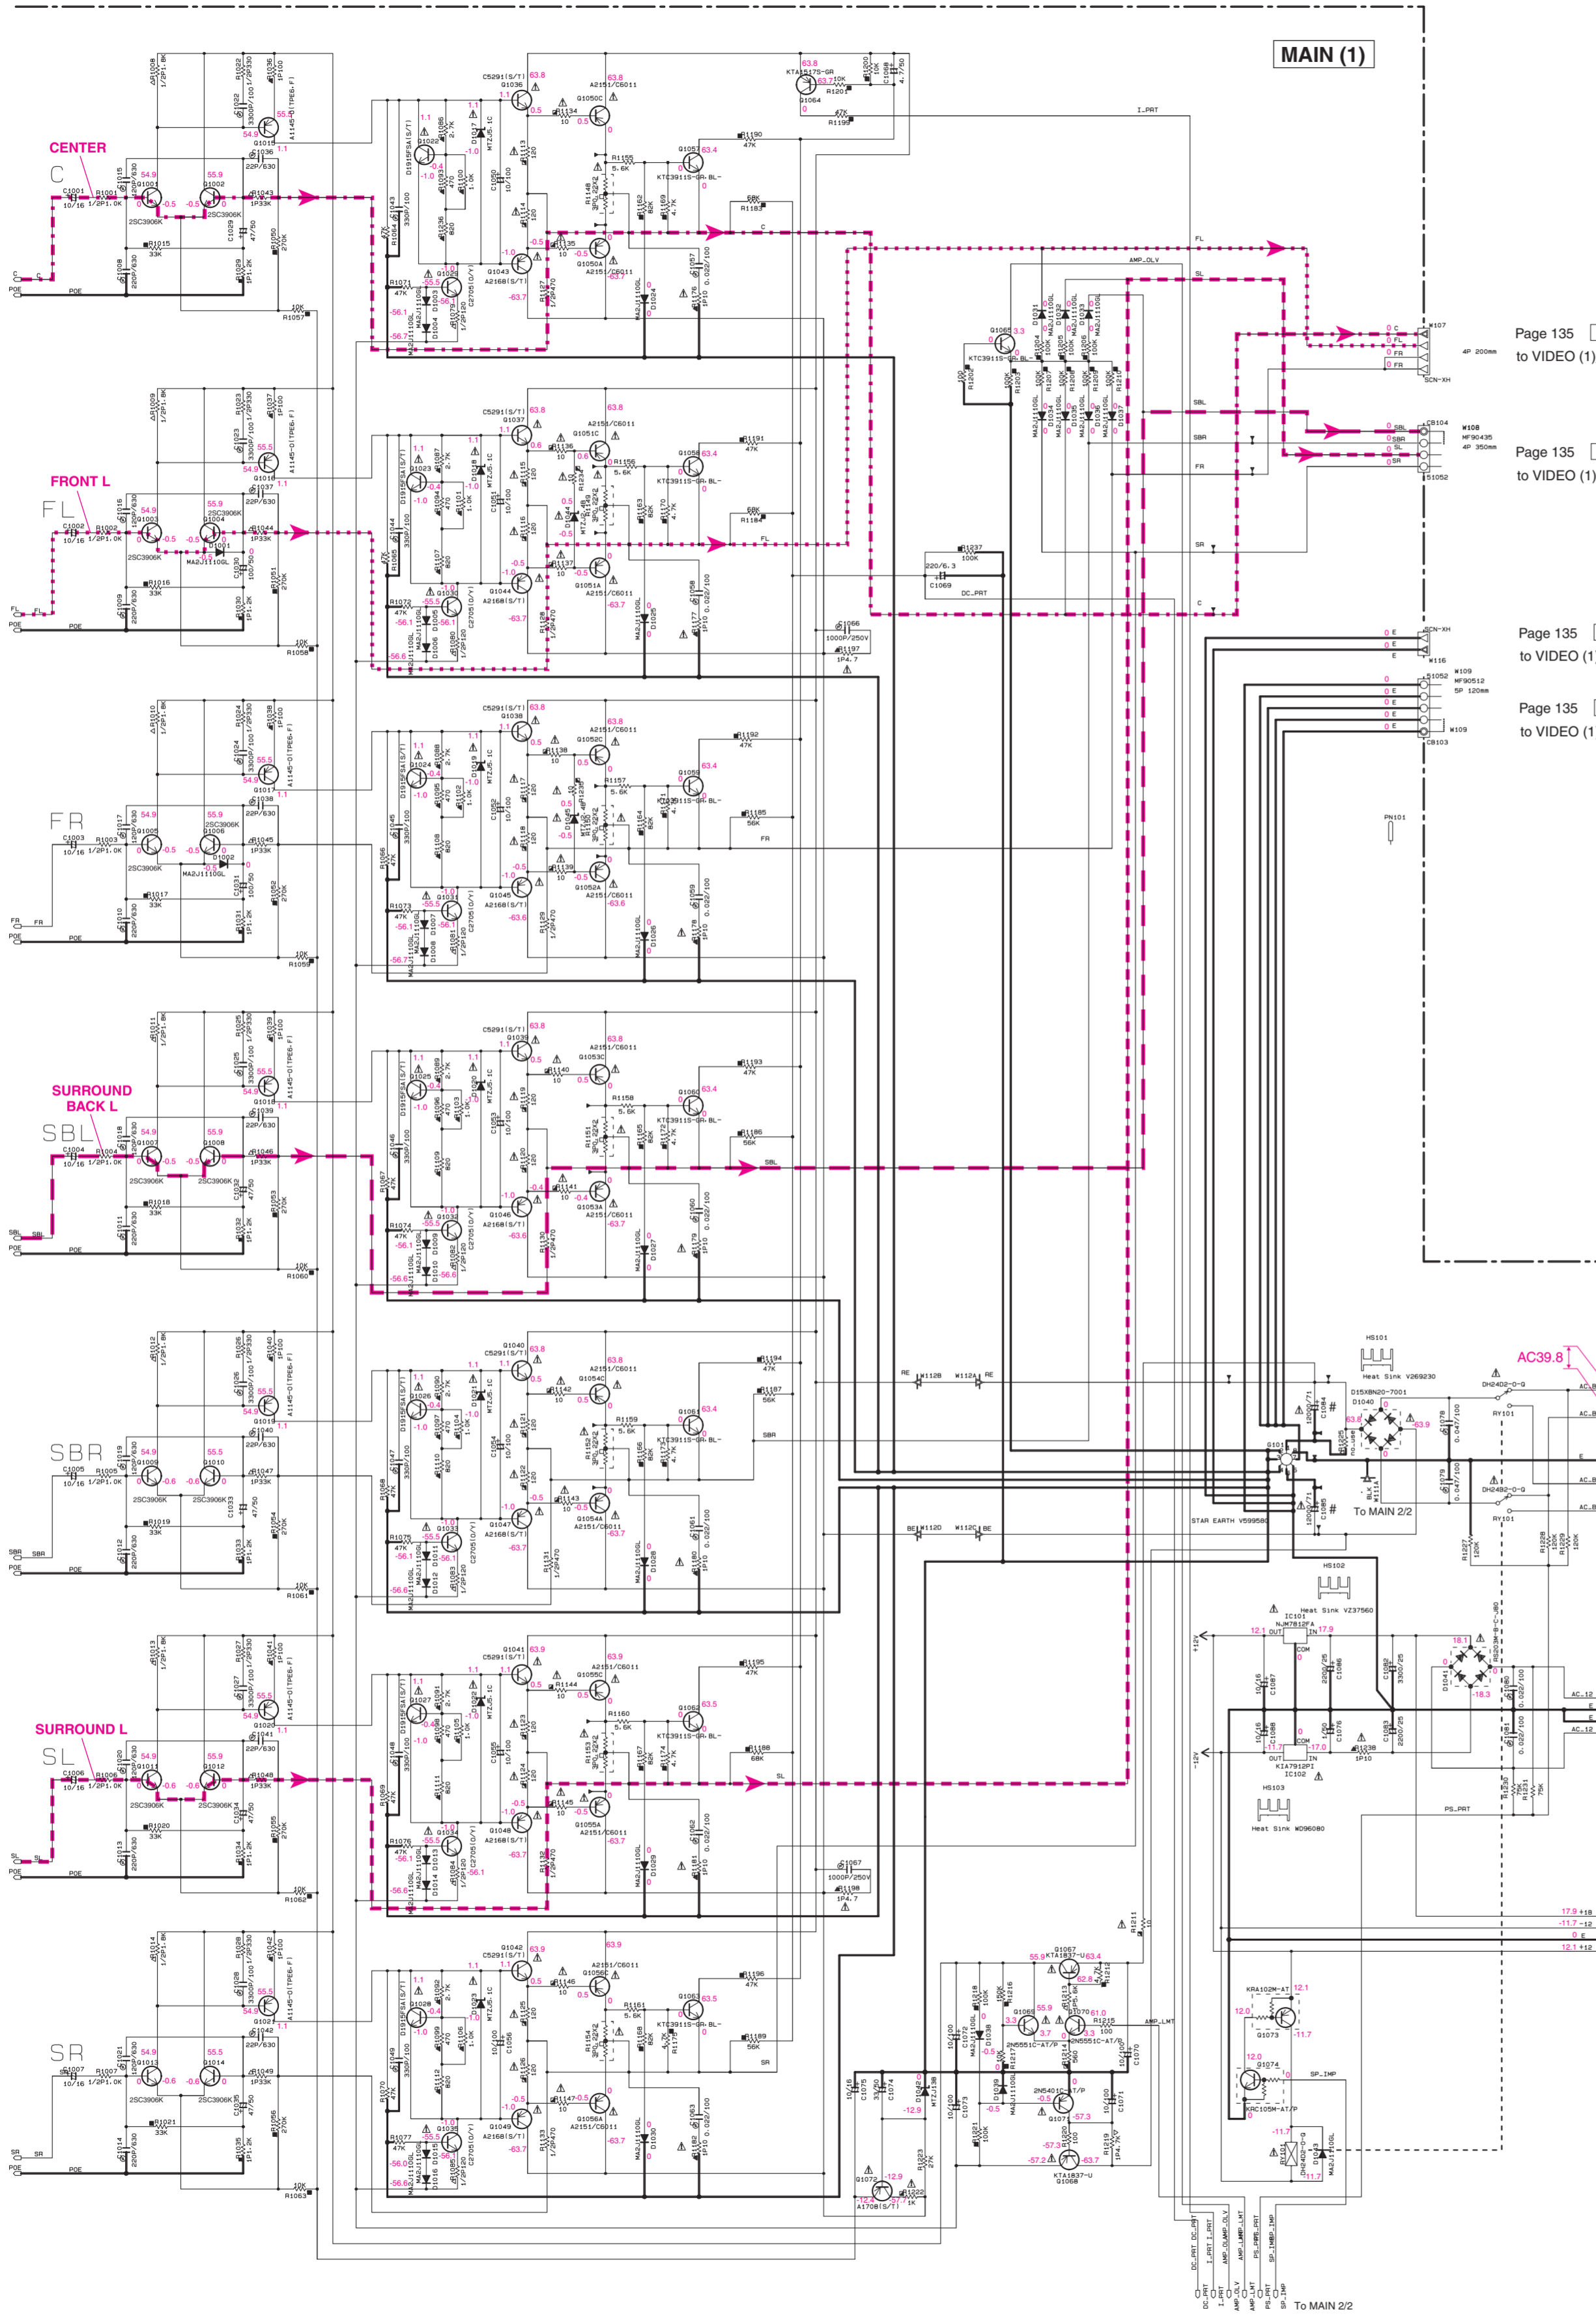

RESISTOR

| REMARKS | PARTS NAME |
|---------|---------------------------------|
| NO MARK | CARBON FILM RESISTOR (P-5) |
| □ | CARBON FILM RESISTOR (P-10) |
| △ | METAL OXIDE FILM RESISTOR |
| ◇ | METAL FILM RESISTOR |
| ■ | FIRE PROOF CARBON FILM RESISTOR |
| □ | CEMENT MOLDED RESISTOR |
| □ | SEMI-CONDUCTIVE RESISTOR |
| ● | CHIP RESISTOR |

DESTINATION PART LIST

| NO. | LOC. | IC | A | MARK | L |
|-----|------|----|-------------|------|--------|
| 41 | 0401 | X | W40010 | X | W40010 |
| 42 | 0811 | X | W40770 | X | W40770 |
| 43 | F100 | X | W40000-020P | X | X |
| 44 | U001 | X | W40000 | X | W40000 |
| 45 | W104 | X | W40020 | X | W40020 |
| 46 | W105 | X | W40020 | X | W40020 |
| 47 | W106 | X | W40020 | X | W40020 |
| 48 | W107 | X | W40020 | X | W40020 |
| 49 | W108 | X | W40020 | X | W40020 |
| 50 | W109 | X | W40020 | X | W40020 |
| 51 | W110 | X | W40020 | X | W40020 |
| 52 | W111 | X | W40020 | X | W40020 |

CAPACITOR

| REMARKS | PARTS NAME |
|---------|----------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| □ | TANTALUM CAPACITOR |
| NO MARK | CERAMIC CAPACITOR |
| ● | CERAMIC TUBULAR CAPACITOR |
| ○ | DISC TAPER FILM CAPACITOR |
| ○ | POLYESTER FILM CAPACITOR |
| ○ | MICA CAPACITOR |
| ○ | POLYPROPYLENE FILM CAPACITOR |
| ● | SEMICONDUCTIVE CERAMIC CAPACITOR |

NOTICE (mode)

(J)..... JAPAN
 (U)..... U.S.A.
 (C)..... CANADA
 (B)..... GENERAL
 (T)..... CHINA
 (K)..... KOREA
 (A)..... AUSTRALIA
 (E)..... BRITISH
 (D)..... EUROPE
 (S)..... SINGAPORE
 (I)..... SOUTH EUROPE
 (V)..... TAIWAN
 (F)..... RUSSIAN
 (P)..... LATIN AMERICA

Page 135 A4
to VIDEO (1)_CB342

Page 135 A5
to VIDEO (1)_CB343

Page 135 A5
to VIDEO (1)_CB340

Page 135 A6
to VIDEO (1)_CB344

Interchangeable Parts at Manufacture-Stage

| Mark | Reference Parts Number | Parts Name |
|------|------------------------|------------|
| | | |
| | | |


Page 139 E5
to ACDC (1)_CB603




VOLTAGE SELECTOR

| 230-240V | 1-2/5-6 |
|----------|---------|
| 220V | 2-3/6-7 |
| 110V | 3-4/7-8 |
| 120V | 4-5/8-1 |

IC101: NJM7812FA
Voltage regulator

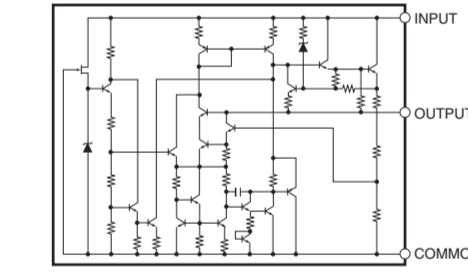

IC102: KIA7912PI
Voltage regulator

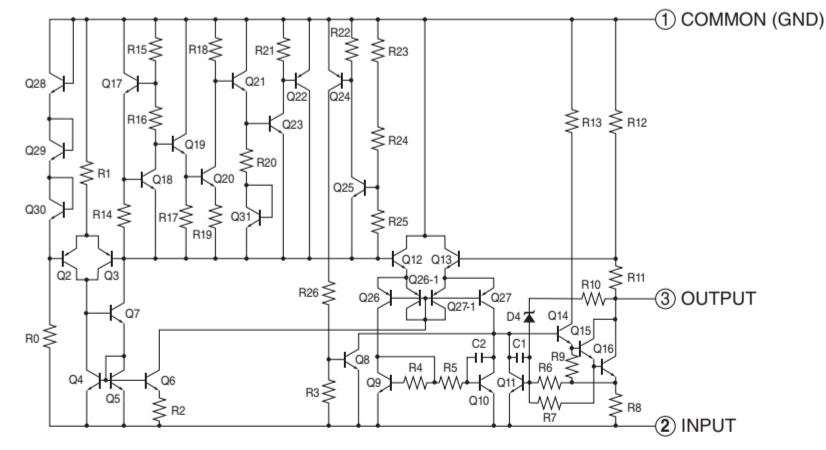

Page 135 A6
to VIDEO (1)_CB346


MAIN

| | |
|---|------------------|
| □ | C.R. 1-1000-1000 |
| □ | C.R. 1-100-100 |
| □ | SP#4172 |
| □ | #-1000-100 |
| □ | C-1000/ |
| □ | D-1000/ |
| □ | DB-107-111-102/ |
| □ | 100-100/ |


* All voltages are measured with a 10MΩ/V DC electronic voltmeter.
 * Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.
 * Schematic diagram is subject to change without notice.

MAIN 2/2


Page 131 [BB] to OPERATION (2)_CB451

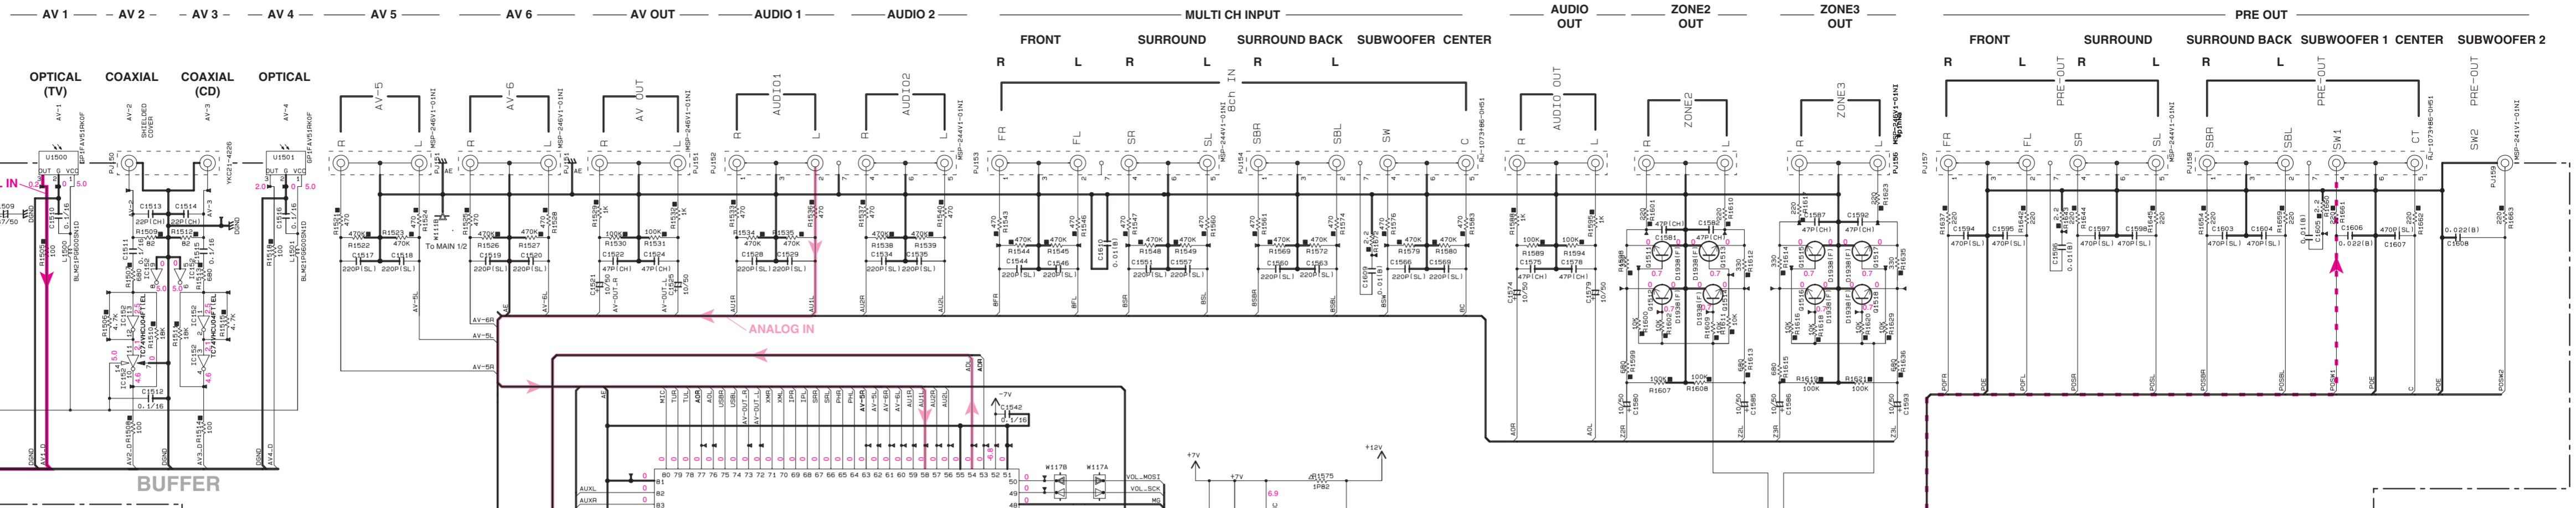


Page 131 [C8] to OPERATION (2)_CB454

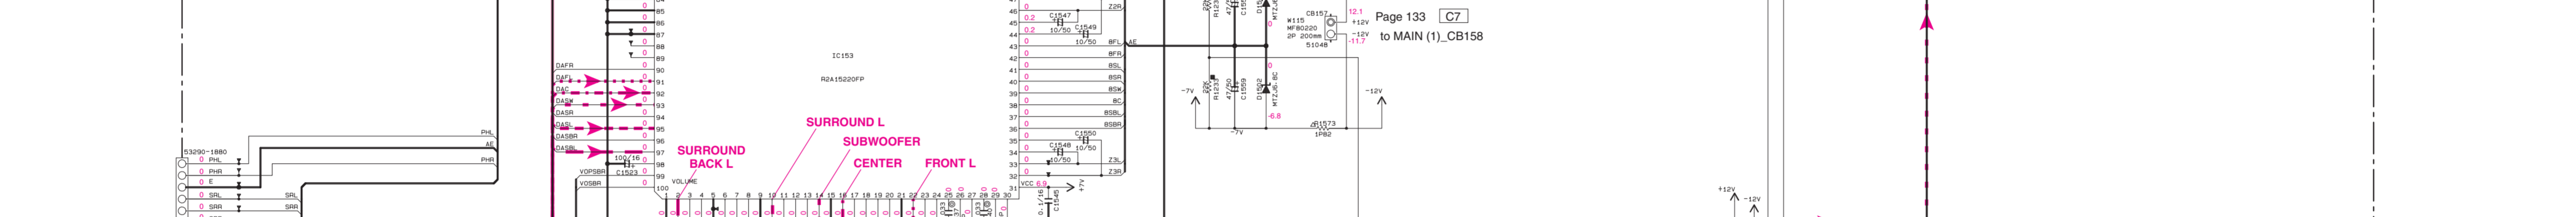


Page 131 [D8] to OPERATION (2)_CB456

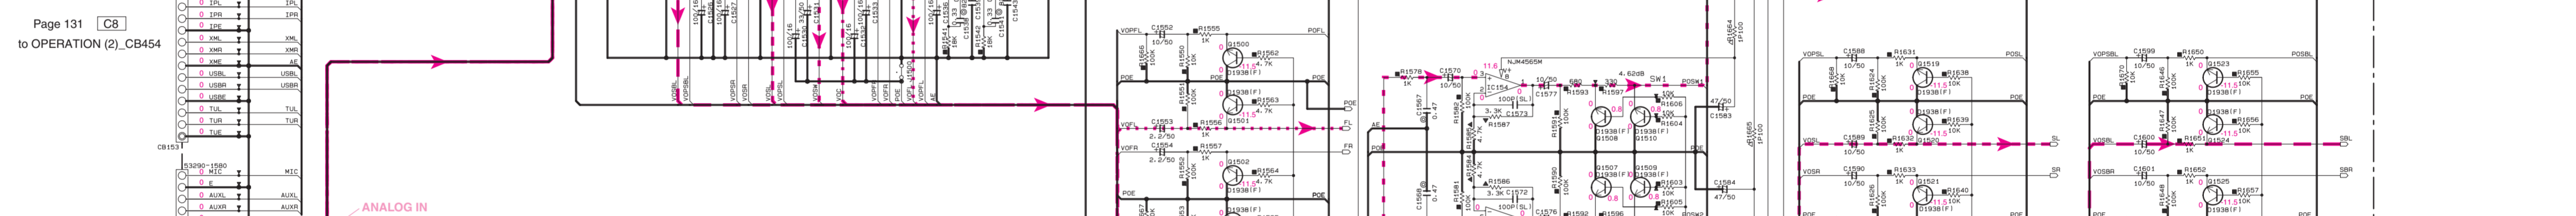


Page 131 [E8] to OPERATION (2)_CB457

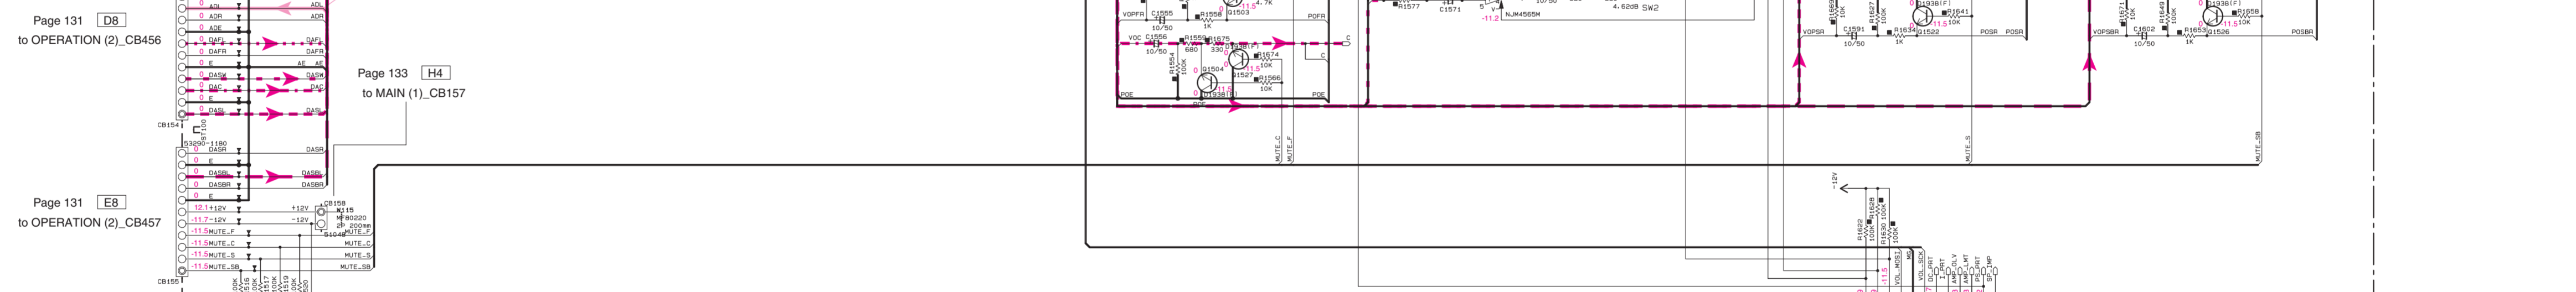


IC152: TC74VHC04FT Hex inverters



IC153: R2A15220FP 8-channel electronic volume with 11 input selector and tone control

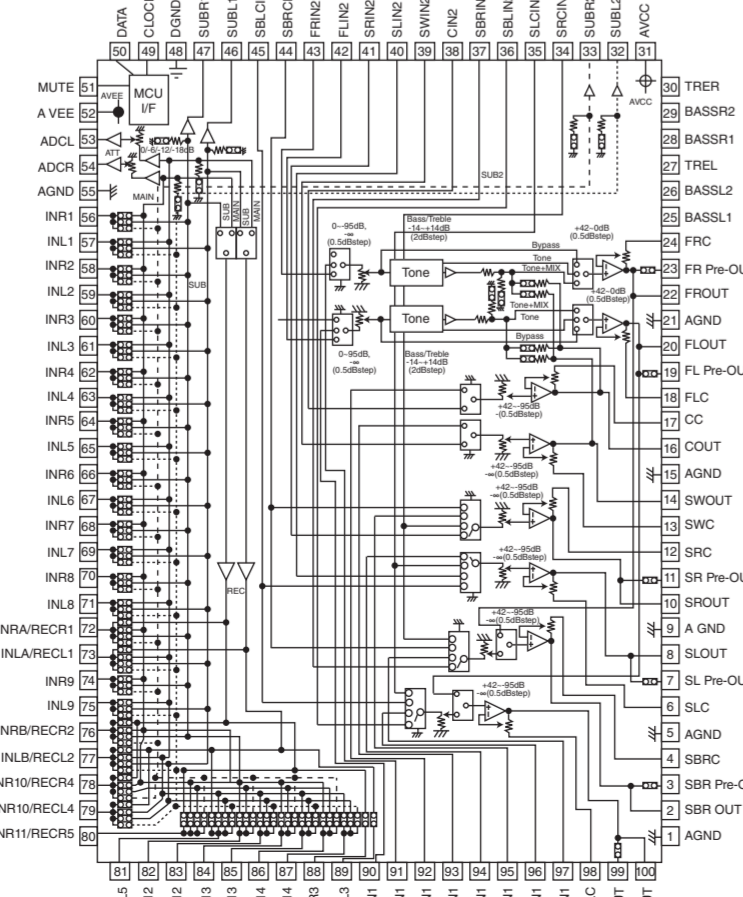

IC154: NJM4565M Dual operational amplifier

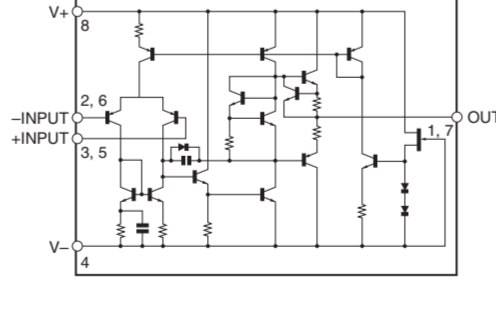

NOTICE (model)


(J)..... JAPAN
(U)..... U.S.A
(C)..... CANADA
(R)..... GENERAL
(T)..... CHINA
(K)..... KOREA
(A)..... AUSTRALIA
(B)..... BRITISH
(G)..... EUROPE
(L)..... SINGAPORE
(E)..... SOUTH EUROPE
(V)..... TAIWAN
(F)..... RUSSIAN
(P)..... LATIN AMERICA

| REMARKS | PARTS NAME |
|---------|---------------------------------|
| NO MARK | CARBON FILM RESISTOR (P=5) |
| □ | CARBON FILM RESISTOR (P=10) |
| △ | METAL OXIDE FILM RESISTOR |
| ▲ | METAL FILM RESISTOR |
| ■ | METAL PLATE RESISTOR |
| ⊠ | FIRE PROOF CARBON FILM RESISTOR |
| ⊞ | CEMENT MOUNTED RESISTOR |
| ⊚ | SEMI VARIABLE RESISTOR |
| ⊙ | CHIP RESISTOR |

| REMARKS | PARTS NAME |
|---------|----------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| ⊖ | TANTALUM CAPACITOR |
| NO MARK | CERAMIC CAPACITOR |
| ⊕ | CERAMIC TUBULAR CAPACITOR |
| ⊗ | POLYESTER FILM CAPACITOR |
| ⊙ | POLYSTYRENE FILM CAPACITOR |
| ○ | MICA CAPACITOR |
| ⊖ | POLYPROPYLENE FILM CAPACITOR |
| ⊙ | SEMICONDUCTIVE CERAMIC CAPACITOR |

Page 124 [E2] to DIGITAL (1)_CB23


* All voltages are measured with a 10MΩ/V DC electronic voltmeter.
 * Components having special characteristics are marked Δ, and must be replaced with parts having specifications equal to those originally installed.
 * Schematic diagram is subject to change without notice.

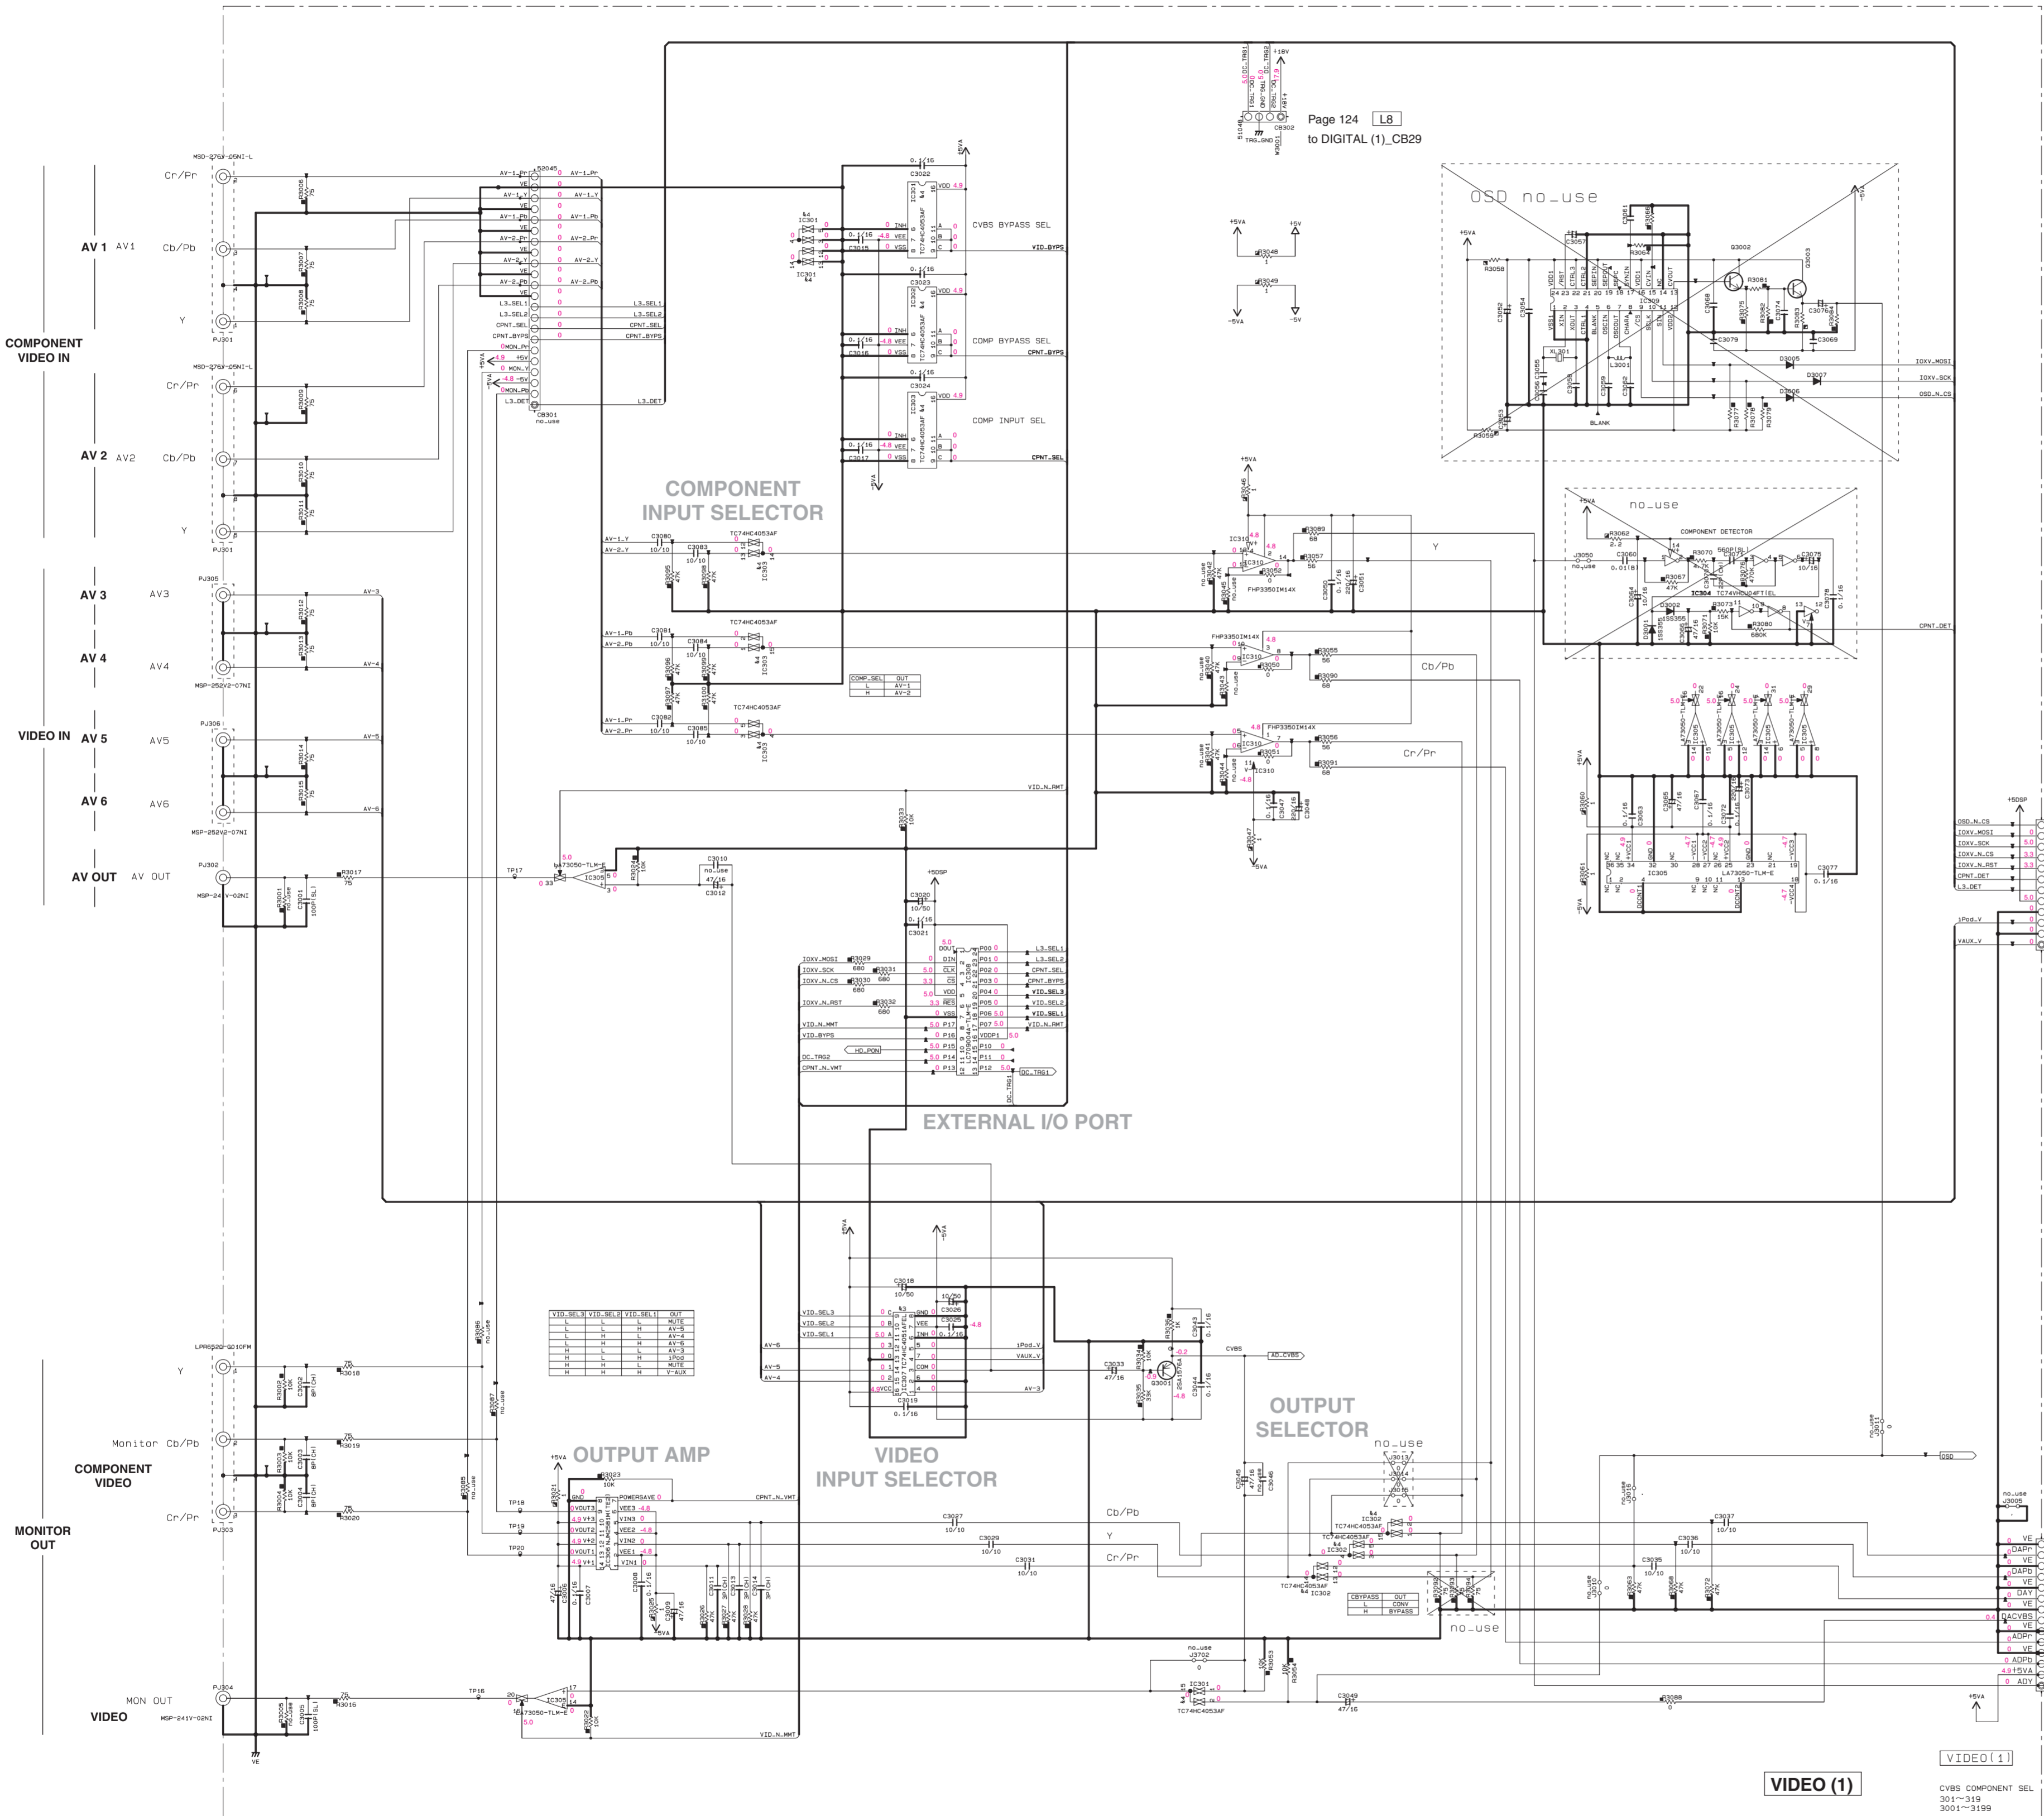

Page 124 L8
to DIGITAL (1)_CB29

Interchangeable Parts at Manufacture Stage

| Part | Reference Parts Number | Parts Name |
|------|--|----------------------------------|
| K1 | 03000 | KT4164E *TOP 2811601L/P/1 |
| K2 | | |
| K3 | IC307 | TC74HC4051AFEL 8*74HC4051AFEL,NL |
| K4 | IC301-303 | TC74HC4053AF 8*74HC4053AF,NL |
| K5 | | |
| K6 | 03000-3311, 3313, 3314, 3403-3407, 3601-3602, 3801-3805, 3901-3902 | IS9395 MAJ11100L |
| K7 | 03405-3408, 3410, 3412, 3414 | KT4146KA KR4102S-RTX/P |
| K8 | 03405-3407, 3409, 3411, 3413 | DT1146KA KR102S-RTX/P |
| K9 | 03603 | DT1146KA KR102S-RTX/P |
| K10 | 03000-3304 | 28A10151Y1 KT41966 Y+AT |
| K11 | 03001 | 28C174051R/S1 28C30114R41R/S1 |
| K12 | 03003-3305, 3801, 3802 | 28R1811Y1 KTCS198 Y+AT |

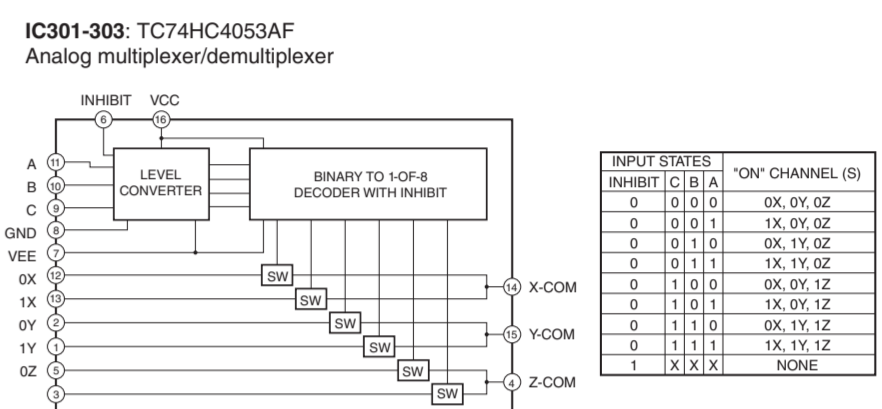

Page 131 G7
to OPERATION (2)_CB459






- NOTICE (mode1)
- (J) JAPAN
 - (U) U.S.A.
 - (C) CANADA
 - (R) GENERAL
 - (T) CHINA
 - (K) KOREA
 - (A) AUSTRALIA
 - (B) BRITISH
 - (S) EUROPE
 - (L) SINGAPORE
 - (E) SOUTH EUROPE
 - (V) TAIWAN
 - (F) RUSSIAN
 - (P) LATIN AMERICA

RESISTOR

| REMARKS | PARTS NAME |
|---------|---------------------------------|
| NO MARK | CARBON FILM RESISTOR (P=5) |
| | CARBON FILM RESISTOR (P=10) |
| | METAL OXIDE FILM RESISTOR |
| | METAL FILM RESISTOR |
| | METAL PLATE RESISTOR |
| | FINE PITCH CARBON FILM RESISTOR |
| | CEMENT MOLDED RESISTOR |
| | SEMI VARIABLE RESISTOR |
| | CHIP RESISTOR |

CAPACITOR

| REMARKS | PARTS NAME |
|---------|----------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| | TANTALUM CAPACITOR |
| NO MARK | CERAMIC CAPACITOR |
| | CERAMIC TUBULAR CAPACITOR |
| | SILVER PAPER FILM CAPACITOR |
| | POLYESTER FILM CAPACITOR |
| | MICA CAPACITOR |
| | POLYPROPYLENE FILM CAPACITOR |
| | SEMICONDUCTIVE CERAMIC CAPACITOR |

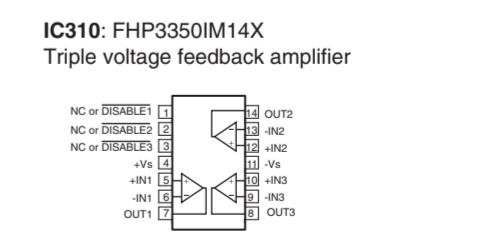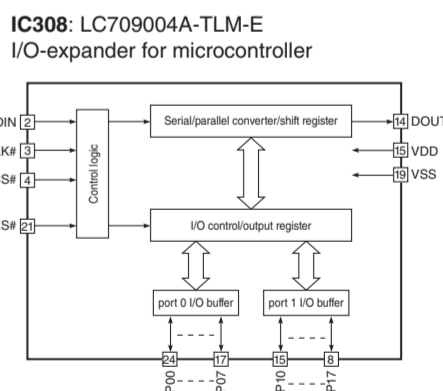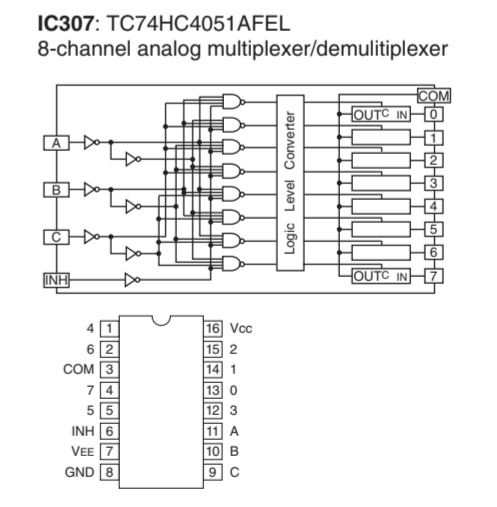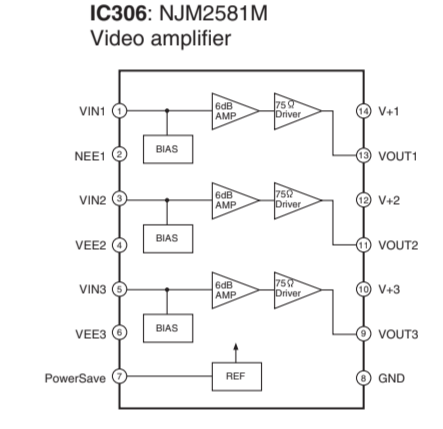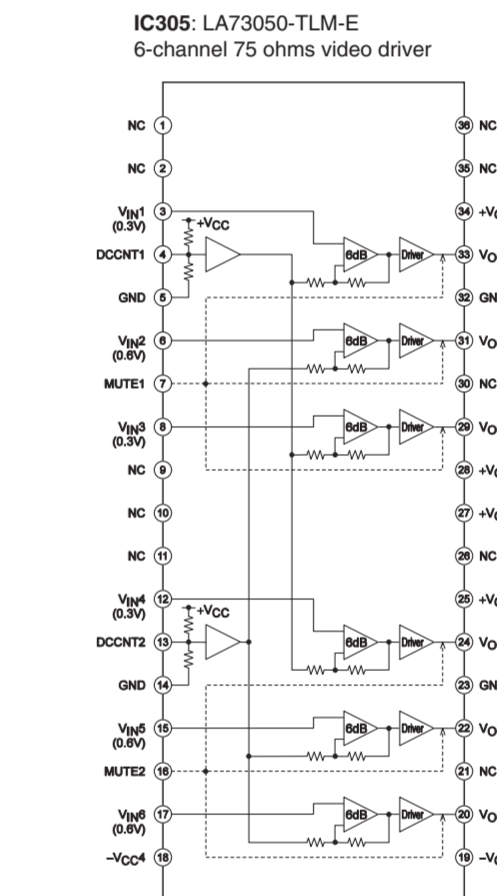



Page 127 H2
to DIGITAL (1)_CB71

To Digital


VIDEO (1)
CVBS COMPONENT SEL
301~319
3001~3199

* All voltages are measured with a 10MΩ/V DC electronic voltmeter.
* Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.
* Schematic diagram is subject to change without notice.

VIDEO 2/3

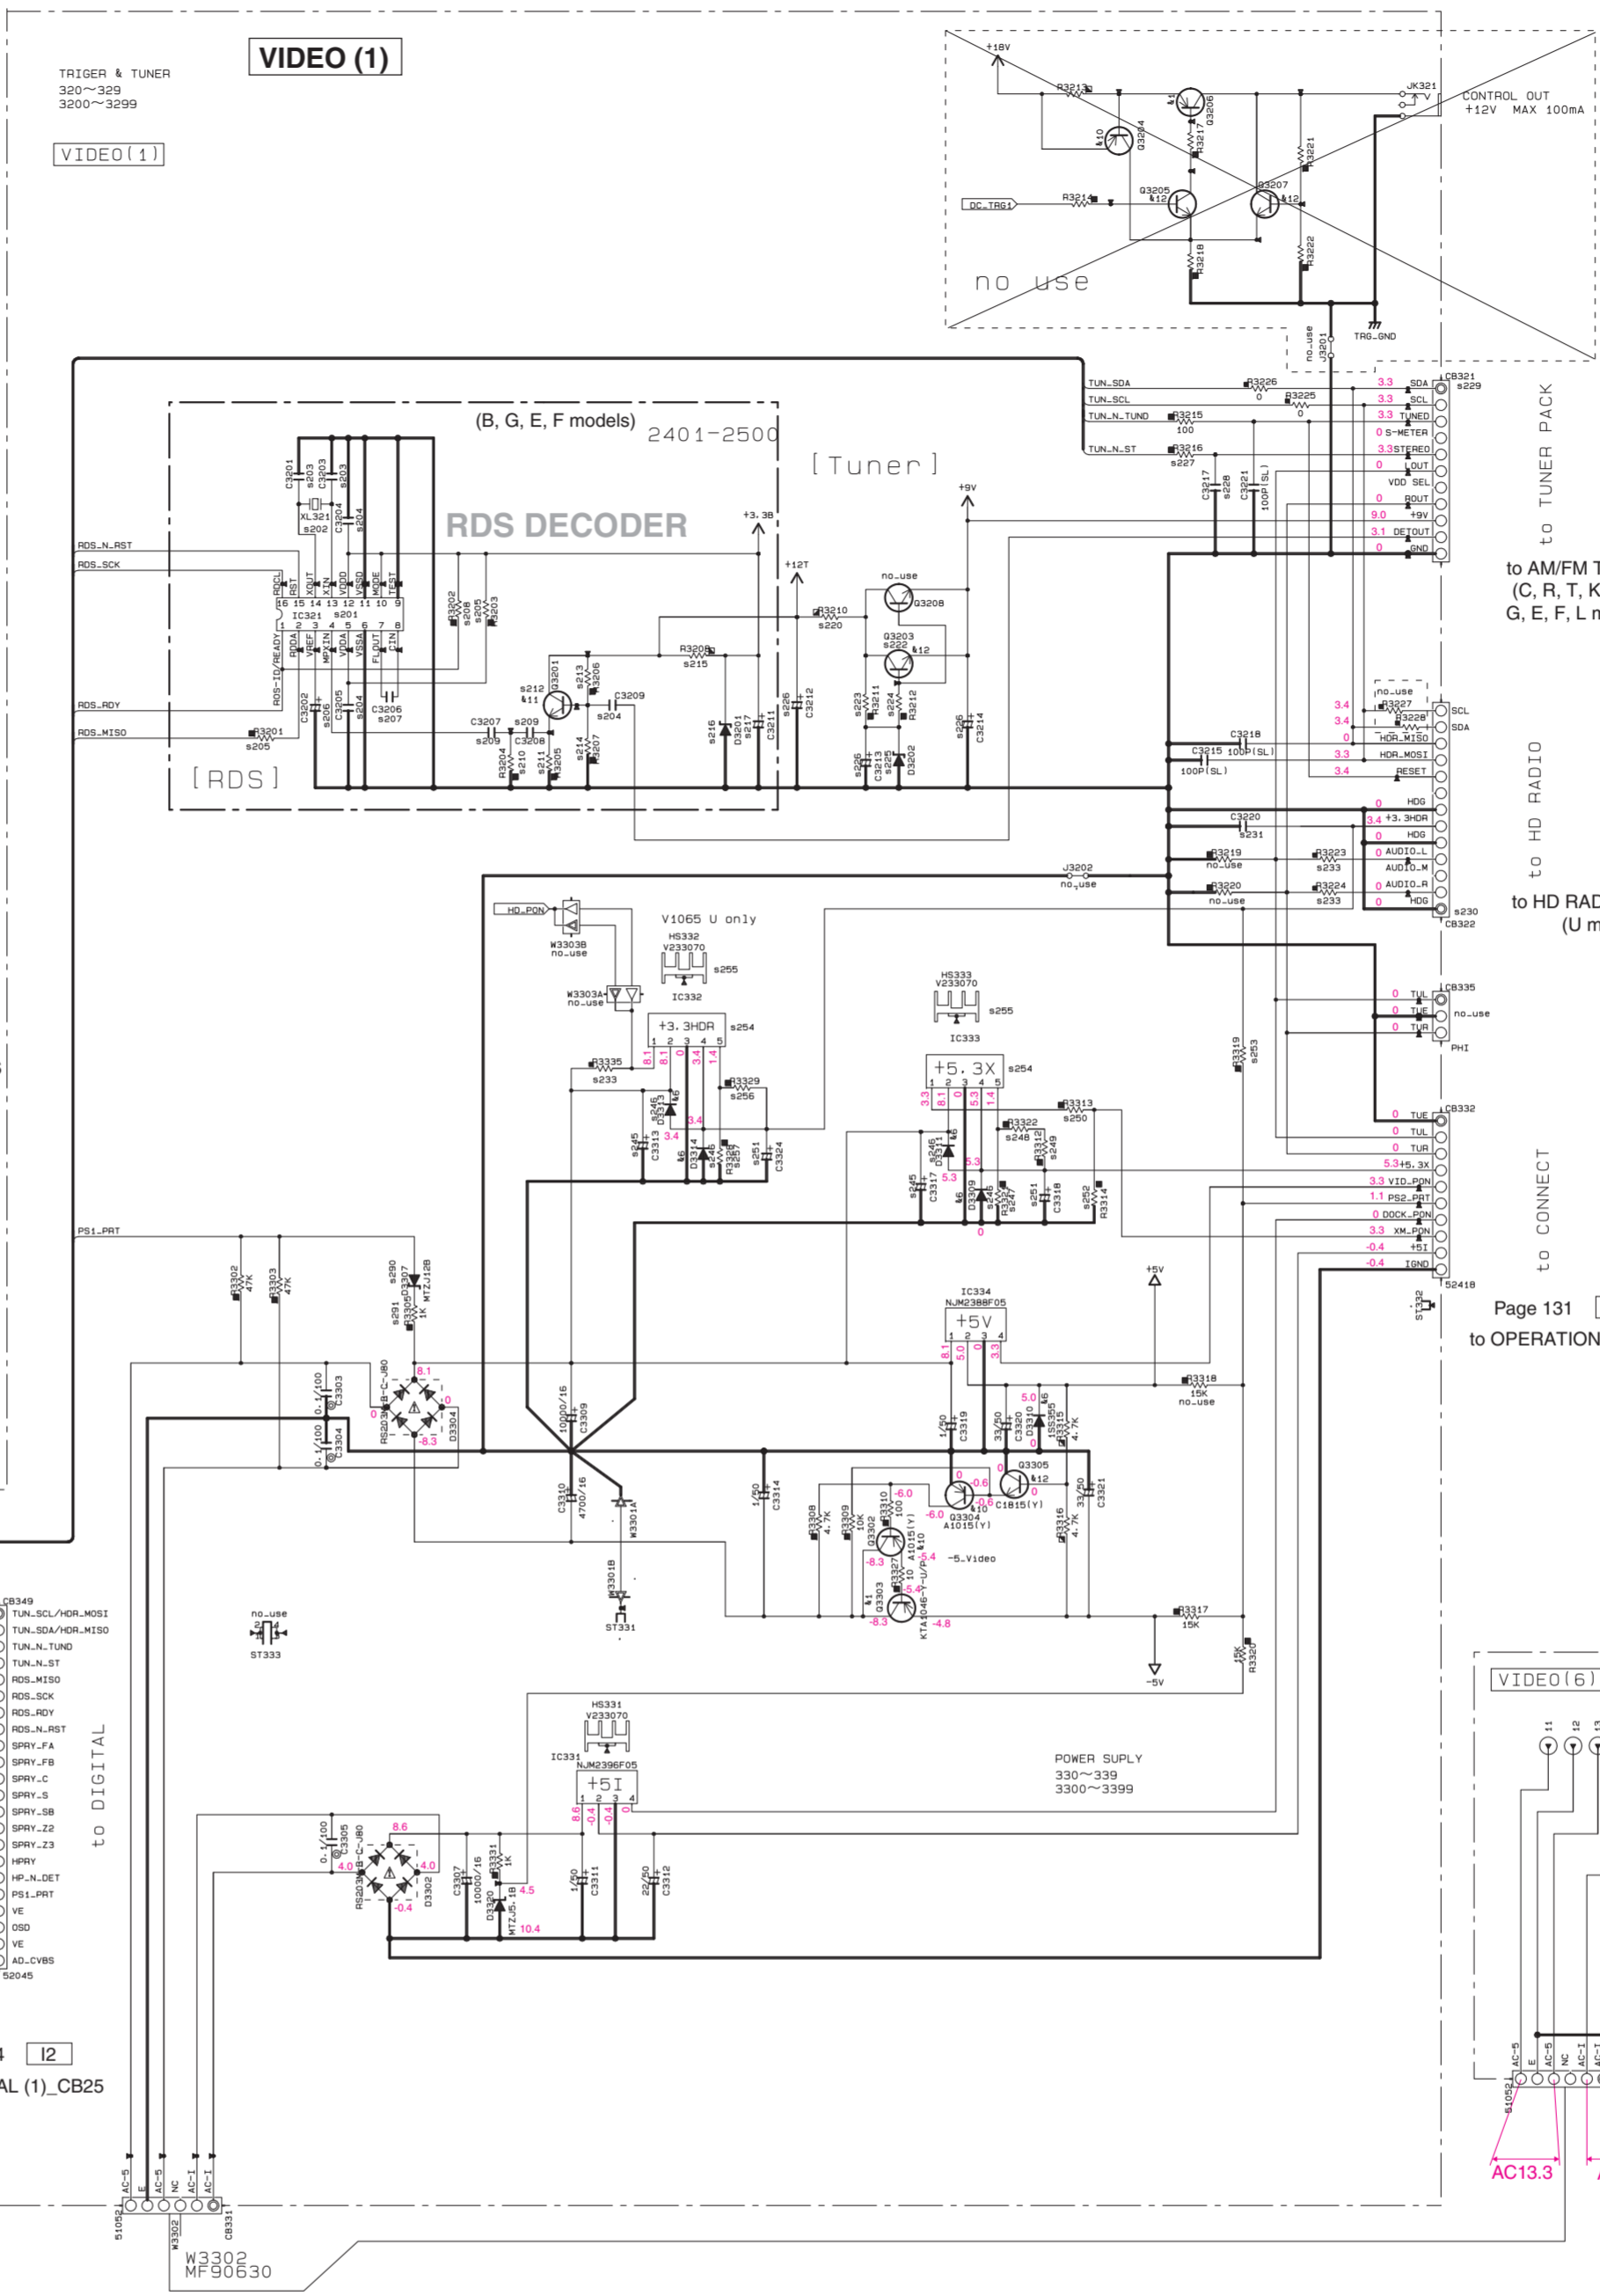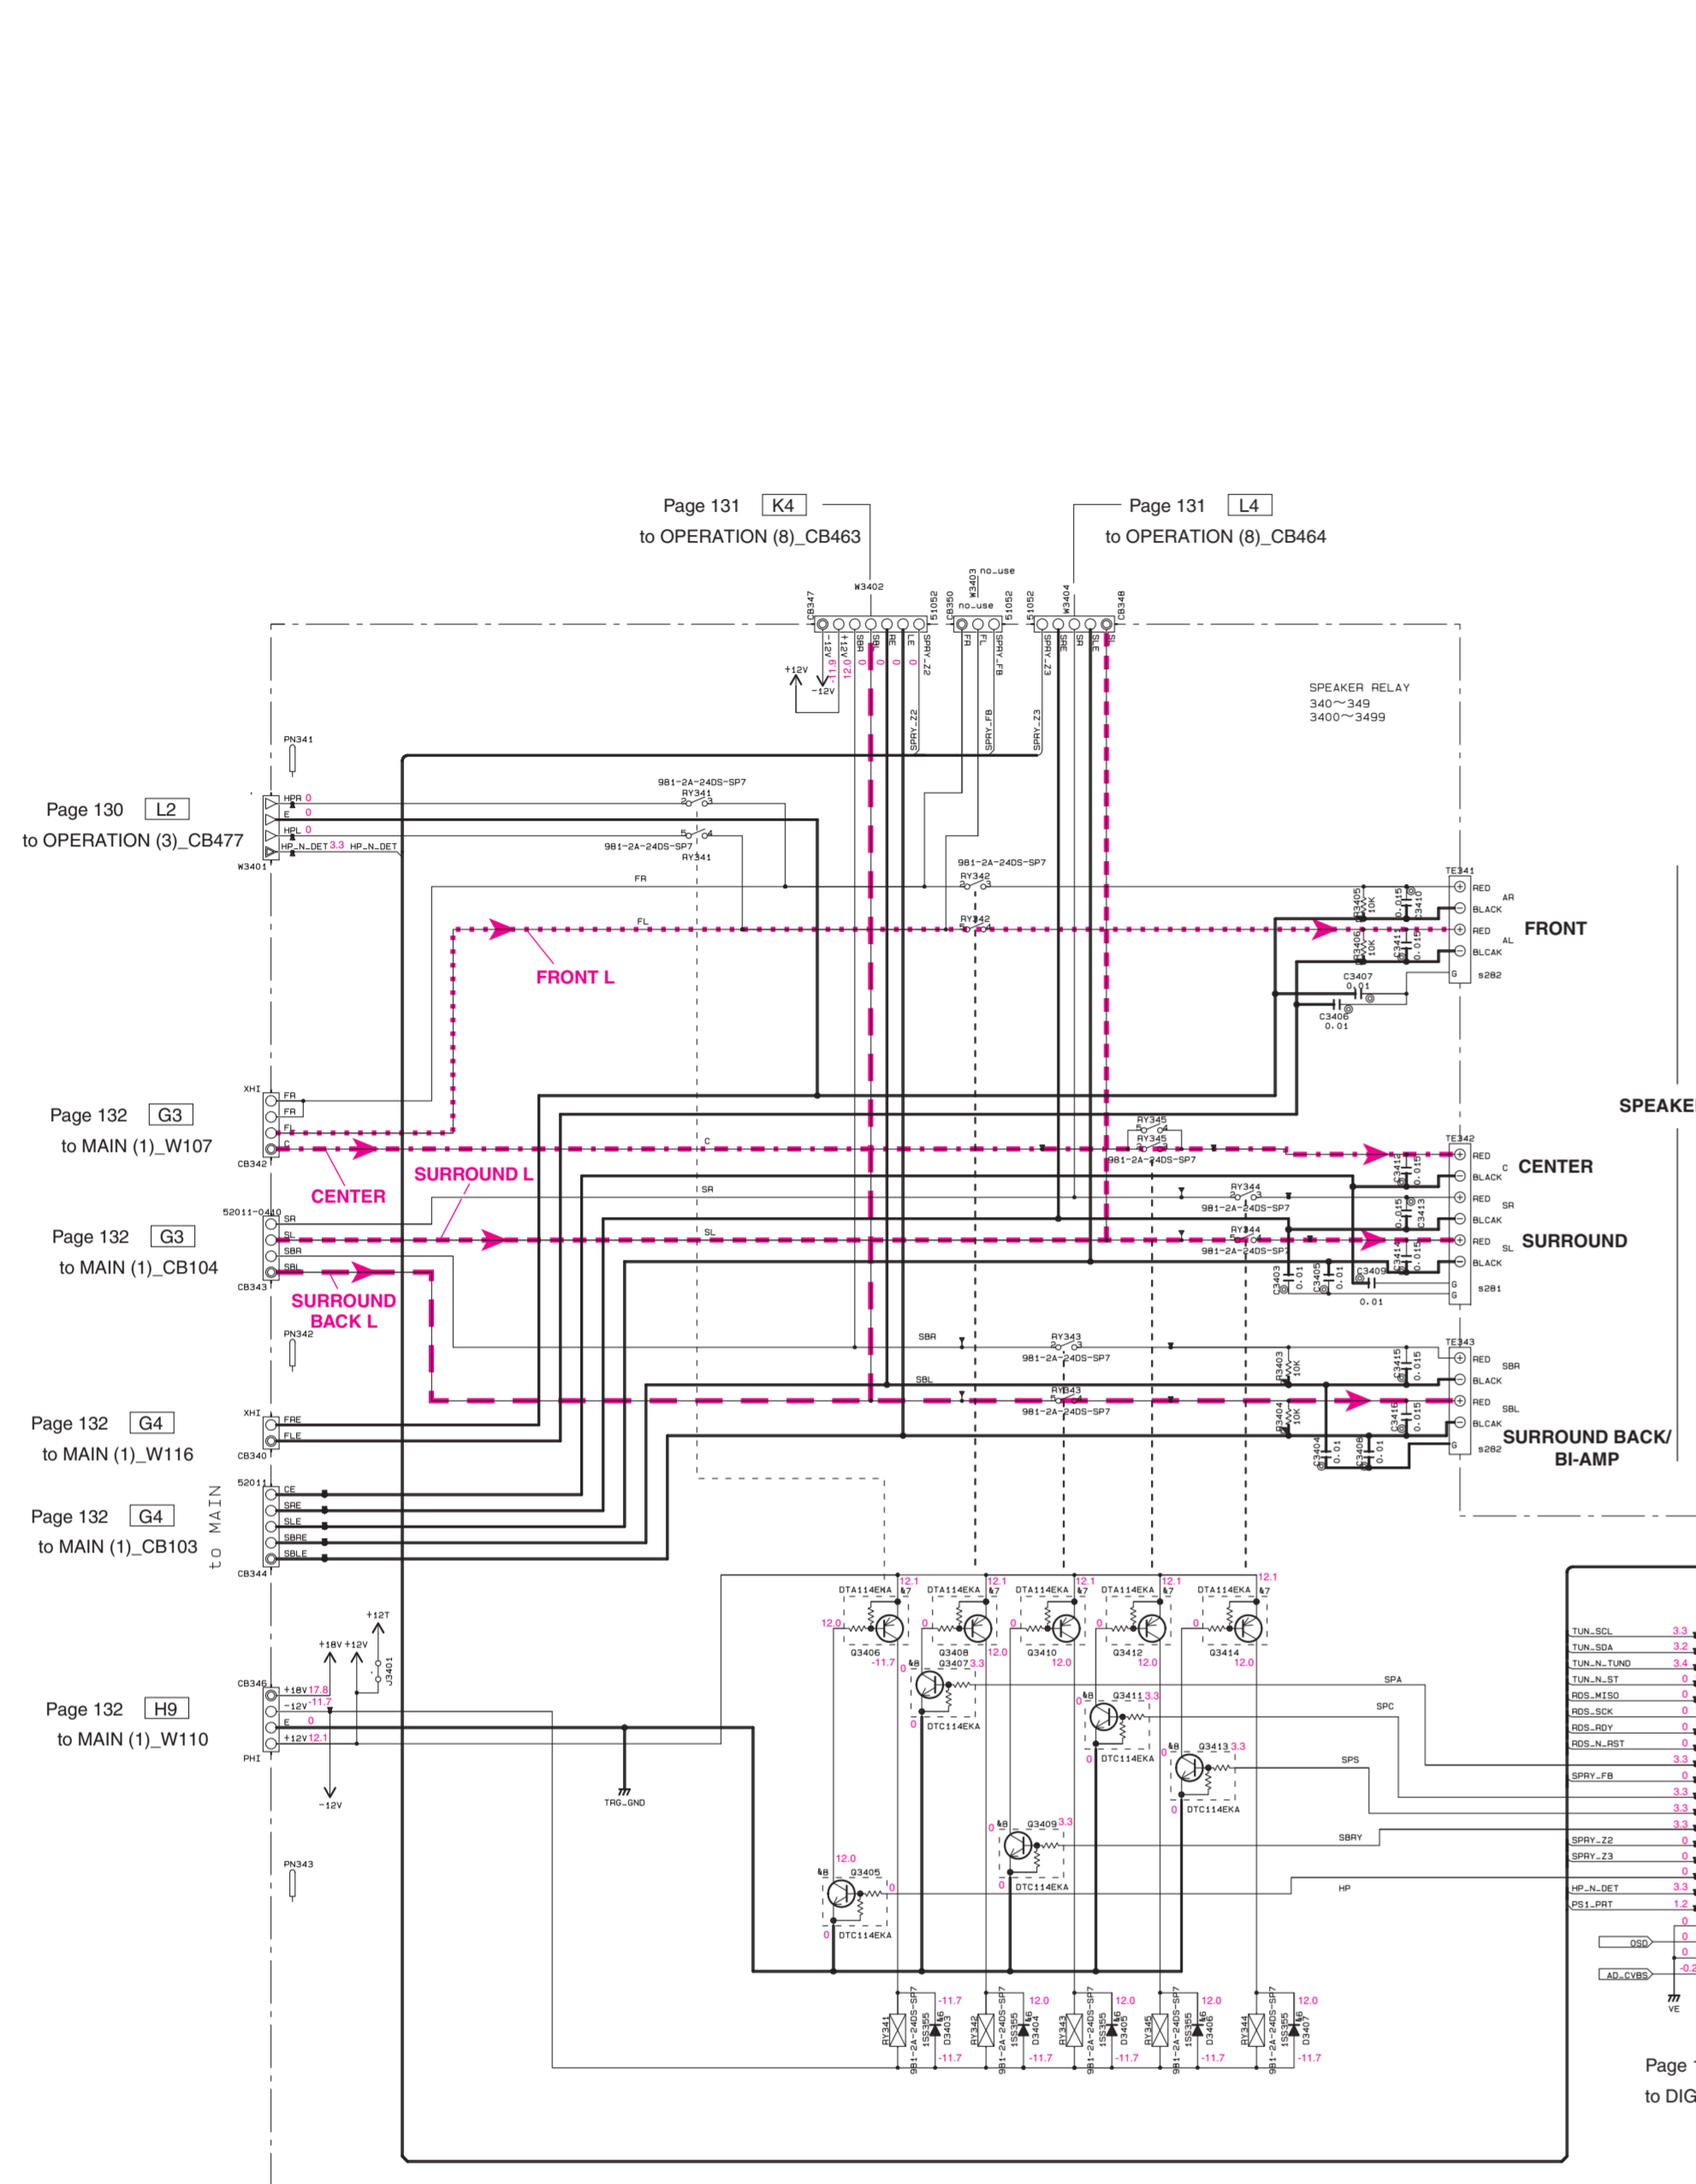





| REF | LOC | U | C | R | T | A | REF | L | K |
|------|-------|---|---|---|---|---|----------|---|---|
| 8201 | IC201 | X | X | X | X | X | IC174250 | X | X |
| 8202 | AL321 | X | X | X | X | X | IC174250 | X | X |
| 8203 | C3003 | X | X | X | X | X | IC174250 | X | X |
| 8204 | C3004 | X | X | X | X | X | IC174250 | X | X |
| 8205 | R3003 | X | X | X | X | X | IC174250 | X | X |
| 8206 | C3002 | X | X | X | X | X | IC174250 | X | X |
| 8207 | C3006 | X | X | X | X | X | IC174250 | X | X |
| 8208 | R3002 | X | X | X | X | X | IC174250 | X | X |
| 8209 | C3008 | X | X | X | X | X | IC174250 | X | X |
| 8210 | R3004 | X | X | X | X | X | IC174250 | X | X |
| 8211 | R3005 | X | X | X | X | X | IC174250 | X | X |
| 8212 | D3001 | X | X | X | X | X | IC174250 | X | X |
| 8213 | R3006 | X | X | X | X | X | IC174250 | X | X |
| 8214 | R3007 | X | X | X | X | X | IC174250 | X | X |
| 8215 | R3008 | X | X | X | X | X | IC174250 | X | X |
| 8216 | D3001 | X | X | X | X | X | IC174250 | X | X |
| 8217 | C3011 | X | X | X | X | X | IC174250 | X | X |
| 8220 | R3010 | X | X | X | X | X | IC174250 | X | X |
| 8221 | R3011 | X | X | X | X | X | IC174250 | X | X |
| 8222 | R3012 | X | X | X | X | X | IC174250 | X | X |
| 8223 | R3013 | X | X | X | X | X | IC174250 | X | X |
| 8224 | R3014 | X | X | X | X | X | IC174250 | X | X |
| 8225 | R3015 | X | X | X | X | X | IC174250 | X | X |
| 8226 | R3016 | X | X | X | X | X | IC174250 | X | X |
| 8227 | R3017 | X | X | X | X | X | IC174250 | X | X |
| 8228 | R3018 | X | X | X | X | X | IC174250 | X | X |
| 8229 | R3019 | X | X | X | X | X | IC174250 | X | X |
| 8230 | R3020 | X | X | X | X | X | IC174250 | X | X |
| 8231 | R3021 | X | X | X | X | X | IC174250 | X | X |
| 8232 | R3022 | X | X | X | X | X | IC174250 | X | X |
| 8233 | R3023 | X | X | X | X | X | IC174250 | X | X |
| 8234 | R3024 | X | X | X | X | X | IC174250 | X | X |
| 8235 | R3025 | X | X | X | X | X | IC174250 | X | X |
| 8236 | R3026 | X | X | X | X | X | IC174250 | X | X |
| 8237 | R3027 | X | X | X | X | X | IC174250 | X | X |
| 8238 | R3028 | X | X | X | X | X | IC174250 | X | X |
| 8239 | R3029 | X | X | X | X | X | IC174250 | X | X |
| 8240 | R3030 | X | X | X | X | X | IC174250 | X | X |
| 8241 | R3031 | X | X | X | X | X | IC174250 | X | X |
| 8242 | R3032 | X | X | X | X | X | IC174250 | X | X |
| 8243 | R3033 | X | X | X | X | X | IC174250 | X | X |
| 8244 | R3034 | X | X | X | X | X | IC174250 | X | X |
| 8245 | R3035 | X | X | X | X | X | IC174250 | X | X |
| 8246 | R3036 | X | X | X | X | X | IC174250 | X | X |
| 8247 | R3037 | X | X | X | X | X | IC174250 | X | X |
| 8248 | R3038 | X | X | X | X | X | IC174250 | X | X |
| 8249 | R3039 | X | X | X | X | X | IC174250 | X | X |
| 8250 | R3040 | X | X | X | X | X | IC174250 | X | X |
| 8251 | R3041 | X | X | X | X | X | IC174250 | X | X |
| 8252 | R3042 | X | X | X | X | X | IC174250 | X | X |
| 8253 | R3043 | X | X | X | X | X | IC174250 | X | X |
| 8254 | R3044 | X | X | X | X | X | IC174250 | X | X |
| 8255 | R3045 | X | X | X | X | X | IC174250 | X | X |
| 8256 | R3046 | X | X | X | X | X | IC174250 | X | X |
| 8257 | R3047 | X | X | X | X | X | IC174250 | X | X |
| 8258 | R3048 | X | X | X | X | X | IC174250 | X | X |
| 8259 | R3049 | X | X | X | X | X | IC174250 | X | X |
| 8260 | R3050 | X | X | X | X | X | IC174250 | X | X |
| 8261 | R3051 | X | X | X | X | X | IC174250 | X | X |

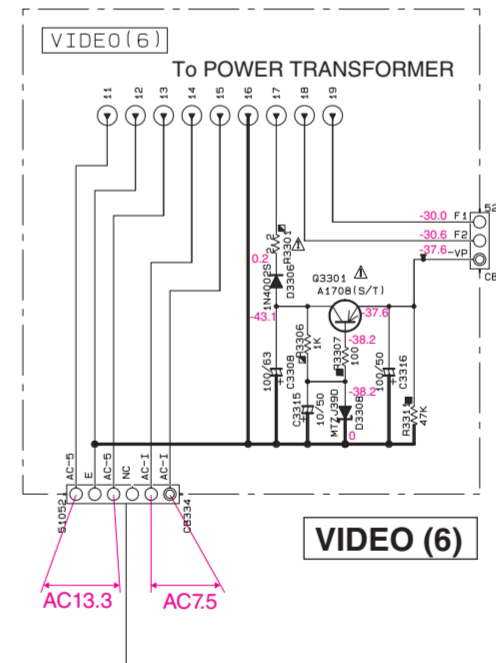

NOTICE (note 1)
 (J)..... JAPAN
 (U)..... U. S. A.
 (C)..... CANADA
 (R)..... GENERAL
 (T)..... CHINA
 (K)..... KOREA
 (A)..... AUSTRALIA
 (B)..... BRITISH
 (G)..... EUROPE
 (L)..... SINGAPORE
 (E)..... SOUTH EUROPE
 (V)..... TAIWAN
 (F)..... RUSSIAN
 (P)..... LATIN AMERICA




| REMARKS | PARTS NAME |
|---------|---------------------------------|
| NO MARK | CARBON FILM RESISTOR (P=5) |
| □ | CARBON FILM RESISTOR (P=10) |
| △ | METAL OXIDE FILM RESISTOR |
| ▲ | METAL FILM RESISTOR |
| ⊠ | METAL PLATE RESISTOR |
| ■ | FIRE PROOF CARBON FILM RESISTOR |
| ⊞ | CEMENT MOLDED RESISTOR |
| ⊚ | SEMI VARIABLE RESISTOR |
| ⊙ | CHIP RESISTOR |

| REMARKS | PARTS NAME |
|---------|----------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| ⊗ | TANTALUM CAPACITOR |
| NO MARK | CERAMIC CAPACITOR |
| ⊙ | CERAMIC TUBULAR CAPACITOR |
| ⊚ | POLYESTER FILM CAPACITOR |
| ○ | POLYSTYRENE FILM CAPACITOR |
| □ | MICA CAPACITOR |
| ⊚ | POLYPROPYLENE FILM CAPACITOR |
| ⊙ | SEMICONDUCTIVE CERAMIC CAPACITOR |

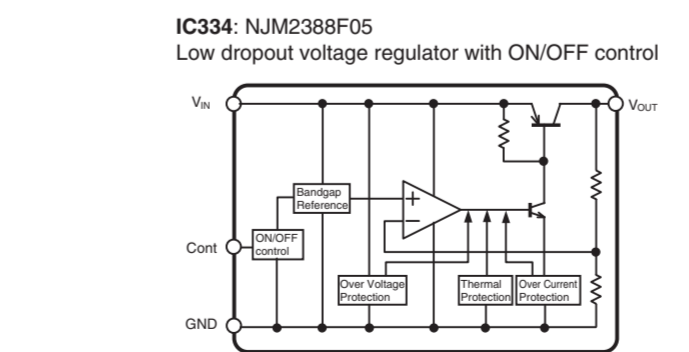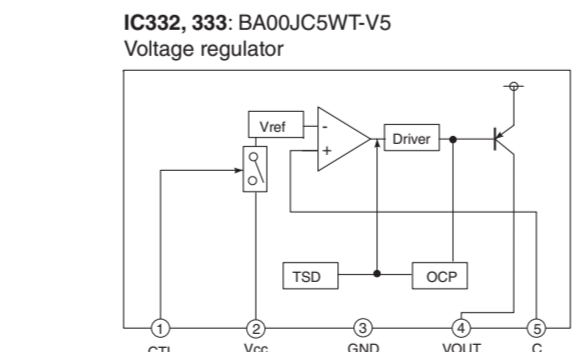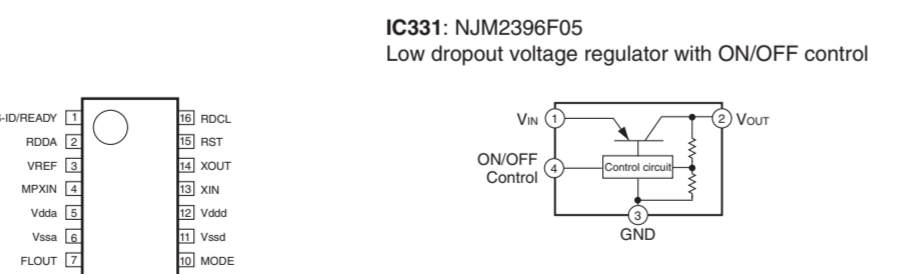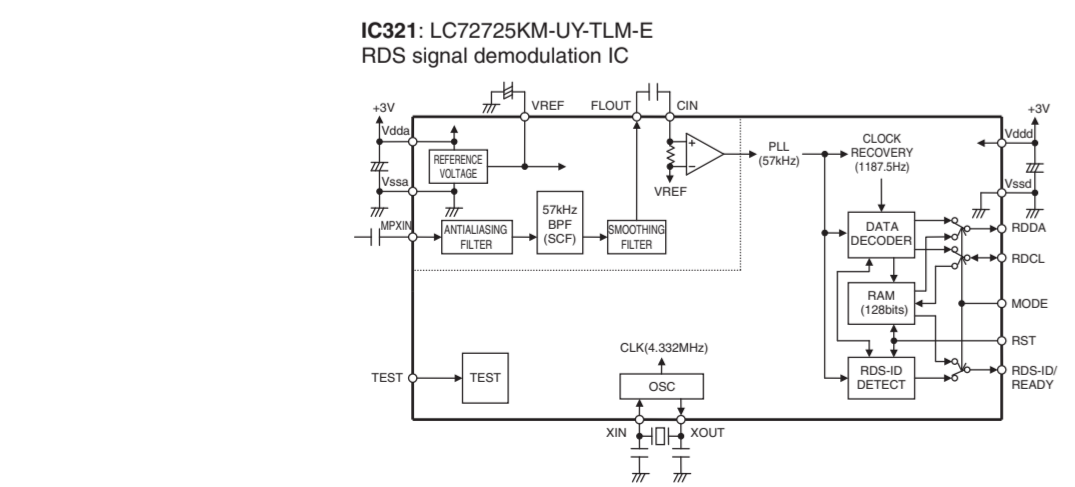



* All voltages are measured with a 10MΩ/V DC electric voltmeter.
 * Components having special characteristics are marked Δ, and must be replaced with parts having specifications equal to those originally installed.
 * Schematic diagram is subject to change without notice.

VIDEO 3/3

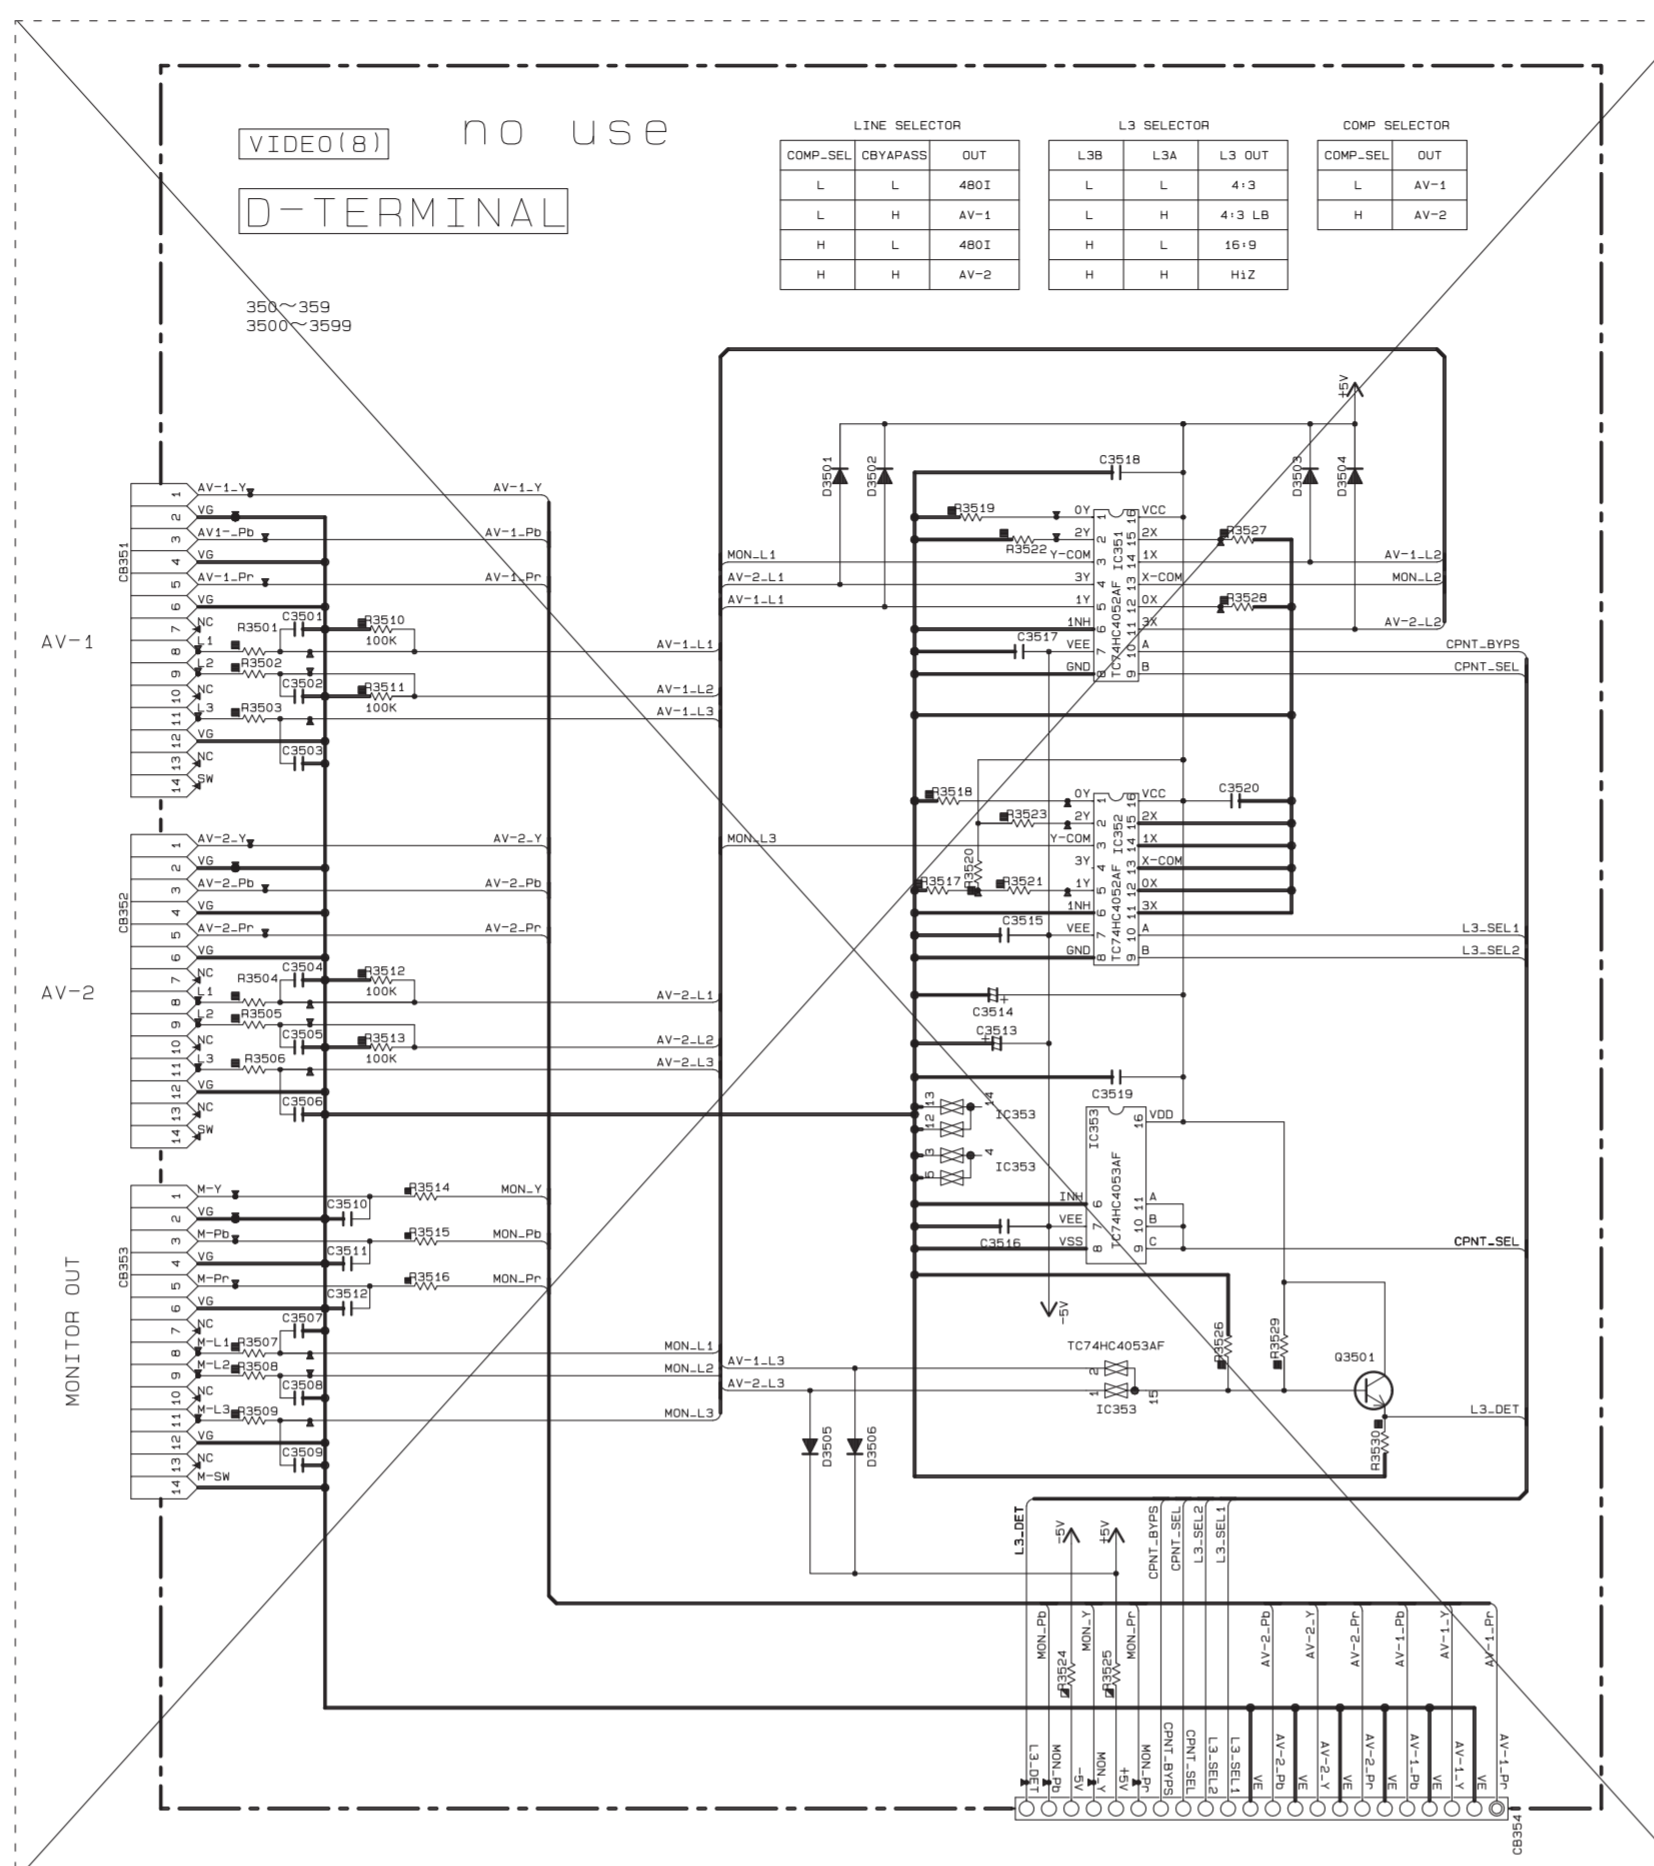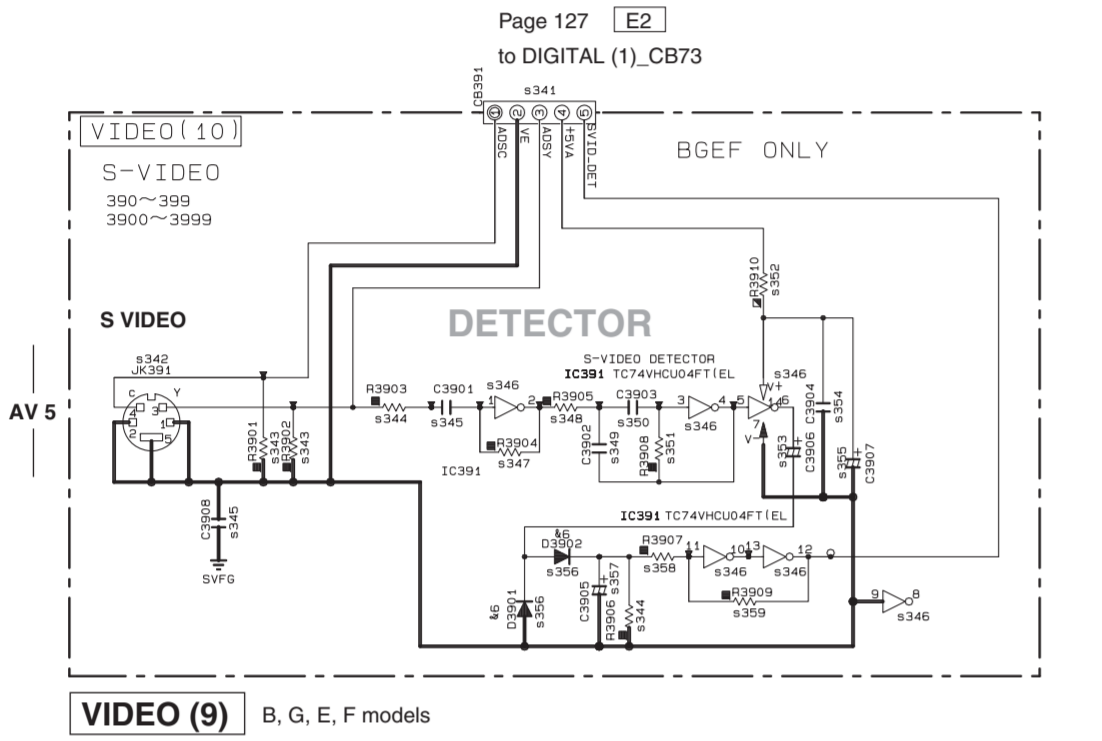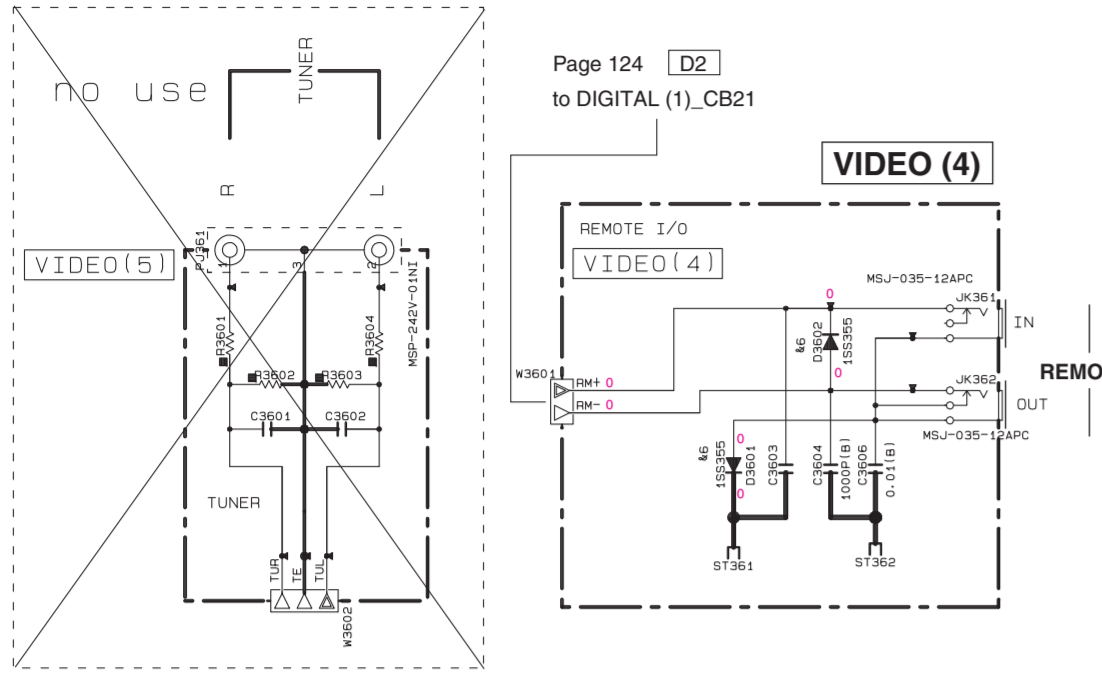

Destination Part List

| QXX | LOC | U | C | R | T | A | F | ROEP | L | K | | | | | | | |
|------|-------|--------|------|--------|------|--------|------|--------|------|--------|-----|---------|----------------|--------|------|--------|-----|
| 9383 | R3909 | RO3968 | 1.0K | RO2927 | 2.7K | RO3967 | 4.7K | RO3968 | 6.8K | RO3970 | 10K | RO3974 | 47K | RO3970 | 100K | RO3970 | 10K |
| 9341 | CB391 | X | X | X | X | X | X | X | X | X | X | VS04410 | 50K44 | X | X | X | X |
| 9342 | JK391 | X | X | X | X | X | X | X | X | X | X | VS03100 | W517000V | X | X | X | X |
| 9343 | R3901 | X | X | X | X | X | X | X | X | X | X | RO3975 | 75 | X | X | X | X |
| 9344 | R3903 | X | X | X | X | X | X | X | X | X | X | RO3970 | 10K | X | X | X | X |
| 9345 | C3908 | X | X | X | X | X | X | X | X | X | X | US06410 | 0.01181 | X | X | X | X |
| 9346 | IC391 | X | X | X | X | X | X | X | X | X | X | X29040 | TC74VHC04FTTEL | X | X | X | X |
| 9347 | IC394 | X | X | X | X | X | X | X | X | X | X | RO3977 | 47K | X | X | X | X |
| 9348 | R3905 | X | X | X | X | X | X | X | X | X | X | RO3967 | 4.7K | X | X | X | X |
| 9349 | C3902 | X | X | X | X | X | X | X | X | X | X | US06212 | 100P1L1 | X | X | X | X |
| 9350 | C3903 | X | X | X | X | X | X | X | X | X | X | US06232 | 220P1L1 | X | X | X | X |
| 9351 | R3908 | X | X | X | X | X | X | X | X | X | X | RO3967 | 47K | X | X | X | X |
| 9352 | R3910 | X | X | X | X | X | X | X | X | X | X | HV7532 | 5-2 | X | X | X | X |
| 9353 | C3906 | X | X | X | X | X | X | X | X | X | X | UR03710 | 10/16 | X | X | X | X |
| 9354 | C3904 | X | X | X | X | X | X | X | X | X | X | US0610 | 0.1716 | X | X | X | X |
| 9355 | C3907 | X | X | X | X | X | X | X | X | X | X | UR01647 | 47/16 | X | X | X | X |
| 9356 | C3902 | X | X | X | X | X | X | X | X | X | X | VT33290 | 10000 | X | X | X | X |
| 9357 | C3905 | X | X | X | X | X | X | X | X | X | X | UR03747 | 47/16 | X | X | X | X |
| 9358 | R3907 | X | X | X | X | X | X | X | X | X | X | RO3975 | 10K | X | X | X | X |
| 9359 | R3909 | X | X | X | X | X | X | X | X | X | X | RO3968 | 680K | X | X | X | X |

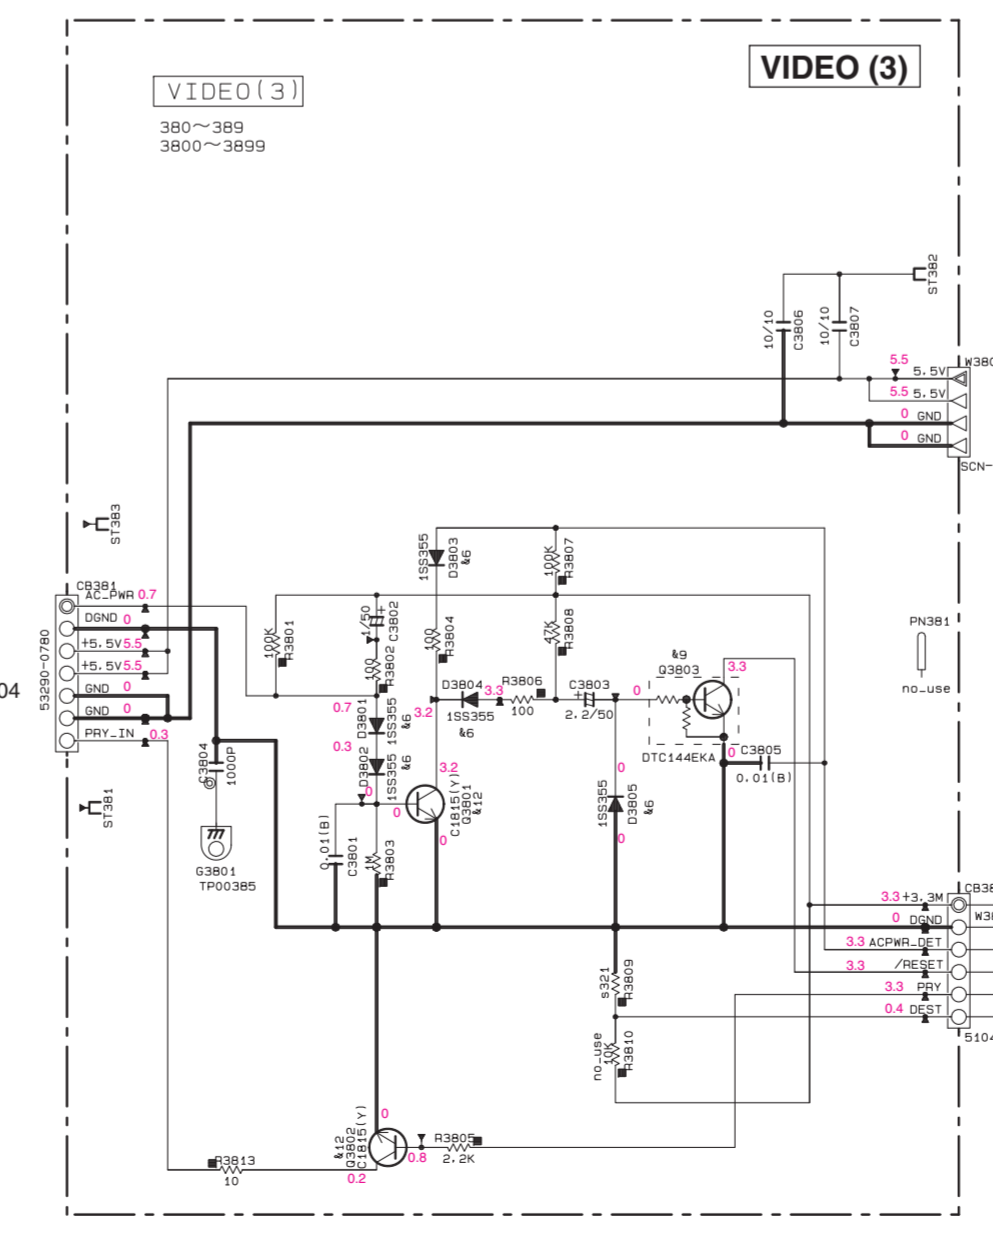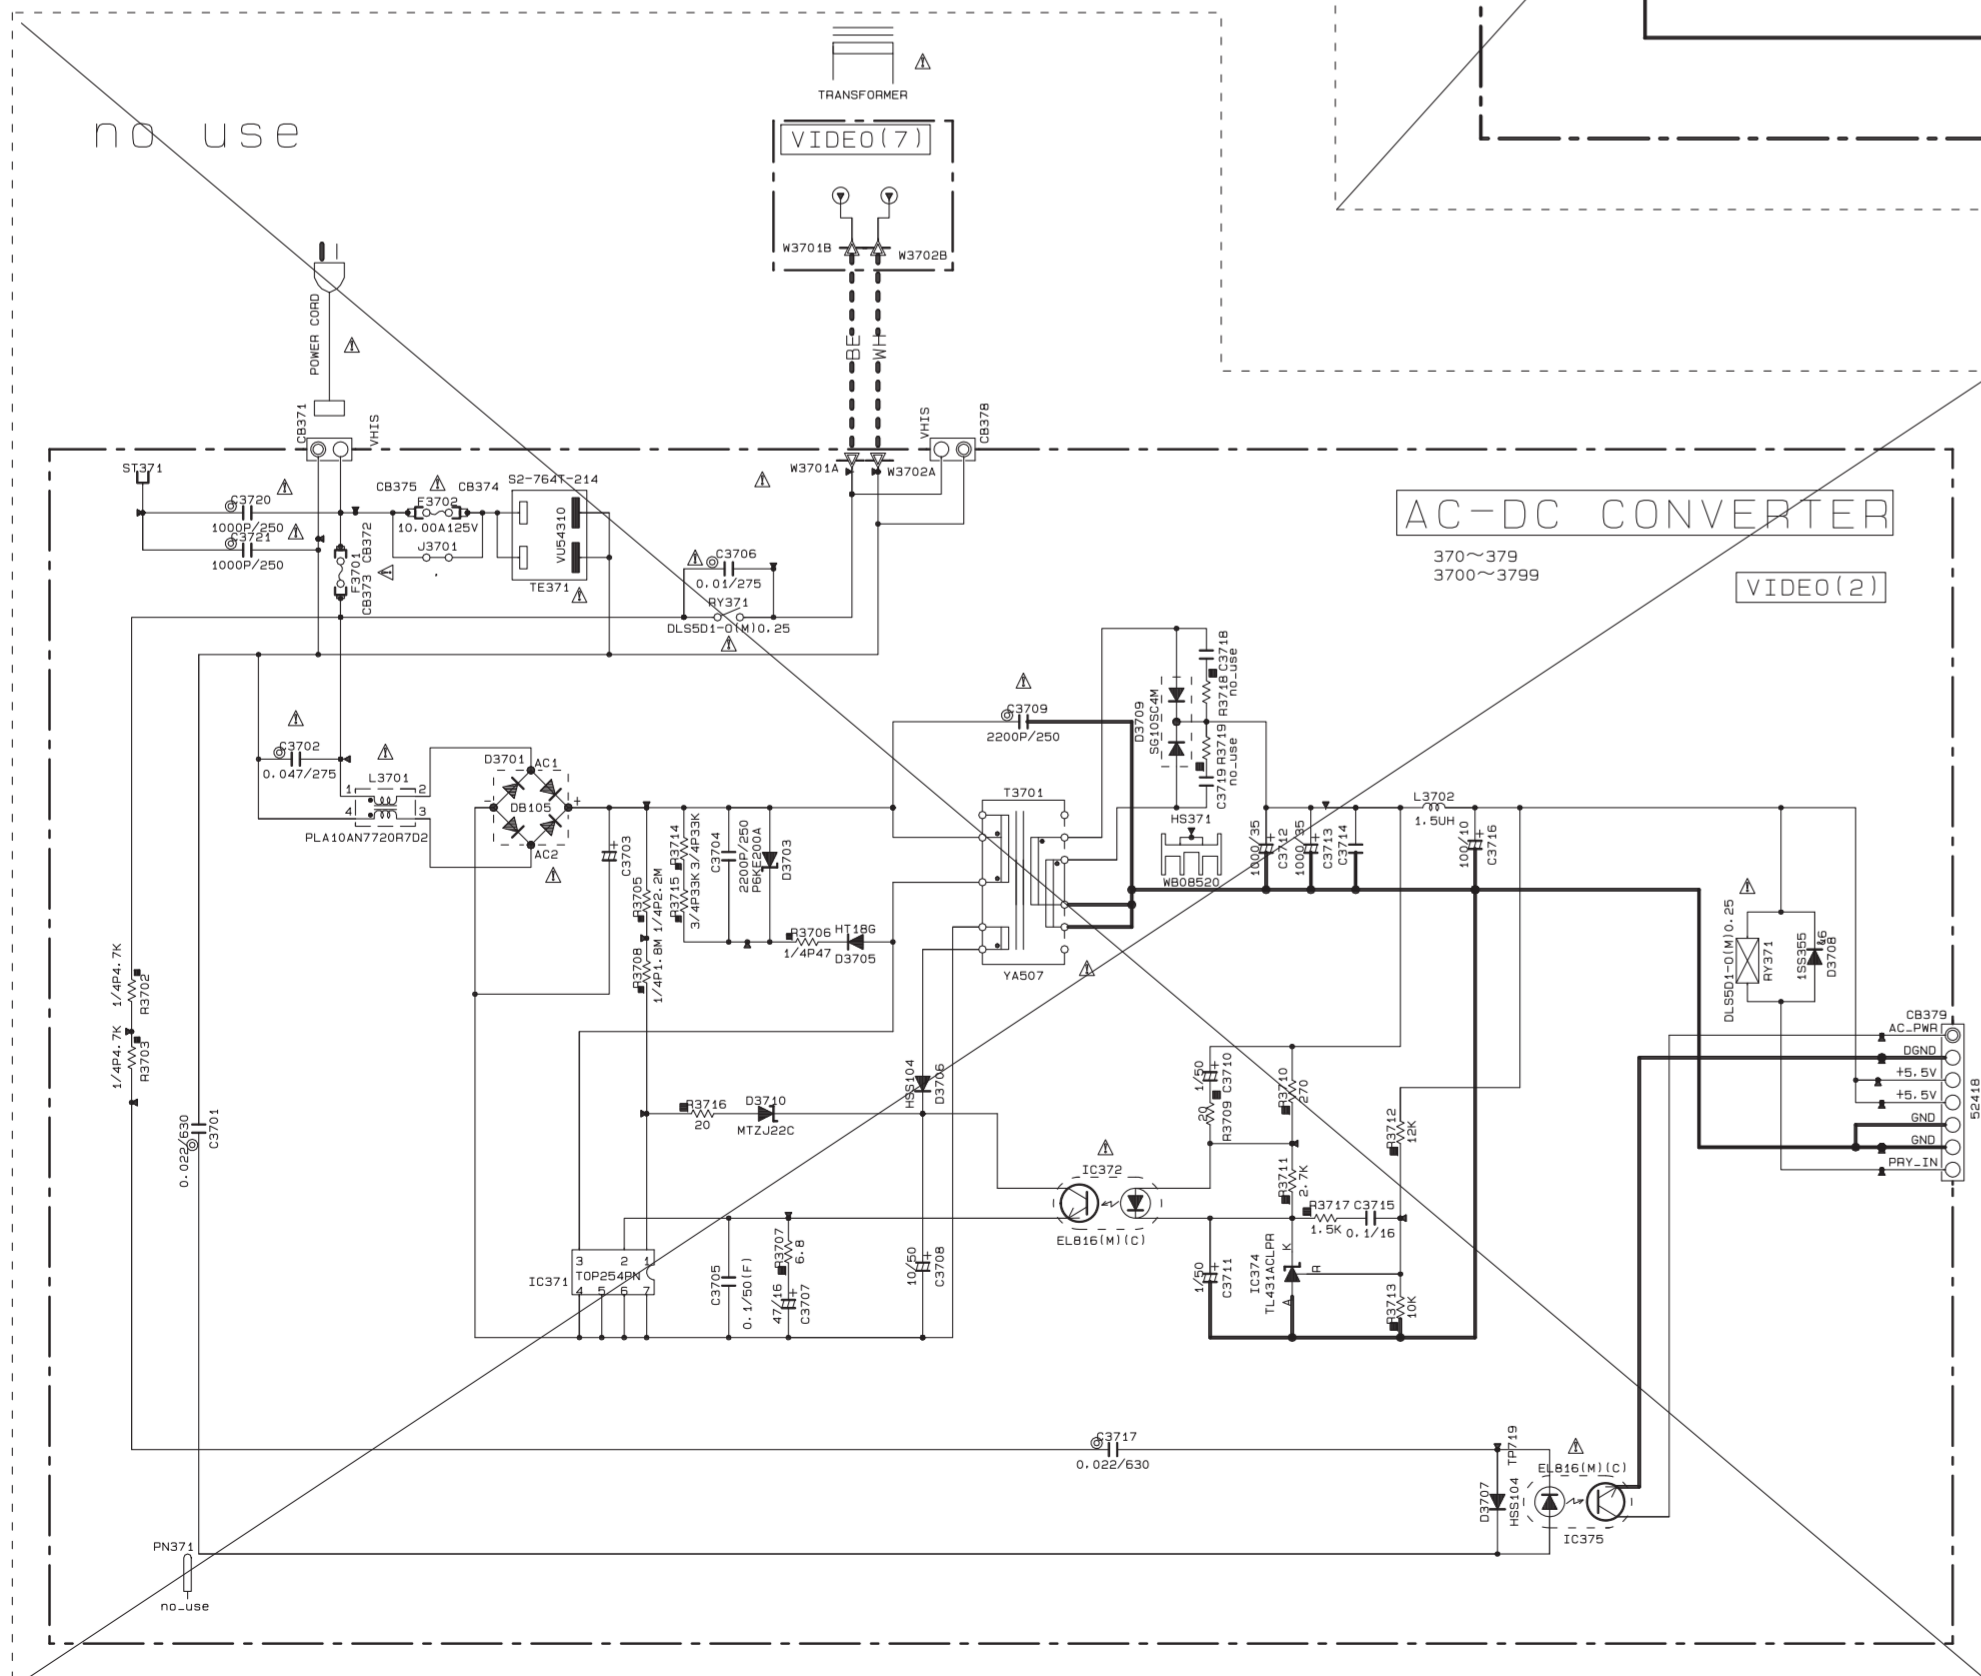

CAPACITOR


| REMARKS | PARTS NAME |
|---------|--------------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| ⊖ | TANTALUM CAPACITOR |
| NO MARK | CERAMIC CAPACITOR |
| ⊖ | CERAMIC TUBULAR CAPACITOR |
| ⊖ | POLYESTER FILM CAPACITOR |
| ⊖ | POLYSTYRENE FILM CAPACITOR |
| ⊖ | MECA. CAPACITOR |
| ⊖ | POLYPROPYLENE FILM CAPACITOR |
| ⊖ | SEMICONDUCTIVE ORGANIC CAPACITOR |
| ⊖ | POLYPHENYLENE SULFIDE FILM CAPACITOR |

RESISTOR





| REMARKS | PARTS NAME |
|---------|---------------------------------|
| NO MARK | CARBON FILM RESISTOR (PM-0) |
| ⊖ | CARBON FILM RESISTOR (PM-0) |
| ⊖ | METAL FILM RESISTOR |
| ⊖ | METAL FILM RESISTOR |
| ⊖ | FINE PROOF CARBON FILM RESISTOR |
| ⊖ | SEMICONDUCTIVE RESISTOR |
| ⊖ | SEMI VARIABLE RESISTOR |
| ⊖ | CHIP RESISTOR |

NOTICE (Inch)

(J)..... JAPAN
 (U)..... U.S.A
 (C)..... CANADA
 (R)..... GENERAL
 (I)..... CHINA
 (K)..... KOREA
 (A)..... AUSTRALIA
 (B)..... BRITISH
 (E)..... SOUTH EUROPE
 (V)..... TAIWAN
 (F)..... RUSSIAN
 (P)..... LATIN AMERICA

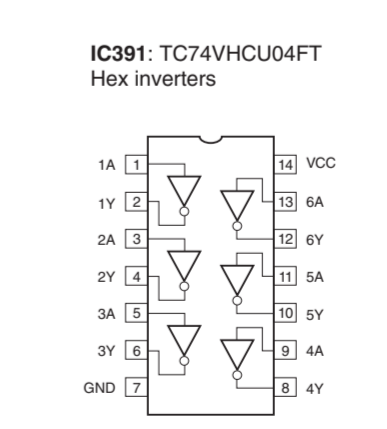

* All voltages are measured with a 10MΩ/V DC electronic voltmeter.
 * Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.
 * Schematic diagram is subject to change without notice.

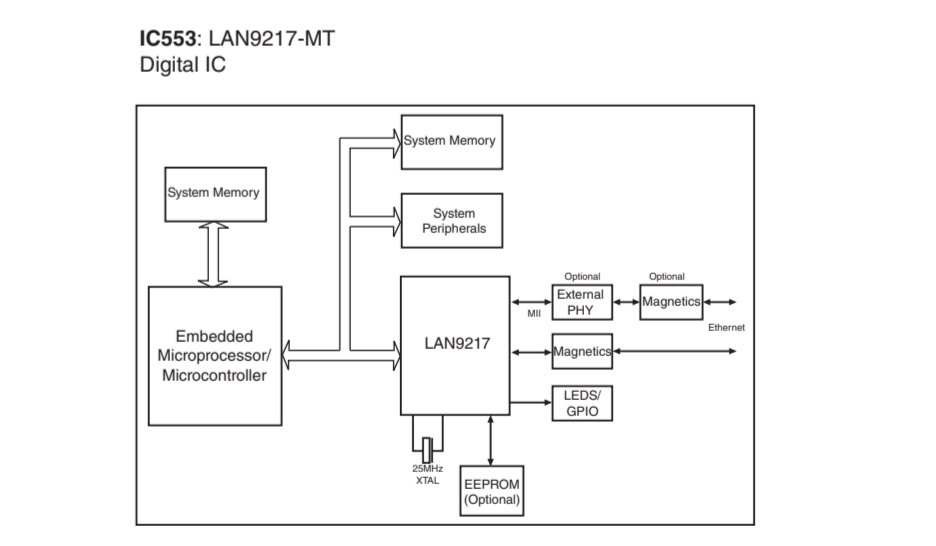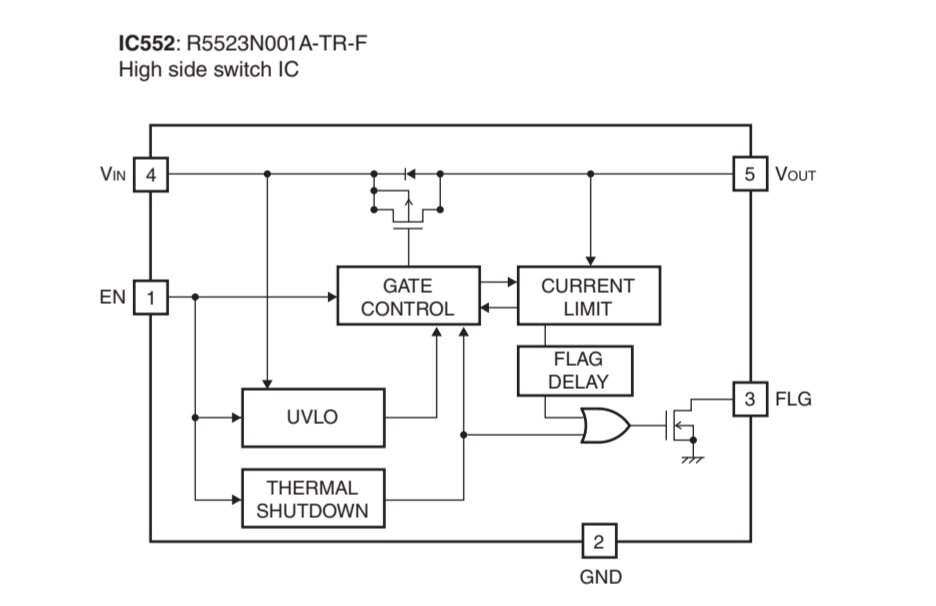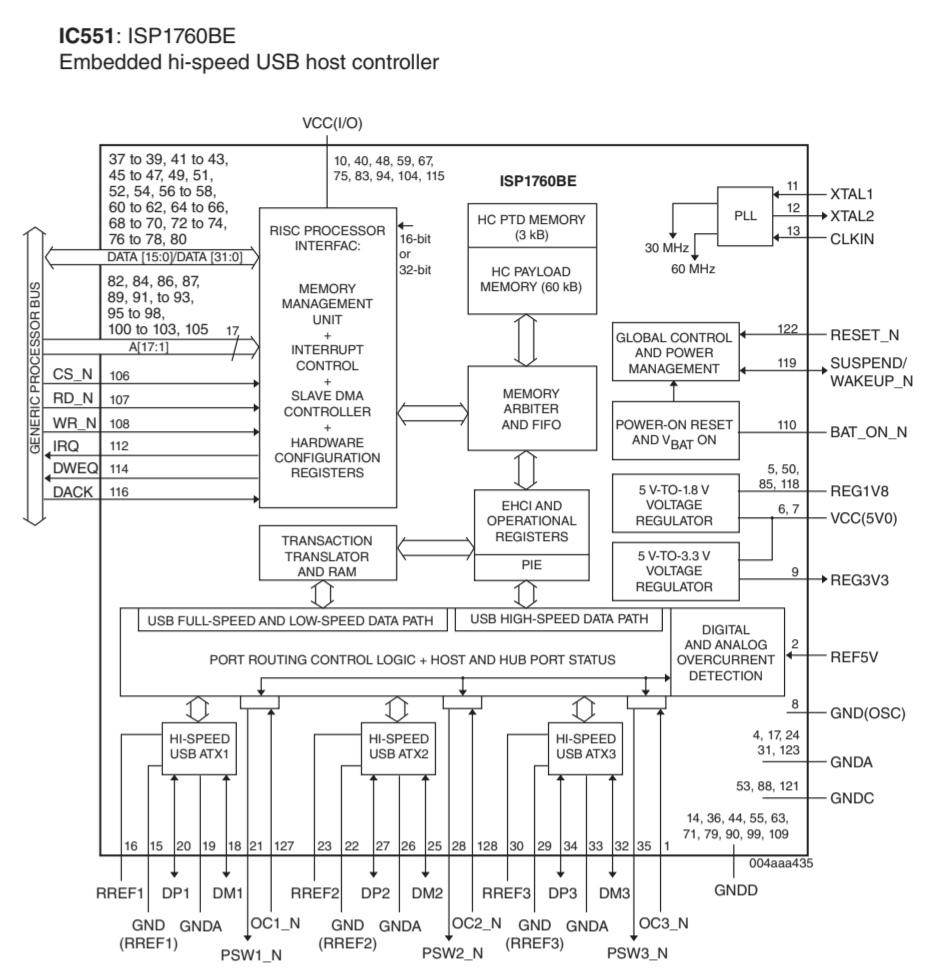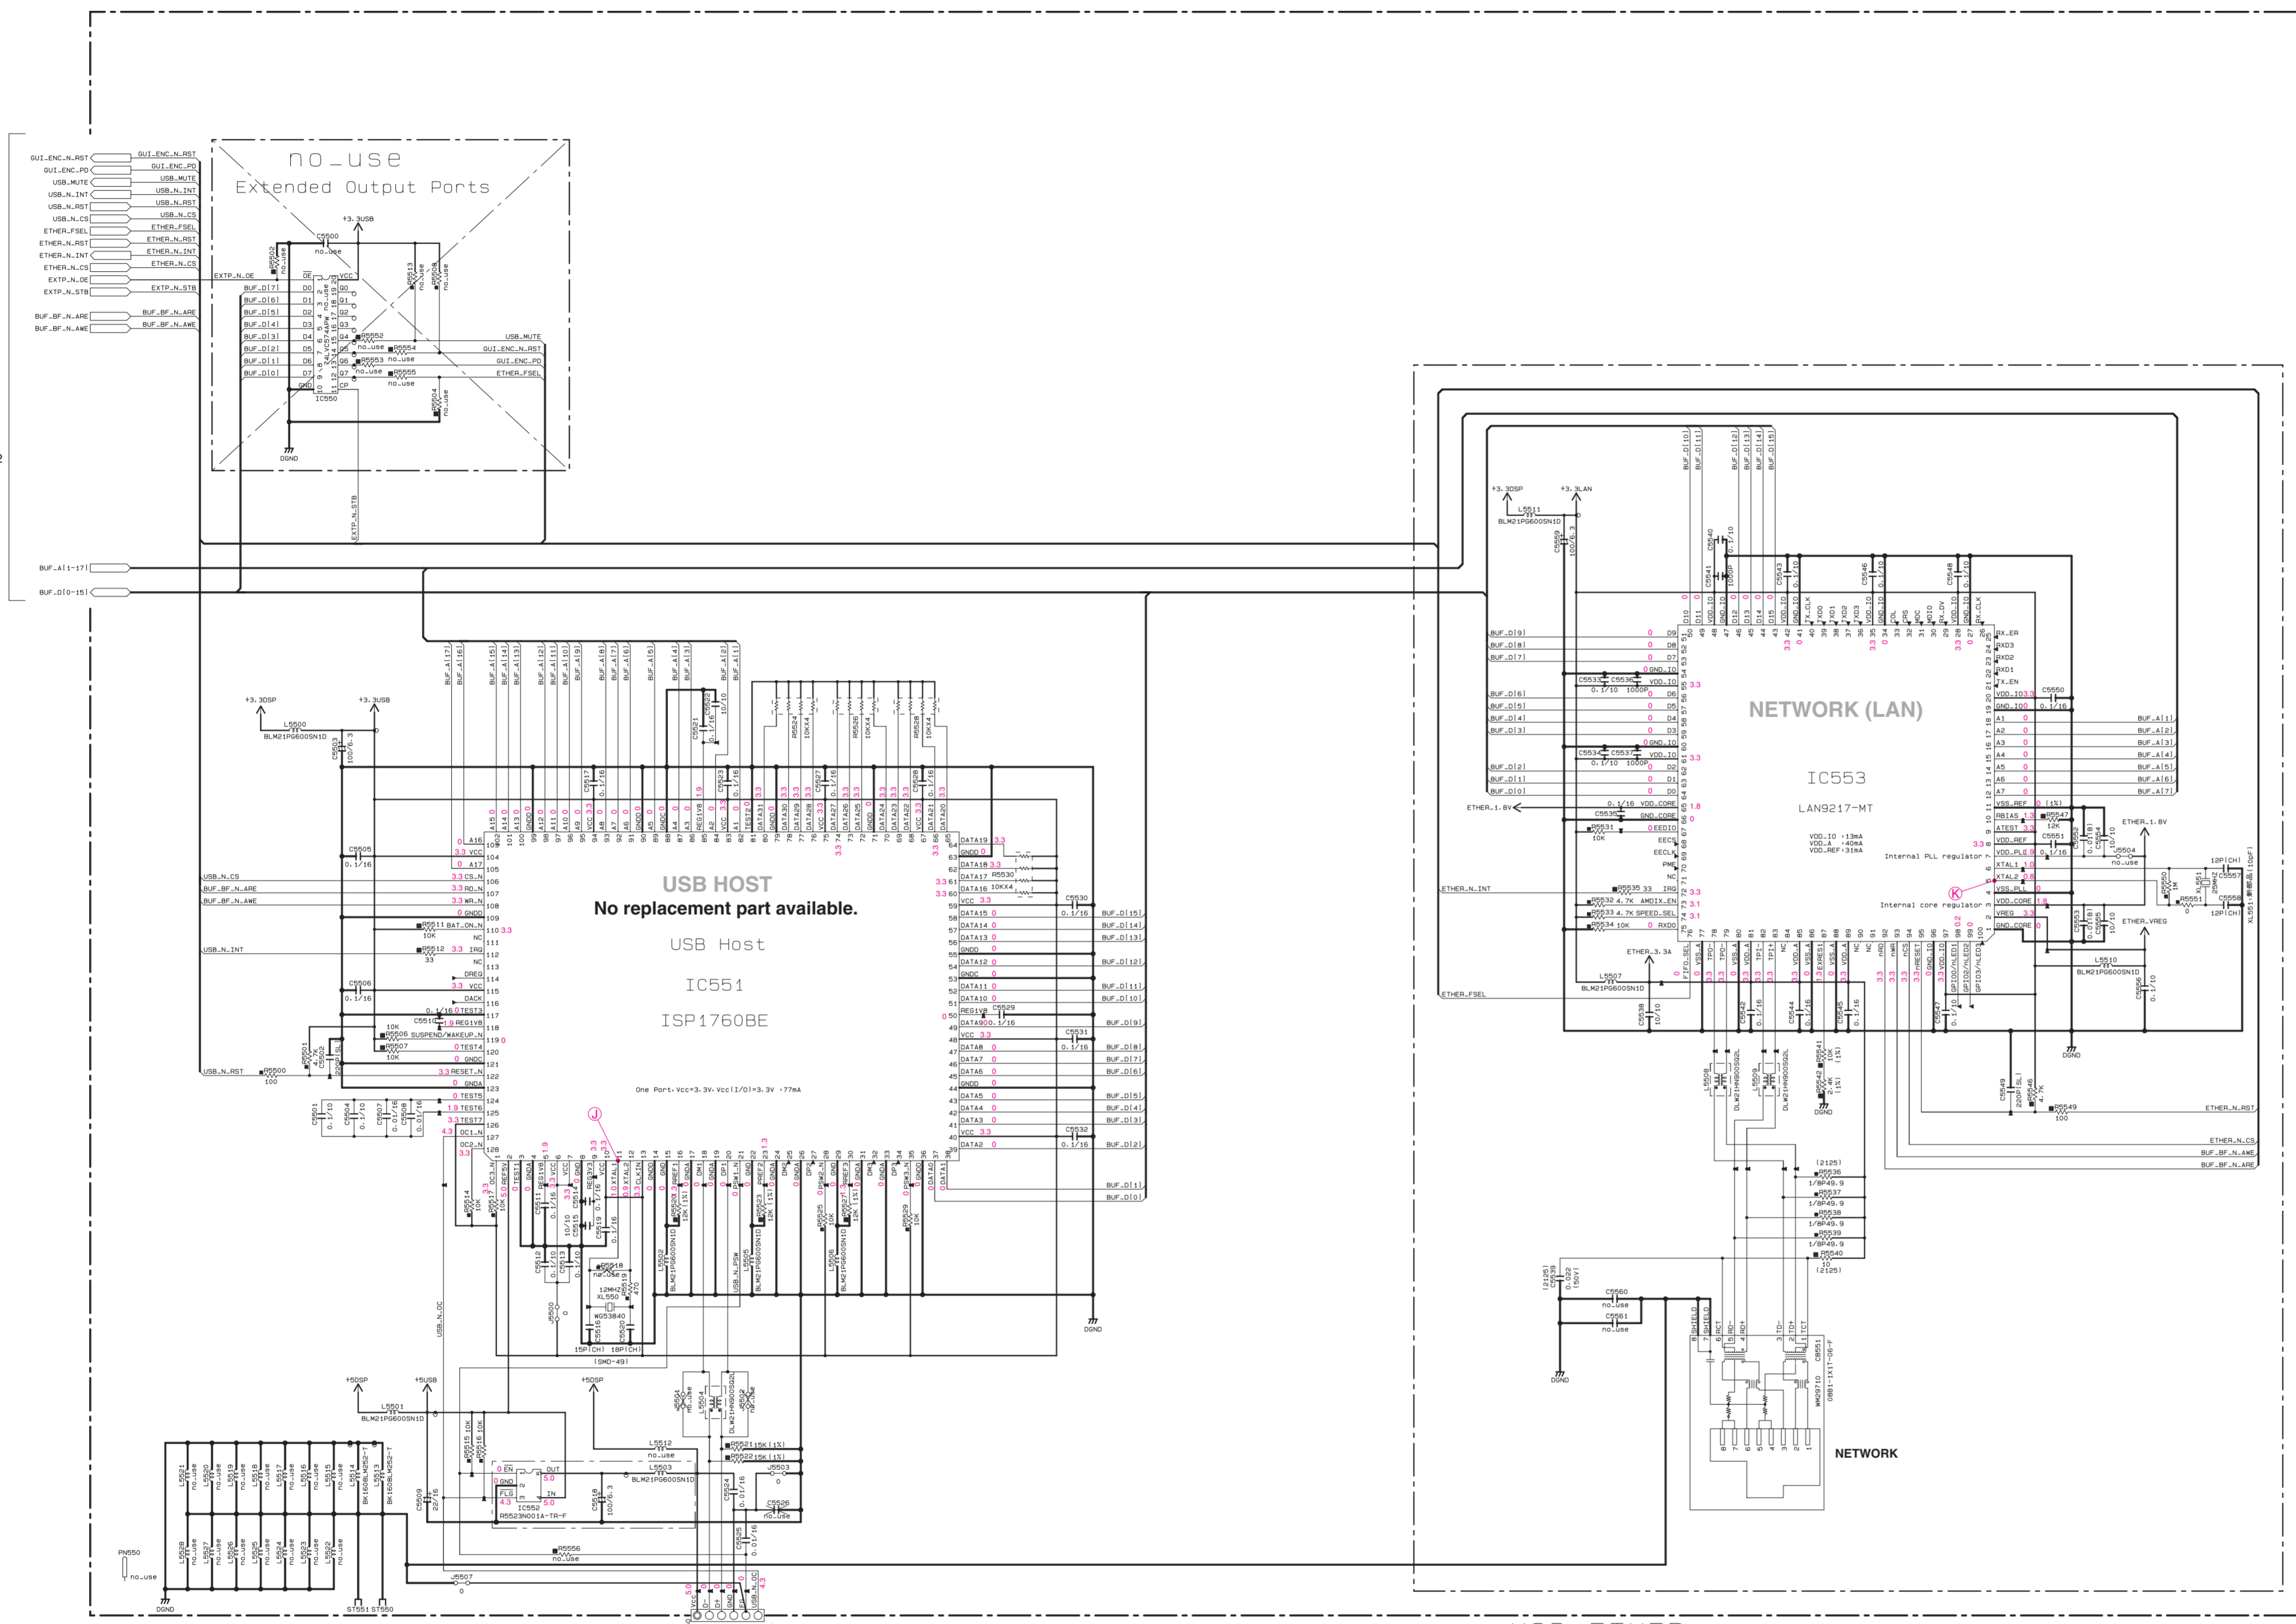

To Sheet 1

To GUI 1/2


From OPE(1) USB

Page 130 [K5] to OPERATION (5)_W4407


USB, ETHER
 CB/IC/XL/PN:550 -599
 OTHER :5500-5999

GUI (2)

POINT ① XL550 (Pin 11 of IC551)

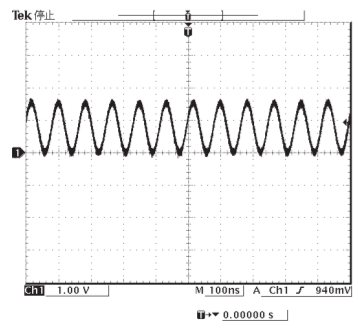

POINT ② XL551 (Pin 5 of IC553)

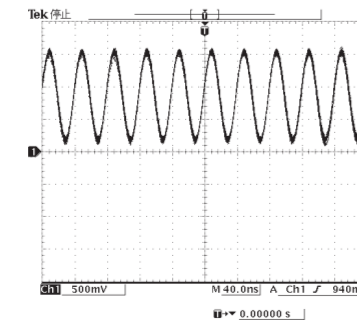

| REMARKS | PARTS NAME |
|---------|---------------------------------|
| NO MARK | CARBON FILM RESISTOR (P=5) |
| □ | CARBON FILM RESISTOR (P=10) |
| △ | METAL OXIDE FILM RESISTOR |
| ▲ | METAL FILM RESISTOR |
| ⊠ | METAL PLATE RESISTOR |
| ■ | FIRE PROOF CARBON FILM RESISTOR |
| □ | CEMENT MOUNTED RESISTOR |
| ⊙ | SEMI VARIABLE RESISTOR |
| ■ | CHIP RESISTOR |

| REMARKS | PARTS NAME |
|---------|--------------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| □ | TANTALUM CAPACITOR |
| NO MARK | CERAMIC CAPACITOR |
| ⊙ | CERAMIC TUBULAR CAPACITOR |
| ⊖ | POLYESTER FILM CAPACITOR |
| ⊕ | POLYSTYRENE FILM CAPACITOR |
| ⊖ | MICA CAPACITOR |
| ⊕ | POLYPROPYLENE FILM CAPACITOR |
| ⊖ | SEMI CONDUCTIVE CERAMIC CAPACITOR |
| ⊕ | POLYPHENYLENE SULFIDE FILM CAPACITOR |

NOTICE (model)

(J)..... JAPAN
 (U)..... U.S.A
 (C)..... CANADA
 (R)..... GENERAL
 (T)..... CHINA
 (K)..... KOREA
 (A)..... AUSTRALIA
 (B)..... BRITISH
 (E)..... EUROPE
 (L)..... SINGAPORE
 (S)..... SOUTH EUROPE
 (V)..... TAIWAN
 (F)..... RUSSIAN
 (P)..... LATIN AMERICA

* All voltages are measured with a 10MΩ/V DC electronic voltmeter.
 * Components having special characteristics are marked Δ, and must be replaced with parts having specifications equal to those originally installed.
 * Schematic diagram is subject to change without notice.

ACDC

RESISTOR

| REMARKS | PARTS NAME |
|---------|---------------------------------|
| NO MARK | CARBON FILM RESISTOR (P=5) |
| □ | CARBON FILM RESISTOR (P=10) |
| △ | METAL OXIDE FILM RESISTOR |
| ▲ | METAL FILM RESISTOR |
| ⊠ | METAL PLATE RESISTOR |
| ▨ | FIRE PROOF CARBON FILM RESISTOR |
| ▩ | CEMENT MOLDED RESISTOR |
| ⊗ | SEMI VARIABLE RESISTOR |
| ■ | CHIP RESISTOR |

CAPACITOR

| REMARKS | PARTS NAME |
|---------|----------------------------------|
| NO MARK | ELECTROLYTIC CAPACITOR |
| ⊗ | TANTALUM CAPACITOR |
| NO MARK | CERAMIC CAPACITOR |
| ● | CERAMIC TUBULAR CAPACITOR |
| ⊙ | POLYESTER FILM CAPACITOR |
| ○ | POLYSTYRENE FILM CAPACITOR |
| ⊖ | MICA CAPACITOR |
| ⊕ | POLYPROPYLENE FILM CAPACITOR |
| ⊗ | SEMICONDUCTIVE CERAMIC CAPACITOR |

NOTICE (model)


(J)..... JAPAN
 (U)..... U.S.A
 (C)..... CANADA
 (R)..... GENERAL
 (T)..... CHINA
 (K)..... KOREA
 (A)..... AUSTRALIA
 (B)..... BRITISH
 (G)..... EUROPE
 (L)..... SINGAPORE
 (E)..... SOUTH EUROPE
 (V)..... TAIWAN
 (F)..... RUSSIAN
 (P)..... LATIN AMERICA

Destination Part List


| sXX | LDC | UC | R | TKABGEF | L |
|------|------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| s601 | F6002 | WG21120 10.00A125V | WG21120 10.00A125V | WM93310 T5.0AL250V | WM93310 T5.0AL250V |
| s602 | W6001A W6001B | MH06620 | X | MH06620 | X |
| s603 | W6002A W6002B | MH09620 | X | MH09620 | X |
| s604 | CB603 | X | VGB7990 VHIS | X | VGB7990 VHIS |

Interchangeable Parts at Manufacture-Stage

| Mark | Reference Parts Number | Parts Name |
|------|------------------------|-------------------------------------|
| &1 | D6009 | 1SS355 MA2J110GL KDS160-RTK/P |
| &2 | D6006-6008 | 1SS133 1SS176 HSS104 |

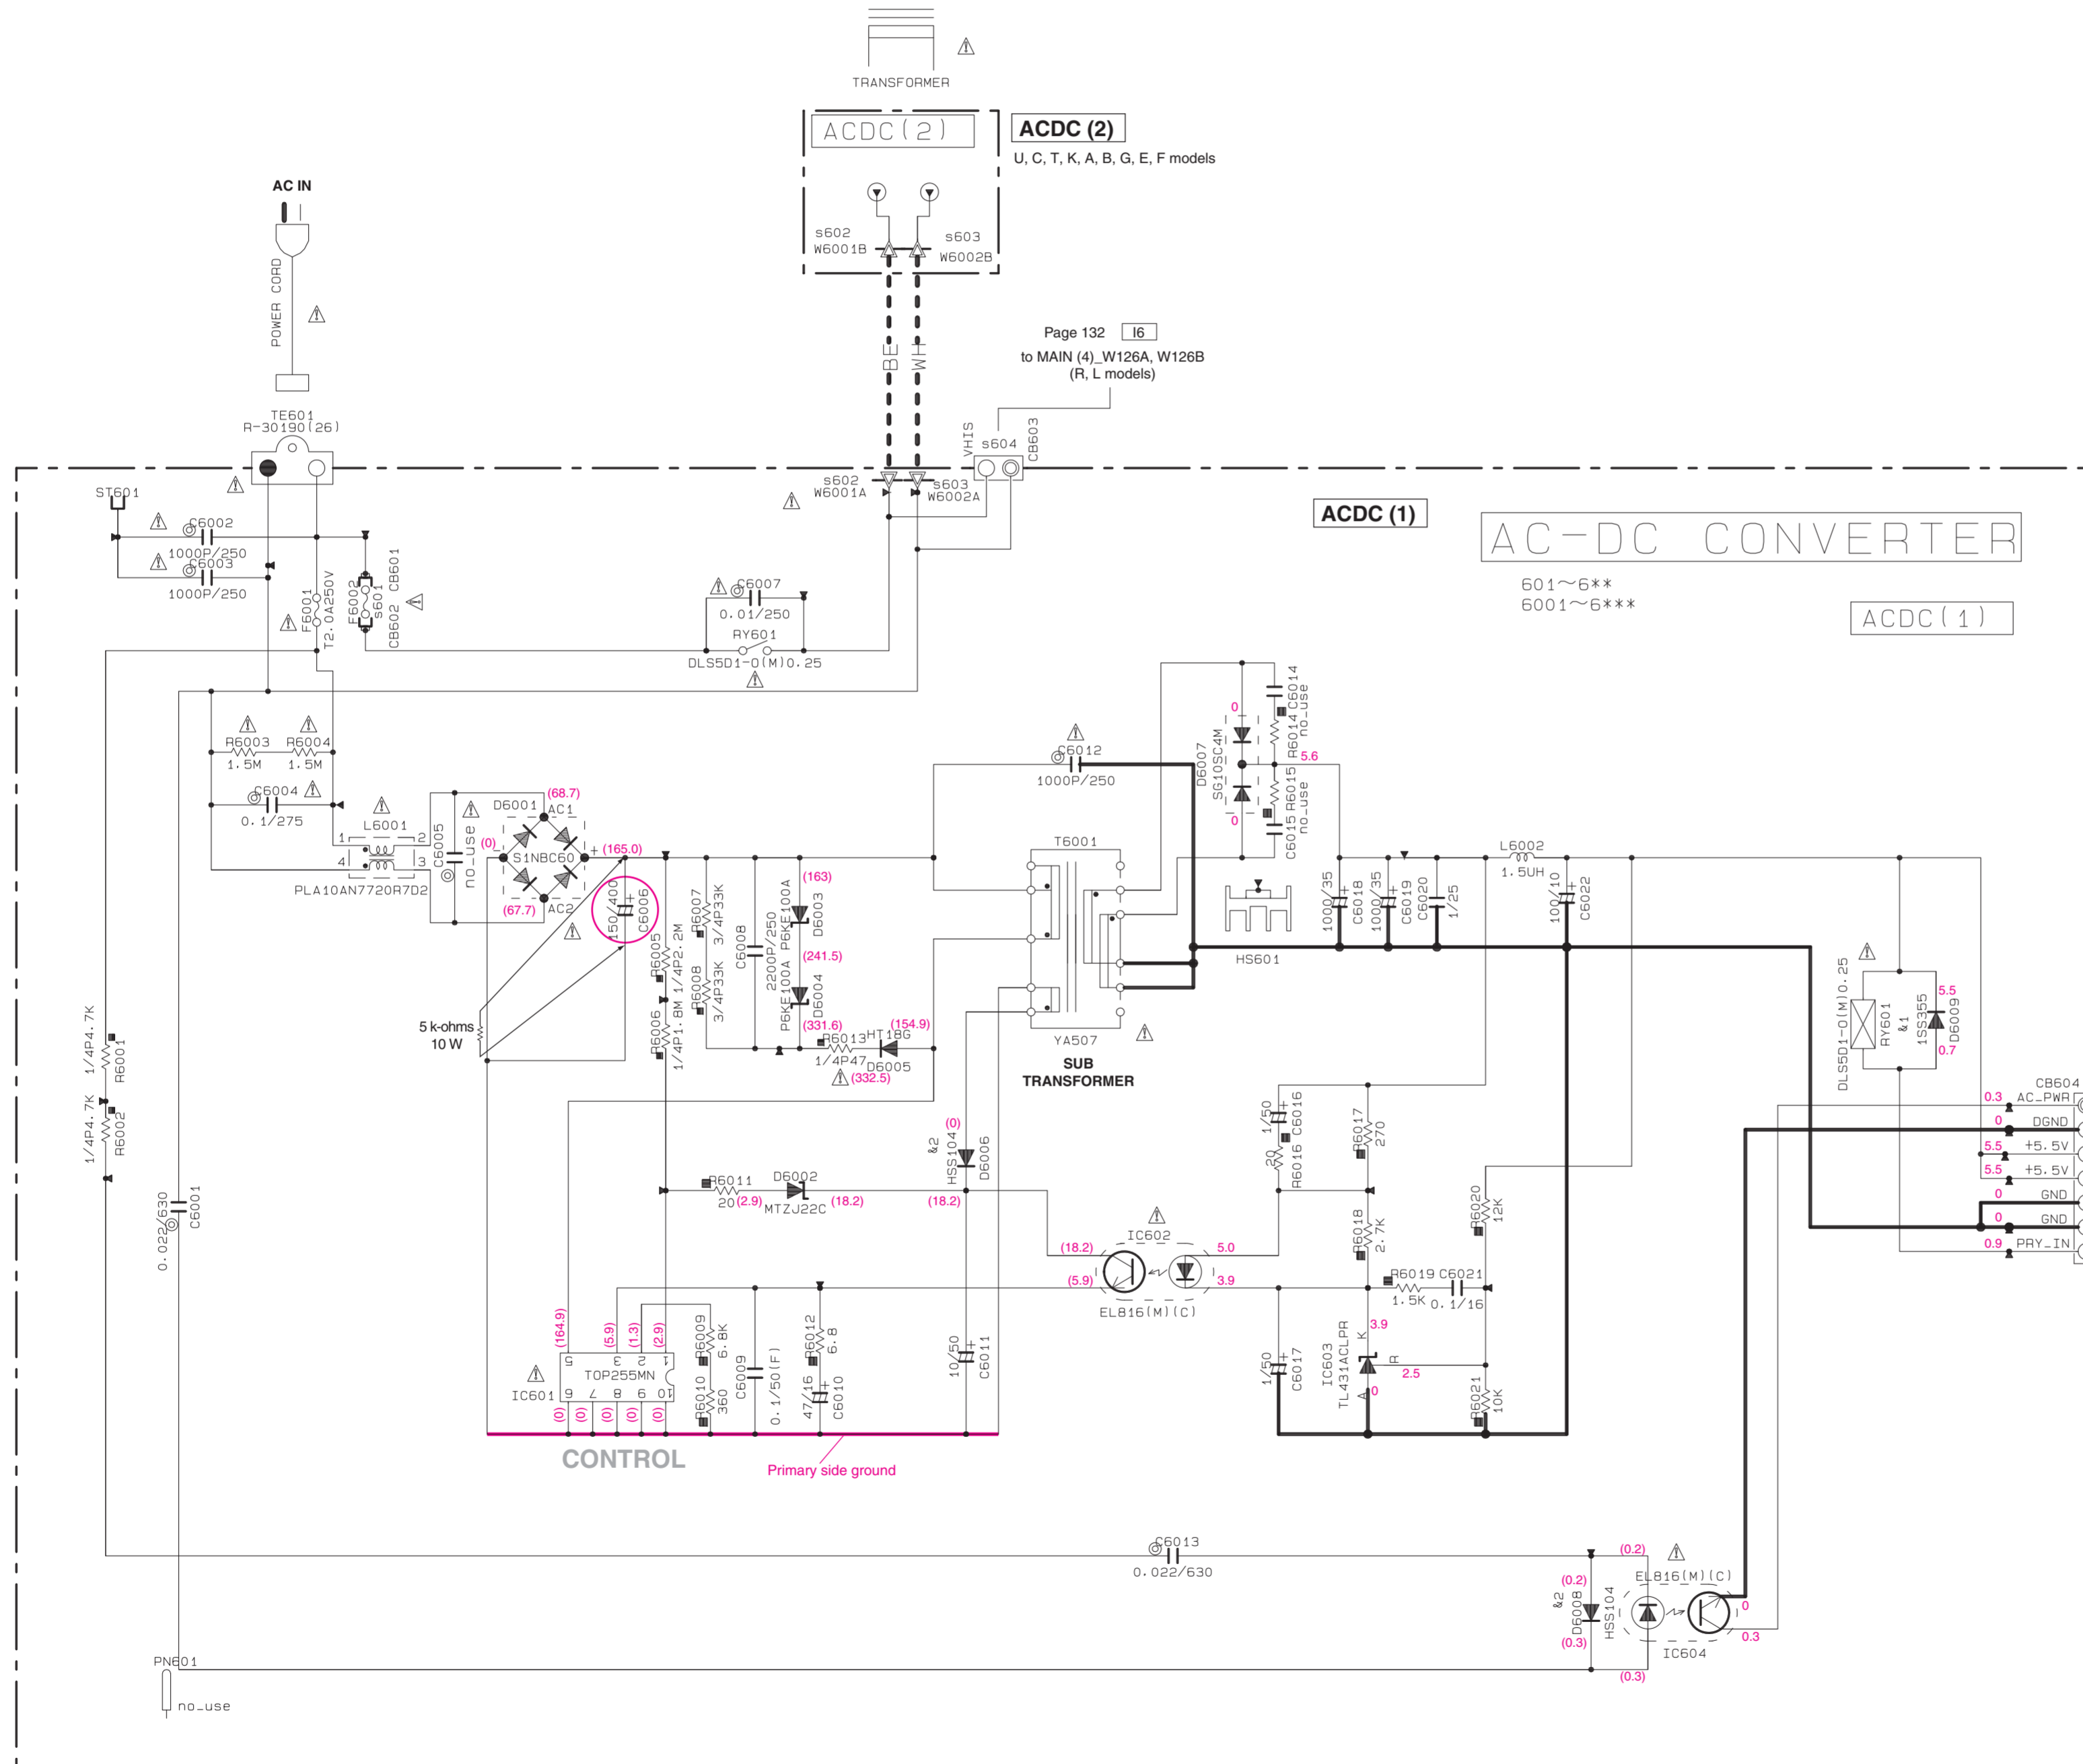


IC601: TOP255MN

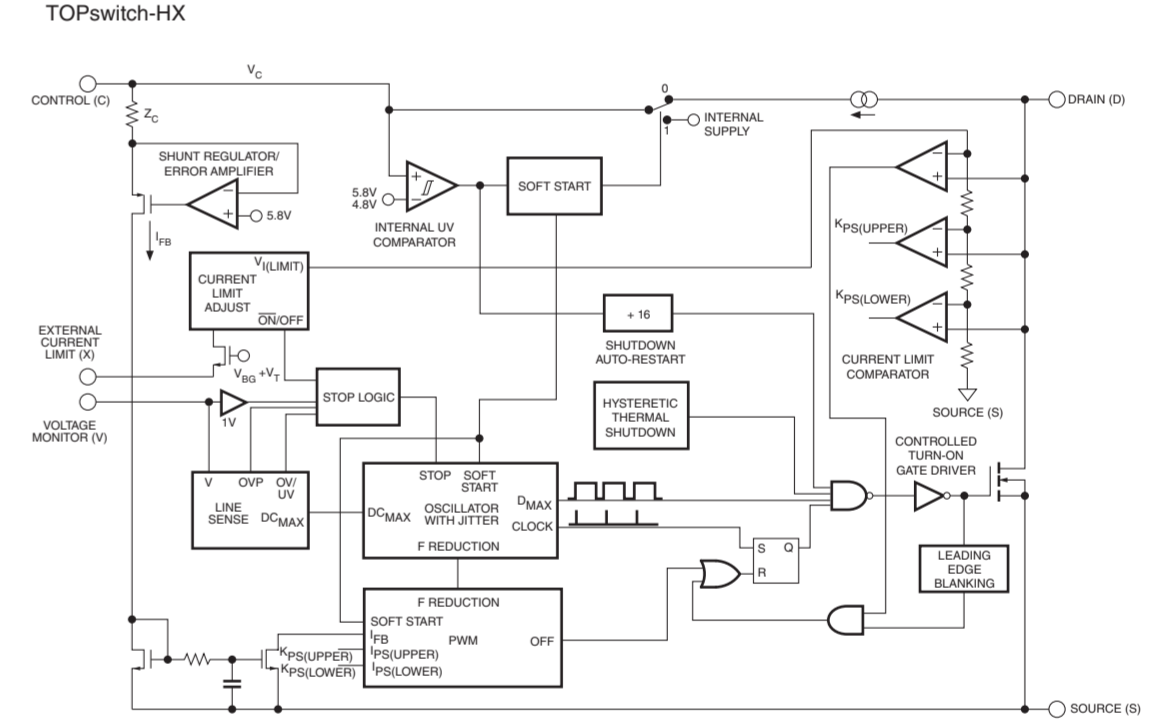


IC603: TL431ACLPR

Adjustable precision shunt regulators



ACDC (3)

Page 124 [D2] to DIGITAL (1)_CB22

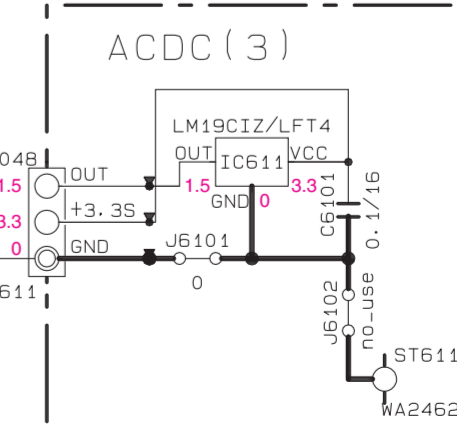

Notes

Safety measures

- Some internal parts in this product contain high voltages and are dangerous. Be sure to take safety measures during servicing, such as wearing insulating gloves.
- Note that positions indicated below are dangerous even after the power is turned off because an electric charge remains and a high voltage continues to exist there. Before starting any repair work, perform discharge by connecting a discharge resistor (5k-ohms/10W) between terminals at following positions. The time required for discharging is about 30 seconds. C6006 on ACDC (1) P.C.B.

- All voltages are measured with a 10MΩ/V DC electronic voltmeter.
- Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.
- Schematic diagram is subject to change without notice.

■ REPLACEMENT PARTS LIST

• ELECTRICAL COMPONENT PARTS

WARNING

- Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.

ABBREVIATIONS IN THIS LIST ARE AS FOLLOWS:

| | | | |
|------------|-------------------------------|------------|--------------------------------|
| C.A.EL.CHP | : CHIP ALUMI.ELECTROLYTIC CAP | L.EMIT | : LIGHT EMITTING MODULE |
| C.CE | : CERAMIC CAP | LED.DSPLY | : LED DISPLAY |
| C.CE.ARRAY | : CERAMIC CAP ARRAY | LED.INFRD | : LED,INFRARED |
| C.CE.CHP | : CHIP CERAMIC CAP | MODUL.RF | : MODULATOR,RF |
| C.CE.ML | : MULTILAYER CERAMIC CAP | PHOT.CPL | : PHOTO COUPLER |
| C.CE.M.CHP | : CHIP MULTILAYER CERAMIC CAP | PHOT.INTR | : PHOTO INTERRUPTER |
| C.CE.SAFTY | : RECOGNIZED CERAMIC CAP | PHOT.RFLCT | : PHOTO REFLECTOR |
| C.CE.TUBLR | : CERAMIC TUBULAR CAP | PIN.TEST | : PIN,TEST POINT |
| C.CE.SMI | : SEMI CONDUCTIVE CERAMIC CAP | PLST.RIVET | : PLASTIC RIVET |
| C.EL | : ELECTROLYTIC CAP | R.ARRAY | : RESISTOR ARRAY |
| C.MICA | : MICA CAP | R.CAR. | : CARBON RESISTOR |
| C.ML.FLM | : MULTILAYER FILM CAP | R.CAR.CHP | : CHIP RESISTOR |
| C.MP | : METALLIZED PAPER CAP | R.CAR.FP | : FLAME PROOF CARBON RESISTOR |
| C.MYLAR | : MYLAR FILM CAP | R.FUS | : FUSABLE RESISTOR |
| C.MYLAR.ML | : MULTILAYER MYLAR FILM CAP | R.MTL.CHP | : CHIP METAL FILM RESISTOR |
| C.PAPER | : PAPER CAPACITOR | R.MTL.FLM | : METAL FILM RESISTOR |
| C.PLS | : POLYSTYRENE FILM CAP | R.MTL.OXD | : METAL OXIDE FILM RESISTOR |
| C.POL | : POLYESTER FILM CAP | R.MTL.PLAT | : METAL PLATE RESISTOR |
| C.POLY | : POLYETHYLENE FILM CAP | RSNR.CE | : CERAMIC RESONATOR |
| C.PP | : POLYPROPYLENE FILM CAP | RSNR.CRYS | : CRYSTAL RESONATOR |
| C.TNTL | : TANTALUM CAP | R.TW.CEM | : TWIN CEMENT FIXED RESISTOR |
| C.TNTL.CHP | : CHIP TANTALUM CAP | R.CEMENT | : CEMENT RESISTOR |
| C.TRIM | : TRIMMER CAP | SCR.BND.HD | : BIND HEAD B-TIGHT SCREW |
| CN | : CONNECTOR | SCR.BW.HD | : BW HEAD TAPPING SCREW |
| CN.BS.PIN | : CONNECTOR,BASE PIN | SCR.CUP | : CUP TIGHT SCREW |
| CN.CANNON | : CONNECTOR,CANNON | SCR.TERM | : SCREW TERMINAL |
| CN.DIN | : CONNECTOR,DIN | SCR.TR | : SCREW,TRANSISTOR |
| CN.FLAT | : CONNECTOR,FLAT CABLE | SUPRT.PCB | : SUPPORT,P.C.B. |
| CN.POST | : CONNECTOR,BASE POST | SURG.PRTCT | : SURGE PROTECTOR |
| COIL.MX.AM | : COIL,AM MIX | SW.TACT | : TACT SWITCH |
| COIL.AT.FM | : COIL,FM ANTENNA | SW.LEAF | : LEAF SWITCH |
| COIL.DT.FM | : COIL,FM DETECT | SW.LEVER | : LEVER SWITCH |
| COIL.MX.FM | : COIL,FM MIX | SW.MICRO | : MICRO SWITCH |
| COIL.OUTPT | : OUTPUT COIL | SW.PUSH | : PUSH SWITCH |
| DIOD.ARRAY | : DIODE ARRAY | SW.RT.ENC | : ROTARY ENCODER |
| DIODE.BRG | : DIODE BRIDGE | SW.RT.MTR | : ROTARY SWITCH WITH MOTOR |
| DIODE.CHP | : CHIP DIODE | SW.RT | : ROTARY SWITCH |
| DIODE.VAR | : VARACTOR DIODE | SW.SLIDE | : SLIDE SWITCH |
| DIOD.Z.CHP | : CHIP ZENER DIODE | TERM.SP | : SPEAKER TERMINAL |
| DIODE.ZENR | : ZENER DIODE | TERM.WRAP | : WRAPPING TERMINAL |
| DSCR.CE | : CERAMIC DISCRIMINATOR | THRMST.CHP | : CHIP THERMISTOR |
| FER.BEAD | : FERRITE BEADS | TR.CHP | : CHIP TRANSISTOR |
| FER.CORE | : FERRITE CORE | TR.DGT | : DIGITAL TRANSISTOR |
| FET.CHP | : CHIP FET | TR.DGT.CHP | : CHIP DIGITAL TRANSISTOR |
| FL.DSPLY | : FLUORESCENT DISPLAY | TRANS | : TRANSFORMER |
| FLTR.CE | : CERAMIC FILTER | TRANS.PULS | : PULSE TRANSFORMER |
| FLTR.COMB | : COMB FILTER MODULE | TRANS.PWR | : POWER TRANSFORMER ASS'Y |
| FLTR.LC.RF | : LC FILTER,EMI | TUNER.AM | : TUNER PACK,AM |
| GND.MTL | : GROUND PLATE | TUNER.FM | : TUNER PACK,FM |
| GND.TERM | : GROUND TERMINAL | TUNER.PK | : FRONT-ENDTUNER PACK |
| HOLDER.FUS | : FUSE HOLDER | VR | : ROTARY POTENTIOMETER |
| IC.PRTCT | : IC PROTECTOR | VR.MTR | : POTENTIOMETER WITH MOTOR |
| JUMPER.CN | : JUMPER CONNECTOR | VR.SW | : POTENTIOMETER WITH ROTARY SW |
| JUMPER.TST | : JUMPER,TEST POINT | VR.SLIDE | : SLIDE POTENTIOMETER |
| L.DTCT | : LIGHT DETECTING MODULE | VR.TRIM | : TRIMMER POTENTIOMETER |

P.C.B. DIGITAL

| Ref No. | Part No. | Description | Markets |
|---------|----------|-------------------------|----------------|
| * | WS305800 | P. C. B. DIGITAL | U |
| * | WS305900 | P. C. B. DIGITAL | CRTKAL (V2065) |
| * | WS306700 | P. C. B. DIGITAL | C (6295) |
| * | WS306000 | P. C. B. DIGITAL | BGEF |
| * CB1 | WD295600 | CN. BS. PIN 20P SE | |
| CB3-6 | WH641400 | CN. HDMI 19P SE | |
| CB7 | LB919040 | CN. BS. PIN 4P | |
| CB9 | WH641400 | CN. HDMI 19P SE | |
| CB15 | WH641400 | CN. HDMI 19P SE | |
| CB20 | VP082900 | CN. BS. PIN 25P | |
| CB21 | VB389800 | CN. BS. PIN 2P | |
| CB22 | VK024700 | CN. BS. PIN 3P | |
| CB23 | VK025600 | CN. BS. PIN 12P | |
| CB24 | VK026500 | CN. BS. PIN 6P | |
| CB25 | VQ045200 | CN. BS. PIN 22P | |
| CB27 | VQ047200 | CN. BS. PIN 9P | |
| CB28 | VM859700 | CN. BS. PIN 16P | |
| CB29 | VK026300 | CN. BS. PIN 4P | |
| CB31 | LB918020 | CN. BS. PIN 2P | C (V2065) |
| CB31 | LB918020 | CN. BS. PIN 2P | RTKABGEFL |
| CB40 | WJ458700 | CN. XM 4P, CAM-D96 | U |
| CB61-63 | V9356900 | CN. JE 19P SE | |
| CB71 | VF982200 | CN. BS. PIN 14P | |
| CB73 | VQ044100 | CN. BS. PIN 5P | BGEF |
| CB80 | VK026400 | CN. BS. PIN 5P | U |
| CB81 | VK027000 | CN. BS. PIN 11P | |
| CB84 | V3768800 | SOCKET 17LE-23090-28 | |
| CB95 | WH641400 | CN. HDMI 19P SE | |
| CB96 | WC197000 | CN. FMN 20P TE | |
| C1 | US135100 | C. CE. CHP 0.1uF 16V | |
| C2 | UF438100 | C. EL. CHP 100uF 16V | |
| C3 | US135100 | C. CE. CHP 0.1uF 16V | |
| C4-6 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C7 | WG888300 | C. CE. M. CHP 10uF 6.3V | |
| C8-9 | US135100 | C. CE. CHP 0.1uF 16V | |
| C10-12 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C13 | US135100 | C. CE. CHP 0.1uF 16V | |
| C14-16 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C17-18 | US135100 | C. CE. CHP 0.1uF 16V | |
| C19-22 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C23-25 | US135100 | C. CE. CHP 0.1uF 16V | |
| C26-28 | WG888300 | C. CE. M. CHP 10uF 6.3V | |
| C29-32 | US135100 | C. CE. CHP 0.1uF 16V | |
| C33-45 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C46-48 | US135100 | C. CE. CHP 0.1uF 16V | |
| C50-51 | US135100 | C. CE. CHP 0.1uF 16V | |
| C53 | WG888300 | C. CE. M. CHP 10uF 6.3V | |
| C54-57 | US135100 | C. CE. CHP 0.1uF 16V | |
| C58 | WG888300 | C. CE. M. CHP 10uF 6.3V | |
| C59-60 | US135100 | C. CE. CHP 0.1uF 16V | |
| C61-62 | WD758300 | C. CE. CHP 10uF 10V | |
| C63-72 | US135100 | C. CE. CHP 0.1uF 16V | |
| C73-82 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C83 | US135100 | C. CE. CHP 0.1uF 16V | |
| C84 | US060700 | C. CE. CHP 7pF 50V B | |
| C85 | US060500 | C. CE. CHP 5pF 50V B | |
| C86 | US135100 | C. CE. CHP 0.1uF 16V | |

*: New Parts

| Ref No. | Part No. | Description | Markets |
|----------|----------|-------------------------|---------|
| C87 | US062470 | C. CE. CHP 470pF 50V B | |
| C88 | WD758300 | C. CE. CHP 10uF 10V | |
| C89-90 | US135100 | C. CE. CHP 0.1uF 16V | |
| C91 | US063100 | C. CE. CHP 1000pF 50V B | |
| C92-93 | US135100 | C. CE. CHP 0.1uF 16V | |
| C94 | US063100 | C. CE. CHP 1000pF 50V B | |
| C97-99 | US063100 | C. CE. CHP 1000pF 50V B | |
| C100-102 | US135100 | C. CE. CHP 0.1uF 16V | |
| C103 | WD758300 | C. CE. CHP 10uF 10V | |
| C104 | US135100 | C. CE. CHP 0.1uF 16V | |
| C105 | WD758300 | C. CE. CHP 10uF 10V | |
| C106 | US135100 | C. CE. CHP 0.1uF 16V | |
| C107 | WD758300 | C. CE. CHP 10uF 10V | |
| C108 | US135100 | C. CE. CHP 0.1uF 16V | |
| C109 | WD758300 | C. CE. CHP 10uF 10V | |
| C110-112 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C113-114 | WD758300 | C. CE. CHP 10uF 10V | |
| C115 | US135100 | C. CE. CHP 0.1uF 16V | |
| C116 | WD758300 | C. CE. CHP 10uF 10V | |
| C117-124 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C125 | WD758300 | C. CE. CHP 10uF 10V | |
| C126 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C127 | WD758300 | C. CE. CHP 10uF 10V | |
| C128 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C129 | US062470 | C. CE. CHP 470pF 50V B | |
| C130 | WD758300 | C. CE. CHP 10uF 10V | |
| C131-133 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C134-135 | WD758300 | C. CE. CHP 10uF 10V | |
| C136 | US135100 | C. CE. CHP 0.1uF 16V | |
| C137 | WD758300 | C. CE. CHP 10uF 10V | |
| C138-145 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C146 | WD758300 | C. CE. CHP 10uF 10V | |
| C147 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C148 | WD758300 | C. CE. CHP 10uF 10V | |
| C149 | US064100 | C. CE. CHP 0.01uF 50V B | |
| C150 | US062470 | C. CE. CHP 470pF 50V B | |
| C151-152 | US135100 | C. CE. CHP 0.1uF 16V | |
| C153-154 | WG251600 | C. CE. CHP 4.7uF 6.3V | |
| * C155 | UF027470 | C. EL. CHP 47uF 10V | |
| C156 | WJ344400 | C. CE. CHP 22uF 6.3V | |
| C157 | US062220 | C. CE. CHP 220pF 50V B | |
| C158 | US135100 | C. CE. CHP 0.1uF 16V | |
| C159 | US063330 | C. CE. CHP 3300pF 50V B | |
| C160 | US063120 | C. CE. CHP 1200pF 50V B | |
| C161 | US135100 | C. CE. CHP 0.1uF 16V | |
| C162 | WD758300 | C. CE. CHP 10uF 10V | |
| C163 | WJ344400 | C. CE. CHP 22uF 6.3V | |
| C164 | US062220 | C. CE. CHP 220pF 50V B | |
| C165 | US135100 | C. CE. CHP 0.1uF 16V | |
| C166 | US063470 | C. CE. CHP 4700pF 50V B | |
| C167 | US063120 | C. CE. CHP 1200pF 50V B | |
| C168 | US135100 | C. CE. CHP 0.1uF 16V | |
| C169 | WD758300 | C. CE. CHP 10uF 10V | |
| C170 | WH772100 | C. EL 1000uF 10V | |
| C171 | US135100 | C. CE. CHP 0.1uF 16V | |
| C173-184 | US135100 | C. CE. CHP 0.1uF 16V | |
| C190-192 | US135100 | C. CE. CHP 0.1uF 16V | |

*: New Parts

RX-V2065/HTR-6295

P.C.B. DIGITAL

| Ref No. | Part No. | Description | Markets |
|----------|----------|---------------------------|---------|
| C193 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C194 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C200 | UR837330 | C. EL 33uF 16V | |
| C202 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C204-205 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C207-211 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C212 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C214 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C215-216 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C217 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C218-219 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C220-225 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C226 | WG251600 | C. CE. CHP 4. 7uF 6. 3V | |
| C228-229 | WG251600 | C. CE. CHP 4. 7uF 6. 3V | |
| C231 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C232-238 | US046100 | C. CE. CHP 1uF 25V | |
| C239-242 | US062100 | C. CE. CHP 100pF 50V B | |
| C243 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C400-401 | WD758300 | C. CE. CHP 10uF 10V | U |
| C402 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C404 | US061100 | C. CE. CHP 10pF 50V B | U |
| C405-406 | US035100 | C. CE. CHP 0. 1uF 16V B | U |
| C407 | US061100 | C. CE. CHP 10pF 50V B | U |
| C408-409 | US035100 | C. CE. CHP 0. 1uF 16V B | U |
| C410 | WG251600 | C. CE. CHP 4. 7uF 6. 3V | |
| C411 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C412 | US035100 | C. CE. CHP 0. 1uF 16V B | |
| C413-414 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C415 | US044220 | C. CE. CHP 0. 022uF 25V B | |
| C416 | US062100 | C. CE. CHP 100pF 50V B | |
| C417 | UR267470 | C. EL 47uF 50V | |
| C418 | US062220 | C. CE. CHP 220pF 50V B | |
| C419 | WG251600 | C. CE. CHP 4. 7uF 6. 3V | |
| C420 | US062220 | C. CE. CHP 220pF 50V B | |
| C421 | US035100 | C. CE. CHP 0. 1uF 16V B | U |
| C422 | US062220 | C. CE. CHP 220pF 50V B | |
| C423 | US035100 | C. CE. CHP 0. 1uF 16V B | |
| C424-425 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C426 | US062220 | C. CE. CHP 220pF 50V B | |
| C427 | US035100 | C. CE. CHP 0. 1uF 16V B | U |
| C428 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C429 | WD758300 | C. CE. CHP 10uF 10V | |
| C430 | UR067470 | C. EL 47uF 50V | |
| C431 | US062100 | C. CE. CHP 100pF 50V B | |
| C432-433 | US062220 | C. CE. CHP 220pF 50V B | |
| C434-436 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C437-438 | US062100 | C. CE. CHP 100pF 50V B | |
| C439 | US061100 | C. CE. CHP 10pF 50V B | |
| C440 | US060800 | C. CE. CHP 8pF 50V B | |
| C441-442 | US062390 | C. CE. CHP 390pF 50V B | |
| C443-444 | US035100 | C. CE. CHP 0. 1uF 16V B | U |
| C445-446 | UR837100 | C. EL 10uF 16V | |
| C447-448 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C449-450 | UR237470 | C. EL 47uF 16V | |
| C451 | US062100 | C. CE. CHP 100pF 50V B | |
| C452 | UR067100 | C. EL 10uF 50V | |
| C453 | US126100 | C. CE. CHP 1uF 10V | |

* New Parts

| Ref No. | Part No. | Description | Markets |
|------------|----------|---------------------------|---------|
| C454-469 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C471-472 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C473 | US062680 | C. CE. CHP 680pF 50V B | |
| C474-476 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C477 | WG251600 | C. CE. CHP 4. 7uF 6. 3V | |
| C478-484 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C485 | WG251600 | C. CE. CHP 4. 7uF 6. 3V | |
| C486 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C488-489 | UU297220 | C. EL 22uF 100V | |
| C491-493 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C494-496 | US063100 | C. CE. CHP 1000pF 50V B | |
| C497-498 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C499-502 | US063100 | C. CE. CHP 1000pF 50V B | |
| C503-506 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C520 | WG251600 | C. CE. CHP 4. 7uF 6. 3V | |
| C521 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C600 | WK041800 | C. EL 10uF 16V | |
| C601-603 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C604-605 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C606 | UR067100 | C. EL 10uF 50V | |
| C607 | US064100 | C. CE. CHP 0. 01uF 50V B | U |
| C608-609 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C610 | US126100 | C. CE. CHP 1uF 10V | |
| C611 | US062100 | C. CE. CHP 100pF 50V B | |
| C612 | UR067100 | C. EL 10uF 50V | |
| C613-614 | US126100 | C. CE. CHP 1uF 10V | |
| C615 | UR237100 | C. EL 10uF 16V | U |
| C616-617 | US135100 | C. CE. CHP 0. 1uF 16V | U |
| C618 | US063100 | C. CE. CHP 1000pF 50V B | |
| C619 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C620 | UR348100 | C. EL 100uF 25V | |
| C621 | UR237470 | C. EL 47uF 16V | U |
| C622 | UR067100 | C. EL 10uF 50V | |
| C623 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C624 | WK041800 | C. EL 10uF 16V | |
| C625 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C626 | UR067100 | C. EL 10uF 50V | |
| C627-628 | WJ603600 | C. MYLAR 820pF 50V J | |
| C629-630 | UR837100 | C. EL 10uF 16V | U |
| C633-634 | UR067100 | C. EL 10uF 50V | |
| C635-642 | US062100 | C. CE. CHP 100pF 50V B | |
| * C643-644 | US663330 | C. CE. CHP 3300pF 50V | U |
| C700-702 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C703-704 | WD758300 | C. CE. CHP 10uF 10V | |
| C705-706 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C707-708 | WD758300 | C. CE. CHP 10uF 10V | |
| C709-710 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C711-712 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C713 | UF037220 | C. EL. CHP 22uF 16V | |
| C714-717 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C718 | US034390 | C. CE. CHP 0. 039uF 16V B | |
| C719-721 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C722-723 | US063100 | C. CE. CHP 1000pF 50V B | |
| C724-725 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C726 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C727 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C728 | US064100 | C. CE. CHP 0. 01uF 50V B | |

* New Parts

RX-V2065/HTR-6295

P.C.B. DIGITAL

| Ref No. | Part No. | Description | Markets |
|----------|----------|---------------------------|---------|
| C729 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C730 | VZ243400 | C. CE. CHP 0. 33uF 16V | |
| C731 | VZ281900 | C. CE. CHP 0. 47uF 16V K | |
| C732 | US034820 | C. CE. CHP 0. 082uF 16V K | |
| C733 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C734 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C735 | US061100 | C. CE. CHP 10pF 50V B | |
| C736 | US060800 | C. CE. CHP 8pF 50V B | |
| C737-742 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C743 | UF037220 | C. EL. CHP 22uF 16V | |
| C744-746 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C747 | UF037100 | C. EL. CHP 10uF 16V | |
| C748-749 | US135100 | C. CE. CHP 0. 1uF 16V | |
| * C750 | WPO92800 | C. EL. CHP 22uF 16V | |
| C751 | US135100 | C. CE. CHP 0. 1uF 16V | |
| * C752 | WPO92800 | C. EL. CHP 22uF 16V | |
| C753 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C754 | UF037100 | C. EL. CHP 10uF 16V | |
| C755-757 | US135100 | C. CE. CHP 0. 1uF 16V | |
| * C758 | WPO92800 | C. EL. CHP 22uF 16V | |
| C759 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C760 | UF037220 | C. EL. CHP 22uF 16V | |
| C761 | US062100 | C. CE. CHP 100pF 50V B | |
| C762 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C763 | UF037220 | C. EL. CHP 22uF 16V | |
| C764-766 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C767-768 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C769 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C770-771 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C772 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C773 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C774-776 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C777-778 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C779-780 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C781 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C782-790 | US135100 | C. CE. CHP 0. 1uF 16V | |
| * C791 | WPO92800 | C. EL. CHP 22uF 16V | |
| C792-794 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C795 | UF037100 | C. EL. CHP 10uF 16V | |
| C796-797 | US063100 | C. CE. CHP 1000pF 50V B | |
| C798-799 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C806 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C930 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C950 | UF438100 | C. EL. CHP 100uF 16V | |
| C951 | UF417220 | C. EL. CHP 22uF 6. 3V | |
| C952 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C953-954 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C955 | WG888300 | C. CE. M. CHP 10uF 6. 3V | |
| C956 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C957-960 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C961 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C962 | WG888300 | C. CE. M. CHP 10uF 6. 3V | |
| C963-964 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C965 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C966 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C967-968 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C972 | WG888300 | C. CE. M. CHP 10uF 6. 3V | |

* New Parts

| Ref No. | Part No. | Description | Markets |
|------------|----------|-------------------------------|-------------|
| C973 | WD758300 | C. CE. CHP 10uF 10V | |
| C974-975 | UR267470 | C. EL 47uF 50V | U |
| * C976-977 | WJ603700 | C. MYLAR 1000pF 50V | U |
| C978-979 | UR267100 | C. EL 10uF 50V | U |
| * C980-981 | WJ605600 | C. MYLAR 0. 033uF 50V | U |
| * C982-983 | WJ604900 | C. MYLAR 9100pF 50V | U |
| C984-985 | UR218220 | C. EL 220uF 6. 3V | U |
| C986-989 | WJ603100 | C. MYLAR 220pF 50V | U |
| C990 | US064100 | C. CE. CHP 0. 01uF 50V B | U |
| C991-993 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C994 | UR237470 | C. EL 47uF 16V | |
| C995-998 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C999 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| D23-25 | WE674800 | DIODE AVR161A1R1NTB | |
| D27 | WE674800 | DIODE AVR161A1R1NTB | |
| D36-37 | WE674800 | DIODE AVR161A1R1NTB | |
| D47-49 | WE674800 | DIODE AVR161A1R1NTB | |
| D59-61 | WE674800 | DIODE AVR161A1R1NTB | |
| D62 | VV220700 | DIODE. SHOT RB501V-40 | |
| D63-64 | V6267600 | DIODE RB051L-40 | |
| D67-68 | WE674800 | DIODE AVR161A1R1NTB | |
| D151-152 | WE674800 | DIODE AVR161A1R1NTB | |
| D153 | VV220700 | DIODE. SHOT RB501V-40 | |
| D200-204 | VU990900 | DIODE. ZENR MAZ8033GHL 3. 4V | |
| D400-402 | WE674800 | DIODE AVR161A1R1NTB | U |
| D403-404 | VT332900 | DIODE 1SS355 | |
| D406-407 | VT332900 | DIODE 1SS355 | |
| D600 | VT332900 | DIODE 1SS355 | |
| D602-603 | VT332900 | DIODE 1SS355 | |
| D702-703 | VT332900 | DIODE 1SS355 | |
| D950 | WE674800 | DIODE AVR161A1R1NTB | |
| * D951-958 | WP385600 | PESD PESD0603-240 | |
| D959-961 | WE674800 | DIODE AVR161A1R1NTB | |
| D962 | VT332900 | DIODE 1SS355 | |
| D963-964 | VV659300 | DIODE. ZENR RLZ7. 5B 7. 5V | U |
| IC3 | XS775A00 | IC TC7SH04FU | |
| IC5 | X7195A00 | IC R1172S121D-E2-F | |
| IC6 | XZ287A00 | IC SN74LVC245APWR | |
| IC10 | X7741A00 | IC NJM2867F3-05 (TE1) | |
| IC11 | X0199B00 | IC TC74VHC157FT (EL, K) | |
| IC16 | X7741A00 | IC NJM2867F3-05 (TE1) | |
| IC20 | X8013A00 | IC. CPU M3087BFKBGP CPU | (unwritten) |
| IC21 | X8194A00 | IC R1172H331D-T1-F | |
| * IC22 | YA739A00 | IC. MEMORY LE25LB2562M-TLM-E | U |
| * IC22 | YC035A00 | IC LE25LB643M-TLM-E | CRTKABGEFL |
| IC40 | X8192A00 | IC F2621E-01-TR | U |
| * IC41 | YA399A00 | IC LC89058WD-E | |
| IC43 | X7378A00 | IC NJM4565M (TE1) | |
| * IC45 | X9798B00 | IC CS230003-CZZR | |
| * IC47 | YC008A00 | IC R1173S001D-E2-F | |
| * IC48 | X9626B00 | IC. MEMORY K4S641632N-LC60000 | |
| * IC49 | YC016C00 | IC. MEMORY F49L160BA-70TG2N | (written) |
| IC50 | XR680A00 | IC TC7SH08FU (TE85L, JF) | |
| * IC51 | YA255A00 | IC R1172H501D-T1-F | |
| IC52 | XR680A00 | IC TC7SH08FU (TE85L, JF) | |
| IC61 | X7375A00 | IC PCM1781DBQR | U |
| IC62 | X0199B00 | IC TC74VHC157FT (EL, K) | |

* New Parts

P.C.B. DIGITAL and P.C.B. OPERATION

| Ref No. | Part No. | Description | Markets |
|------------|----------|-------------|---------------------|
| IC63 | XS534A00 | IC | NJM78M05DL1A |
| IC65 | X7355A00 | IC | PCM1680DBQR |
| IC66 | X7357A00 | IC | PCM1803DBR |
| IC67 | X3586B00 | IC | TC74VHCT08AFT EL, K |
| IC68 | XR680A00 | IC | TC7SH08FU(TE85L, JF |
| IC70 | X9393A00 | IC | ADV7800BSTZ-80 |
| * IC71 | YA215A00 | IC | ABT1012 |
| IC72 | X6671A00 | IC | ADV7172KSTZ |
| IC73 | X9460A00 | IC | R1172H181B-T1-F |
| IC74 | X8194A00 | IC | R1172H331D-T1-F |
| IC75 | X8531A00 | IC | TC7WZ32FK |
| IC76-78 | XZ283A00 | IC | SN74LVTH245APW BUS |
| * IC80 | YA844A00 | IC | ISL83385EIBZ-T |
| IC81 | X3505A00 | IC | NJM2068MD-TE2 |
| IC95 | X8900A00 | IC | CXB1442AR-T4 |
| IC96 | X8368A00 | IC | PCA9517DP |
| IC97 | X8897A00 | IC | R1172S331B-E2-F |
| JK81-82 | V9435700 | JACK. MNI | MSJ-035-12APC |
| PJ80 | VM725600 | JACK. PIN | 2P |
| Q3-10 | VQ986700 | TR | 2SC4081 T106 |
| Q80 | iA101510 | TR | 2SA1015 Y |
| Q81 | iC181510 | TR | 2SC1815 Y |
| Q82 | WG538600 | TR | KTA1046-Y-U/P |
| Q83 | iC181510 | TR | 2SC1815 Y |
| Q84 | iA101510 | TR | 2SA1015 Y |
| Q85 | iC181510 | TR | 2SC1815 Y |
| Q86 | WG538600 | TR | KTA1046-Y-U/P |
| Q87 | iC181510 | TR | 2SC1815 Y |
| Q95-96 | VQ986700 | TR | 2SC4081 T106 |
| * Q200 | WQ381000 | FET | MCHG6336-TL-E |
| Q201-202 | VV655300 | TR. DGT | DTA144EKA |
| Q203-209 | VR936300 | TR | 2SA1576A T106 |
| * Q400 | WQ381000 | FET | MCHG6336-TL-E |
| Q401 | VV655300 | TR. DGT | DTA144EKA |
| Q600 | VV655200 | TR. DGT | DTA143EKA |
| Q601 | VV655700 | TR. DGT | DTC144EKA |
| * Q700 | WQ381000 | FET | MCHG6336-TL-E |
| Q701 | VR936300 | TR | 2SA1576A T106 |
| * Q702 | WQ381000 | FET | MCHG6336-TL-E |
| Q703 | VR936300 | TR | 2SA1576A T106 |
| Q704 | WE834500 | FET | UPA672T-T1-A |
| R180 | V8070100 | R. MTL. FLM | 2. 2Ω 1W |
| R189 | WB784700 | R. MTL. FLM | 6. 8Ω 1W |
| R200 | RD357100 | R. CHP | 10KΩ 1/16W |
| R466-467 | HV753220 | R. CAR. FP | 2. 2Ω 1/4W |
| * R601 | WQ072300 | R. MTL. OXD | 2. 2Ω 1W |
| R607 | HV753220 | R. CAR. FP | 2. 2Ω 1/4W |
| R930 | HV753560 | R. CAR. FP | 5. 6Ω 1/4W |
| R936 | HV753560 | R. CAR. FP | 5. 6Ω 1/4W |
| * R967-968 | WQ964700 | R. MTL. OXD | 470Ω 1W |
| ST1-2 | V4040500 | SCR. TERM | M3 |
| ST80 | V4040500 | SCR. TERM | M3 |
| ST80 | V4040500 | SCR. TERM | M3 |
| ST81 | V4040500 | SCR. TERM | M3 |
| * XL1 | WR725300 | RSNR. CRY | 27MHz SMD-49 |
| XL20 | WF997400 | RSNR. CE | 20MHz |
| * XL41 | WR846900 | RSNR. CRY | 45. 1984MHz DSX321G |

* New Parts

| Ref No. | Part No. | Description | Markets |
|------------|----------|-------------|------------------|
| XL42 | V3625700 | RSNR. CRY | 24. 576MHz |
| XL70 | VZ772700 | RSNR. CRY | 28. 63636MHz |
| * | WS305500 | P. C. B. | OPERATION |
| * | WS305600 | P. C. B. | OPERATION |
| * | WS305700 | P. C. B. | OPERATION |
| CB401 | VQ045400 | CN. BS. PIN | 25P |
| CB402 | VQ044400 | CN. BS. PIN | 9P |
| CB451 | VQ961100 | CN. BS. PIN | 8P |
| CB452 | V9357000 | CN | 19P TE |
| CB454 | VQ962100 | CN. BS. PIN | 18P |
| CB455 | V9357000 | CN | 19P TE |
| CB456 | VQ961800 | CN. BS. PIN | 15P |
| CB457 | VQ961400 | CN. BS. PIN | 11P |
| CB458 | V9357000 | CN | 19P TE |
| CB459 | VQ963300 | CN. BS. PIN | 12P |
| CB460 | VQ963100 | CN. BS. PIN | 10P |
| CB461 | VQ044400 | CN. BS. PIN | 9P |
| CB462 | VK026400 | CN. BS. PIN | 5P |
| CB463 | VQ585700 | CN. JUMPER | 7P |
| CB464 | VQ585500 | CN. JUMPER | 5P |
| * CB471 | WQ680200 | CN. USB | 4P TE AAPVA004C0 |
| CB475 | VK024900 | CN. BS. PIN | 5P TE |
| CB477 | VB858300 | CN. BS. PIN | 4P |
| C4001 | US063100 | C. CE. CHP | 1000pF 50V B |
| C4002 | US065100 | C. CE. CHP | 0. 1uF 50V B |
| C4003 | UR067100 | C. EL | 10uF 50V |
| C4004 | US064100 | C. CE. CHP | 0. 01uF 50V B |
| C4005 | UR837220 | C. EL | 22uF 16V |
| C4006 | US062100 | C. CE. CHP | 100pF 50V B |
| C4007 | UR257470 | C. EL | 47uF 35V |
| C4008 | US061330 | C. CE. CHP | 33pF 50V B |
| C4009-4010 | UR267220 | C. EL | 22uF 50V |
| C4011 | UR067100 | C. EL | 10uF 50V |
| C4012-4013 | US135100 | C. CE. CHP | 0. 1uF 16V |
| C4015 | UR268220 | C. EL | 220uF 50V |
| C4016 | UM388330 | C. EL | 330uF 6. 3V |
| C4017 | US135100 | C. CE. CHP | 0. 1uF 16V |
| C4018 | US061680 | C. CE. CHP | 68pF 50V B |
| C4019 | US065100 | C. CE. CHP | 0. 1uF 50V B |
| C4020-4021 | US135100 | C. CE. CHP | 0. 1uF 16V |
| C4022 | US064100 | C. CE. CHP | 0. 01uF 50V B |
| C4023-4024 | US063100 | C. CE. CHP | 1000pF 50V B |
| C4025-4026 | US065100 | C. CE. CHP | 0. 1uF 50V B |
| C4027 | US135100 | C. CE. CHP | 0. 1uF 16V |
| C4028 | US062100 | C. CE. CHP | 100pF 50V B |
| C4030 | US062100 | C. CE. CHP | 100pF 50V B |
| C4031 | US062470 | C. CE. CHP | 470pF 50V B |
| C4032 | US135100 | C. CE. CHP | 0. 1uF 16V |
| C4033 | US063100 | C. CE. CHP | 1000pF 50V B |
| C4034 | UM417100 | C. EL | 10uF 50V |
| C4035 | US135100 | C. CE. CHP | 0. 1uF 16V |
| C4036-4040 | US063100 | C. CE. CHP | 1000pF 50V B |
| C4041-4046 | US135100 | C. CE. CHP | 0. 1uF 16V |
| C4201 | UR067470 | C. EL | 47uF 50V |

* New Parts

RX-V2065/HTR-6295

P.C.B. OPERATION

| Ref No. | Part No. | Description | Markets |
|--------------|----------|--------------------------|------------|
| C4202 | US063100 | C. CE. CHP 1000pF 50V B | U |
| C4203 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C4205-4211 | US062220 | C. CE. CHP 220pF 50V B | U |
| C4212 | US062100 | C. CE. CHP 100pF 50V B | |
| C4213 | UR267100 | C. EL 10uF 50V | |
| C4214 | WK041800 | C. EL 10uF 16V | |
| * C4215 | WJ603500 | C. MYLAR 680pF 50V | |
| C4216 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C4217 | UR267470 | C. EL 47uF 50V | |
| C4218 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C4219 | UR267470 | C. EL 47uF 50V | |
| * C4220 | WJ603500 | C. MYLAR 680pF 50V | |
| C4221 | WK041800 | C. EL 10uF 16V | |
| C4222 | UR267100 | C. EL 10uF 50V | |
| C4223-4224 | US062100 | C. CE. CHP 100pF 50V B | |
| C4225 | UR267100 | C. EL 10uF 50V | |
| C4226 | WK041800 | C. EL 10uF 16V | |
| * C4227 | WJ603500 | C. MYLAR 680pF 50V | |
| C4228-4229 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C4230 | WJ605800 | C. MYLAR 0. 047uF 50V J | |
| C4231-4232 | UR267100 | C. EL 10uF 50V | |
| * C4233 | WJ604700 | C. MYLAR 6800pF 50V | |
| C4234 | US062100 | C. CE. CHP 100pF 50V B | |
| C4235 | UR267100 | C. EL 10uF 50V | |
| C4236 | WK041800 | C. EL 10uF 16V | |
| * C4237 | WJ603500 | C. MYLAR 680pF 50V | |
| C4238-4239 | US135100 | C. CE. CHP 0. 1uF 16V | |
| * C4240 | WJ603500 | C. MYLAR 680pF 50V | |
| C4241 | WK041800 | C. EL 10uF 16V | |
| C4242 | UR267100 | C. EL 10uF 50V | |
| C4243-4244 | US062100 | C. CE. CHP 100pF 50V B | |
| C4245 | UR267100 | C. EL 10uF 50V | |
| C4246 | WK041800 | C. EL 10uF 16V | |
| * C4247 | WJ603500 | C. MYLAR 680pF 50V | |
| C4248-4249 | US135100 | C. CE. CHP 0. 1uF 16V | |
| * C4250 | WJ603500 | C. MYLAR 680pF 50V | |
| C4251 | WK041800 | C. EL 10uF 16V | |
| C4252 | UR267100 | C. EL 10uF 50V | |
| C4253 | US062100 | C. CE. CHP 100pF 50V B | |
| C4254-4255 | UR067100 | C. EL 10uF 50V | |
| C4301 | UR267470 | C. EL 47uF 50V | CRTKABGEFL |
| C4302 | UR267470 | C. EL 47uF 50V | CRTKABGEFL |
| * C4303-4304 | WJ603700 | C. MYLAR 1000pF 50V | CRTKABGEFL |
| C4305 | UR267100 | C. EL 10uF 50V | CRTKABGEFL |
| C4306 | UR267100 | C. EL 10uF 50V | CRTKABGEFL |
| * C4307-4308 | WJ605600 | C. MYLAR 0. 033uF 50V | CRTKABGEFL |
| * C4309 | WJ604900 | C. MYLAR 9100pF 50V | CRTKABGEFL |
| * C4310 | WJ604900 | C. MYLAR 9100pF 50V | CRTKABGEFL |
| C4311 | UR218220 | C. EL 220uF 6. 3V | CRTKABGEFL |
| C4312 | UR218220 | C. EL 220uF 6. 3V | CRTKABGEFL |
| C4313 | WJ603100 | C. MYLAR 220pF 50V | CRTKABGEFL |
| C4314 | WJ603100 | C. MYLAR 220pF 50V | CRTKABGEFL |
| C4315 | WJ603100 | C. MYLAR 220pF 50V | CRTKABGEFL |
| C4316 | WJ603100 | C. MYLAR 220pF 50V | CRTKABGEFL |
| C4317 | US064100 | C. CE. CHP 0. 01uF 50V B | CRTKABGEFL |
| C4318-4325 | WJ605000 | C. MYLAR 0. 01uF 50V J | |
| C4401 | US062100 | C. CE. CHP 100pF 50V B | |

* New Parts

| Ref No. | Part No. | Description | Markets |
|--------------|----------|------------------------------|------------|
| C4402 | US063100 | C. CE. CHP 1000pF 50V B | |
| * C4403 | WJ604300 | C. MYLAR 3300pF 50V | |
| C4404-4405 | US062220 | C. CE. CHP 220pF 50V B | |
| * C4406 | WJ604300 | C. MYLAR 3300pF 50V | |
| C4407 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C4410 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C4411 | US060500 | C. CE. CHP 5pF 50V B | |
| C4413 | US060500 | C. CE. CHP 5pF 50V B | |
| C4414 | US063100 | C. CE. CHP 1000pF 50V B | |
| C4415 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C4417 | US126100 | C. CE. CHP 1uF 10V | |
| C4418 | US062220 | C. CE. CHP 220pF 50V B | |
| C4419 | US063100 | C. CE. CHP 1000pF 50V B | |
| D4001-4002 | VT332900 | DIODE 1SS355 | |
| D4003 | VU171900 | DIODE. ZENR UDZ5. 1B 5. 1V | |
| D4004-4005 | VT332900 | DIODE 1SS355 | |
| D4006-4007 | VU991000 | DIODE. ZENR MAZ8036GLL 3. 5V | |
| D4008 | WG760400 | LED SELK6E10C BLUE | |
| * D4009 | WR095700 | LED 8224-10SDRD/S530A3 | |
| D4011 | V2598200 | LED SIR-505ST | |
| D4301 | VV659300 | DIODE. ZENR RLZ7. 5B 7. 5V | CRTKABGEFL |
| D4302 | VV659300 | DIODE. ZENR RLZ7. 5B 7. 5V | CRTKABGEFL |
| D4303 | VT332900 | DIODE 1SS355 | |
| D4305 | VT332900 | DIODE 1SS355 | |
| D4401-4402 | VT332900 | DIODE 1SS355 | |
| D4404-4405 | VT332900 | DIODE 1SS355 | |
| D4408 | VT332900 | DIODE 1SS355 | |
| D4410 | VT332900 | DIODE 1SS355 | |
| IC401 | X7378A00 | IC NJM4565M (TE1) | |
| IC402 | X6386A00 | IC M66003-0131FP | |
| IC451-454 | X5482A00 | IC NE5532DR OP AMP | |
| IC461 | X3505A00 | IC NJM2068MD-TE2 | CRTKABGEFL |
| JK401 | WC814400 | JACK. MNI JY-3554-01-130 | |
| JK451 | VV269500 | CN 8P DIN | U |
| JK472 | V9408200 | JACK. PHONE MSJ-064-05B GR | |
| PJ461 | WD599600 | JACK. PIN 2P MSP-252V2-06 NI | CRTKABGEFL |
| PJ471 | WJ117500 | JACK. PIN 3P | |
| Q4001-4003 | WC529400 | TR KTC3875S Y GR RTK | |
| Q4004 | VV655400 | TR. DGT DTC114EKA | |
| Q4005 | WC397700 | TR 2N5401C-AT | |
| Q4006-4012 | WC529400 | TR KTC3875S Y GR RTK | |
| Q4301 | VV655400 | TR. DGT DTC114EKA | |
| Q4302 | VV655000 | TR. DGT DTA114EKA | |
| Q4305 | VV655400 | TR. DGT DTC114EKA | |
| Q4306 | VV655000 | TR. DGT DTA114EKA | |
| R4201 | HV753100 | R. CAR. FP 1Ω 1/4W | |
| * R4208-4209 | WQ072300 | R. MTL. OXD 2. 2Ω 1W | |
| * R4301 | WQ964700 | R. MTL. OXD 470Ω 1W | CRTKABGEFL |
| * R4302 | WQ964700 | R. MTL. OXD 470Ω 1W | CRTKABGEFL |
| R4320-4323 | HV757100 | R. CAR. FP 10KΩ 1/4W | |
| R4413-4414 | V8071300 | R. MTL. FLM 470Ω 1W | |
| RY461 | WJ122400 | RELAY 981-2A-24DS-SP7 | |
| RY463 | WJ122400 | RELAY 981-2A-24DS-SP7 | |
| ST451 | V4040500 | SCR. TERM M3 | |
| ST471 | V4040500 | SCR. TERM M3 | |
| SW401-404 | WD483100 | SW. TACT SKRGAAD010 | |
| SW406-407 | WD483100 | SW. TACT SKRGAAD010 | |

* New Parts

P.C.B. OPERATION and P.C.B. MAIN

| Ref No. | Part No. | Description | Markets |
|----------------|----------|--------------|--------------------|
| SW409-413 | WD483100 | SW. TACT | SKRGAADO10 |
| SW415 | WD483100 | SW. TACT | SKRGAADO10 |
| SW417-419 | WD483100 | SW. TACT | SKRGAADO10 |
| SW421 | WD483100 | SW. TACT | SKRGAADO10 |
| SW424 | WD483100 | SW. TACT | SKRGAADO10 |
| SW441-442 | V9266400 | SW. RT. ENC | XREB12105PVB25F |
| SW443 | V9597100 | SW. RT. ENC | EC12E2460802 |
| SW471 | WD483100 | SW. TACT | SKRGAADO10 |
| TE461 | WK560800 | TERM. SP | 4P MST-204V1-01 NC |
| TE461 | WK560900 | TERM. SP | 4P MST-204V1-01 WC |
| TE462 | WK560800 | TERM. SP | 4P MST-204V1-01 NC |
| TE462 | WK560900 | TERM. SP | 4P MST-204V1-01 WC |
| * U4001 | WQ600700 | L. DTCT | SM3385VMH6 |
| U4201 | WH536900 | CN. PHOTO. T | 1P GP1FAV51TKOF |
| * V4001 | WQ842100 | FL. DSPLY | 18-MT-09GNK |
| | V6007100 | SPACER. FL | 4. 6/10/32 |
| * | WR912900 | P. C. B. | MAIN UC |
| * | WR913000 | P. C. B. | MAIN R |
| * | WR913100 | P. C. B. | MAIN TKABGEF |
| * | WR913200 | P. C. B. | MAIN L |
| CB111-112 | WN077700 | CLIP. FUSE | CLIP PFC5000-0202F |
| CB152 | VQ962900 | CN. BS. PIN | 8P |
| CB153 | VQ963900 | CN. BS. PIN | 18P |
| CB154 | VQ963600 | CN. BS. PIN | 15P |
| CB155 | VQ963200 | CN. BS. PIN | 11P |
| C1001-1007 | WK041800 | C. EL | 10uF 16V |
| C1008-1014 | WE100900 | C. PP | 220pF 630V |
| * C1015-1021 | WE100600 | C. PP | 120pF 630V |
| * C1022-1028 | WE102300 | C. PP | 3300pF 100V |
| C1029 | URO67470 | C. EL | 47uF 50V |
| C1030-1031 | URO68100 | C. EL | 100uF 50V |
| C1032-1035 | URO67470 | C. EL | 47uF 50V |
| △ C1036-1042 | WE100200 | C. PP | 22pF 630V |
| △ C1043-1049 | WN164300 | C. PP | 330pF 100V |
| C1050-1056 | UR397100 | C. EL | 10uF 100V |
| C1057-1063 | WN165500 | C. PP | 0. 022uF 100V |
| C1066-1067 | WN156000 | C. PP | 1000pF 250V |
| C1068 | UR866470 | C. EL | 4. 7uF 50V |
| C1069 | UR218220 | C. EL | 220uF 6. 3V |
| C1070-1073 | UR297100 | C. EL | 10uF 100V |
| C1074 | UR267330 | C. EL | 33uF 50V |
| C1075 | WK041800 | C. EL | 10uF 16V |
| C1076 | UR266100 | C. EL | 1uF 50V |
| * C1078-1079 | WP421000 | C. PP | 0. 047uF 100V |
| C1080-1081 | WN165500 | C. PP | 0. 022uF 100V |
| C1082 | URO49330 | C. EL | 3300uF 25V |
| C1083 | URO49220 | C. EL | 2200uF 25V |
| △ # C1084-1085 | WJ788600 | C. EL | 12000uF 71V |
| C1086 | URO49220 | C. EL | 2200uF 25V |
| C1087-1088 | WK041800 | C. EL | 10uF 16V |
| C1509 | URO67470 | C. EL | 47uF 50V |
| C1510-1512 | US135100 | C. CE. CHP | 0. 1uF 16V |
| C1513-1514 | US061220 | C. CE. CHP | 22pF 50V B |
| C1515-1516 | US135100 | C. CE. CHP | 0. 1uF 16V |

* New Parts

Note) Those parts marked with "#" are not included in the P.C.B. ass'y.

| Ref No. | Part No. | Description | Markets |
|------------|----------|-------------|---------------|
| C1517-1520 | US062220 | C. CE. CHP | 220pF 50V B |
| C1521 | UR267100 | C. EL | 10uF 50V |
| C1522 | US061470 | C. CE. CHP | 47pF 50V B |
| C1523 | UR238100 | C. EL | 100uF 16V |
| C1524 | US061470 | C. CE. CHP | 47pF 50V B |
| C1525 | UR267100 | C. EL | 10uF 50V |
| C1526-1527 | UR238100 | C. EL | 100uF 16V |
| C1528-1529 | US062220 | C. CE. CHP | 220pF 50V B |
| C1530 | UR238100 | C. EL | 100uF 16V |
| C1531 | UR267330 | C. EL | 33uF 50V |
| C1532-1533 | UR238100 | C. EL | 100uF 16V |
| C1534-1535 | US062220 | C. CE. CHP | 220pF 50V B |
| C1536 | UR238100 | C. EL | 100uF 16V |
| * C1537 | WJ605600 | C. MYLAR | 0. 033uF 50V |
| C1538 | VR169000 | C. MYLAR | 0. 33uF 50V |
| * C1539 | WJ604800 | C. MYLAR | 8200pF 50V |
| * C1540 | WJ605600 | C. MYLAR | 0. 033uF 50V |
| C1541 | VR169000 | C. MYLAR | 0. 33uF 50V |
| C1542 | US135100 | C. CE. CHP | 0. 1uF 16V |
| * C1543 | WJ604800 | C. MYLAR | 8200pF 50V |
| C1544 | US062220 | C. CE. CHP | 220pF 50V B |
| C1545 | US135100 | C. CE. CHP | 0. 1uF 16V |
| C1546 | US062220 | C. CE. CHP | 220pF 50V B |
| C1547-1550 | UR267100 | C. EL | 10uF 50V |
| C1551 | US062220 | C. CE. CHP | 220pF 50V B |
| C1552 | UR267100 | C. EL | 10uF 50V |
| C1553-1554 | UR266220 | C. EL | 2. 2uF 50V |
| C1555-1556 | UR267100 | C. EL | 10uF 50V |
| C1557 | US062220 | C. CE. CHP | 220pF 50V B |
| C1558-1559 | UR267470 | C. EL | 47uF 50V |
| C1560 | US062220 | C. CE. CHP | 220pF 50V B |
| C1563 | US062220 | C. CE. CHP | 220pF 50V B |
| C1566 | US062220 | C. CE. CHP | 220pF 50V B |
| C1567-1568 | VR169200 | C. MYLAR | 0. 47uF 50V |
| C1569 | US062220 | C. CE. CHP | 220pF 50V B |
| C1570-1571 | UR267100 | C. EL | 10uF 50V |
| C1572-1573 | US062100 | C. CE. CHP | 100pF 50V B |
| C1574 | UR267100 | C. EL | 10uF 50V |
| C1575 | US061470 | C. CE. CHP | 47pF 50V B |
| C1576-1577 | UR267100 | C. EL | 10uF 50V |
| C1578 | US061470 | C. CE. CHP | 47pF 50V B |
| C1579-1580 | UR267100 | C. EL | 10uF 50V |
| C1581-1582 | US061470 | C. CE. CHP | 47pF 50V B |
| C1583-1584 | UR267470 | C. EL | 47uF 50V |
| C1585-1586 | UR267100 | C. EL | 10uF 50V |
| C1587 | US061470 | C. CE. CHP | 47pF 50V B |
| C1588-1591 | UR267100 | C. EL | 10uF 50V |
| C1592 | US061470 | C. CE. CHP | 47pF 50V B |
| C1593 | UR267100 | C. EL | 10uF 50V |
| C1594-1595 | US062470 | C. CE. CHP | 470pF 50V B |
| C1596 | US064100 | C. CE. CHP | 0. 01uF 50V B |
| C1597-1598 | US062470 | C. CE. CHP | 470pF 50V B |
| C1599-1602 | UR267100 | C. EL | 10uF 50V |
| C1603-1604 | US062470 | C. CE. CHP | 470pF 50V B |
| C1605 | US064100 | C. CE. CHP | 0. 01uF 50V B |
| C1606 | US044220 | C. CE. CHP | 0. 022uF 25V |
| C1607 | US062470 | C. CE. CHP | 470pF 50V B |

* New Parts

RX-V2065/HTR-6295

P.C.B. MAIN and P.C.B. VIDEO

| Ref No. | Part No. | Description | Markets |
|----------------|----------|-------------|---------------------|
| C1608 | US044220 | C. CE. CHP | 0.022uF 25V |
| C1609-1610 | US064100 | C. CE. CHP | 0.01uF 50V B |
| D1001-1016 | VR496500 | DIODE. CHP | MA111 FLAT TP |
| △ D1017-1023 | VG437500 | DIODE. ZENR | MTZJ5. 1C 5. 1V |
| D1024-1039 | VR496500 | DIODE. CHP | MA111 FLAT TP |
| △ D1040 | WK878000 | DIODE. BRG | D15XBN20-7001 15A |
| △ D1041 | WH487300 | DIODE. BRG | RS203M 2. 0A 200V |
| D1042 | VG440500 | DIODE. ZENR | MTZJ13B 13V |
| D1043 | VR496500 | DIODE. CHP | MA111 FLAT TP |
| △ D1044-1045 | VG435500 | DIODE. ZENR | MTZJ2. 4B 2. 4V |
| D1501-1502 | VG438400 | DIODE. ZENR | MTZJ6. 8C 6. 8V |
| △ F100 | KB000780 | FUSE | T5A 250V |
| G101 | V5995800 | PLATE. GND | |
| △ IC101 | XJ608A00 | IC | NJM7812FA |
| △ IC102 | X4154A00 | IC | KIA7912PI |
| △ IC152 | XZ509A00 | IC | TC74VHC004FT INVER |
| * IC153 | YA361A00 | IC | TA15220FP |
| IC154 | X7378A00 | IC | NJM4565M (TE1) |
| PJ150 | V5715300 | JACK. PIN | 2P OR/OR |
| PJ151 | V7046800 | JACK. PIN | 6P MSP-246V1-01NI |
| PJ152-153 | V7046700 | JACK. PIN | 4P MSP-244V1-01NI |
| PJ154 | WG674900 | JACK. PIN | 4P |
| PJ156 | V7046800 | JACK. PIN | 6P MSP-246V1-01NI |
| PJ157 | V7046700 | JACK. PIN | 4P MSP-244V1-01NI |
| PJ158 | WG674900 | JACK. PIN | 4P |
| PJ159 | V7189700 | JACK. PIN | 1P |
| Q1001-1014 | WF549900 | TR | 2SC3906K T146 R, S |
| Q1015-1021 | VE198700 | TR | 2SA1145 O, Y |
| △ Q1022-1028 | VK432900 | TR | 2SD1915F S, T |
| △ Q1029-1035 | VE198800 | TR | 2SC2705 O, Y |
| Q1036-1042 | WG408900 | TR | 2SC5291 S, T |
| △ Q1043-1049 | WG408800 | TR | 2SA2168 S, T |
| Q1050-1056 | WD281200 | TR. PAIR | A2151/C6011 O, P, Y |
| Q1057-1063 | WC139600 | TR | KTC3911S GR BL |
| Q1064 | WH372100 | TR | KTA1517S GR TP |
| Q1065 | WC139600 | TR | KTC3911S GR BL |
| △ * Q1067-1068 | WC292600 | TR | KTA1837-U |
| △ Q1069-1070 | WC398400 | TR | 2N5551C-AT |
| △ Q1071 | WC397700 | TR | 2N5401C-AT |
| △ Q1072 | VP872600 | TR | 2SA1708 S, T |
| Q1073 | WC398500 | TR. DGT | KRA102M-AT |
| * Q1074 | WS512800 | TR. DGT | KRC105M-AT/P |
| Q1500-1504 | VZ725900 | TR | 2SD1938F S, T |
| Q1507-1527 | VZ725900 | TR | 2SD1938F S, T |
| R1001-1007 | HF356100 | R. CAR | 1KΩ 1/2W |
| R1008-1010 | HF356180 | R. CAR | 1. 8KΩ 1/2W |
| R1011-1014 | HL006180 | R. MTL. OXD | 1. 8KΩ 1/2W |
| R1022-1028 | HF355330 | R. CAR | 330Ω 1/2W |
| * R1029-1035 | WA622000 | R. MTL. OXD | 1. 2KΩ 1W |
| R1036-1042 | V8070900 | R. MTL. FLM | 100Ω 1W |
| R1043-1049 | V8072600 | R. MTL. OXD | 33KΩ 1W |
| R1079-1085 | HL005120 | R. MTL. OXD | 120Ω 1/2W |
| R1086-1092 | WG727400 | R. MTL. FLM | 2. 7KΩ 1/4W |
| R1093-1099 | WG725600 | R. MTL. FLM | 470Ω 1/4W |
| R1100-1106 | WG726400 | R. MTL. FLM | 1KΩ 1/4W |
| R1107-1112 | WG726200 | R. MTL. FLM | 820Ω 1/4W |
| △ R1113-1126 | HV755120 | R. CAR. FP | 120Ω 1/4W |

* New Parts

| Ref No. | Part No. | Description | Markets |
|----------------|----------|--------------|-----------------|
| R1127-1133 | HF355470 | R. CAR | 470Ω 1/2W |
| △ R1134-1147 | HV754100 | R. CAR. FP | 10Ω 1/4W |
| △ * R1148-1154 | WP839400 | R. WW | 0. 22+0. 22 3W |
| △ R1176-1182 | V8070300 | R. MTL. FLM | 10Ω 1W |
| △ R1197-1198 | V8070200 | R. MTL. FLM | 4. 7Ω 1W |
| △ R1211 | HV754100 | R. CAR. FP | 10Ω 1/4W |
| R1213 | V8072100 | R. MTL. OXD | 5. 6KΩ 1W |
| R1214 | HV755560 | R. CAR. FP | 560Ω 1/4W |
| R1219 | V8072000 | R. MTL. OXD | 4. 7KΩ 1W |
| △ R1222 | HV756100 | R. CAR. FP | 1KΩ 1/4W |
| △ R1234-1235 | HV754100 | R. CAR. FP | 10Ω 1/4W |
| R1236 | WG726200 | R. MTL. FLM | 820Ω 1/4W |
| △ R1238 | V8070300 | R. MTL. FLM | 10Ω 1W |
| R1504 | HV753100 | R. CAR. FP | 1Ω 1/4W |
| * R1573 | WQ835700 | R. MTL. OXD | 82Ω 1W |
| * R1575 | WQ835700 | R. MTL. OXD | 82Ω 1W |
| * R1664-1665 | WQ835800 | R. MTL. OXD | 100Ω 1W |
| △ RY101 | WE648700 | RELAY | DC DH24D2-0-Q |
| ST100 | V4040500 | SCR. TERM | M3 |
| △ SW101 | WB493700 | VOLT. SELECT | R8140246 |
| △ SW101 | WD073700 | VOLT. SELECT | R8140254 |
| U1500-1501 | WH169900 | CN. PHOTO. R | 1P GP1FAV51RKOF |
| | WE774200 | SCR. BND. HD | 3x10 MFZ2W3 |
| * WS304700 | P. C. B. | VIDEO | U |
| * WS304800 | P. C. B. | VIDEO | C |
| * WS304900 | P. C. B. | VIDEO | R |
| * WS305000 | P. C. B. | VIDEO | T |
| * WS305100 | P. C. B. | VIDEO | K |
| * WS305200 | P. C. B. | VIDEO | A |
| * WS305300 | P. C. B. | VIDEO | BGEF |
| * WS305400 | P. C. B. | VIDEO | L |
| CB303 | VQ961500 | CN. BS. PIN | 12P |
| CB304 | VN394900 | CN. BS. PIN | 14P |
| CB321 | VM859500 | CN. BS. PIN | 11P |
| CB322 | VM923600 | CN. BS. PIN | 13P |
| CB332 | VQ961300 | CN. BS. PIN | 10P |
| CB333 | VK024700 | CN. BS. PIN | 3P |
| CB340 | LB918020 | CN. BS. PIN | 2P |
| CB342 | LB918040 | CN. BS. PIN | 4P |
| CB343 | VZ130900 | CN. JUMPER | 4P |
| CB344 | VQ585500 | CN. JUMPER | 5P |
| CB346 | VB390000 | CN. BS. PIN | 4P |
| * CB349 | VQ047700 | CN. BS. PIN | 22P |
| CB381 | VQ962800 | CN. BS. PIN | 7P |
| CB391 | VQ044100 | CN. BS. PIN | 5P |
| C3001 | US062100 | C. CE. CHP | 100pF 50V B |
| C3002-3004 | US060800 | C. CE. CHP | 8pF 50V B |
| C3005 | US062100 | C. CE. CHP | 100pF 50V B |
| C3006 | UR237470 | C. EL | 47uF 16V |
| C3007-3008 | US135100 | C. CE. CHP | 0. 1uF 16V |
| C3009 | UR237470 | C. EL | 47uF 16V |
| C3011 | US060300 | C. CE. CHP | 3pF 50V B |
| C3012 | UR837470 | C. EL | 47uF 16V |
| C3013-3014 | US060300 | C. CE. CHP | 3pF 50V B |

* New Parts

P.C.B. VIDEO

| Ref No. | Part No. | Description | Markets |
|------------|----------|--------------------------|------------|
| C3015-3017 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C3018 | UR267100 | C. EL 10uF 50V | |
| C3019 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C3020 | UR267100 | C. EL 10uF 50V | |
| C3021-3025 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C3026 | UR267100 | C. EL 10uF 50V | |
| C3027 | WD758300 | C. CE. CHP 10uF 10V | |
| C3029 | WD758300 | C. CE. CHP 10uF 10V | |
| C3031 | WD758300 | C. CE. CHP 10uF 10V | |
| C3033 | UR837470 | C. EL 47uF 16V | |
| C3035-3037 | WD758300 | C. CE. CHP 10uF 10V | |
| C3043-3044 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C3045 | UR837470 | C. EL 47uF 16V | |
| C3047 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C3048 | UR238220 | C. EL 220uF 16V | |
| C3049 | UR837470 | C. EL 47uF 16V | |
| C3050 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C3051 | UR238220 | C. EL 220uF 16V | |
| C3063 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C3065 | UR237470 | C. EL 47uF 16V | |
| C3067 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C3072 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C3073 | UR238220 | C. EL 220uF 16V | |
| C3077 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C3080-3085 | WD758300 | C. CE. CHP 10uF 10V | |
| C3201 | US061270 | C. CE. CHP 27pF 50V B | BGEF |
| C3202 | UR237100 | C. EL 10uF 16V | BGEF |
| C3203 | US061270 | C. CE. CHP 27pF 50V B | BGEF |
| C3204-3205 | US135100 | C. CE. CHP 0. 1uF 16V | BGEF |
| C3206 | US062560 | C. CE. CHP 560pF 50V B | BGEF |
| C3207-3208 | US062330 | C. CE. CHP 330pF 50V B | BGEF |
| C3209 | US135100 | C. CE. CHP 0. 1uF 16V | BGEF |
| C3211 | UR237470 | C. EL 47uF 16V | BGEF |
| C3212 | UR237470 | C. EL 47uF 16V | CRTKABGEFL |
| C3213 | UR237470 | C. EL 47uF 16V | CRTKABGEFL |
| C3214 | UR237470 | C. EL 47uF 16V | CRTKABGEFL |
| C3215 | US062100 | C. CE. CHP 100pF 50V B | |
| C3217 | US062100 | C. CE. CHP 100pF 50V B | CRTKABGEFL |
| C3218 | US062100 | C. CE. CHP 100pF 50V B | |
| C3220 | US064100 | C. CE. CHP 0. 01uF 50V B | U |
| C3221 | US062100 | C. CE. CHP 100pF 50V B | |
| C3303-3305 | VR324900 | C. MYLAR 0. 1uF 100V | |
| C3307 | WG601900 | C. EL 10000uF 16V | |
| C3308 | UR278100 | C. EL 100uF 63V | |
| C3309 | UR03A100 | C. EL 10000uF 16V | |
| C3310 | UR039470 | C. EL 4700uF 16V | |
| C3311 | UR266100 | C. EL 1uF 50V | |
| C3312 | UR267220 | C. EL 22uF 50V | |
| C3313 | UR266100 | C. EL 1uF 50V | U |
| C3314 | UR266100 | C. EL 1uF 50V | |
| C3315 | UR267100 | C. EL 10uF 50V | |
| C3316 | UR268100 | C. EL 100uF 50V | |
| C3317 | UR266100 | C. EL 1uF 50V | U |
| C3318 | UR237470 | C. EL 47uF 16V | U |
| C3319 | UR266100 | C. EL 1uF 50V | |
| C3320-3321 | UR267330 | C. EL 33uF 50V | |
| C3324 | UR237470 | C. EL 47uF 16V | U |

* New Parts

| Ref No. | Part No. | Description | Markets |
|--------------|----------|---------------------------------|------------|
| C3403-3409 | WJ605000 | C. MYLAR 0. 01uF 50V J | |
| * C3410-3416 | WJ605200 | C. MYLAR 0. 015uF 50V | |
| C3603-3604 | US063100 | C. CE. CHP 1000pF 50V B | |
| C3606 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C3801 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C3802 | V7887800 | C. EL 1uF 50V | |
| C3803 | WJ335500 | C. EL 2. 2uF 50V | |
| * C3804 | WJ603700 | C. MYLAR 1000pF 50V | |
| C3805 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C3806-3807 | WD758300 | C. CE. CHP 10uF 10V | |
| C3901 | US064100 | C. CE. CHP 0. 01uF 50V B | BGEF |
| C3902 | US062120 | C. CE. CHP 120pF 50V B | BGEF |
| C3903 | US062220 | C. CE. CHP 220pF 50V B | BGEF |
| C3904 | US135100 | C. CE. CHP 0. 1uF 16V | BGEF |
| C3905 | UR837470 | C. EL 47uF 16V | BGEF |
| C3906 | UR837100 | C. EL 10uF 16V | BGEF |
| C3907 | UR818470 | C. EL 470uF 6. 3V | BGEF |
| C3908 | US064100 | C. CE. CHP 0. 01uF 50V B | BGEF |
| D3201 | VG436100 | DIODE. ZENR MTZJ3. 3B 3. 3V | BGEF |
| △ D3202 | VG439500 | DIODE. ZENR MTZJ10B 10V | CRTKABGEFL |
| D3302 | WH487300 | DIODE. BRG RS203M 2. 0A 200V | |
| △ D3304 | WH487300 | DIODE. BRG RS203M 2. 0A 200V | |
| D3306 | VV307700 | DIODE 1N4002S | |
| D3307 | VG440200 | DIODE. ZENR MTZJ12B 12V | R |
| * D3308 | VG444700 | DIODE. ZENR MTZ J 39D 39. 0V TP | |
| D3309 | VT332900 | DIODE 1SS355 | U |
| D3310 | VT332900 | DIODE 1SS355 | |
| D3311 | VT332900 | DIODE 1SS355 | U |
| D3313-3314 | VT332900 | DIODE 1SS355 | U |
| D3320 | VG437400 | DIODE. ZENR MTZJ5. 1B 5. 1V | |
| D3403-3407 | VT332900 | DIODE 1SS355 | |
| D3601-3602 | VT332900 | DIODE 1SS355 | |
| D3801-3805 | VT332900 | DIODE 1SS355 | |
| D3901-3902 | VT332900 | DIODE 1SS355 | BGEF |
| IC301-303 | XY879A00 | IC TC74HC4053AF (EL) | |
| IC305 | X6742A00 | IC LA73050-TLM-E | |
| IC306 | X2904A00 | IC NJM2581M VIDEO AMP | |
| IC307 | XY549A00 | IC TC74HC4051AFEL | |
| IC308 | X7779A00 | IC LC709004A-TLM-E | |
| IC310 | X8875A00 | IC FHP33501M14X | |
| IC321 | X8235A00 | IC LC72725KM | BGEF |
| IC331 | X8276A00 | IC NJM2396F05 | |
| IC332-333 | X8035A00 | IC BA00JCSWT-V5 | U |
| IC334 | X6143A00 | IC NJM2388F05 5. 0V | |
| IC391 | XZ509A00 | IC TC74VHC04FT INVER | BGEF |
| JK361-362 | V9435700 | JACK. MNI MSJ-035-12APC | |
| JK391 | V6931000 | CN. DIN 1P YKF51-5506 | BGEF |
| PJ301 | WG505100 | JACK. PIN 6P | |
| PJ302 | V7189800 | JACK. PIN 1P | |
| * PJ303 | WH381400 | JACK. PIN 3P JACK G, B, R | |
| PJ304 | V7189800 | JACK. PIN 1P | |
| PJ305-306 | V7190000 | JACK. PIN 2P | |
| Q3001 | VR936300 | TR 2SA1576A T106 | |
| Q3201 | iC174020 | TR 2SC1740S QRS | BGEF |
| Q3203 | iC181510 | TR 2SC1815 Y | CRTKABGEFL |
| △ Q3301 | VP872600 | TR 2SA1708 S, T | |
| Q3302 | iA101510 | TR 2SA1015 Y | |

* New Parts

RX-V2065/HTR-6295

P.C.B. VIDEO and P.C.B. GUI

| Ref No. | Part No. | Description | Markets |
|--------------|----------|--------------|--------------------|
| Q3303 | WG538600 | TR | KTA1046-Y-U/P |
| Q3304 | iA101510 | TR | 2SA1015 Y |
| Q3305 | iC181510 | TR | 2SC1815 Y |
| Q3405 | VV655400 | TR. DGT | DTC114EKA |
| Q3406 | VV655000 | TR. DGT | DTA114EKA |
| Q3407 | VV655400 | TR. DGT | DTC114EKA |
| Q3408 | VV655000 | TR. DGT | DTA114EKA |
| Q3409 | VV655400 | TR. DGT | DTC114EKA |
| Q3410 | VV655000 | TR. DGT | DTA114EKA |
| Q3411 | VV655400 | TR. DGT | DTC114EKA |
| Q3412 | VV655000 | TR. DGT | DTA114EKA |
| Q3413 | VV655400 | TR. DGT | DTC114EKA |
| Q3414 | VV655000 | TR. DGT | DTA114EKA |
| Q3801-3802 | iC181510 | TR | 2SC1815 Y |
| Q3803 | VV655700 | TR. DGT | DTC144EKA |
| R3021 | HV753100 | R. CAR. FP | 1Ω 1/4W |
| R3025 | HV753100 | R. CAR. FP | 1Ω 1/4W |
| R3046-3049 | HV753100 | R. CAR. FP | 1Ω 1/4W |
| R3060-3061 | HV753100 | R. CAR. FP | 1Ω 1/4W |
| R3208 | HV755680 | R. CAR. FP | 680Ω 1/4W |
| R3210 | HV754180 | R. CAR. FP | 18Ω 1/4W |
| R3301 | HV753220 | R. CAR. FP | 2.2Ω 1/4W |
| R3306 | HV756100 | R. CAR. FP | 1KΩ 1/4W |
| R3315-3316 | HV756470 | R. CAR. FP | 4.7KΩ 1/4W |
| R3403-3406 | HV757100 | R. CAR. FP | 10KΩ 1/4W |
| R3910 | HV753220 | R. CAR. FP | 2.2Ω 1/4W |
| RY341-345 | WJ122400 | RELAY | 981-2A-24DS-SP7 |
| ST331-332 | V4040500 | SCR. TERM | M3 |
| ST361-362 | V4040500 | SCR. TERM | M3 |
| ST381-383 | V4040500 | SCR. TERM | M3 |
| TE341 | WK560800 | TERM. SP | 4P MST-204V1-01 NC |
| TE341 | WK560900 | TERM. SP | 4P MST-204V1-01 WC |
| TE342 | WK561000 | TERM. SP | 6P MST-207V1-01 NC |
| TE342 | WK561100 | TERM. SP | 6P MST-207V1-01 WC |
| TE343 | WK560800 | TERM. SP | 4P MST-204V1-01 NC |
| TE343 | WK560900 | TERM. SP | 4P MST-204V1-01 WC |
| XL321 | V2731100 | RSNR. CRYST. | 4.332M HC-49/U |
| | WE774200 | SCR. BND. HD | 3x10 MFZN2W3 |
| * | WS306800 | P. C. B. | GUI |
| CB500 | VK026600 | CN. BS. PIN | 7P |
| CB501 | VQ044700 | CN. BS. PIN | 16P |
| CB503 | VK026300 | CN. BS. PIN | 4P |
| CB550 | VB858500 | CN. BS. PIN | 6P |
| * CB551 | WM297100 | CN. LAN | 6P 08B1-1X1T-06-F |
| * C5000-5001 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5002-5003 | US061120 | C. CE. CHP | 12pF 50V B |
| * C5004 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5005-5008 | US135100 | C. CE. CHP | 0.1uF 16V |
| C5009-5010 | US061180 | C. CE. CHP | 18pF 50V B |
| C5012 | US135100 | C. CE. CHP | 0.1uF 16V |
| C5013 | US663100 | C. CE. CHP | 1000pF 50V |
| * C5014-5016 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5017 | US135100 | C. CE. CHP | 0.1uF 16V |
| C5018 | US063100 | C. CE. CHP | 1000pF 50V B |

* New Parts

| Ref No. | Part No. | Description | Markets |
|--------------|----------|-------------|--------------|
| * C5019 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5020 | US063100 | C. CE. CHP | 1000pF 50V B |
| C5021-5024 | US135100 | C. CE. CHP | 0.1uF 16V |
| C5025 | US063100 | C. CE. CHP | 1000pF 50V B |
| C5026 | US064100 | C. CE. CHP | 0.01uF 50V B |
| C5027 | US063100 | C. CE. CHP | 1000pF 50V B |
| C5028 | US135100 | C. CE. CHP | 0.1uF 16V |
| * C5029 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5030 | US663100 | C. CE. CHP | 1000pF 50V |
| C5031 | US061220 | C. CE. CHP | 22pF 50V B |
| C5032 | UF037100 | C. EL. CHP | 10uF 16V |
| * C5033-5034 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5035 | US663100 | C. CE. CHP | 1000pF 50V |
| C5036 | US061220 | C. CE. CHP | 22pF 50V B |
| C5037 | UF018100 | C. EL. CHP | 100uF 6.3V |
| C5038-5039 | UF037100 | C. EL. CHP | 10uF 16V |
| C5040 | UF037220 | C. EL. CHP | 22uF 16V |
| * C5041-5042 | US663330 | C. CE. CHP | 3300pF 50V |
| C5043 | US135100 | C. CE. CHP | 0.1uF 16V |
| C5044-5049 | US063100 | C. CE. CHP | 1000pF 50V B |
| C5050-5054 | US135100 | C. CE. CHP | 0.1uF 16V |
| C5055 | UF037220 | C. EL. CHP | 22uF 16V |
| * C5056-5058 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5059 | UF037100 | C. EL. CHP | 10uF 16V |
| C5060 | US135100 | C. CE. CHP | 0.1uF 16V |
| * C5061 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5062 | UF037100 | C. EL. CHP | 10uF 16V |
| * C5063-5065 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5066-5067 | US135100 | C. CE. CHP | 0.1uF 16V |
| * C5068-5069 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5070 | UF037100 | C. EL. CHP | 10uF 16V |
| * C5071 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5072 | US663100 | C. CE. CHP | 1000pF 50V |
| C5073-5076 | US063100 | C. CE. CHP | 1000pF 50V B |
| * C5077-5078 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5079 | US135100 | C. CE. CHP | 0.1uF 16V |
| * C5080-5081 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5082 | US135100 | C. CE. CHP | 0.1uF 16V |
| * C5083 | WP882000 | C. CE. CHP | 10uF 6.3V |
| * C5084 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5085-5086 | US135100 | C. CE. CHP | 0.1uF 16V |
| * C5087 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5088 | US062220 | C. CE. CHP | 220pF 50V B |
| * C5089-5095 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5096-5107 | US135100 | C. CE. CHP | 0.1uF 16V |
| C5108 | US663100 | C. CE. CHP | 1000pF 50V |
| C5109-5112 | US063100 | C. CE. CHP | 1000pF 50V B |
| C5113-5114 | US135100 | C. CE. CHP | 0.1uF 16V |
| * C5115 | WP882000 | C. CE. CHP | 10uF 6.3V |
| C5116-5119 | US662100 | C. CE. CHP | 100pF 50V |
| * C5501 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5502 | US062220 | C. CE. CHP | 220pF 50V B |
| C5503 | UF018100 | C. EL. CHP | 100uF 6.3V |
| * C5504 | US625100 | C. CE. CHP | 0.100uF 10V |
| C5505-5506 | US135100 | C. CE. CHP | 0.1uF 16V |
| C5507-5508 | US634100 | C. CE. CHP | 0.01uF 16V |
| C5509 | UF037220 | C. EL. CHP | 22uF 16V |

* New Parts

P.C.B. GUI

| Ref No. | Part No. | Description | Markets |
|--------------|----------|------------------------------|-----------|
| C5510-5511 | US135100 | C. CE. CHP 0. 1uF 16V | |
| * C5512-5513 | US625100 | C. CE. CHP 0. 100uF 10V | |
| C5514 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C5515 | WD758300 | C. CE. CHP 10uF 10V | |
| C5516 | US061150 | C. CE. CHP 15pF 50V B | |
| C5517 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C5518 | UF018100 | C. EL. CHP 100uF 6. 3V | |
| C5519 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C5520 | US061180 | C. CE. CHP 18pF 50V B | |
| C5521 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C5522 | WD758300 | C. CE. CHP 10uF 10V | |
| C5523 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C5524-5525 | US634100 | C. CE. CHP 0. 01uF 16V | |
| C5527-5532 | US135100 | C. CE. CHP 0. 1uF 16V | |
| * C5533-5534 | US625100 | C. CE. CHP 0. 100uF 10V | |
| C5535 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C5536-5537 | US663100 | C. CE. CHP 1000pF 50V | |
| C5538 | WD758300 | C. CE. CHP 10uF 10V | |
| C5539 | UB044220 | C. CE. CHP 0. 022uF 50V | |
| * C5540 | US625100 | C. CE. CHP 0. 100uF 10V | |
| C5541 | US663100 | C. CE. CHP 1000pF 50V | |
| C5542 | US135100 | C. CE. CHP 0. 1uF 16V | |
| * C5543 | US625100 | C. CE. CHP 0. 100uF 10V | |
| C5544-5545 | US135100 | C. CE. CHP 0. 1uF 16V | |
| * C5546-5548 | US625100 | C. CE. CHP 0. 100uF 10V | |
| C5549 | US062220 | C. CE. CHP 220pF 50V B | |
| C5550-5551 | US135100 | C. CE. CHP 0. 1uF 16V | |
| C5552-5553 | US064100 | C. CE. CHP 0. 01uF 50V B | |
| C5554-5555 | WD758300 | C. CE. CHP 10uF 10V | |
| * C5556 | US625100 | C. CE. CHP 0. 100uF 10V | |
| C5557-5558 | US061120 | C. CE. CHP 12pF 50V B | |
| C5559 | UF018100 | C. EL. CHP 100uF 6. 3V | |
| IC501-502 | X7678A00 | IC SN74LV163APWR CNT | |
| IC503 | X5534A00 | IC SN74LV74APWR D-FF | |
| IC504 | X7375A00 | IC PCMI1781DBQR | |
| * IC506 | YA322A00 | IC AK8814VQ | |
| * IC507 | YA478A00 | IC K4S560832J-UC75000 | |
| * IC508 | YA350A00 | IC 74LVC1G08GW AND | |
| * IC509-512 | XZ286A00 | IC 74LVC245APW118 | |
| * IC513 | YC017C00 | IC. MEMORY K8P6415UQB-PI | (written) |
| * IC514 | YA478A00 | IC K4S560832J-UC75000 | |
| IC521-522 | X4063A00 | IC TC7WHU04FU | |
| * IC523 | YA354A00 | IC 74LVC08APW AND | |
| IC524 | X8386A00 | IC TC7WH14FK (TE85L, F) | |
| * IC525-526 | XA356A00 | IC 74LVC32APW OR | |
| IC552 | X8096A00 | IC R5523N001A-TR-F | |
| * IC553 | YA477A00 | IC LAN9217-MT | |
| Q5000 | WE834500 | FET UPA672T-T1-A | |
| ST550-551 | V4040500 | SCR. TERM M3 | |
| XL500 | V3625700 | RSNR. CRY5 24. 576MHz | |
| XL501 | WH625000 | RSNR. CRY5 27MHz | |
| XL502 | WB551700 | RSNR. CRY5 16. 666MHz SMD-49 | |
| XL550 | WG538400 | RSNR. CRY5 12MHz | |
| * XL551 | WR864600 | RSNR. CRY5 25MHz SMD-49 | |

* New Parts

P.C.B. ACDC


| Ref No. | Part No. | Description | Markets |
|---------|------------|---------------------------------------|----------|
| * | WS306200 | P. C. B. ACDC | UC |
| * | WS306300 | P. C. B. ACDC | R |
| * | WS306400 | P. C. B. ACDC | TKABGEF |
| * | WS306500 | P. C. B. ACDC | L |
| | CB601-602 | WN103000 CL. IP. FUSE TP00351-31 | |
| | CB603 | VG879900 CN. BS. PIN 2P | RL |
| | CB604 | VQ961000 CN. BS. PIN 7P | |
| * | C6001 | WQ852400 C. POL. MTL 0. 022uF 630V | |
| Δ * | C6002-6003 | WQ902300 C. CE. SAFTY 1000pF 250V | |
| Δ | C6004 | WE256400 C. CE. SAFTY 0. 1uF 275V | |
| * | C6006 | WS068600 C. EL. 150uF 400V | |
| Δ * | C6007 | WQ939400 C. CE. SAFTY 0. 01uF 250V | |
| * | C6008 | WR182800 C. CE. CHP 2200pF 250V | |
| | C6009 | US065100 C. CE. CHP 0. 1uF 50V B | |
| | C6010 | UR837470 C. EL. 47uF 16V | |
| | C6011 | UR867100 C. EL. 10uF 50V | |
| Δ * | C6012 | WQ902300 C. CE. SAFTY 1000pF 250V | |
| * | C6013 | WQ852400 C. POL. MTL 0. 022uF 630V | |
| | C6016-6017 | UR866100 C. EL. 1uF 50V | |
| * | C6018-6019 | WH777900 C. EL. 1000uF 35V | |
| | C6020 | US046100 C. CE. CHP 1uF 25V | |
| | C6021 | US135100 C. CE. CHP 0. 1uF 16V | |
| | C6022 | WH771300 C. EL. 100uF 10V | |
| | C6101 | US135100 C. CE. CHP 0. 1uF 16V | |
| Δ * | D6001 | WS071800 DIODE. BRG S1NBC60 1A 600V | |
| | D6002 | VG442200 DIODE. ZENR MTZJ22C 22V | |
| * | D6003-6004 | WS071700 DIODE. ZENR P6KE100A 100V | |
| * | D6005 | WQ647500 DIODE HT18G | |
| | D6006 | VD631600 DIODE 1SS133, 176 | |
| * | D6007 | WR007000 DIODE. SCHO 10A 40V SG10SC4M | |
| | D6008 | VD631600 DIODE 1SS133, 176 | |
| | D6009 | VT332900 DIODE 1SS355 | |
| Δ * | F6001 | WR944000 FUSE 2A 250V | UCR |
| Δ * | F6002 | WQ211200 FUSE 10A 125V | TKABGEFL |
| Δ | F6002 | WM933100 FUSE T5A 250V | |
| Δ * | IC601 | YA851A00 IC TOP255MN | |
| Δ * | IC602 | WQ867100 PHOT. CPL EL816 (M) (C) | |
| * | IC603 | YA276A00 IC TL431AC 2. 5-36V | |
| Δ * | IC604 | WQ867100 PHOT. CPL EL816 (M) (C) | |
| * | IC611 | YA381A00 IC LM19C1Z/LF THERMAL | |
| Δ * | RY601 | WQ804100 RELAY DC DLS5D1-O (M) 0. 25 | |
| | ST601 | V4040500 SCR. TERM M3 | |
| | ST611 | WA246200 SCR. TERM 3. 5 | |
| Δ * | T6001 | YA507A00 TRANS. PWR | |
| Δ | TE601 | WB782600 AC INLET R-30190 (26) | |
| | | WE774200 SCR. BND. HD 3x10 MFZN2W3 | |

* New Parts






Carbon Resistors

| Value | 1/4W Type Part No. | 1/6W Type Part No. | Value | 1/4W Type Part No. | 1/6W Type Part No. |
|--------|--------------------|--------------------|--------|--------------------|--------------------|
| 1.0 Ω | HJ35 3100 | HF85 3100 | 11 kΩ | HF45 7110 | HF45 7110 |
| 1.8 Ω | HJ35 3180 | * | 12 kΩ | HJ35 7120 | HF85 7120 |
| 2.2 Ω | HJ35 3220 | HF85 3220 | 13 kΩ | HF45 7130 | HF45 7130 |
| 3.3 Ω | HJ35 3330 | HF85 3330 | 15 kΩ | HF45 7150 | HF45 7150 |
| 4.7 Ω | HJ35 3470 | HF85 3470 | 18 kΩ | HF45 7180 | HF45 7180 |
| 5.6 Ω | HJ35 3560 | HF85 3560 | 22 kΩ | HF45 7220 | HF45 7220 |
| 10 Ω | HF45 4100 | HF45 4100 | 24 kΩ | HF45 7240 | HF45 7240 |
| 15 Ω | HJ35 4150 | HF85 4150 | 27 kΩ | HJ35 7270 | HF85 7270 |
| 22 Ω | HF45 4220 | HF45 4220 | 30 kΩ | HF45 7300 | HF45 7300 |
| 27 Ω | HJ35 4270 | HF85 4270 | 33 kΩ | HF45 7330 | HF45 7330 |
| 33 Ω | HF45 4330 | HF45 4330 | 36 kΩ | HF45 7360 | HF45 7360 |
| 39 Ω | HJ35 4470 | HF85 4390 | 39 kΩ | HF45 7390 | HF45 7390 |
| 47 Ω | HF45 4470 | HF45 4470 | 47 kΩ | HF45 7470 | HF45 7470 |
| 56 Ω | HF45 4560 | HF45 4560 | 51 kΩ | HF45 7510 | HF45 7510 |
| 68 Ω | HF45 4680 | HF45 4680 | 56 kΩ | HF45 7560 | HF45 7560 |
| 75 Ω | HF45 4750 | HF45 4750 | 62 kΩ | HF45 7620 | HF45 7620 |
| 82 Ω | HF45 4820 | HF45 4820 | 68 kΩ | HF45 7680 | HF45 7680 |
| 91 Ω | HF45 4910 | HF45 4910 | 82 kΩ | HF45 7820 | HF45 7820 |
| 100 Ω | HF45 5100 | HF45 5100 | 91 kΩ | HF45 7910 | HF45 7910 |
| 110 Ω | HJ35 5110 | HF85 5110 | 100 kΩ | HF45 8100 | HF45 8100 |
| 120 Ω | HF45 5120 | HF45 5120 | 110 kΩ | HF45 8110 | HF45 8110 |
| 150 Ω | HF45 5150 | HF45 5150 | 120 kΩ | HF45 8120 | HF45 8120 |
| 160 Ω | HJ35 5160 | * | 130 kΩ | HF45 8130 | * |
| 180 Ω | HF45 5180 | HF45 5180 | 150 kΩ | HF45 8150 | HF45 8150 |
| 200 Ω | HF45 5200 | HF45 5200 | 180 kΩ | HF45 8180 | HF45 8180 |
| 220 Ω | HF45 5220 | HF45 5220 | 220 kΩ | HJ35 8220 | HF85 8220 |
| 270 Ω | HF45 5270 | HF45 5270 | 270 kΩ | HF45 8270 | HF45 8270 |
| 330 Ω | HF45 5330 | HF45 5330 | 300 kΩ | HF45 8300 | HF45 8300 |
| 390 Ω | HF45 5390 | HF45 5390 | 330 kΩ | HF45 8330 | HF45 8330 |
| 430 Ω | HF45 5430 | HF45 5430 | 390 kΩ | HJ35 8390 | HF85 8390 |
| 470 Ω | HF45 5470 | HF45 5470 | 470 kΩ | HF45 8470 | HF45 8470 |
| 510 Ω | HF45 5510 | HF45 5510 | 560 kΩ | HJ35 8560 | HF85 8560 |
| 560 Ω | HF45 5560 | HF45 5560 | 680 kΩ | HJ35 8680 | HF85 8680 |
| 680 Ω | HF45 5680 | HF45 5680 | 820 kΩ | HJ35 8820 | HF85 8820 |
| 820 Ω | HF45 5820 | HF45 5820 | 1.0 MΩ | HF45 9100 | HF45 9100 |
| 910 Ω | HF45 5910 | HF45 5910 | 1.2 MΩ | HJ35 9120 | * |
| 1.0 kΩ | HF45 6100 | HF45 6100 | 1.5 MΩ | HJ35 9150 | HF85 9150 |
| 1.2 kΩ | HF45 6120 | HF45 6120 | 1.8 MΩ | HJ35 9180 | HF85 9180 |
| 1.5 kΩ | HF45 6150 | HF45 6150 | 2.2 MΩ | HJ35 9220 | HF85 9220 |
| 1.8 kΩ | HF45 6180 | HF45 6180 | 3.3 MΩ | HJ35 9330 | HF85 9330 |
| 2.0 kΩ | HJ35 6200 | HF85 6200 | 3.9 MΩ | HJ35 9390 | * |
| 2.2 kΩ | HF45 6220 | HF45 6220 | 4.7 MΩ | HJ35 9470 | HF85 9470 |
| 2.4 kΩ | HJ35 6240 | HF85 6240 | | | |
| 2.7 kΩ | HF45 6270 | HF45 6270 | | | |
| 3.0 kΩ | HF45 6300 | HF45 6300 | | | |
| 3.3 kΩ | HF45 6330 | HF45 6330 | | | |
| 3.6 kΩ | HJ35 6360 | HF85 6360 | | | |
| 3.9 kΩ | HF45 6390 | HF45 6390 | | | |
| 4.7 kΩ | HF45 6470 | HF45 6470 | | | |
| 5.1 kΩ | HF45 6510 | HF45 6510 | | | |
| 5.6 kΩ | HF45 6560 | HF45 6560 | | | |
| 6.8 kΩ | HF45 6680 | HF45 6680 | | | |
| 8.2 kΩ | HF45 6820 | HF45 6820 | | | |
| 9.1 kΩ | HF45 6910 | HF45 6910 | | | |
| 10 kΩ | HF45 7100 | HF45 7100 | | | |

* : Not available

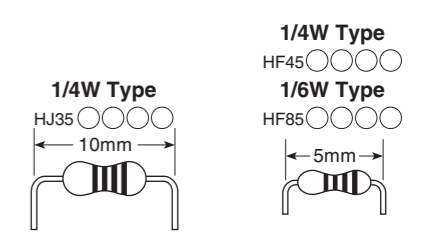

• OVERALL ASS'Y

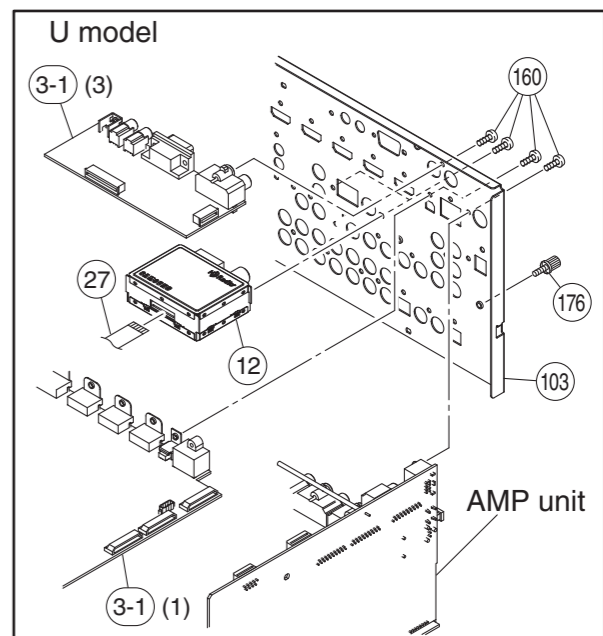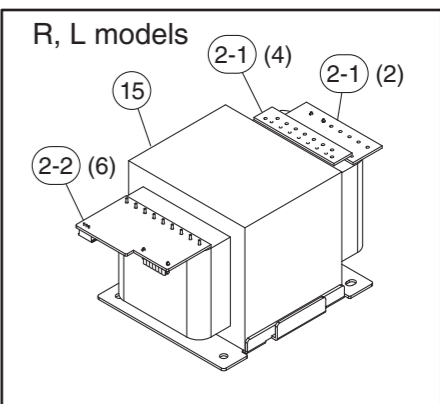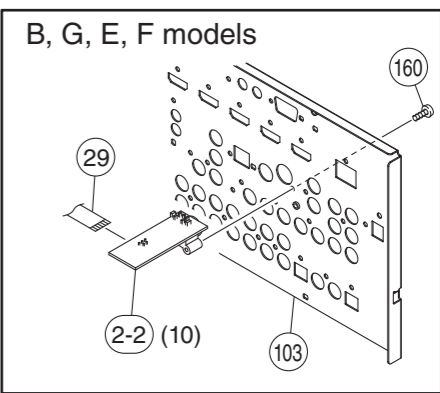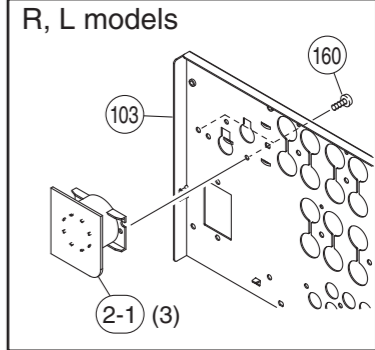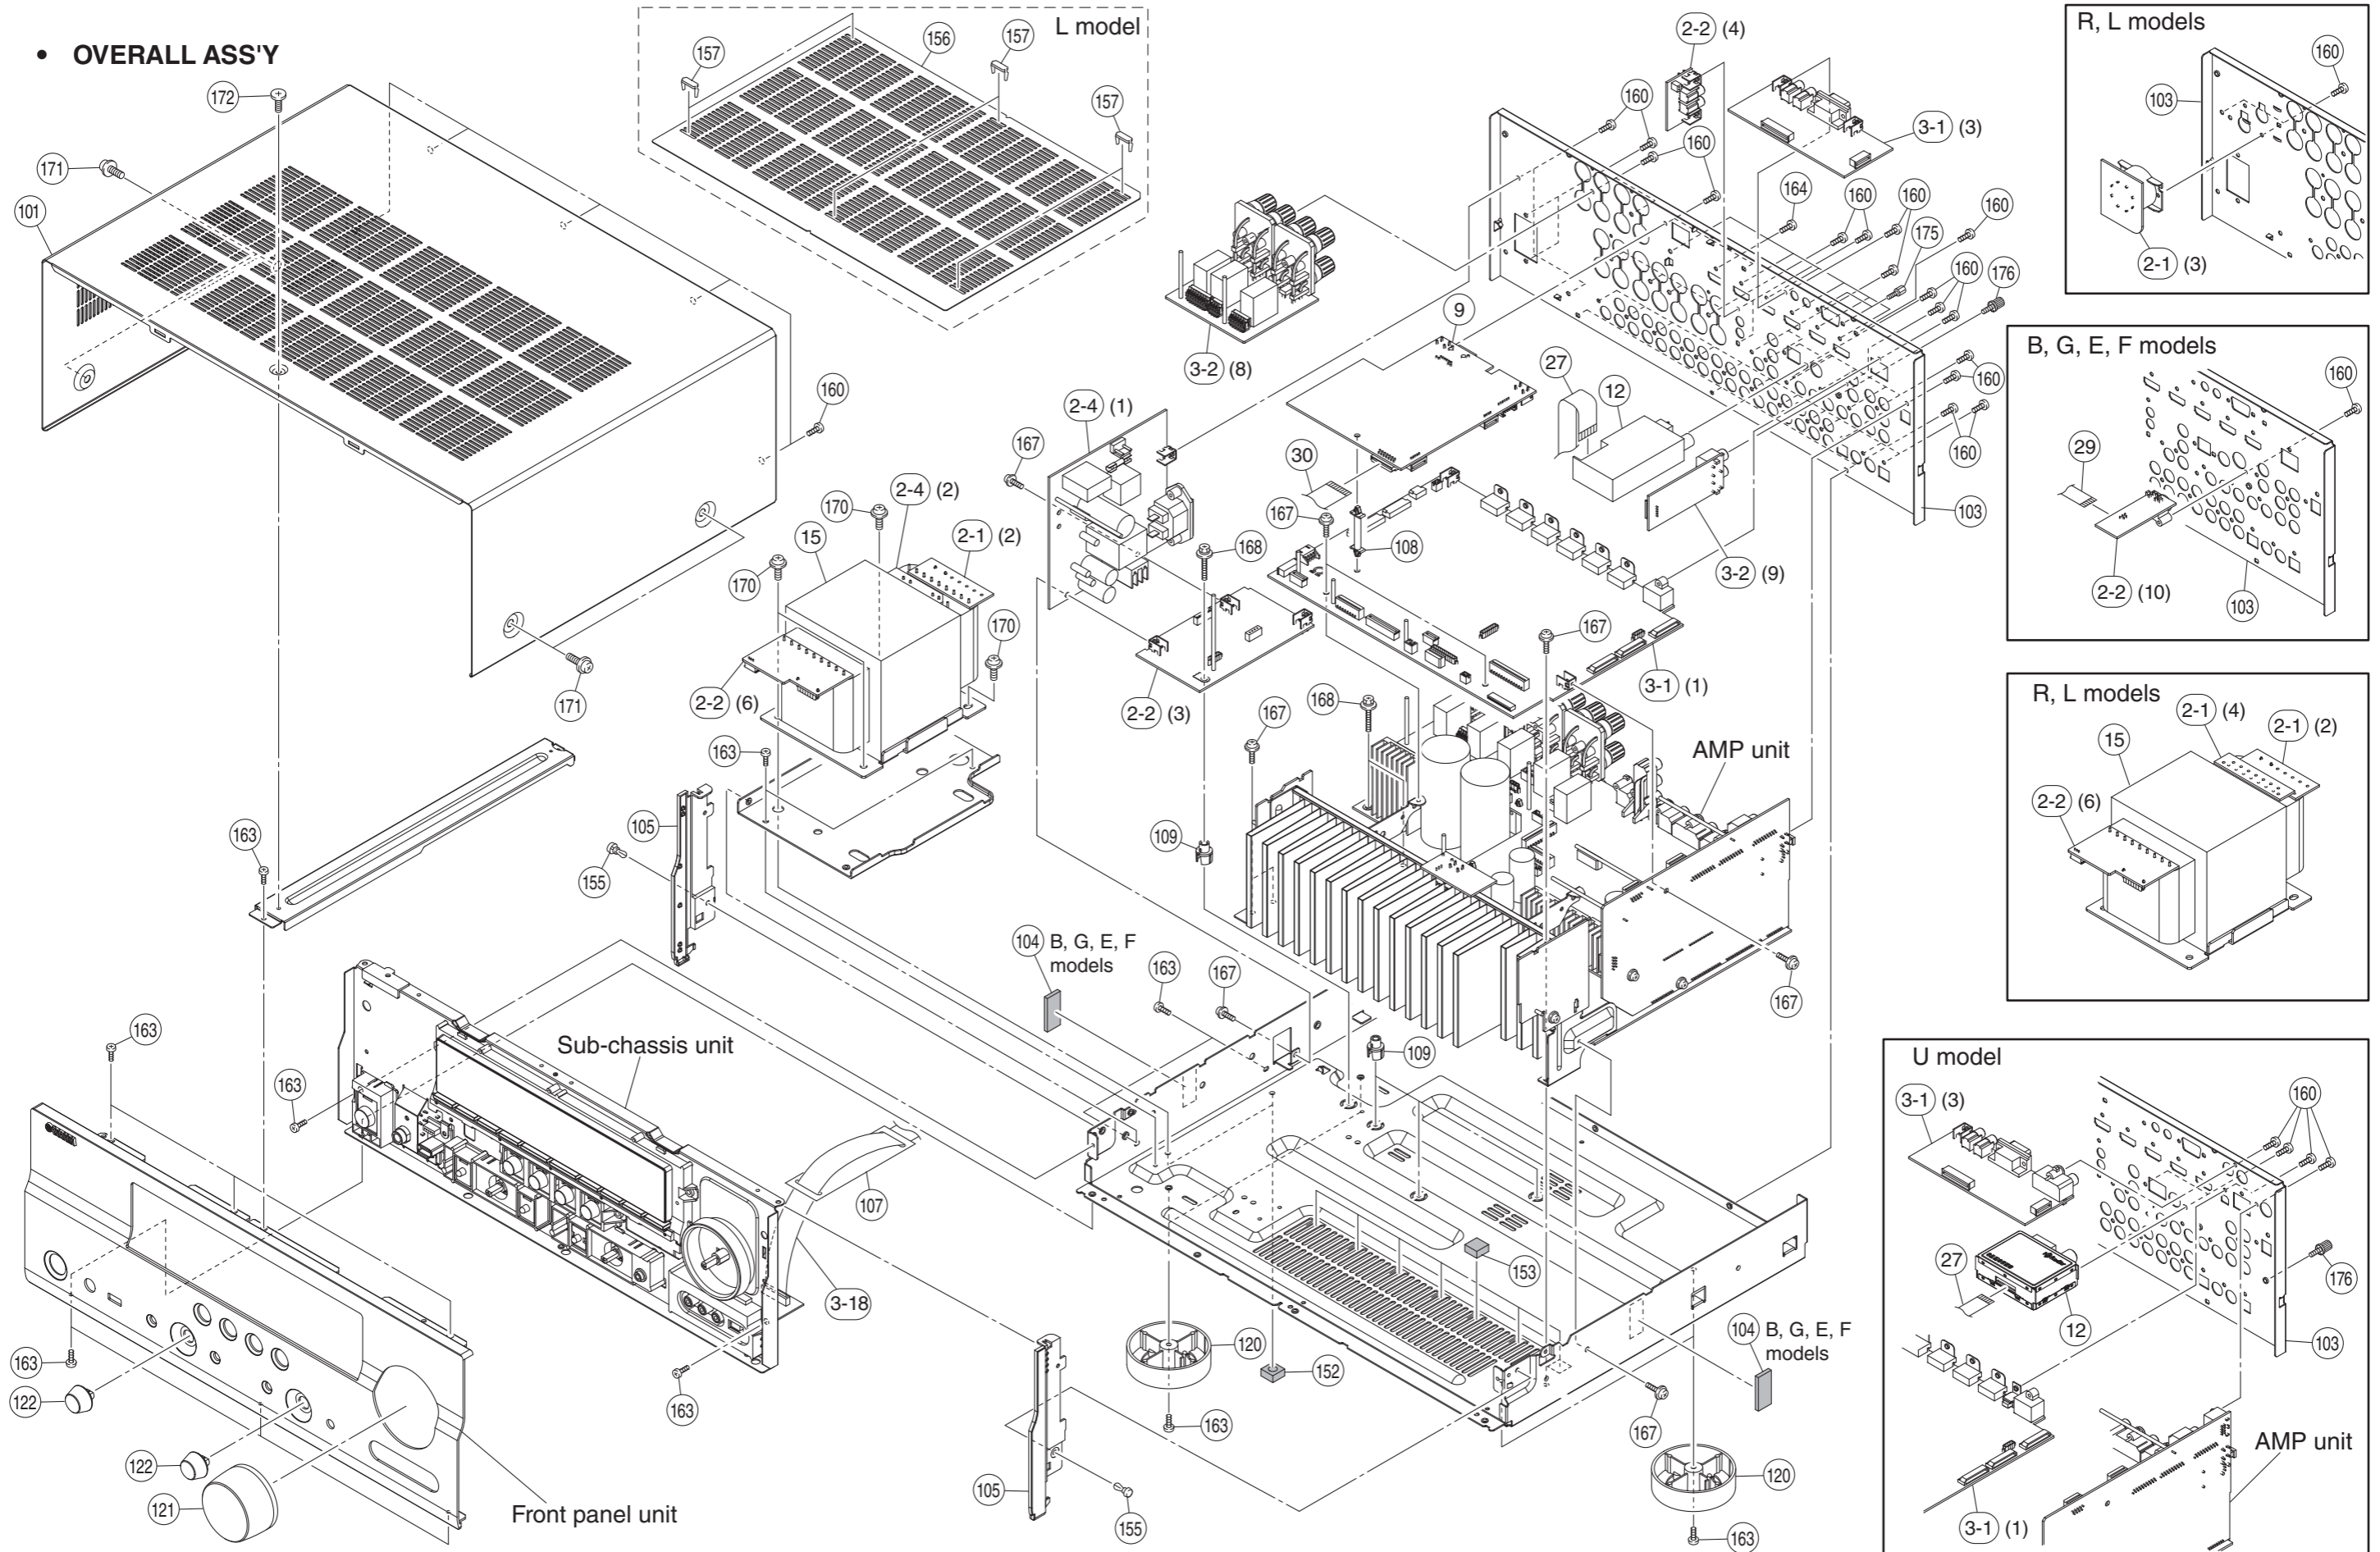


| Ref No. | Part No. | Description | Remarks | Markets |
|---------|----------|---------------------|------------------|------------|
| * 2-1 | WR913000 | P. C. B. ASS' Y | | R |
| * 2-1 | WR913200 | P. C. B. ASS' Y | | L |
| * 2-2 | WS304700 | P. C. B. ASS' Y | | U |
| * 2-2 | WS304800 | P. C. B. ASS' Y | | C |
| * 2-2 | WS304900 | P. C. B. ASS' Y | | R |
| * 2-2 | WS305000 | P. C. B. ASS' Y | | T |
| * 2-2 | WS305100 | P. C. B. ASS' Y | | K |
| * 2-2 | WS305200 | P. C. B. ASS' Y | | A |
| * 2-2 | WS305300 | P. C. B. ASS' Y | | BGEF |
| * 2-2 | WS305400 | P. C. B. ASS' Y | | L |
| * 2-4 | WS306200 | P. C. B. ASS' Y | | UC |
| * 2-4 | WS306300 | P. C. B. ASS' Y | | R |
| * 2-4 | WS306400 | P. C. B. ASS' Y | | TKABGEF |
| * 2-4 | WS306500 | P. C. B. ASS' Y | | L |
| * 3-1 | WS305800 | P. C. B. ASS' Y | V2065 | U |
| * 3-1 | WS305900 | P. C. B. ASS' Y | V2065 | CRTAKL |
| * 3-1 | WS306700 | P. C. B. ASS' Y | 6295 | C |
| * 3-1 | WS306000 | P. C. B. ASS' Y | V2065 | BGEF |
| * 3-2 | WS305500 | P. C. B. ASS' Y | | U |
| * 3-2 | WS305600 | P. C. B. ASS' Y | | CRTA |
| * 3-2 | WS305700 | P. C. B. ASS' Y | | KBGEFL |
| * 3-18 | WQ083500 | FLEXIBLE FLAT CABLE | 20P 180mm P=1.0 | |
| * 9 | WS306800 | P. C. B. ASS' Y | | GUI |
| * 12 | WT510100 | HD RADIO TUNER | 2023-CRA | U |
| * 12 | WQ756600 | AM/FM TUNER | FAEH06-A | CRTL |
| * 12 | WQ756700 | AM/FM TUNER | FAEH06-E | KABGEF |
| △ * 15 | YC001A00 | POWER TRANSFORMER | | UC |
| △ * 15 | YA955A00 | POWER TRANSFORMER | | RL |
| △ * 15 | YA956A00 | POWER TRANSFORMER | | TK |
| △ * 15 | YA957A00 | POWER TRANSFORMER | | A |
| △ * 15 | YA958A00 | POWER TRANSFORMER | | BGEF |
| * 27 | MF113180 | FLEXIBLE FLAT CABLE | 13P 180mm P=1.25 | U |
| * 27 | WR284900 | FLEXIBLE FLAT CABLE | 11P 100mm P=1.25 | CRTKABGEFL |
| * 29 | WS162400 | FLEXIBLE FLAT CABLE | 5P 250mm P=1.25 | BGEF |
| * 30 | WS162500 | FLEXIBLE FLAT CABLE | 16P 60mm P=1.25 | |
| * 101 | WQ665500 | TOP COVER | | BL |
| * 101 | WQ665700 | TOP COVER | | TI |
| * 103 | WS042200 | REAR PANEL | | U |
| * 103 | WS042300 | REAR PANEL | V2065 | C |
| * 103 | WS043000 | REAR PANEL | 6295 | C |
| * 103 | WS042400 | REAR PANEL | | R |
| * 103 | WS042500 | REAR PANEL | | T |
| * 103 | WS042600 | REAR PANEL | | K |
| * 103 | WS042700 | REAR PANEL | | A |
| * 103 | WS042800 | REAR PANEL | | BGEF |
| * 103 | WS042900 | REAR PANEL | | L |
| * 104 | WB870100 | DAMPER | | BGEF |
| * 105 | WRO04900 | PLATE SIDE | | BL |
| * 105 | WRO05000 | PLATE SIDE | | TI |
| * 107 | WR946700 | BARRIER FFC | | |
| * 108 | WS000800 | SPACER SUPPORT | LCA4-29M PIN | |
| * 109 | WQ664500 | SUPPORT H8 | | |
| * 120 | VS025000 | LEG | D60xH21 HS | |

* New Parts

| Ref No. | Part No. | Description | Remarks | Markets |
|---------|----------|------------------------------|---------------------|---------|
| 121 | WJ181300 | KNOB | D50 | BL |
| 121 | WJ181500 | KNOB | D50 | TI |
| * 122 | WS039800 | KNOB | D21 | BL |
| * 122 | WS039900 | KNOB | D21 | TI |
| 152 | WC879000 | DAMPER | SCREW MASK | |
| * 153 | WR377400 | DAMPER | 14x10x10 | |
| 155 | VQ368600 | PUSH RIVET | P3555-B | |
| 156 | WK667900 | SHEET TOP | | L |
| 157 | WJ053800 | RIVET TOP | | L |
| 160 | WE774100 | BIND HEAD BONDING B-T. SCREW | 3x8 MFZN2B3 | |
| 163 | WE774300 | BIND HEAD B-TIGHT SCREW | 3x8 MFZN2W3 | |
| 164 | WE877900 | BIND HEAD S-TIGHT SCREW | 3x6 MFZN2W3 | |
| 167 | WF002600 | PW HEAD B-TIGHT SCREW | 3x8 MFZN2W3 | |
| 168 | WE774600 | SCREW IC | 3x18 MFZN2W3 | |
| 170 | WE774700 | BIND HEAD S-TIGHT SCREW | 4x10 MFZN2W3 | |
| 171 | VH313200 | PW HEAD S-TIGHT SCREW | 4x8-10 MFN13BL | BL |
| 171 | VD069600 | PW HEAD S-TIGHT SCREW | 4x8-10 MFN133 | TI |
| 172 | WE200500 | DISH HEAD B-TIGHT SCREW | 3x6 MFN13BL | BL |
| 172 | WE200400 | DISH HEAD B-TIGHT SCREW | 3x6 MFN133 | TI |
| 175 | V6509600 | JACK SCREW | SS6-A47511848 | |
| 176 | AA627310 | GROUND TERMINAL | | |
| | | SERVICE TOOLS | | |
| | WR492800 | RS232C CONVERSION ADAPTOR | 3.3Vtype with FFC9P | |
| | MF125400 | FLEXIBLE FLAT CABLE | 25P 400mm P=1.25 | |
| | MF109400 | FLEXIBLE FLAT CABLE | 9P 400mm P=1.25 | |
| | MFA20250 | FLEXIBLE FLAT CABLE | 20P 250mm P=1.0 | |

* New Parts


• ACCESSORIES

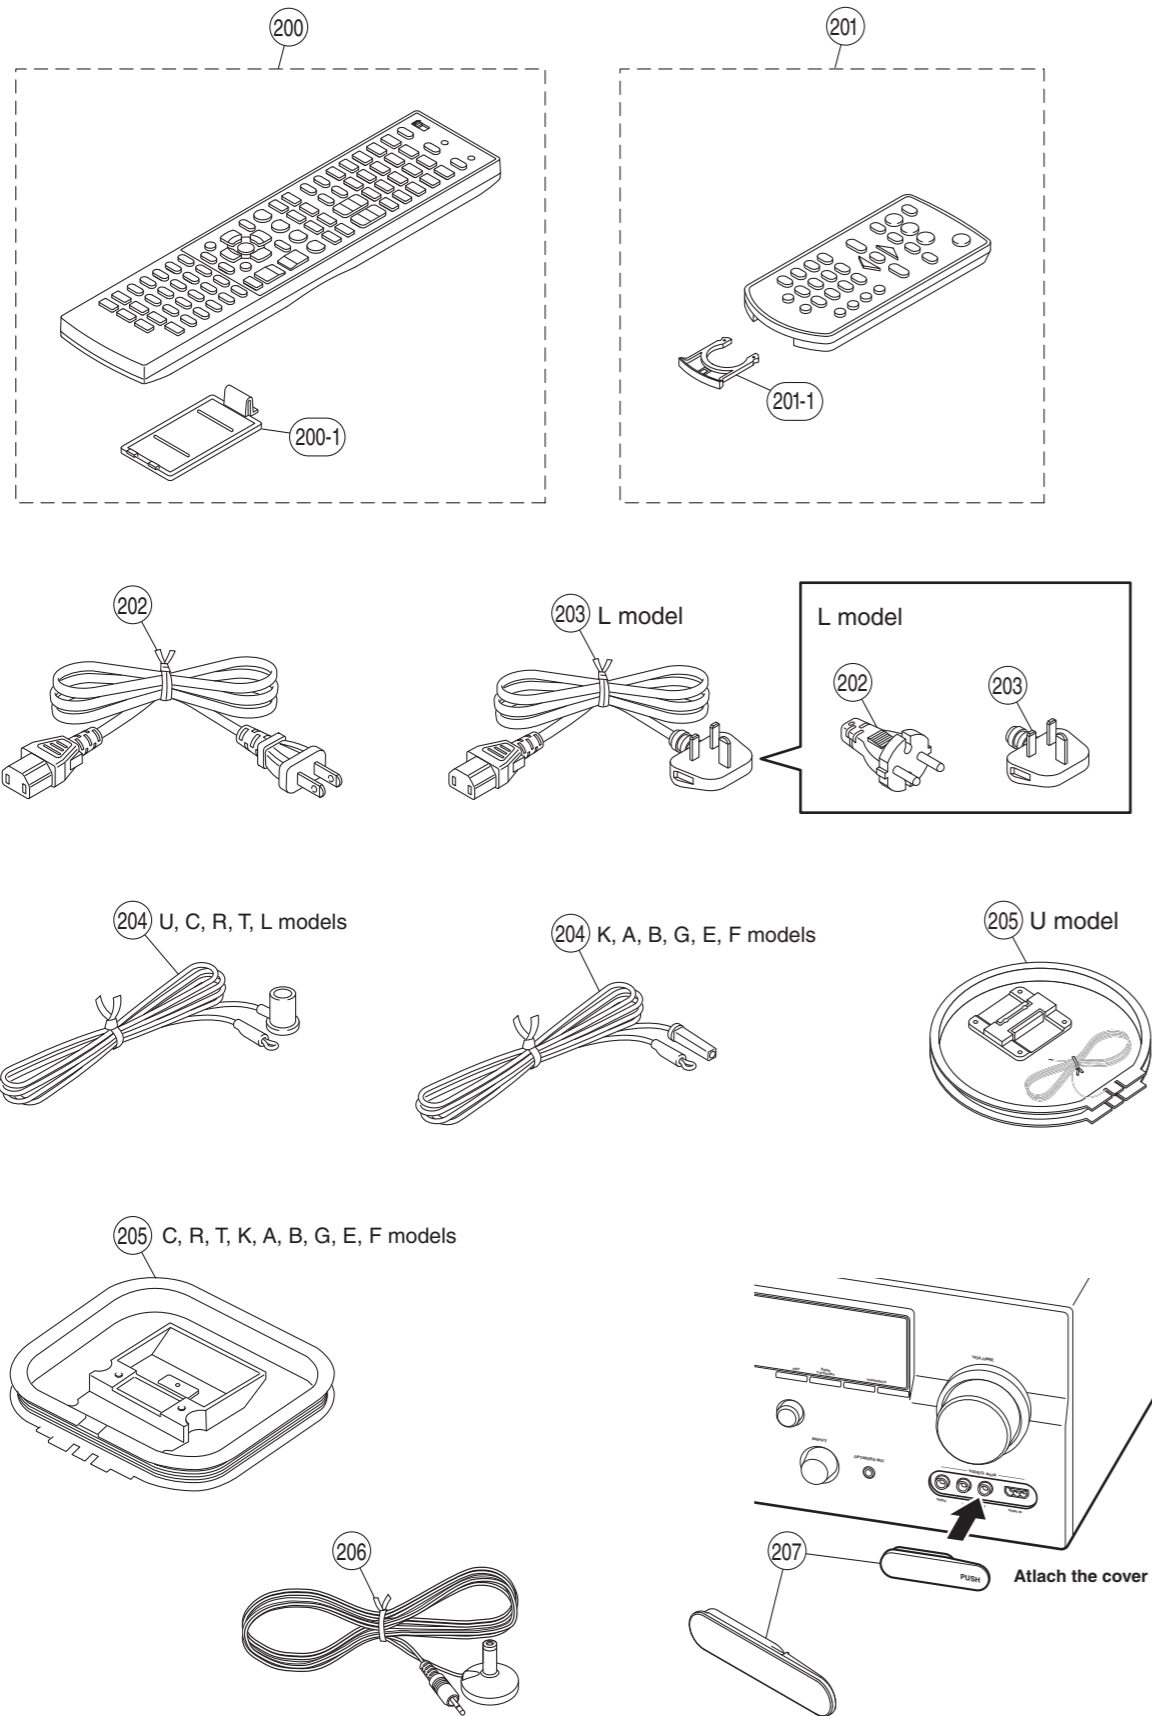

| Ref No. | Part No. | Description | Remarks | Markets |
|---------|----------|---------------------------|---------------------|------------|
| * 200 | WS317100 | REMOTE CONTROL | RAV296 | U |
| * 200 | WS317200 | REMOTE CONTROL | RAV297 | CRAL |
| * 200 | WS317300 | REMOTE CONTROL | RAV298 | TKBGEF |
| | 200-1 | BATTERY COVER | | CG-2209 |
| * 201 | WS317400 | SIMPLIFIED REMOTE CONTROL | RAV38 | |
| | 201-1 | BATTERY HOLDER | CG-4335 Black | 2AA041110 |
| △ 202 | V7704800 | POWER CABLE | 2m 1pc | UC |
| △ 202 | WK391000 | POWER CABLE | 2m 1pc | R |
| △ 202 | V9358400 | POWER CABLE | 2m 1pc | T |
| △ 202 | WH641300 | POWER CABLE | 2m 1pc | K |
| △ 202 | WB750900 | POWER CABLE | 2m 1pc | A |
| △ 202 | WB751000 | POWER CABLE | 2m 1pc | B |
| △ 202 | V7704900 | POWER CABLE | 2m 1pc | GEFL |
| △ 203 | WB751000 | POWER CABLE | 2m 1pc | L |
| 204 | V6267000 | INDOOR FM ANTENNA | 1.4m 1pc | UCRTL |
| 204 | VQ147100 | INDOOR FM ANTENNA | 1.4m 1pc | KABGEF |
| 205 | WE746800 | AM LOOP ANTENNA | 1.2m 1pc | U |
| 205 | VR248500 | AM LOOP ANTENNA | 1.0m 1pc | CRTKABGEFL |
| 206 | WN649600 | OPTIMIZER MICROPHONE | 6.0m 1pc | |
| * 207 | WS039400 | VIDEO AUX INPUT COVER | 1pc | BL |
| * 207 | WS039500 | VIDEO AUX INPUT COVER | 1pc | TI |
| | | BATTERY | R03, AAA, UM-4 2pcs | |
| | | LITHIUM BATTERY | CR2025 1pc | |

* New Parts

• AMP UNIT

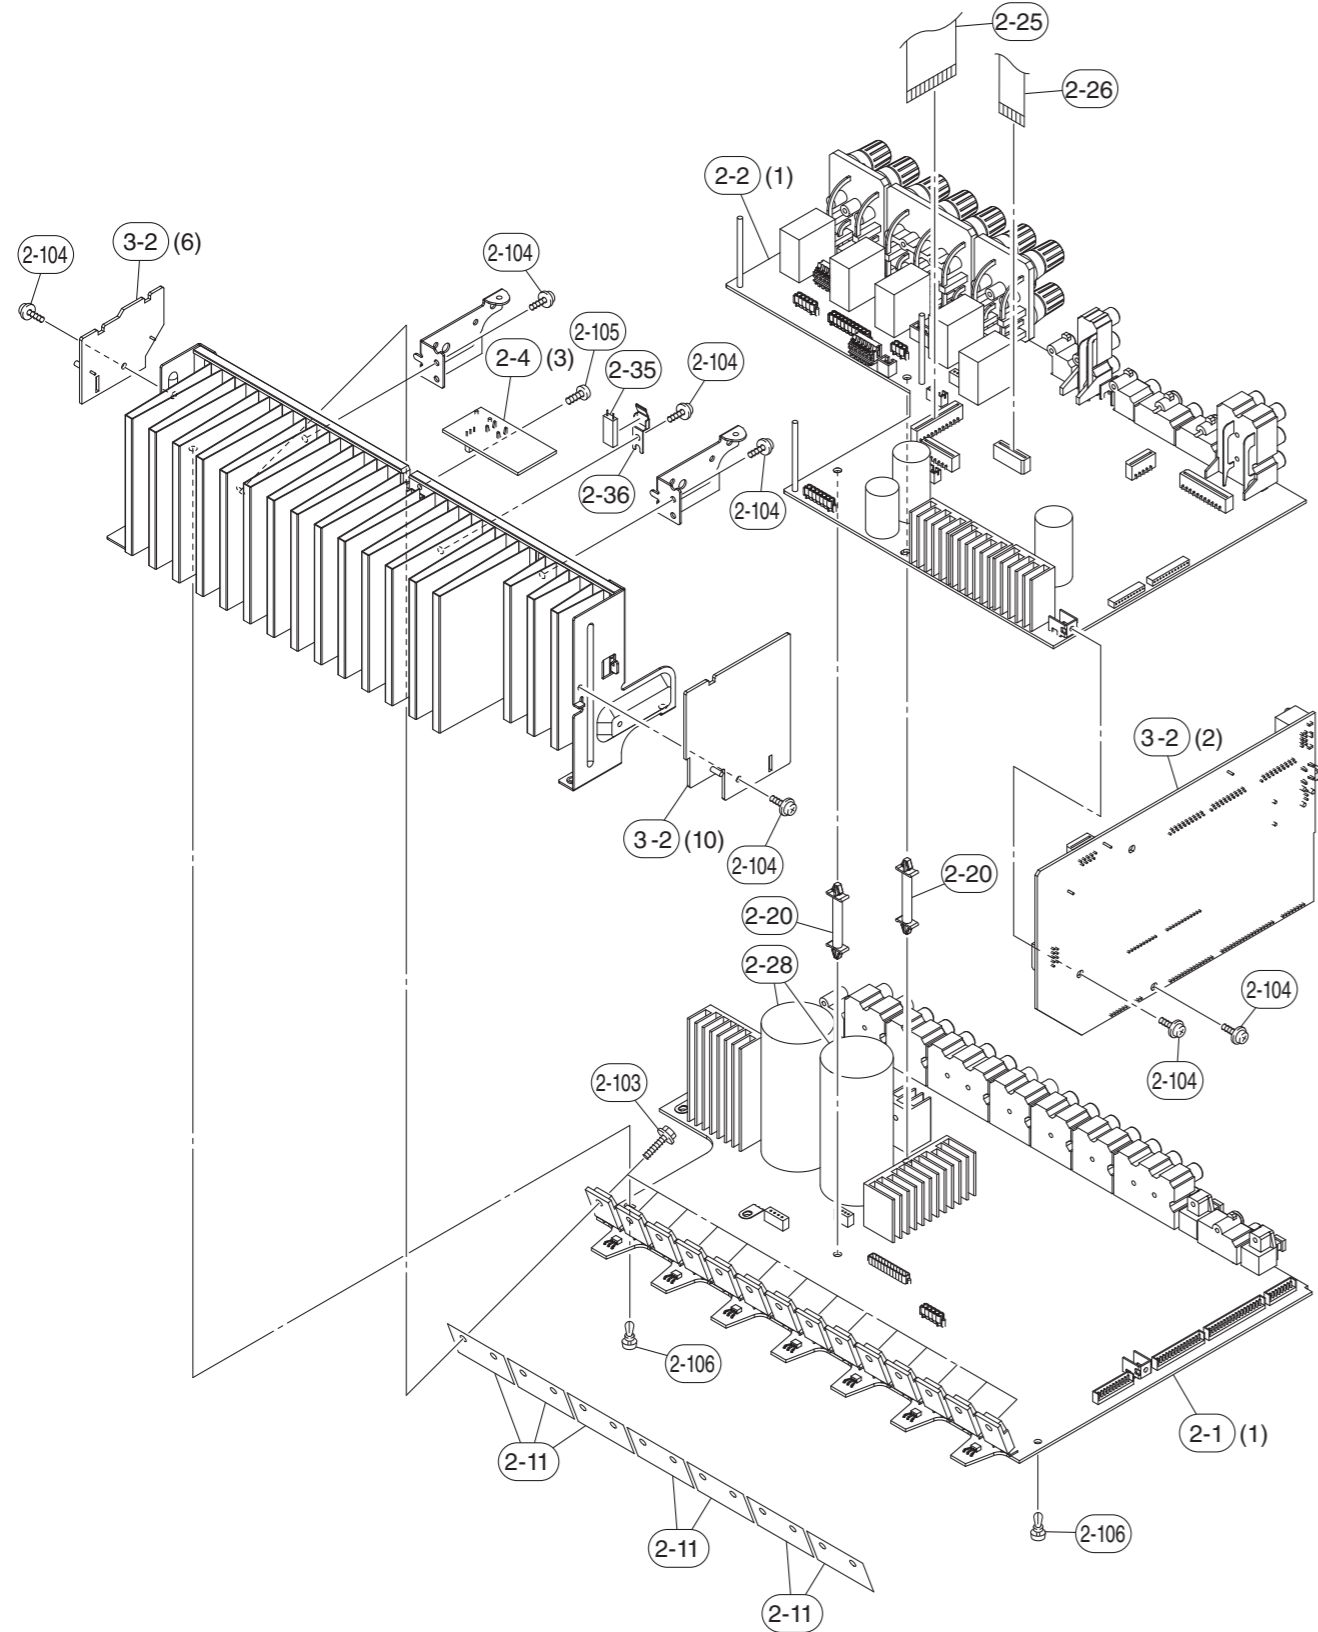

| Ref No. | Part No. | Description | Remarks | Markets |
|----------|----------|------------------------------|--------------------|--------------|
| * 2-1 | WR912900 | P. C. B. ASS'Y | MAIN | UC |
| * 2-1 | WR913000 | P. C. B. ASS'Y | MAIN | R |
| * 2-1 | WR913100 | P. C. B. ASS'Y | MAIN | TKABGEF |
| * 2-1 | WR913200 | P. C. B. ASS'Y | MAIN | L |
| * 2-2 | WS304700 | P. C. B. ASS'Y | VIDEO | U |
| * 2-2 | WS304800 | P. C. B. ASS'Y | VIDEO | C |
| * 2-2 | WS304900 | P. C. B. ASS'Y | VIDEO | R |
| * 2-2 | WS305000 | P. C. B. ASS'Y | VIDEO | T |
| * 2-2 | WS305100 | P. C. B. ASS'Y | VIDEO | K |
| * 2-2 | WS305200 | P. C. B. ASS'Y | VIDEO | A |
| * 2-2 | WS305300 | P. C. B. ASS'Y | VIDEO | BGEF |
| * 2-2 | WS305400 | P. C. B. ASS'Y | VIDEO | L |
| * 2-4 | WS306200 | P. C. B. ASS'Y | ACDC | UC |
| * 2-4 | WS306300 | P. C. B. ASS'Y | ACDC | R |
| * 2-4 | WS306400 | P. C. B. ASS'Y | ACDC | TKABGEF |
| * 2-4 | WS306500 | P. C. B. ASS'Y | ACDC | L |
| * 2-11 | WQ753200 | MICA SHEET | TB-1021 40x23x0.06 | |
| * 2-20 | WS000800 | SPACER SUPPORT | LCA4-29M PIN | |
| * 2-25 | WS162200 | FLEXIBLE FLAT CABLE | 22P 160mm P=1.25 | |
| * 2-26 | WR285300 | FLEXIBLE FLAT CABLE | 14P 200mm P=1.25 | |
| Δ # 2-28 | WJ788600 | ELECTROLYTIC CAPACITOR | 12000uF 71V | C1084, C1085 |
| * 2-35 | WS341600 | THERMAL PROTECTOR | OP62G-90 | CRTKABGEFL |
| * 2-36 | WS545600 | SUPPORT THM | | CRTKABGEFL |
| 2-103 | WM220800 | HEXAGONAL HEAD B-TIGHT SCREW | 3x15 SP MFZN2W3 | |
| 2-104 | WF002600 | PW HEAD B-TIGHT SCREW | 3x8 MFZN2W3 | |
| 2-105 | WE774300 | BIND HEAD B-TIGHT SCREW | 3x8 MFZN2W3 | |
| 2-106 | VQ368600 | PUSH RIVET | P3555-B | |
| * 3-2 | WS305500 | P. C. B. ASS'Y | OPERATION | U |
| * 3-2 | WS305600 | P. C. B. ASS'Y | OPERATION | CRTA |
| * 3-2 | WS305700 | P. C. B. ASS'Y | OPERATION | KBGEFL |

* New Parts


Note) Those parts marked with "#" are not included in the P.C.B. ass'y.

1 ■ REMOTE CONTROL


- RAV296: U model / RAV297: C, R, A, L models / RAV298: T, K, B, G, E, F models

SCHEMATIC DIAGRAMS

RAV296/RAV297

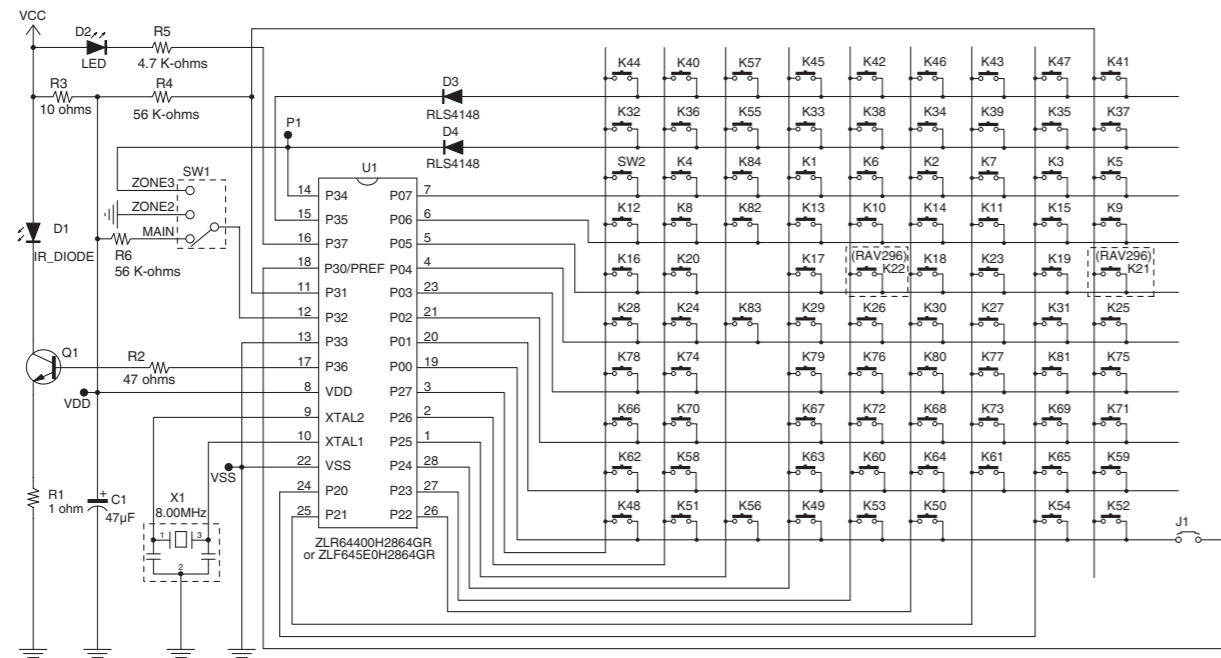


RAV298

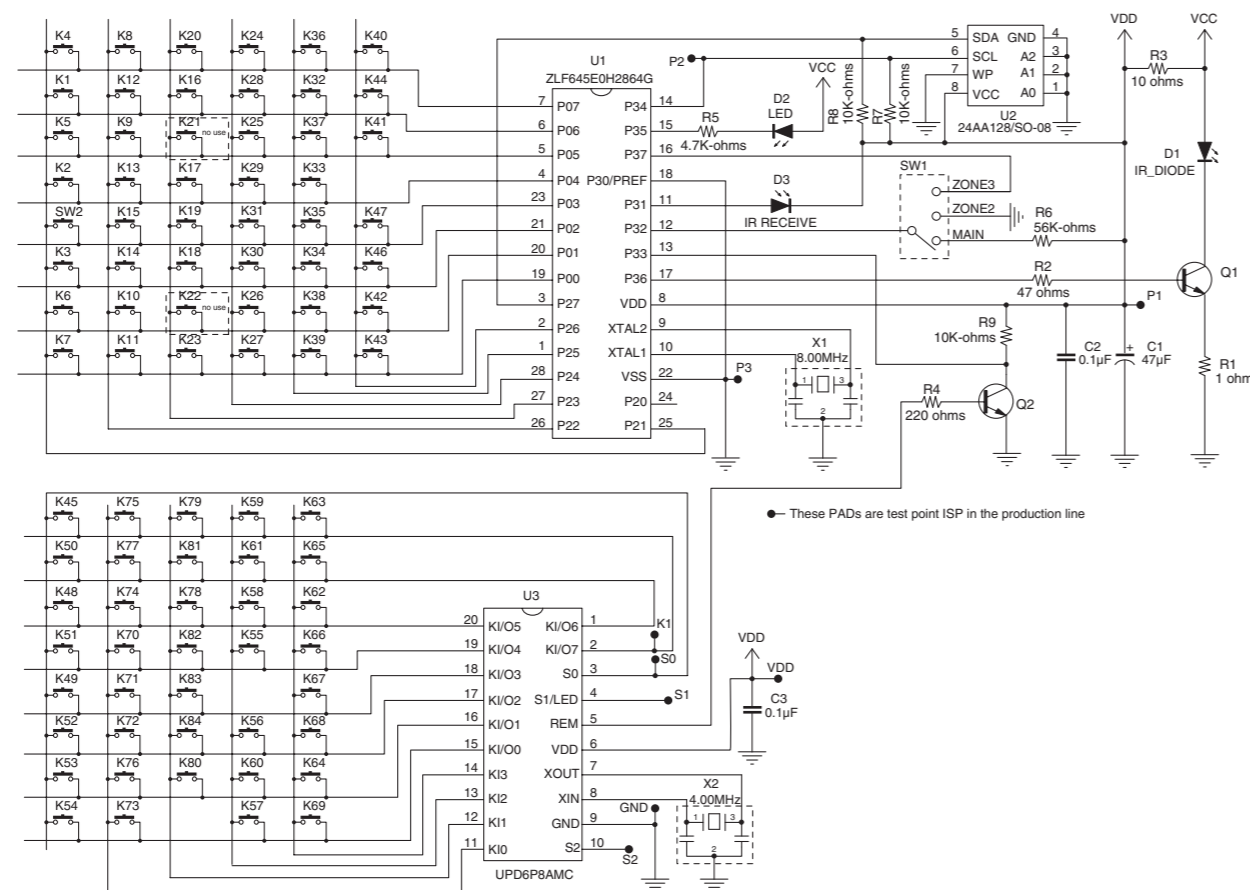


PANELS


RAV296
(U model)

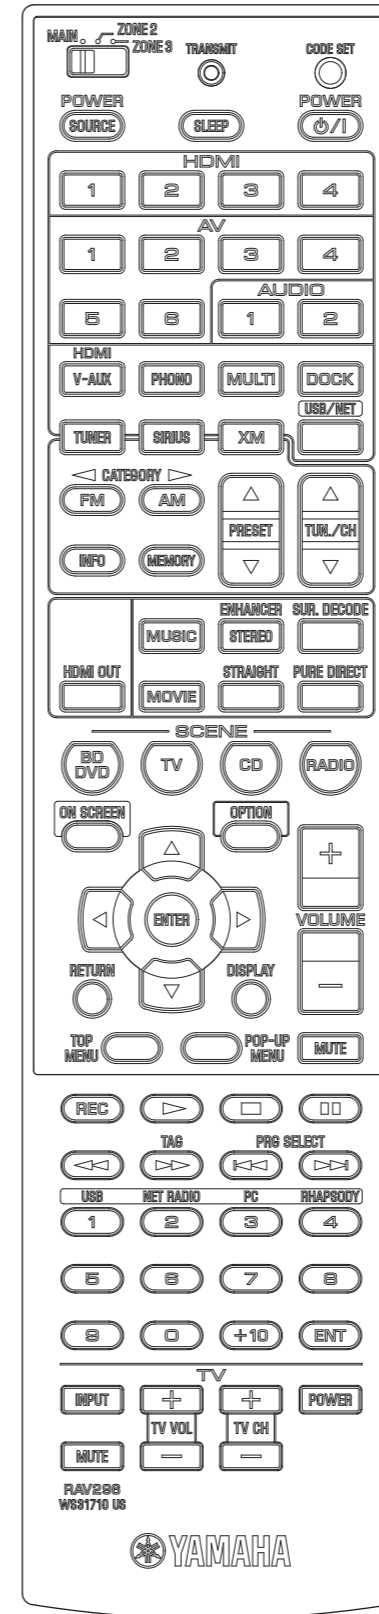


RAV297
(C, R, A, L models)

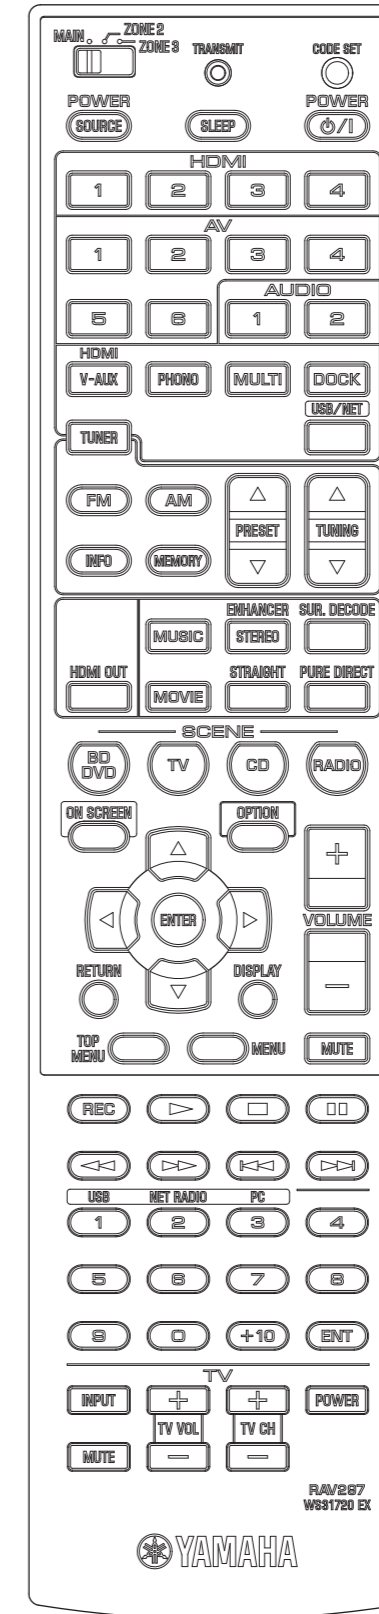

RAV298
(T, K, B, G, E, F models)

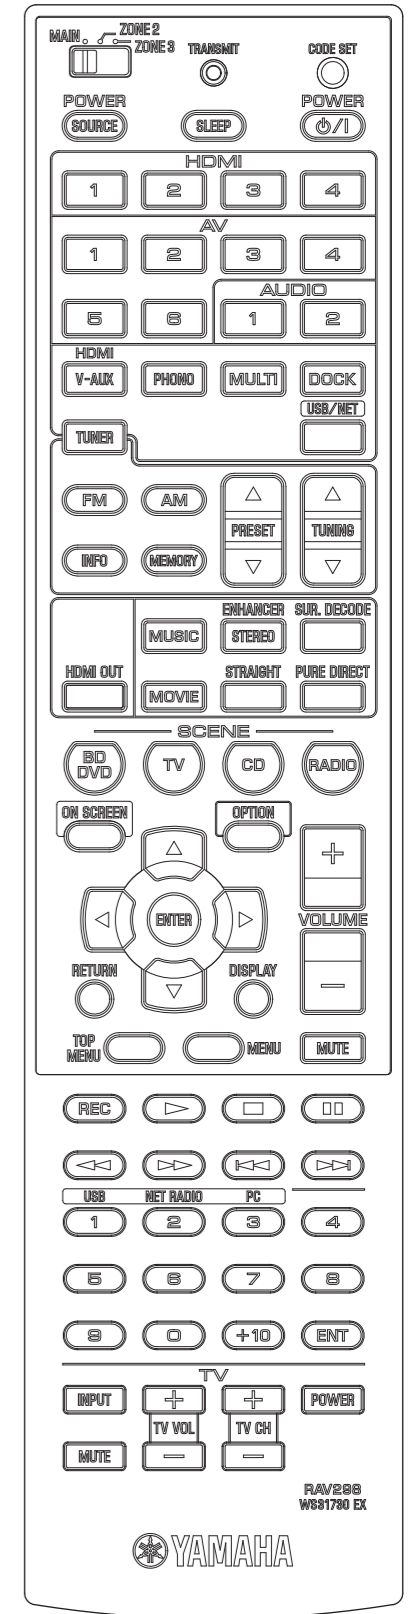

KEY NO. LAYOUT

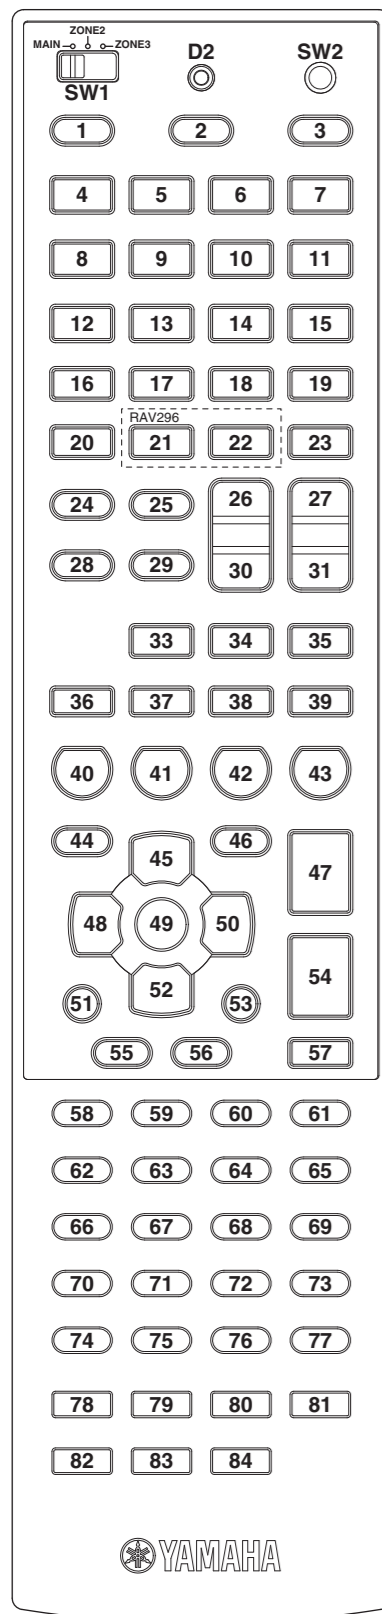

KEY CODE

| GROUP | PRE SET | COM | Key No. | FUNCTION | ID1 | | | ID2 | | |
|---------|---------|-----|---------|--|-----------|-----------|-----------|-----------|-----------|-----------|
| | | | | | MAIN | ZONE2 | ZONE3 | MAIN | ZONE2 | ZONE3 |
| | - | - | SW1 | MAIN / ZONE2 / ZONE3 | [MAIN] | [ZONE2] | [ZONE3] | [MAIN] | [ZONE2] | [ZONE3] |
| | - | - | D2 | TRANSMIT | - | - | - | - | - | - |
| | - | - | SW2 | CODE SET | - | - | - | - | - | - |
| POWER | - | O | K2 | SLEEP | 7A-30 | 7A-31 | 7A-32 | 7A-30CE | 7A-31CF | 7A-32CC |
| | - | O | K3 | POWER / | 7E-2A | 7A-453A | 7A-4639 | 7E-2AD4 | 7A-453B | 7A-4638 |
| INPUT 1 | O | O | K4 | HDMI-1 (Default setting) | 7A-4738 | 7A-4837 | 7A-4936 | 7A-4739 | 7A-4836 | 7A-4937 |
| | O | O | K5 | HDMI-2 | 7A-4A35 | 7A-4B34 | 7A-4C33 | 7A-4A34 | 7A-4B35 | 7A-4C32 |
| | O | O | K6 | HDMI-3 | 7A-4D32 | 7A-4E31 | 7A-4F30 | 7A-4D33 | 7A-4E30 | 7A-4F31 |
| | O | O | K7 | HDMI-4 | 7A-502F | 7A-512E | 7A-522D | 7A-502E | 7A-512F | 7A-522C |
| | O | O | K8 | AV-1 | 7A-532C | 7A-542B | 7A-552A | 7A-532D | 7A-542A | 7A-552B |
| | O | O | K9 | AV-2 | 7A-5629 | 7A-5728 | 7A-5827 | 7A-5628 | 7A-5729 | 7A-5826 |
| | O | O | K10 | AV-3 | 7A-5926 | 7A-5A25 | 7A-5B24 | 7A-5927 | 7A-5A24 | 7A-5B25 |
| | O | O | K11 | AV-4 | 7A-5C23 | 7A-5D22 | 7A-5E21 | 7A-5C22 | 7A-5D23 | 7A-5E20 |
| | O | O | K12 | AV-5 | 7A-5F20 | 7A-601F | 7A-611E | 7A-5F21 | 7A-601E | 7A-611F |
| | O | O | K13 | AV-6 | 7A-621D | 7A-631C | 7A-641B | 7A-621C | 7A-631D | 7A-641A |
| | O | O | K14 | AUDIO-1 | 7A-651A | 7A-6619 | 7A-6718 | 7A-651B | 7A-6618 | 7A-6719 |
| | O | O | K15 | AUDIO-2 | 7A-6817 | 7A-6916 | 7A-6A15 | 7A-6816 | 7A-6917 | 7A-6A14 |
| | O | O | K16 | HDMI / V-AUX | 7A-55 | 7A-D8 | 7A-F0 | 7A-55AB | 7A-D826 | 7A-F00E |
| | O | O | K17 | PHONO | 7A-14 | 7A-D0 | 7A-F1 | 7A-14EA | 7A-D02E | 7A-F10F |
| | O | O | K18 | MULTI | 7A-87 | - | - | 7A-8779 | - | - |
| INPUT 2 | - | O | K19 | DOCK | 7F01-4A | 7F01-4B | 7F01-4C | 7F01-4AB4 | 7F01-4BB5 | 7F01-4CB2 |
| | - | O | K20 | TUNER | 7A-16 | 7A-D2 | 7A-F3 | 7A-16E8 | 7A-D22C | 7A-F30D |
| | - | O | K21 | SIRIUS (U model, RAV296) | 7A-39 | 7A-3A | 7A-3B | 7A-39C7 | 7A-3AC4 | 7A-3BC5 |
| | - | O | K22 | XM (U model, RAV296) | 7A-B4 | 7A-B8 | 7A-B9 | 7A-B44A | 7A-B846 | 7A-B947 |
| | - | O | K23 | USB/NET | 7F01-3F | 7F01-40 | 7F01-41 | 7F01-3FC1 | 7F01-40BE | 7F01-41BF |
| RADIO | - | O | K24 | CATEGORY / FM (RAV296) FM (RAV297, RAV298) | 7F01-5827 | 7F01-5926 | 7F01-5A25 | 7F01-5826 | 7F01-5927 | 7F01-5A24 |
| | - | O | K25 | CATEGORY / AM (RAV296) AM (RAV297, RAV298) | 7F01-552A | 7F01-5629 | 7F01-5728 | 7F01-552B | 7F01-5628 | 7F01-5729 |
| | - | O | K26 | PRESET | 7F01-5B24 | 7F01-5C23 | 7F01-5D22 | 7F01-5B25 | 7F01-5C22 | 7F01-5D23 |
| | - | O | K27 | TUN./CH (RAV296) TUNING (RAV297, RAV298) | 7F01-611E | 7F01-621D | 7F01-631C | 7F01-611F | 7F01-621C | 7F01-631D |
| | - | O | K28 | INFO | 7A-2758 | 7A-2857 | 7A-2956 | 7A-2759 | 7A-2856 | 7A-2957 |
| | - | O | K29 | MEMORY | 7F01-6718 | 7F01-6817 | 7F01-6916 | 7F01-6719 | 7F01-6816 | 7F01-6917 |
| | - | O | K30 | PRESET | 7F01-5E21 | 7F01-5F20 | 7F01-601F | 7F01-5E20 | 7F01-5F21 | 7F01-601E |
| | - | O | K31 | TUNING/CH | 7F01-641B | 7F01-651A | 7F01-6619 | 7F01-641A | 7F01-651B | 7F01-6618 |
| DSP | - | O | K33 | MUSIC | 7A-89 | - | - | 7A-8977 | - | - |
| | - | O | K34 | ENHANCER / STEREO | 7A-94 | - | - | 7A-946A | - | - |
| | - | O | K35 | SUR. DECODE | 7A-8D | - | - | 7A-8D73 | - | - |
| | - | O | K36 | HDMI OUT | 7A-35 | - | - | 7A-35CB | - | - |
| | - | O | K37 | MOVIE | 7A-88 | - | - | 7A-8876 | - | - |
| | - | O | K38 | STRAIGHT | 7A-56 | - | - | 7A-56A8 | - | - |
| | - | O | K39 | PURE DIRECT | 7A-DD | - | - | 7A-DD23 | - | - |

| GROUP | PRE SET | COM | Key No. | FUNCTION | ID1 | | | ID2 | | |
|--------|---------|-----|---------|---|---------|---------|---------|-----------|-----------|-----------|
| | | | | | MAIN | ZONE2 | ZONE3 | MAIN | ZONE2 | ZONE3 |
| SCENE | - | O | K40 | BD/DVD | 7A-007F | 7A-017E | 7A-027D | 7A-007E | 7A-017F | 7A-027C |
| | - | O | K41 | TV | 7A-037C | 7A-047B | 7A-057A | 7A-037D | 7A-047A | 7A-057B |
| | - | O | K42 | CD | 7A-0679 | 7A-0778 | 7A-0877 | 7A-0678 | 7A-0779 | 7A-0876 |
| | - | O | K43 | RADIO | 7A-0976 | 7A-0A75 | 7A-0B74 | 7A-0977 | 7A-0A74 | 7A-0B75 |
| MENU | - | O | K44 | ON SCREEN | 7A-84 | - | - | 7A-847A | - | - |
| | - | O | K46 | OPTION | 7A-6B14 | - | - | 7A-6B15 | - | - |
| CURSOR | - | - | K45 | (UP) | 7A-9D | - | - | 7A-9D63 | - | - |
| | - | - | K48 | (LEFT) | 7A-9F | - | - | 7A-9F61 | - | - |
| | - | - | K49 | ENTER | 7A-DE | - | - | 7A-DE20 | - | - |
| | - | - | K50 | (RIGHT) | 7A-9E | - | - | 7A-9E60 | - | - |
| | - | - | K51 | RETURN | 7A-AA | - | - | 7A-AA54 | - | - |
| | - | - | K52 | (DOWN) | 7A-9C | - | - | 7A-9C62 | - | - |
| | - | - | K53 | DISPLAY | 7F01-60 | 7F01-80 | 7F01-A0 | 7F01-609E | 7F01-807E | 7F01-A05E |
| VOLUME | - | O | K47 | VOLUME + | 7A-1A | 7A-DA | 7A-FD | 7A-1AE4 | 7A-DA24 | 7A-FD03 |
| | - | O | K54 | VOLUME - | 7A-1B | 7A-DB | 7A-FE | 7A-1BE5 | 7A-DB25 | 7A-FE00 |
| | - | O | K57 | MUTE | 7A-1C | 7A-DC | 7A-FF | 7A-1CE2 | 7A-DC22 | 7A-FF01 |
| SOURCE | - | - | K1 | POWER / SOURCE | - | - | - | - | - | - |
| | - | - | K55 | TOP MENU | - | - | - | - | - | - |
| | - | - | K56 | POP-UP MENU (RAV296) MENU (RAV297, RAV298) | - | - | - | - | - | - |
| | - | - | K58 | REC | - | - | - | - | - | - |
| | - | - | K59 | (PLAY) | - | - | - | - | - | - |
| | - | - | K60 | (STOP) | - | - | - | - | - | - |
| | - | - | K61 | (PAUSE) | - | - | - | - | - | - |
| | - | - | K62 | (REW) | - | - | - | - | - | - |
| | - | - | K63 | TAG / (FF) (RAV296) (FF) (RAV297, RAV298) | - | - | - | - | - | - |
| | - | - | K64 | PRG SELECT / (RAV296) (RAV297, RAV298) | - | - | - | - | - | - |
| | - | - | K65 | PRG SELECT / (RAV296) (RAV297, RAV298) | - | - | - | - | - | - |
| 10 key | - | - | K66 | USB / 1 | - | - | - | - | - | - |
| | - | - | K67 | NET RADIO / 2 | - | - | - | - | - | - |
| | - | - | K68 | PC / 3 | - | - | - | - | - | - |
| | - | - | K69 | RHAPSODY / 4 (RAV296) 4 (RAV297, RAV298) | - | - | - | - | - | - |
| | - | - | K70 | 5 | - | - | - | - | - | - |
| | - | - | K71 | 6 | - | - | - | - | - | - |
| | - | - | K72 | 7 | - | - | - | - | - | - |
| | - | - | K73 | 8 | - | - | - | - | - | - |
| | - | - | K74 | 9 | - | - | - | - | - | - |
| | - | - | K75 | 0 | - | - | - | - | - | - |
| | - | - | K76 | +10 | - | - | - | - | - | - |
| | - | - | K77 | ENT | - | - | - | - | - | - |
| TV | - | - | K78 | INPUT | - | - | - | - | - | - |
| | - | - | K79 | TV VOL + | - | - | - | - | - | - |
| | - | - | K80 | TV CH + | - | - | - | - | - | - |
| | - | - | K81 | POWER | - | - | - | - | - | - |
| | - | - | K82 | MUTE | - | - | - | - | - | - |
| | - | - | K83 | TV VOL - | - | - | - | - | - | - |
| | - | - | K84 | TV CH - | - | - | - | - | - | - |

FUNCTION CODE


| Key No. | BD | | | DVD | | | | DVR | | LD | | CD | | | CD-R | | MD | | | |
|----------|---------------|------------|---------------|----------|------------------|----------|----------|---------------|------------|---------------|------------|---------------|------------|------------|---------------|------------|---------------|------------|------------|------------|
| | Brand | Yamaha-1 | Brand | Yamaha-1 | Yamaha-2 | Yamaha-3 | T | Brand | Yamaha | Brand | Yamaha | Brand | Yamaha-1 | Yamaha-2 | Brand | Yamaha | Brand | Yamaha-1 | Yamaha-2 | Yamaha-3 |
| | Preset Number | 2018 | Preset Number | 2000 | 2003 | 2001 | 2136 | Preset Number | 2011 | Preset Number | 2002 | Preset Number | 5013 | 5000 | Preset Number | 5001 | Preset Number | 5002 | 5003 | 5004 |
| Function | Code | Function | Code | Code | Code | Code | Function | Code | Function | Code | Function | Code | Code | Function | Code | Function | Code | Code | Code | Code |
| K45 | UP | 7C-B4 | UP | 7C-B4 | 2002 B0 00 85 35 | 004.088 | 45B5 80 | MENU UP | 048.088 | - | - | - | - | - | - | - | - | - | - | - |
| K48 | LEFT | 7C-B5 | LEFT | 7C-B5 | 2002 B0 00 87 37 | 004.090 | 45B5 51 | MENU LEFT | 048.090 | - | - | - | - | - | - | - | - | - | - | - |
| K49 | ENTER | 7C-B8 | ENTER | 7C-B8 | 2002 B0 00 82 32 | 004.092 | 45B5 21 | MENU ENTER | 048.092 | - | - | - | - | - | - | - | - | - | - | - |
| K50 | RIGHT | 7C-B6 | RIGHT | 7C-B6 | 2002 B0 00 88 38 | 004.091 | 45B5 4D | MENU RIGHT | 048.091 | - | - | - | - | - | - | - | - | - | - | - |
| K51 | RETURN | 7C-B7 | RETURN | 7C-B7 | 2002 B0 00 81 31 | 004.131 | 45B5 22 | RETURN | 048.131 | - | - | - | - | - | - | - | - | - | - | - |
| K52 | DOWN | 7C-B3 | DOWN | 7C-B3 | 2002 B0 00 86 36 | 004.089 | 45B5 81 | MENU DOWN | 048.089 | - | - | - | - | - | - | - | - | - | - | - |
| K53 | DISPLAY | 7C-A6 | DISPLAY | 7C-A6 | 2002 B0 00 92 22 | 004.015 | 45B5 26 | DISPLAY | 048.015 | DISPLAY | 7C-13 | DISPLAY | 79-0A | 79-0A | DISPLAY | 7F-9E | DISPLAY | 79-A5 | 79-A5 | 180F |
| K1 | SOURCE POWER | 7C-80 | SOURCE POWER | 7C-80 | 2002 B0 00 3D 8D | 004.012 | 45B5 12 | AV POWER | 048.012 | AV POWER | - | AV POWER | 79-60 | 79-60 | AV POWER | 7F-80 | AV POWER | - | 79-B5 | 150F |
| K55 | TOP MENU | 7C-B1 | TOP MENU | 7C-B1 | 2002 B0 00 9B 2B | 004.113 | 45B5 DE | TITLE | 048.200 | - | - | - | - | - | - | - | - | - | - | - |
| K56 | MENU | 7C-D0 | MENU | 7C-B2 | 2002 B0 00 80 30 | 004.084 | 45B5 84 | MENU | 048.084 | - | - | - | - | - | - | - | - | - | - | - |
| K58 | DISC SKIP | 7C-8B | DISC SKIP | 7C-8B | - | 004.127 | ?? | REC | 048.055 | - | - | DISC SKIP | 7A-4F | 79-4F | REC | - | REC | 79-AF | 79-B1 | 2D0F |
| K59 | PLAY | 7C-82 | PLAY | 7C-82 | 2002 B0 00 0A BA | 004.044 | 45B5 15 | PLAY | 048.044 | PLAY | 7C-05 | PLAY | 7A-08 | 79-02 | PLAY | 7F-82 | PLAY | 79-A8 | 79-A8 | 2A0F |
| K60 | STOP | 7C-85 | STOP | 7C-85 | 2002 B0 00 00 B0 | 004.049 | 45B5 14 | STOP | 048.049 | STOP | 7C-5B | STOP | 7A-09 | 79-56 | STOP | 7F-84 | STOP | 79-AA | 79-AA | 280F |
| K61 | PAUSE | 7C-83 | PAUSE | 7C-83 | 2002 B0 00 06 B6 | 004.048 | 45B5 00 | PAUSE | 048.048 | PAUSE | 7C-5A | PAUSE | 7A-09 | 79-55 | PAUSE | 7F-83 | PAUSE | 79-A9 | 79-A9 | 290F |
| K62 | REW | 7C-86 | REW | 7C-86 | 2002 B0 00 04 B4 | 004.041 | 45B5 19 | REW | 048.041 | REW | 7C-06 | REW | 7A-0D | 79-05 | REW | 7F-88 | REW | 79-AC | 79-AC | 2B0F |
| K63 | FF | 7C-87 | FF | 7C-87 | 2002 B0 00 05 B5 | 004.040 | 45B5 13 | FF | 048.040 | FF | 7C-07 | FF | 7A-0C | 79-06 | FF | 7F-89 | FF | 79-AD | 79-AD | 2C0F |
| K64 | SKIP (-) | 7C-B9 | SKIP (-) | 7C-B9 | 2002 B0 00 49 F9 | 004.033 | 45B5 23 | SKIP (-) | 048.033 | CHAP/SKIP (-) | 7C-02 | SKIP (-) | 7A-0B | 79-04 | SKIP (-) | 7F-86 | SKIP (-) | 79-AB | 79-AB | 200F |
| K65 | SKIP (+) | 7C-BA | SKIP (+) | 7C-BA | 2002 B0 00 4A FA | 004.032 | 45B5 24 | SKIP (+) | 048.032 | CHAP/SKIP (+) | 7C-03 | SKIP (+) | 7A-0A | 79-07 | SKIP (+) | 7F-87 | SKIP (+) | 79-AE | 79-AE | 210F |
| K66 | 1 | 7C-94 | 1 | 7C-94 | 2002 B0 00 10 A0 | 004.001 | 45B5 01 | 1 | 048.001 | 1 | 7C-17 | 1 | 79-11 | 79-11 | 1 | 7F-91 | 1 | 79-B5 | 79-B7 | 000F |
| K67 | 2 | 7C-95 | 2 | 7C-95 | 2002 B0 00 11 A1 | 004.002 | 45B5 02 | 2 | 048.002 | 2 | 7C-18 | 2 | 79-12 | 79-12 | 2 | 7F-92 | 2 | 79-B6 | 79-B8 | 010F |
| K68 | 3 | 7C-96 | 3 | 7C-96 | 2002 B0 00 12 A2 | 004.003 | 45B5 03 | 3 | 048.003 | 3 | 7C-19 | 3 | 79-13 | 79-13 | 3 | 7F-93 | 3 | 79-B7 | 79-B9 | 020F |
| K69 | 4 | 7C-97 | 4 | 7C-97 | 2002 B0 00 13 A3 | 004.004 | 45B5 04 | 4 | 048.004 | 4 | 7C-1A | 4 | 79-14 | 79-14 | 4 | 7F-94 | 4 | 79-B8 | 79-BA | 030F |
| K70 | 5 | 7C-98 | 5 | 7C-98 | 2002 B0 00 14 A4 | 004.005 | 45B5 05 | 5 | 048.005 | 5 | 7C-1B | 5 | 79-15 | 79-15 | 5 | 7F-95 | 5 | 79-B9 | 79-BB | 040F |
| K71 | 6 | 7C-99 | 6 | 7C-99 | 2002 B0 00 15 A5 | 004.006 | 45B5 06 | 6 | 048.006 | 6 | 7C-1C | 6 | 79-16 | 79-16 | 6 | 7F-96 | 6 | 79-BA | 79-BC | 050F |
| K72 | 7 | 7C-9A | 7 | 7C-9A | 2002 B0 00 16 A6 | 004.007 | 45B5 07 | 7 | 048.007 | 7 | 7C-1D | 7 | 79-17 | 79-17 | 7 | 7F-97 | 7 | 79-BB | 79-BD | 060F |
| K73 | 8 | 7C-9B | 8 | 7C-9B | 2002 B0 00 17 A7 | 004.008 | 45B5 08 | 8 | 048.008 | 8 | 7C-1E | 8 | 79-18 | 79-18 | 8 | 7F-98 | 8 | 79-BC | 79-BE | 070F |
| K74 | 9 | 7C-9C | 9 | 7C-9C | 2002 B0 00 18 A8 | 004.009 | 45B5 09 | 9 | 048.009 | 9 | 7C-1F | 9 | 79-19 | 79-19 | 9 | 7F-99 | 9 | 79-BD | 79-BF | 080F |
| K75 | 0 | 7C-93 | 0 | 7C-93 | 2002 B0 00 19 A9 | 004.000 | 45B5 0A | 0 | 048.000 | 0 | 7C-1E | 0 | 79-10 | 79-10 | 0 | 7F-90 | 0 | 79-BE | 79-C0 | 090F |
| K76 | +10 | 7C-9D | +10 | 7C-9D | 2002 B0 00 89 39 | 004.120 | 45B5 25 | +10 | - | +10 | 7C-5D | +10 | 79-1A | 79-1A | +10 | 7F-9A | +10 | 79-BF | 79-BF | 0A0F |
| K77 | TITLE/INDEX | 7C-9E | TITLE/INDEX | 7C-9E | - | - | 45B5 20 | TITLE/INDEX | - | CHAP/TIME | 7C-15 | INDEX | 79-0B | 79-0B | INDEX | 7F-8A | INDEX | - | - | - |
| K78 | TV INPUT | (TV INPUT) | TV INPUT | | (TV INPUT) | | | TV INPUT | (TV INPUT) | TV INPUT | (TV INPUT) | TV INPUT | (TV INPUT) | TV INPUT | (TV INPUT) | TV INPUT | (TV INPUT) | TV INPUT | (TV INPUT) | TV INPUT |
| K79 | TV VOL (+) | (TV VOL +) | TV VOL (+) | | (TV VOL +) | | | TV VOL (+) | (TV VOL +) | TV VOL (+) | (TV VOL +) | TV VOL (+) | (TV VOL +) | TV VOL (+) | (TV VOL +) | TV VOL (+) | (TV VOL +) | TV VOL (+) | (TV VOL +) | TV VOL (+) |
| K80 | TV CH (+) | (TV CH +) | TV CH (+) | | (TV CH +) | | | TV CH (+) | (TV CH +) | TV CH (+) | (TV CH +) | TV CH (+) | (TV CH +) | TV CH (+) | (TV CH +) | TV CH (+) | (TV CH +) | TV CH (+) | (TV CH +) | TV CH (+) |
| K81 | TV POWER | (TV POWER) | TV POWER | | (TV POWER) | | | TV POWER | (TV POWER) | TV POWER | (TV POWER) | TV POWER | (TV POWER) | TV POWER | (TV POWER) | TV POWER | (TV POWER) | TV POWER | (TV POWER) | TV POWER |
| K82 | TV MUTE | (TV MUTE) | TV MUTE | | (TV MUTE) | | | TV MUTE | (TV MUTE) | TV MUTE | (TV MUTE) | TV MUTE | (TV MUTE) | TV MUTE | (TV MUTE) | TV MUTE | (TV MUTE) | TV MUTE | (TV MUTE) | TV MUTE |
| K83 | TV VOL (-) | (TV VOL -) | TV VOL (-) | | (TV VOL -) | | | TV VOL (-) | (TV VOL -) | TV VOL (-) | (TV VOL -) | TV VOL (-) | (TV VOL -) | TV VOL (-) | (TV VOL -) | TV VOL (-) | (TV VOL -) | TV VOL (-) | (TV VOL -) | TV VOL (-) |
| K84 | TV CH (-) | (TV CH -) | TV CH (-) | | (TV CH -) | | | TV CH (-) | (TV CH -) | TV CH (-) | (TV CH -) | TV CH (-) | (TV CH -) | TV CH (-) | (TV CH -) | TV CH (-) | (TV CH -) | TV CH (-) | (TV CH -) | TV CH (-) |

| Key No. | TUNER | | | | | | | | | | | | TAPE | | | | TV | | | | | | | | |
|----------|---------------|----------|----------|----------|----------|----------|----------|-----------|-----------|-----------|---------------|----------|-----------|---------------|----------|-----------|---------------|----------|----------|---------------|----------|----------|----------|-------------------|----------|
| | Brand | Yamaha-2 | Yamaha-3 | Yamaha-4 | Yamaha-5 | Yamaha-6 | Yamaha-7 | Yamaha-* | Yamaha-11 | Yamaha-12 | Brand | Yamaha-8 | Yamaha-* | Brand | Yamaha-9 | Yamaha-10 | Brand | Yamaha-1 | Yamaha-2 | Brand | Yamaha-1 | Yamaha-2 | Yamaha-3 | Yamaha-4 | Yamaha-5 |
| | Preset Number | 5014 | 5007 | 5008 | 5009 | 5010 | 5011 | **** | 5015 | 5016 | Preset Number | 5012 | **** | Preset Number | 5017 | 5018 | Preset Number | 5005 | 5006 | Preset Number | 0000 | 0001 | 0002 | 0003 | 0004 |
| Function | Code | Code | Code | Code | Code | Code | Code | Code | Code | Function | Code | Code | Function | Code | Code | Function | Code | Code | Function | Code | Code | Code | Code | Code | Code |
| K45 | PRESET (+) | 7A-10 | 7A-10 | 7D-F5 | 7A-6A | 7D-31 | 7F01-0E | 7F01-0EF0 | 7A-6A94 | 7A-10EE | UP | 7F01-2E | 7F01-2ED0 | UP | 7F01-E1 | 7F01-E11F | - | - | - | MENU UP | D1CC | D16C | 5070 | 01 111 0 01 0EE 1 | F082 |
| K48 | A-E/CAT. (-) | - | 7A-AC | 7D-BB | 7A-6E | 7D-35 | 7F01-10 | 7F01-10EE | 7A-6E90 | 7D-BB | LEFT | 7F01-30 | 7F01-30CE | LEFT | 7F01-E2 | 7F01-E21C | - | - | - | MENU LEFT | D1CE | D16E | 5073 | 01 115 0 01 0EA 1 | F080 |
| K49 | ENTER | - | 7A-AD | 7D-BC | 7A-6F | 7D-36 | 7F01-11 | 7F01-11EF | 7A-6F91 | 7A-AD53 | ENTER | 7F01-31 | 7F01-31CF | ENTER | 7F01-E3 | 7F01-E31D | - | - | - | MENU ENTER | D1D0 | D170 | 5033 | 01 15F 0 01 0A0 1 | F087 |
| K50 | A-E/CAT. (+) | D1-0D | 7A-12 | 7D-F7 | 7A-6C | 7D-33 | 7F01-12 | 7F01-12EC | 7A-6C92 | 7A-12EC | RIGHT | 7F01-32 | 7F01-32CC | RIGHT | 7F01-E4 | 7F01-E41A | A/B | 7A-06 | 7F-06 | MENU RIGHT | D1CF | D16F | 5072 | 01 114 0 01 0EB 1 | F081 |
| K51 | MEMORY | - | 7A-AF | 7D-BE | 7A-71 | 7D-38 | 7F01-13 | 7F01-13ED | 7A-718F | 7A-AF51 | RETURN | 7F01-33 | 7F01-33CD | MEMORY | 7F01-DF | 7F01-DF21 | - | - | - | RETURN | D1D5 | D175 | 500A | 01 12F 0 01 0D0 1 | - |
| K52 | PRESET (-) | 7A-11 | 7A-11 | 7D-F6 | 7A-6B | 7D-32 | 7F01-14 | 7F01-14EA | 7A-6B95 | 7A-11EF | DOWN | 7F01-34 | 7F01-34CA | DOWN | 7F01-E5 | 7F01-E51B | - | - | - | MENU DOWN | D1CD | D16D | 5071 | 01 112 0 01 0ED 1 | F083 |
| K53 | DISPLAY | - | 7A-B0 | 7D-BF | 7A-72 | 7D-39 | 7F01-15 | 7F01-15EB | 7A-728C | 7A-B04E | DISPLAY | 7F01-35 | 7F01-35CB | DISPLAY | 7F01-E0 | 7F01-E01E | - | - | - | DISPLAY | - | - | 5010 | 01 11B 0 01 0EA 1 | - |
| K1 | AV POWER | D1-1B | D1-1B | - | - | - | 7F01-00 | 7F01-00FE | - | - | AV POWER | 7F01-20 | 7F01-20DE | AV POWER | 7F01-D0 | 7F01-D02E | AV POWER | - | - | AV POWER | - | - | - | - | - |
| K55 | BAND | - | 7A-AE | 7D-BD | 7A-70 | 7D-37 | 7F01-0D | 7F01-0DF3 | 7A-708E | 7A-AE50 | TITLE | 7F01-2D | 7F01-2DD3 | TITLE | 7F01-DD | 7F01-DD23 | - | - | - | TITLE | - | - | - | - | - |
| K56 | SRCH MODE | - | 7A-AB | 7D-BA | 7A-6D | 7D-34 | 7F01-0F | 7F01-0FF1 | 7A-6D93 | 7A-AB55 | MENU | 7F01-2F | 7F01-2FD1 | SRCH MODE | 7F01-DE | 7F01-DE20 | - | - | - | MENU | D1D3 | D173 | 5053 | 01 120 0 01 0DF 1 | F086 |
| K58 | - | - | - | - | - | - | 7F01-16 | 7F01-16E8 | - | - | PC/MCX | 7F01-36 | 7F01-36C8 | REC | 7F01-E6 | 7F01-E618 | REC | 7A-04 | 7F-04 | REC | - | - | - | - | - |
| K59 | - | - | - | - | - | - | 7F01-1E | 7F01-1EE0 | - | - | PLAY | 7F01-3E | 7F01-3EC0 | PLAY | 7F01-E8 | 7F01-E816 | PLAY | 7A-00 | 7F-00 | PLAY | - | - | - | - | - |
| K60 | - | - | - | - | - | - | 7F01-1D | 7F01-1DE3 | - | - | STOP | 7F01-3D | 7F01-3DC3 | STOP | 7F01-E9 | 7F01-E917 | STOP | 7A-03 | 7F-03 | STOP | - | - | - | - | - |
| K | | | | | | | | | | | | | | | | | | | | | | | | | |


REMOTE CONTROL

● RAV38


SCHEMATIC DIAGRAM

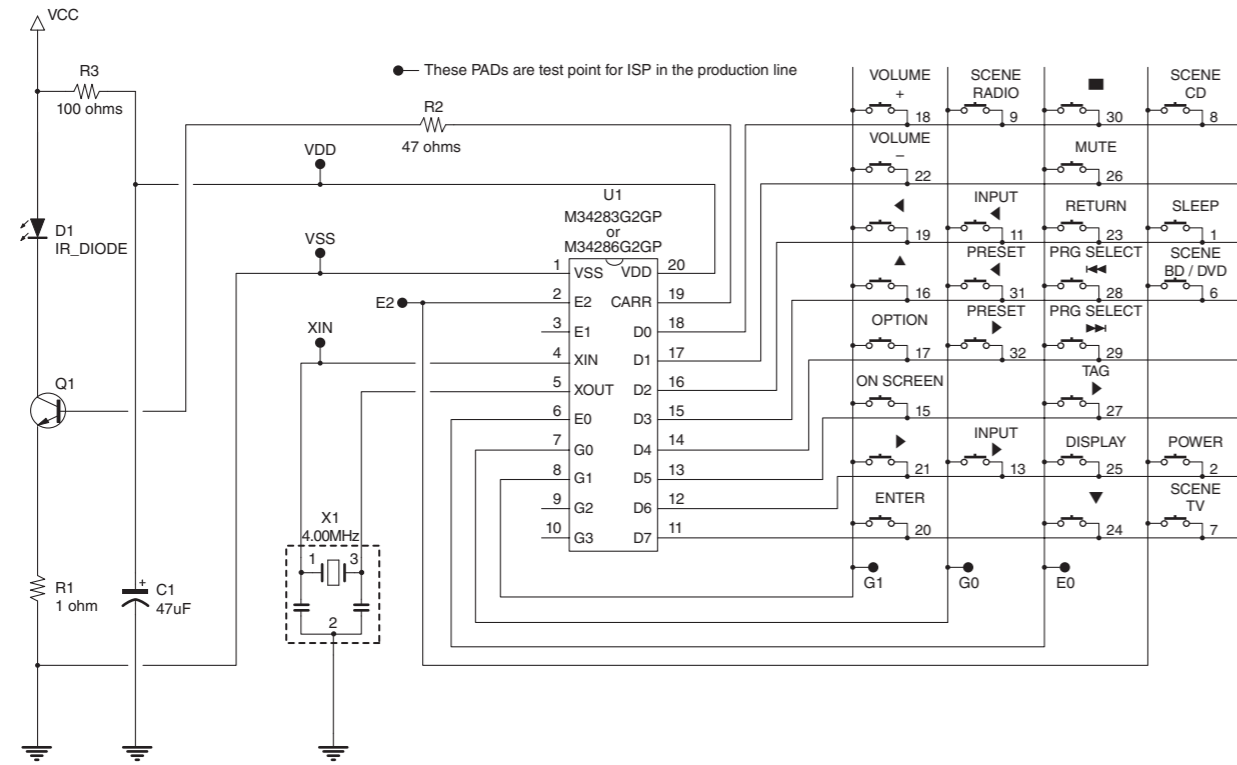

PANEL

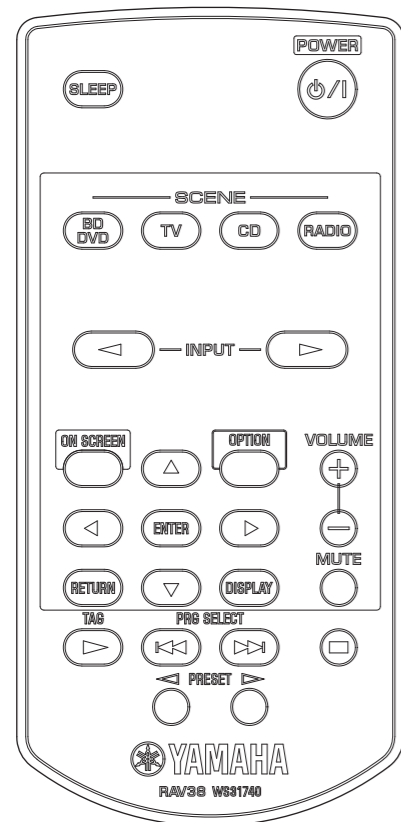

KEY NO. LAYOUT

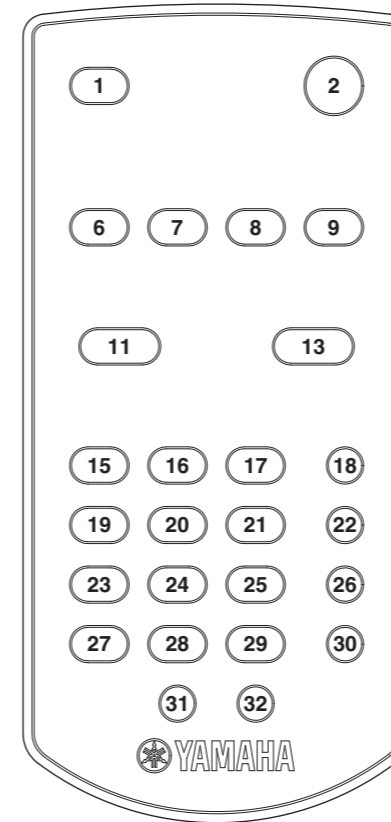

KEY CODE

| Key No. | Key name | Code | | | | | | | |
|---------|-------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| | | ID1 | | | | ID2 | | | |
| | | MAIN | ZONE2 | ZONE3 | ZONE4 | MAIN | ZONE2 | ZONE3 | ZONE4 |
| 1 | SLEEP | 7A-30 | 7A-31 | 7A-32 | 7A-33 | 7A-30CE | 7A-31CF | 7A-32CC | 7A-33CD |
| 2 | POWER / ϕ /I | 7E-2A | 7A-453A | 7A-4639 | 7A-6F10 | 7E-2AD4 | 7A-453B | 7A-4638 | 7A-6F11 |
| 6 | SCENE / BD/DVD | 7A-007F | 7A-017E | 7A-027D | 7A-1867 | 7A-007E | 7A-017F | 7A-027C | 7A-1866 |
| 7 | SCENE / TV | 7A-037C | 7A-047B | 7A-057A | 7A-1966 | 7A-037D | 7A-047A | 7A-057B | 7A-1967 |
| 8 | SCENE / CD | 7A-0679 | 7A-0778 | 7A-0877 | 7A-1A65 | 7A-0678 | 7A-0779 | 7A-0876 | 7A-1A64 |
| 9 | SCENE / RADIO | 7A-0976 | 7A-0A75 | 7A-0B74 | 7A-1B64 | 7A-0977 | 7A-0A74 | 7A-0B75 | 7A-1B65 |
| 11 | INPUT < | 7A-235C | 7A-245B | 7A-255A | 7A-2659 | 7A-235D | 7A-245A | 7A-255B | 7A-2658 |
| 13 | INPUT > | 7A-1F60 | 7A-205F | 7A-215E | 7A-225D | 7A-1F61 | 7A-205E | 7A-215F | 7A-225C |
| 15 | ON SCREEN | 7A-84 | 7A-3B44 | 7A-443B | 7A-413E | 7A-847A | 7A-3B45 | 7A-443A | 7A-413F |
| 16 | ▲ (UP) | 7A-9D | 7A-2B54 | 7A-304F | 7A-354A | 7A-9D63 | 7A-2B55 | 7A-304E | 7A-354B |
| 17 | OPTION | 7A-6B14 | 7A-6C13 | 7A-6D12 | 7A-6E11 | 7A-6B15 | 7A-6C12 | 7A-6D13 | 7A-6E10 |
| 18 | VOLUME + | 7A-1A | 7A-DA | 7A-FD | 7A-2B | 7A-1AE4 | 7A-DA24 | 7A-FD03 | 7A-2BD5 |
| 19 | ◀ (LEFT) | 7A-9F | 7A-2D52 | 7A-324D | 7A-3748 | 7A-9F61 | 7A-2D53 | 7A-324C | 7A-3749 |
| 20 | ENTER | 7A-DE | 7A-2F50 | 7A-344B | 7A-3946 | 7A-DE20 | 7A-2F51 | 7A-344A | 7A-3947 |
| 21 | ▶ (RIGHT) | 7A-9E | 7A-2E51 | 7A-334C | 7A-3847 | 7A-9E60 | 7A-2E50 | 7A-334D | 7A-3846 |
| 22 | VOLUME - | 7A-1B | 7A-DB | 7A-FE | 7A-2C | 7A-1BE5 | 7A-DB25 | 7A-FE00 | 7A-2CD2 |
| 23 | RETURN | 7A-AA | 7A-3C43 | 7A-3F40 | 7A-423D | 7A-AA54 | 7A-3C42 | 7A-3F41 | 7A-423C |
| 24 | ▼ (DOWN) | 7A-9C | 7A-2C53 | 7A-314E | 7A-3649 | 7A-9C62 | 7A-2C52 | 7A-314F | 7A-3648 |
| 25 | DISPLAY | 7F01-60 | 7F01-80 | 7F01-A0 | 7F01-C0 | 7F01-609E | 7F01-807E | 7F01-A05E | 7F01-C03E |
| 26 | MUTE | 7A-1C | 7A-DC | 7A-FF | 7A-2D | 7A-1CE2 | 7A-DC22 | 7A-FF01 | 7A-2DD3 |
| 27 | TAG / > | 7F01-68 | 7F01-88 | 7F01-A8 | 7F01-C8 | 7F01-6896 | 7F01-8876 | 7F01-A856 | 7F01-C836 |
| 28 | PRG SELECT / ◀◀ | 7F01-6C | 7F01-8C | 7F01-AC | 7F01-CC | 7F01-6C92 | 7F01-8C72 | 7F01-AC52 | 7F01-CC32 |
| 29 | PRG SELECT / ▶▶ | 7F01-6D | 7F01-8D | 7F01-AD | 7F01-CD | 7F01-6D93 | 7F01-8D73 | 7F01-AD53 | 7F01-CD33 |
| 30 | ■ | 7F01-69 | 7F01-89 | 7F01-A9 | 7F01-C9 | 7F01-6997 | 7F01-8977 | 7F01-A957 | 7F01-C937 |
| 31 | PRESET < | 7F01-5E21 | 7F01-5F20 | 7F01-601F | 7F01-6B14 | 7F01-5E20 | 7F01-5F21 | 7F01-601E | 7F01-6B15 |
| 32 | PRESET > | 7F01-5B24 | 7F01-5C23 | 7F01-5D22 | 7F01-6A15 | 7F01-5B25 | 7F01-5C22 | 7F01-5D23 | 7F01-6A14 |

Default: ID1/MAIN

| ID setting | [K19] + [K6] | | | | [K19] + [K7] | | | |
|------------|------------------------|-------------------------|-------------------------|-------------------------|------------------------|-------------------------|-------------------------|-------------------------|
| | = ID1 | | | | = ID2 | | | |
| ID setting | [K21] + [K6] = MAIN | [K21] + [K7] = ZONE2 | [K21] + [K8] = ZONE3 | [K21] + [K9] = ZONE4 | [K21] + [K6] = MAIN | [K21] + [K7] = ZONE2 | [K21] + [K8] = ZONE3 | [K21] + [K9] = ZONE4 |

■ ADVANCED SETUP

In the advanced setup menu, you can set basic operations of this unit, such as on and off of a bi-amp connection, or initialize user settings.

1 Set this unit to standby.

2 While holding down **⓪**STRAIGHT on the front panel, press **Ⓛ**MAIN ZONE ON/OFF.

Keep holding down **⓪**STRAIGHT until “ADVANCED SETUP” appears on the front panel display.

ADVANCED SETUP

3 Rotate the **Ⓟ**PROGRAM selector to select the parameter you want to change.

The default setting are marked with “*”.



- Set values are placed in XXX of the following parameters on an actual display screen.

SP IMP. -XXX

Choices: 6ΩMIN, 8ΩMIN*

Selects output impedance of this unit according to connected speakers. When you connect 4-ohm speakers to the FRONT speaker terminals, set “SP IMP.” to “6ΩMIN”.

RS232C STBY -X

Choices: Y (Yes)*, N (No)

Selects whether or not to transmit data via the RS-232C terminal when this unit is in the standby mode.

REMOTE ID -XXX

Choices: ID1*, ID2

Sets a remote control ID. When using multiple Yamaha AV receivers, you can operate them with a single remote control by setting the receiver IDs to the same setting.

SR PIN -XXX

Choices: RESET, CANCEL*

Resets Parental lock cord when using SIRIUS Satellite tuner.

BI AMP - XXX

Choices: ON, OFF*

Switches on and off of bi-amp connection of main speakers.

SCENE IR -XXX

Choices: ON*, OFF

Selects whether or not to transmit the control signals to an external component connected to the REMOTE OUT jack on this unit when BD/DVD or CD SCENE function is selected.

MON. CHK - XXXX

Choices: YES*, SKIP

Adds upscaling limitation on output signals to a video monitor connected to this unit via the HDMI OUT jack.

INIT-XXXXXXXX

Choices: DSP PARAM, VIDEO, NETWORK, ALL, CANCEL*

Initializes various settings stored in this unit. You can select an initialization method from the following.

DSP PARAM: All parameters of sound field

programs

VIDEO Video conversion settings (resolution/aspect) in the Setup menu and the GUI display position

NETWORK Network settings in the Setup menu

ALL All

CANCEL Cancellation of initialization

USB FirmUpdate

NET FirmUpdate

Updates the firmware of this unit. For details on how to update the firmware, refer to information supplied with updates.

Notes

- Do not use this feature unless you need to update the firmware.
- Be sure to read information supplied with updates before updating the firmware.

VERXXX.XXX.XXX

Displays the firmware of this unit.

4 Press **⓪**STRAIGHT repeatedly to change the selected parameter setting.

To change other settings, repeat steps 3 and 4.

5 Press **Ⓟ**MAIN ZONE ON/OFF to set this unit to standby.

The settings you made are reflected next time you turn on this unit.

Setting a remote control ID

Two IDs are provided for the remote control of this unit. If another Yamaha amplifier is in the same room, setting a different remote control ID to this unit prevents unwanted operation of the other amplifier.

“ID1” is set for both the main unit and remote control by default. If you have changed the remote control ID, make sure that you select the same ID for the main unit in the advanced setup menu.



- For details on how to set the remote control ID of the simplified remote control.

1 Press [15] CODE SET on the remote control using a pointed object such as the tip of a ballpoint pen.

[14] **TRANSMIT** blinks twice.

2 Press [9] ON SCREEN.

3 Enter the desired remote control ID code.

To switch to ID1, press [12] **Numeric keys** to enter “5019”.

To switch to ID2, press [12] **Numeric keys** to enter “5020”.

Once the remote control code is registered,




[14] **TRANSMIT** blinks twice.

If it fails, [14] **TRANSMIT** blinks six times. Repeat from step 1.



- If you initialize the settings of this unit, “REMOTE ID” (remote control code of this unit) is set to “ID1”.

MEMO



RX-V2065/HTR-6295

