

BT-GPRS-S Installation Guide

Preliminary



Table of Contents

Introduction	2
Standard Package Contents	2
Safety and Hazards	2
Limitation of Liability	2
Patents	2
Copyright	2
Trademarks	2
Product Overview	2
Data Connection	3
LED Status Indicators	3
Antenna Selection and Installation	4
Power Connection	5
Product Activation	6
Step – 1: Powering-up the modem	6
Step – 2: Activating the cellular unit on the network	6
Step – 3: Programming the phone number	6
Step – 4: Testing the modem	6
Product Operation	6
Mobile Terminated Call	6
Mobile Originated Call:	6
GSM circuit-switched data or GPRS packet-switched data	6
SMS Mobile Originated/Terminated	6
SIM Card Installation	7
Product Configuration – AT Commands	8
Installing the Modem Driver (WinXP)	9
Creating a Dialup Networking Session (WinXP)	10
Customer Support	13
Warranty	13
Technical Specifications	14
Regulatory Information	15

Introduction

The BT-GPRS-S is a fully integrated GSM modem, which adds wireless GPRS functionality to remote and mobile applications.

Standard Package Contents

The BT-GPRS-S package includes the following components:

- BT-GPRS-S cellular modem
- Power harness – 10 feet – with 3A inline fuse
- CD-ROM that contains this manual and the BlueVue2.0 software

Additional accessories are available from BlueTree Wireless. These include:

- Serial Cables
- Approved Cellular Antennas
- AC/DC power adapter 120Vac to 12Vdc

Safety and Hazards

Do not operate the BlueTree Wireless Data BT-GPRS modem in areas near medical equipment, where blasting is in progress, where explosive atmospheres may be present, or near any equipment that may be susceptible to any form of radio interference.

Limitation of Liability

While every effort has been made to achieve technical accuracy, information in this document is subject to change without notice and does not represent a commitment on the part of BlueTree Wireless Data, Inc., or any of its subsidiaries, affiliates, agents, licensors, or resellers. There are no

warranties, express or implied, with respect to the content of this document.

Patents

Portions of this product are covered by some or all of the following patents:

US 6,278,442	6,271,605	6,219,694	6,075,470
6,073,318	D445,428	D416,256	

Copyright

© 2003 BlueTree Wireless Data, Inc. All rights reserved.

Trademarks

All brand or product names, logos, trademarks, etc. mentioned in this guide are owned by their respective companies.

BT-GPRS-S and BlueTree are trademarks of BlueTree Wireless Data, Inc.

Product Overview

The BT-GPRS-S is a rugged GSM/GPRS wireless data modem incorporating Research In Motion's 1902G radio module.

The modem is intended for use with a host platform such as a computer or remote terminal data unit. The modem exchanges data between the host platforms using an RS232 serial connection.

Data Connection


The BT-GPRS-S is configured as DCE (Data Communications Equipment) and uses the standard RS232 9-pin designations. Two RS232 serial ports are available, each with a DB9 female connector:

MAIN – Port 1: connects to a data terminal such as a computer, RTU, etc.

AUX – Port 2: intended for field diagnostics and future consideration.

Both Port 1 and Port 2 support speeds from 9600 bps up to 115.2 kbps.

RS-232 voltage levels

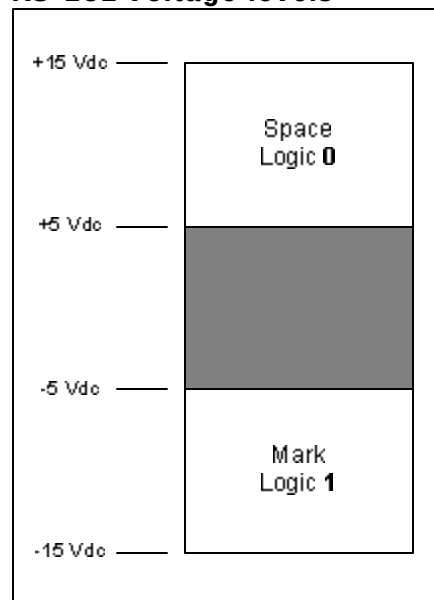

Pin	Name	Description	Port 1	Port 2
1	DCD	Data Carrier	Out	X
2	RXD	Receive Data	Out	Out
3	TXD	Transmit Data	In	In
4	DTR	Data Terminal	In	X
5	GND	Ground	Common	X
6	DSR	Data Set Ready	Out	X
7	RTS	Request To Send	In	In
8	CTS	Clear To Send	Out	Out
9	RI	Ring Indicator	Out	X

How to install the data cable

To install the serial data cable between the modem and your computer, connect the male DB9 end of the cable to the BT-GPRS-S and tighten the screws. The other end of the cable connects to the communications port of the computer. The maximum length of a standard RS232 cable is 25 feet. If longer cable runs are required a special low loss cable can be used.

LED Status Indicators

Table 2 The LED Indicators

LED	Color Scheme	Corresponding state
DTR	Red	Data Terminal Ready detected
TX	Red	Transmitting data
RX	Red	Receiving data
COV	Red	Coverage indicator (GPRS or GSM)
PWR	Off	No power
	Red Flashing 2Hz	Channel scanning
	Red Flashing 0.5Hz	In-coverage
	Red	Registered

Antenna Selection and Installation



WARNING – Only approved antennas may be connected to the modem. To comply to FCC regulations, only antennas meeting the following specifications should be used:

- Rated gain of 3dBd
- Minimal cable loss of 0.5dB
- Dual-band 800 & 1900 MHz
- Nominal 50 ohm impedance
- Male TNC connector
- Coil style cellular whip
- Mount designed for a horizontal metal surface of vehicle.

Unauthorized antennas, modifications, or attachments could impair data quality, damage the modem, or result in the violation of FCC regulations.

Contact Bluetree Wireless Data Inc. for a list of compatible antennas.



WARNING – "Antenna must not exceed 5.15 dBi. This device must be used in mobile configurations. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. Users and Installers must be provided with antenna installation instruction and transmitter operating conditions for satisfying RF exposure compliance"

How to install the antenna

The steps involved in connecting the RF antenna are:

1. Determine a suitable location for the antenna. Note the following when selecting the location:
 - The antenna should be mounted at least 20 cm from occupants or bystanders.
 - The separation between the antenna for the BT-GPRS-S and other mobile radio antennas should be as much as is practical. Antennas should never be mounted within 30cm or one foot of each other.
 - For optimal performance and safety, mount the antenna on the roof instead of the trunk of a vehicle.
 - The antenna should have a ground plane of at least 15cm (6") of metal in all directions.

Mount the antenna according to the instructions provided with it.

2. Thread the antenna cable through the vehicle so that the TNC connector is available to the BT-GPRS-S.
3. Connect the TNC connector to the BT-GPRS-S. Tighten firmly by hand. Do not use tools.


Notes:

- Tighten the TNC connector (cable to modem) firmly but manually; it is preferable not to use tools.
- The length of the cable may affect the signal strength. Choose appropriate cable type for your installation.

Power Connection

Table 3 Power connector


Pin	Annotation	Description
1	GND	Ground
2	POS	Power supply input 8 to 30 Vdc
3	IGN	Ignition input
4	OUT #1	Digital output (horn alert)

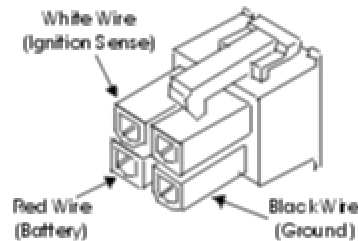

How to install the power cable

Use a 12 volt DC power supply with the BT-GPRS-S. The power cable connects to the modem with a Molex type connector. The part number of the connector for the cable is 39-01-2040 (alternative part number 39-01-2045). The part number for the pins for the cable connector is 39-00-0039.

The modem's power on/off is controlled by the ignition sense line (white wire). When this line is pulled high (5 to 16 volts), the modem will power on. The modem shuts down when the ignition sense line is pulled low (less than 2 volts).

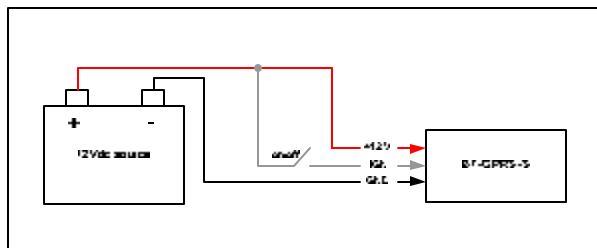

How to power-up the modem

The white ignition sense wire of the power harness must be connected according to how the modem is to be powered on and off. There options are:

1. The white ignition sense wire can be connected to the vehicle's ignition such that the modem is powered on only when the ignition key is switched to 'On'. The modem is then ON, only when the engine is on.
2. Since the BT-GPRS-S has no on/off switch, the white ignition sense wire of the power harness must be connected according to how the modem is to be powered on and off. The recommendation is that the ignition sense wire be connected to a switch, rather than connecting it directly to the red battery wire. It is also recommended that the battery wire have a 3 amp fuse.
3. The white ignition sense wire can be connected to the vehicle's ignition such that the modem is powered on when the ignition is switched to 'Accessories'. The modem can then be turned on, when the engine is off.
4. The white ignition sense wire can be connected to a separate switch, mounted under the dashboard, that allows the modem to be turned on or off, regardless of the position of the ignition key.

The modem can also be configured, via an internal jumper pin, so it can automatically turn ON when a DTR signal is applied in Port 1. When DTR is low, the modem will turn OFF.

Product Activation

Step – 1: Powering-up the modem

- Connect the external antenna to the modem
 - Connect a power source of 12Vdc @ 1A to the power terminal – GND to pin 1 and POS to pin 2
 - To turn ON the modem, apply a 12Vdc to the IGN pin
 - PWR LED on the modem should light-up in red
- For automatic power-up, put a jumper between the IGN pin and the POS pin*

Step – 2: Activating the cellular unit on the network

- 1 Contact your wireless service provider/dealer:
 - a) provide them with the IMEI (Electronic Serial Number, indicated on the modem's enclosure),
 - b) request that they set up an account and provide a phone number for the unit,
 - c) if your dealer is not familiar with industrial cellular modems, you may mention that provisioning the modem is virtually identical to a digital cell phone, except that it is a data only device.
- 2 Ask the wireless service provider to provide you with a SIM card.

Step – 3: Programming the phone number

Provisioning the modem's phone number is accomplished using the configuration software **BlueVue**, available from the source where you purchased the modem and/or from BlueTree's website under the **Download** section.

Step – 4: Testing the modem

You can test the modem by dialing a host computer and connecting to it: ATDT<host phone number>.
If you get a CONNECT message in the **Output window**, that means the modem is ready for operation, otherwise review steps 1, 2 and 3 or call your supplier.

Product Operation

The BT-GPRS-S supports both GSM circuit-switched data and GPRS packet switched data for the 850MHz and 1900MHz bands.

Mobile Terminated Call

Mobile terminated calls are NOT supported.

Mobile Originated Call:

GSM circuit-switched data or GPRS packet-switched data

SMS Mobile Originated/Terminated

Could be used with any type of serial port software (HyperTerminal).

The BT-GPRS-S modem supports both sending and receiving Short Message Services.

Refer to the table of AT Commands for detailed operations.

SIM Card Installation

To install or change the SIM card, follow the next steps:

- 1- Unscrew the front plate (connectors' side) from the enclosure



- 2- Slide the board with the front plate attached out of the enclosure



- 3- On the back side of the board, you will find the RIM 1902G module with on-board SIM holder



- 4- Open the SIM holder and insert the SIM card into it



- 5- Close the SIM holder
- 6- Insert the board back into the enclosure
- 7- Screw the face plate onto the enclosure.

Product Configuration – AT Commands

The modem can be configured by AT commands using a terminal such as HyperTerminal.

The complete list of supported AT commands is available from BlueTree Wireless Data.

The following commands can help you verify the modem connection prior to setting up a dialup connection.

Turn ON the module

ATRIMRADIO=1

OK

Set the serial DCE speed

AT+IPR=115200

OK

Check the SIM card

AT+CPIN?

+CPIN: READY

Check if registered

AT+CREG?

+CREG: 0,1

Put in data mode

AT+FCLASS=0

OK

Define the PDP context

AT+CGDCONT=1,"IP","internet.com","0.0.0.0",0,0

OK

Requested quality of service profile

AT+CGQREQ=1,0,0,0,0,0

OK

Minimum quality of service profile

AT+CGQMIN=1,0,0,0,0,0

OK

PDP context activate

AT+CGACT=1,1

OK

Check if GPRS attached

AT+CGATT?

+CGATT: 1

Select service for mobile originated SMS

AT+CGSMS=2 (*GPRS with fallback to CSD*)

OK

Set the COVERAGE indicator to turn on when GPRS is present

AT+RSCI=1

OK

Check signal strength

AT+RCIQ?

+RCIQ:

Serving Cell Info:

BSIC: 51

TCH: 745

RSSI: -81dBm

LAC: 2100

Cell ID: 989


Dedicated Channel Info:

TCH: 745


Channel Mode: 0

Installing the Modem Driver (WinXP)


Go to **Control Panel** → **Phone and Modems**
Select the **Modems** tab
Click **Add...** to install the modem driver

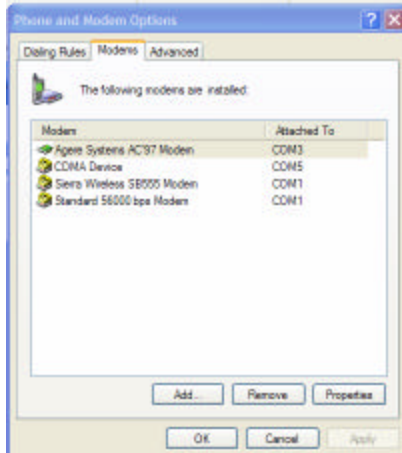


The Hardware Wizard will start
Check the box labeled **“Don’t detect my modem”**
Click **Next**

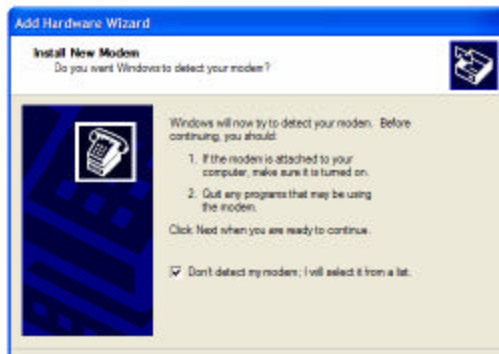

Select **(Standard Modem Types)** as the Manufacturer
Select **Standard 33600bps Modem** as the Model
Click **Next**

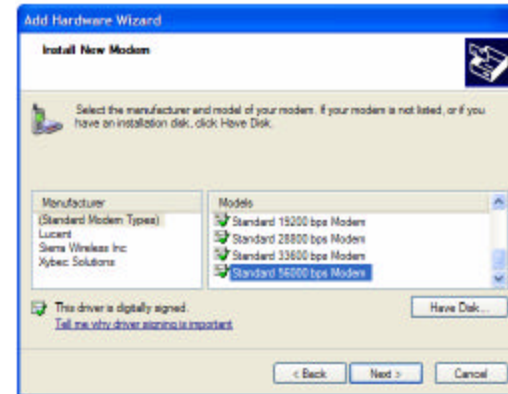

Select the **COM port** to which the modem will be attached
Click **Next**

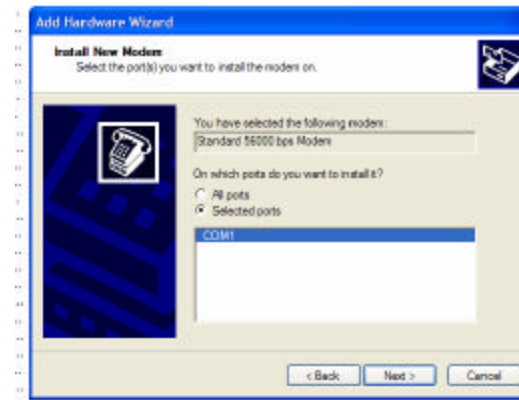


The modem is now added to your list of available modems

Creating a Dialup Networking Session (WinXP)


Go to **Control Panel** → **Network Connections**
Click on **Make A New Connection**
The following Wizard will start




Select **Connect to the internet** as the type of Network Connection
Click **Next**

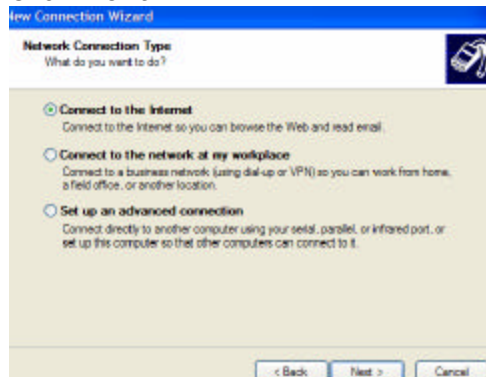


Select to setup the connection **manually**
Click **Next**

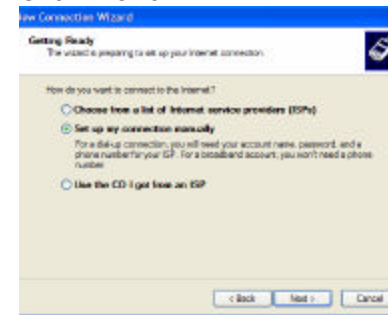


Select **Connect to a dialup modem**
Click **Next**

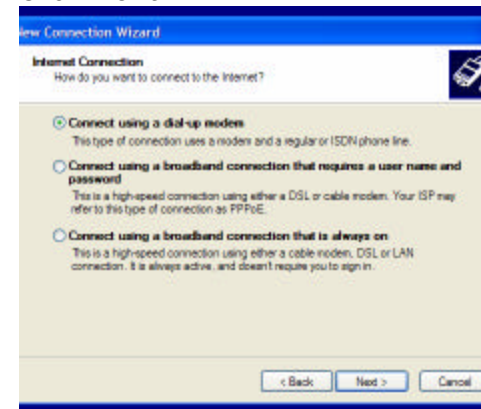


Select the **33600bps** modem driver
Click **Next**

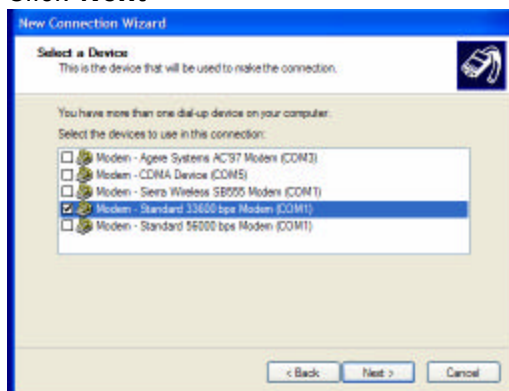

Enter a **name** for your connection
Click **Next**

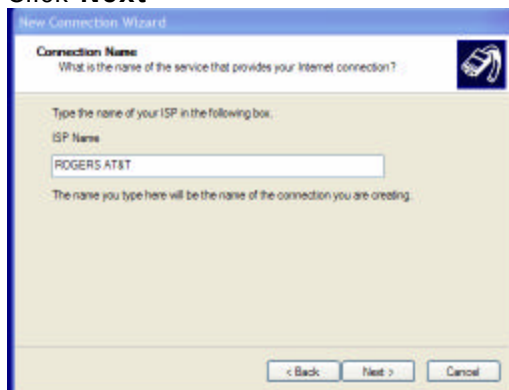

Enter the **phone number** for the GPRS service
This number is supplied by the local cellular provider
Example: enter ***99***1#**
Click **Next**

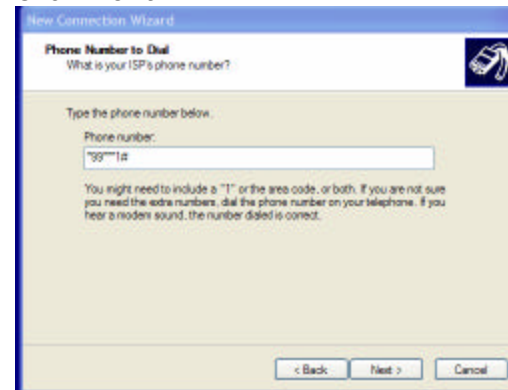


Enter the **username and password** for this connection, given by your cellular provider.
Example: for service provider "WirelessCarrier", username is "wapuser1" and password is "wap".
Click **Next**



The following connection to your wireless service provider is now created

→ Click on **Properties** to verify the setup.

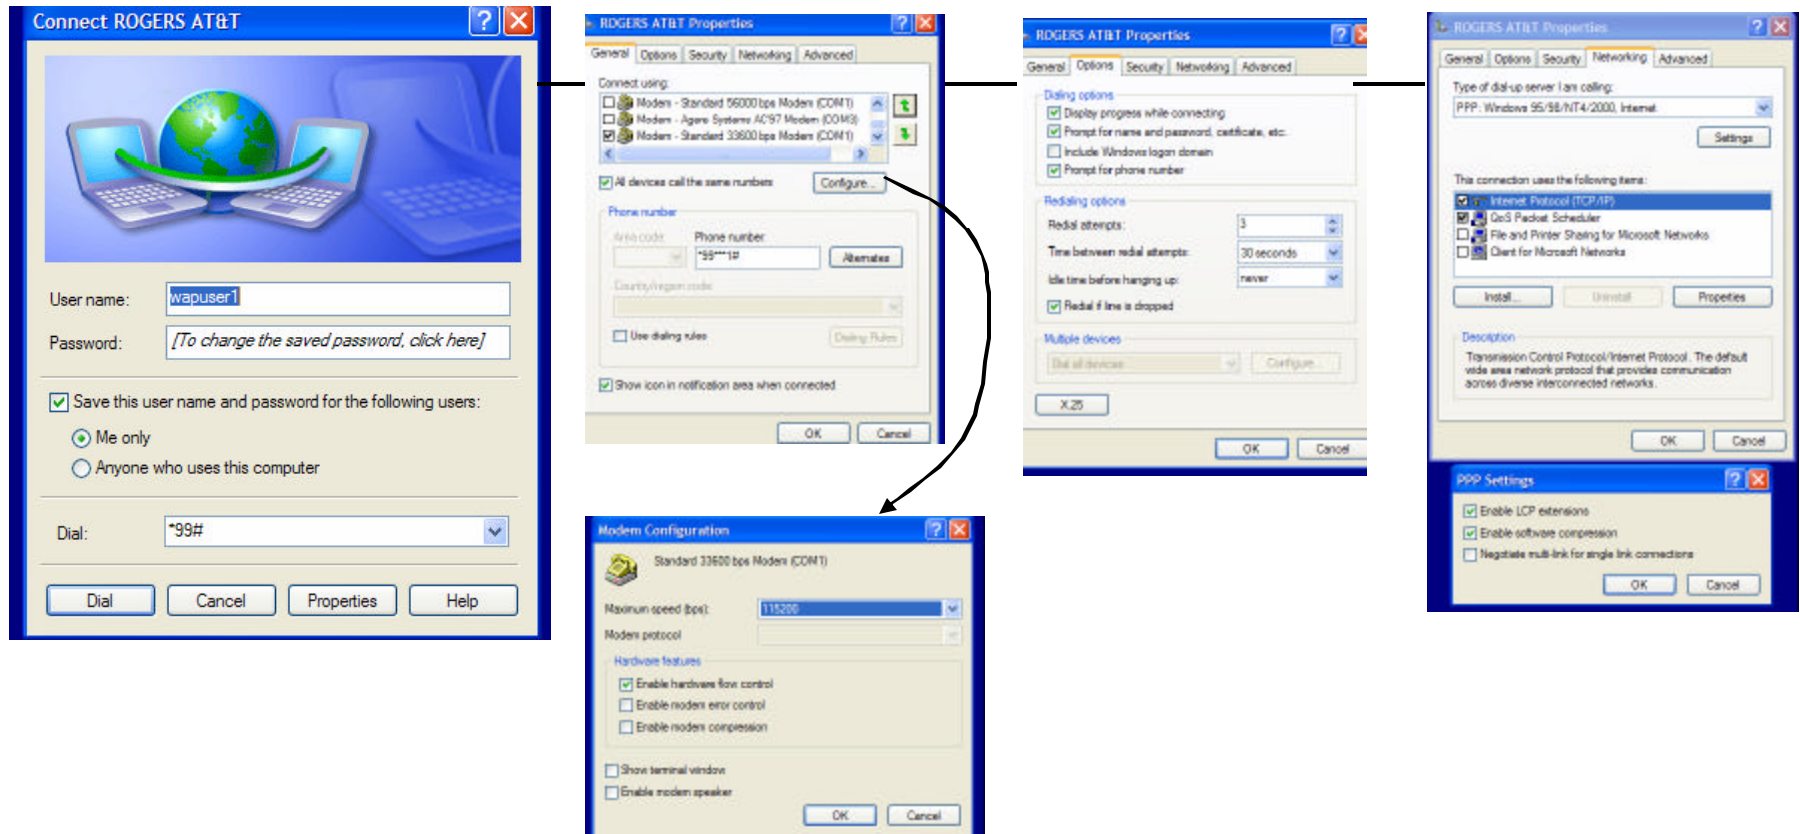

Customer Support

Help Desk	Toll Free:	1- (U.S. and Canada)
	Phone:	(514) 422-9110 x496
	Hours:	09:00 - 17:00 Eastern Time
	Email:	support@bluetreewireless.com
Sales Desk	Phone:	(514) 422-9110
	Hours:	09:00 - 17:00 Eastern Time
	Email:	sales@bluetreewireless.com
Post	BlueTree Wireless Data, Inc. 2405 46 th Avenue Lachine, QC, Canada H8T 3C9	
Fax	(514) 422-3338	
Web	www.bluetreewireless.com	

Warranty

Bluetree Wireless Data Inc. warrants the BT -GPRS-S cellular modem against all defects in materials and workmanship for a period of one (1) year from the date of purchase.

The sole responsibility of Bluetree Wireless Data Inc. under this warranty is limited to either repair or, at the option of Bluetree Wireless Data Inc., replacement of the cellular modem. There are no expressed or implied warranties, including those of fitness for a particular purpose or merchantability, which extend beyond the face hereof.

Bluetree Wireless Data Inc. is not liable for any incidental or consequential damages arising from the use, misuse, or installation of the BT -GPRS-S cellular modem.

This warranty does not apply if the serial number label has been removed, or if the cellular modem has been subjected to physical abuse, improper installation, or modification.

To register the warranty, visit our web site and register on-line from the REGISTER option. Alternatively, you can complete and mail or fax the registration card provided in the package

Technical Specifications

Air-Interface Standards	GSM/GPRS
Frequency bands	850/1900MHz Dual-frequency
Host Interface	RS232 serial port
Interface Connector	DB-9 (RS232)
Enclosure	Extruded aluminum 5.3" x 2.8" x 1.56"
Antenna Connection	TNC 50 ohm male
Power Input	8 – 30 VDC (12VDC nominal)
Power Consumption (approx. @ 12VDC)	Peak (Transmit): 150 mA Stand-By Mode: 25 mA Power-Save Mode : 6 mA
Transmitter Power range at antenna	1.0 W for 1900 MHz 0.8 W for 850 MHz
Programming / Setup	AT Command programming
Multislot Class	8
FCC Industry Canada	FCC Part 15 Class A, CAN ICES-003 800MHz / 1900MHz : TBD
Temperature	Operating: -30° C to + 60° C Storage: -40° C to + 70° C
Humidity Range	MIL-STD-810E M507.3 Pr III

Shock	MIL-STD-810E M516.4 Pr I Function shock
Vibration	MIL-STD-810E M514.4 Ca 1 Basic Transpo.
Data rates over the air	171.2 kbps (theoretical)
Serial Port speeds	1200 to 115200bps
Receiver sensitivity	1900MHz: -106.5 dB 850 MHz: -104 dB

Regulatory Information

FCC Compliance Statement (USA)

FCC Class A Part 15
FCC ID: QWV-BTGPRS

This section applies to the BlueTree Wireless Data modem
BT-GPRS-S.

The device complies with Part 15 of the FCC rules. Operation is
subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including
interference that may cause undesired operation.



CAUTION – Unauthorized modifications or changes
not expressly approved by BlueTree Wireless Data,
Inc. could void compliance with regulatory rules, and
thereby your authority to use this equipment.

This equipment generates, uses and can radiate radio
frequency energy and, if not installed and used in accordance
with the manufacturer's instructions, may cause interference
harmful to radio communications.

However, there is no guarantee that interference will not occur
in a particular installation. If this equipment does cause harmful
interference to radio or television reception, which can be
determined by turning the equipment off and on, the user is
encouraged to try to correct the interference by one or more of
the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different
from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for
help.



WARNING – "Antenna must not exceed 5.15 dBi. This
device must be used in mobile configurations. The
antenna(s) used for this transmitter must be installed
to provide a separation distance of at least 20 cm from
all persons and must not be co-located or operating in
conjunction with any other antenna or transmitter.
Users and Installers must be provided with antenna
installation instruction and transmitter operating
conditions for satisfying RF exposure compliance"