



BRADFORD WHITE[®]

WATER HEATERS

Wholesale Price Schedule

Effective August 28, 2017



Built to be the Best[™]

Index

Terms of Sale 2

- General Information
- Freight Policy
- Parts
- Return Material Policy

Warranty Information 3

New Model Number Naming Structure 4

Residential Gas Models

- Atmospheric Vent Fan Assist Models 5
- Atmospheric Vent Damper Models 5
- Atmospheric Vent Models 6
- Atmospheric Vent High Input Models 6
- Direct Vent Models 7
- High Efficiency eF Series® Power Vent 9
- Power Vent (TTW®) Models 9
- Power Direct Vent Models 9
- Manufactured Home Closed Combustion/Direct Vent 10
- Manufactured Home Open Combustion/Atmospheric Vent 10
- Ultra Low NOx Atmospheric Vent Damper Models 10
- Ultra Low NOx Atmospheric Vent Models 11
- Ultra Low NOx Atmospheric Vent High Input Models 11
- Ultra Low NOx Power Vent (TTW®) Models 11
- Ultra Low NOx Power Direct Vent Models 12
- Ultra Low NOx Direct Vent Models 12
- Infiniti Tankless™ High Efficiency Models 13
- Infiniti Tankless™ Mid Efficiency Models 13

Residential Electric Models

- AeroTherm® Series Heat Pump Models 14
- Upright and Lowboy Models 15
- Wall Hung and Utility 15
- Powerful Compact™ Models 16
- KwickShot® Instantaneous Water Heaters 17

Solar Models

- Residential Solar Models 18-20

Residential Hydronic/Space Heating

- Combi1™ Single-Wall Atmospheric Models 21
- Combi1™ TTW® Single-Wall Power Vent Models 21
- Combi2® Double-Wall Atmospheric Models 21
- Combi2® TTW® Double-Wall Power Vent Models 21

Residential Indirect Models

- PowerStor Series™ Single-Wall Indirect Models 22
- PowerStor2 Series™ Double-Wall Indirect Models 23
- PowerStor Series SS™ Stainless Single-Wall Indirect Models 23

Residential Storage Tank

- AST Models 23

Commercial Gas Models

- Light Duty Atmospheric Vent High Input Models 25
- Light Duty Commercial High Efficiency eF Series® Power Vent Model 26
- Light Duty Power Vent (TTW®) Models 26
- Light Duty Power Direct Vent Models 26
- Light Duty Direct Vent Models 27
- Light Duty Ultra Low NOx Atmospheric Vent High Input Models 27
- Light Duty Ultra Low NOx Direct Vent Models 28
- Light Duty Ultra Low NOx Power Vent (TTW®) Models 28
- Light Duty Ultra Low NOx Power Direct Vent Models 28
- Commander Series™ Atmospheric Vent Models 29
- Electronic Ignition Models 30
- Induced Draft Models 31
- Millivolt Models 32
- eF Series® Ultra High Efficiency Models 33

Commercial Electric Models

- ElectriFLEX LD™ (Light Duty) Upright 34-35
- ElectriFLEX LD™ (Light Duty) Lowboy 34-35
- ElectriFLEX LD™ (Light Duty) Utility 35-36
- ElectriFLEX LD™ (Light Duty) Wall Hung 35-36
- ElectriFLEX MD™ (Medium Duty) 37
- ElectriFLEX HD™ (Heavy Duty) 38-39
- M-II Models 40
- ASME Models 41-42
- Brute® Vertical Round 43-46

Commercial Indirect-Fired

- PowerStor Series™ Single-Wall Indirect Models 47

Commercial Storage Tank

- Large Volume Storage Tank Models 47-52

Replacement Parts 53-59

Terms of Sale

■ GENERAL INFORMATION

1. This price schedule does not constitute an offer to sell. All orders are subject to final approval and acceptance. **Prices, terms and specifications are subject to change without notice.** Billing prices are those in effect on the date of order entry for immediate shipment only.
2. **All shipments are F.O.B. shipping point.** Under such F.O.B. terms, the beneficial and legal title to, ownership of, right to possession of, control over and risk of loss and damage to the goods shall pass to Customer at the F.O.B. shipping point upon Seller's tender of the goods for delivery to Customer or a common carrier. For purposes of this Agreement, delivery of the goods includes tendering the goods to be loaded into the transportation unit of the Customer or common carrier located on Seller's property.
3. **Terms 2% 10th prox. Net 30th prox. origin.**
4. All Residential Storage Models meet or exceed efficiency requirements of the Department of Energy, ASHRAE Standard 90.1b (current standard) and the National Appliance Energy Conservation Act of 1987, amendment effective April 16, 2015 which supersedes all state and local efficiency requirements.
5. All gas water heaters are design certified by CSA International (formerly AGA and CGA) in accordance with ANSI Z21.10.1 or 10.3 latest edition. Closed combustion manufactured home heaters are listed by Underwriters Laboratories.
6. All electric water heaters are listed by Underwriters Laboratories and/or Intertek (ETL).
7. Please specify type of gas, element wattages, phase, and voltages when ordering.

■ PARTS

(Standard stock Shipments)

All parts orders under **\$500.00** net will be shipped prepaid and charged F.O.B. shipping point. Parts orders totaling **\$500.00** or more net will be shipped F.F.A.

"Surface". We reserve the right to ship by the carrier of our choice.

Water heater replacement parts that are defective will be replaced free of charge (exclusive of freight charges) within 1 year of purchase. The return must be accompanied by a receipt providing date of purchase and statement of defect.

■ FREIGHT POLICY

The following terms apply to shipment of orders to one destination. Residential and commercial heaters each have a unit value of one. 150 or more units to one destination qualify for a \$3.00 per unit truckload allowance.

Large Volume Storage Tanks are excluded from this freight policy. These units are shipped prepaid and charged F.O.B. shipping point. No freight allowed.

RESIDENTIAL HEATER FREIGHT TERMS

1 to 11 units - Shipped prepaid and charge F.O.B. shipping point plus **\$15.00** per unit handling charge.

12 to 49 units - Shipped prepaid full freight allowed, plus **\$15.00** per unit handling charge.

50 to 149 units - Shipped prepaid full freight allowed, no handling charge.

150 or more units - Shipped prepaid full freight allowed with **\$3.00** per unit truckload allowance to one destination.

The above terms apply to shipment of orders for residential heaters to one destination.

COMMERCIAL HEATER FREIGHT TERMS

1 to 3 units - Shipped prepaid, full freight allowed, plus **\$75.00** per unit handling charge.

4 or more units - Shipped prepaid, full freight allowed, no handling charge.

COMBINED HEATER FREIGHT TERMS

Handling charge for commercial heaters is waived if order is accompanied by a residential order of 50 or more pieces shipping to the same destination.

Power Lift Gate Charge\$125.00

Special LTL Packaging Charge.....\$75.00 per unit

■ RETURN MATERIAL POLICY

No merchandise may be returned for credit until written authorization has been received from Bradford White Corporation. When so returned (provided the equipment is saleable, unused, no more than six months old based on manufacturing date and in original carton), it must be returned freight prepaid, and will be subject to a minimum 15% re-stocking charge. Custom built Commercial Electric product cannot be returned for credit. All merchandise returned without authorization will be refused and returned to the customer with any incurred expenses being charged back to the customer.

Any product not manufactured by Bradford White cannot be returned for credit.

Warranty Information

	Limited Tank Warranty	Limited Parts Warranty		Limited Tank Warranty	Limited Parts Warranty
Residential Gas Models			Commercial Gas Models		
Atmospheric Vent Fan Assist Models.....	6 or 10 Year	6 or 10 Year**	Light Duty Atmospheric Vent High Input Models.....	3 year	1 Year
Atmospheric Vent Damper Models.....	6 or 10 Year	6 or 10 Year**	Light Duty Power Vent (TTW®) Models.....	3 year	1 Year
Atmospheric Vent Models.....	6 or 10 Year	6 or 10 Year**	Light Duty Power Direct Vent Models.....	3 year	1 Year
Atmospheric Vent High Input Models.....	6 or 10 Year	6 or 10 Year**	Light Duty Direct Vent Models.....	3 year	1 Year
Direct Vent Models.....	6 or 10 Year	6 or 10 Year**	Light Duty Ultra Low NOx Atmospheric Vent High Input Models.....	3 year	1 Year
High Efficiency eF Series® Power Vent Model.....	6 or 10 Year	6 or 10 Year**	Light Duty Ultra Low NOx Direct Vent Models.....	3 year	1 Year
Power Vent (TTW®) Models.....	6 or 10 Year	6 or 10 Year**	Light Duty Commercial High Efficiency eF Series® Power Vent Model.....	3 year	1 Year
Power Direct Vent Models.....	6 or 10 Year	6 or 10 Year**	Light Duty Ultra Low NOx Power Vent (TTW®) Models.....	3 year	1 Year
Manufactured Home Models.....	6 or 10 Year	6 Year	Light Duty Ultra Low NOx Power Direct Vent Models.....	3 year	1 Year
Ultra Low NOx Atmospheric Vent Damper Models.....	6 or 10 Year	6 or 10 Year**	Commander Series™ Atmospheric Vent Models.....	3 year	1 Year
Ultra Low NOx Atmospheric Vent Models.....	6 or 10 Year	6 or 10 Year**	Electronic Ignition Models.....	3 year	1 Year
Ultra Low NOx Atmospheric Vent High Input Models.....	6 or 10 Year	6 or 10 Year**	Induced Draft Models.....	3 year	1 Year
Ultra Low NOx Power Vent (TTW®) Models.....	6 or 10 Year	6 or 10 Year**	Millivolt Models.....	3 year	1 Year
Ultra Low NOx Power Direct Vent Models.....	6 or 10 Year	6 or 10 Year**	eF Series® Ultra High Efficiency Models.....	3 year	1 Year
Ultra Low NOx Direct Vent Models.....	6 or 10 Year	6 or 10 Year**	Commercial Electric Models		
Infiniti Tankless™ Models.....	12 Year*	5 Year	ElectriFLEX LD™ (Light Duty) Upright.....	3 year	1 Year
Residential Electric Models			ElectriFLEX LD™ (Light Duty) Lowboy.....	3 year	1 Year
AeroTherm® Series Heat Pump Models.....	10 Year	10 Year	ElectriFLEX LD™ (Light Duty) Utility.....	3 year	1 Year
Upright and Lowboy Models.....	6 or 10 Year	6 or 10 Year**	ElectriFLEX LD™ (Light Duty) Wall Hung.....	3 year	1 Year
Wall Hung and Utility Models.....	6 or 10 Year	6 or 10 Year**	ElectriFLEX MD™ (Medium Duty).....	3 year	1 Year
Powerful Compact™ Models.....	6 or 10 Year	6 or 10 Year**	ElectriFLEX HD™ (Heavy Duty).....	3 year	1 Year
KwickShot® Instantaneous Water Heaters.....	10 Year†	1 Year	ASME Models.....	3 year	1 Year
Solar Models			Brute® Vertical Round.....	3 year	1 Year
Solar Models.....	6 or 10 Year	6 Year	Commercial Indirect-Fired		
Residential Hydronic/Space Heating			PowerStor Series™ Single-Wall Indirect Models.....	3 year	1 Year
Combi™ Models.....	10 Year	6 Year	Commercial Storage Tank		
Combi2® Models.....	10 Year	6 Year	Jacketed Models.....	3 year	1 Year
Residential Indirect Models			Bare Glass Coated Models.....	3 year	1 Year
PowerStor Series™ Single-Wall Indirect Models.....	Limited Lifetime	6 Year	Jacketed Large Volume Models.....	3 year	1 Year
PowerStor2 Series™ Double-Wall Indirect Models.....	Limited Lifetime	6 Year	UnJacketed Large Volume Models.....	3 year	1 Year
PowerStor Series SS™ Stainless Single-Wall Indirect Models....	Limited Lifetime	6 Year	Top Coat Large Volume Models.....	3 year	1 Year
Residential Storage Tank					
AST Models.....	6 Year	6 Year			

Some states do not allow limitations on warranties. See copy of the Warranty included with the heater. *Heat Exchanger Only **10 year parts warranty on warranty upgrade kit models only. †Heater Body Element Assembly.

Warranty Upgrade Kits

Available on selected Residential Water Heaters

- Warranty Upgrade Kit Level 1 - 238-43329-00 (6 upgrades per kit) **\$630.00**
- Warranty Upgrade Kit Level 2 - 238-44332-00 (6 upgrades per kit) **\$996.00**



Residential Warranty Upgrade Kit

The warranty extension will allow a homeowner to increase the original warranty of the water heater from 6 to 10 years on both the tank and parts. The upgrade is available for select residential water heaters. The upgrade requires a registration form be completed and returned to Bradford White. For more information on the new upgrade kits please feel free to contact our Sales Department (800) 523-2931.

Warranty Options

- For 10 Year Limited Tank Warranty change “6” to “10” in Model Number.
- For 1 Year Limited Tank and Parts Warranty change “6” to “1” in Model Number and consult factory for pricing.

*This Warranty Upgrade includes all of the associated suffixes to the base model numbers above. The Upgrade Kit also applies to any corresponding new model numbers created.


** Available in Canada ONLY.

LEVEL 1			
GAS*	RG230S	URG130T	URG250T
RG150L**	RG240T	URG140T	URG250L
RG130T	RG240S	URG150T	URG250S
RG140T	RG250L	URG230T	
RG150T	RG250T	URG240T	
RG230T	RG250S	URG240S	
ELECTRIC*	RE250L	RE340S	RE112T
RE120L	RE230S**	RE340T	RE115U
RE130L	RE240S	RE350S	RE120U
RE230L	RE250S	RE350T	RE16WV
RE230LN	RE265T**	RE16U	RE112WV
RE240L	RE280T**	RE110U	RE120WV
RE240LN	RE330S	RE112U	
LEVEL 2			
GAS*	RG2DV40S	RG1PV50S	URG2DV40S
RG2F40S	RG2DV50S	RG2PV40T	URG2DV50S
RG2F50S	RG2DV50H	RG2PV50T	URG1PV40S
RG250H	RG2MH30T	RG2PV60T**	URG1PV50S
RG275H	RG2MH40T	RG2PV50H	URG2PV40T
RG2100H	RG2DVMH30T	RG2PV75H	URG2PV50T
RG1D30T	RG2DVMH40T	RC2PV50H	URG2PV50H
RG1D40S	RG2PDV40S	URG250H	URG2PV75H
RG1D40T	RG2PDV50S	URG275H	URG2DV50H
RG1D50T	RG2PDV50H	URG2100H	URG2PDV40S
RG2D40S	RG2PDV75H	URG2D40S	URG2PDV50S
RG2D50S	RG1PV40S	URG2D50S	URG2PDV50H
ELECTRIC*	MS65R	MS80R	MS120R


Pre-NAECA models may also be available for warranty upgrade. Please refer to warranty upgrade kit for more information.

Model Number Naming Structure

Residential Model Number Structure

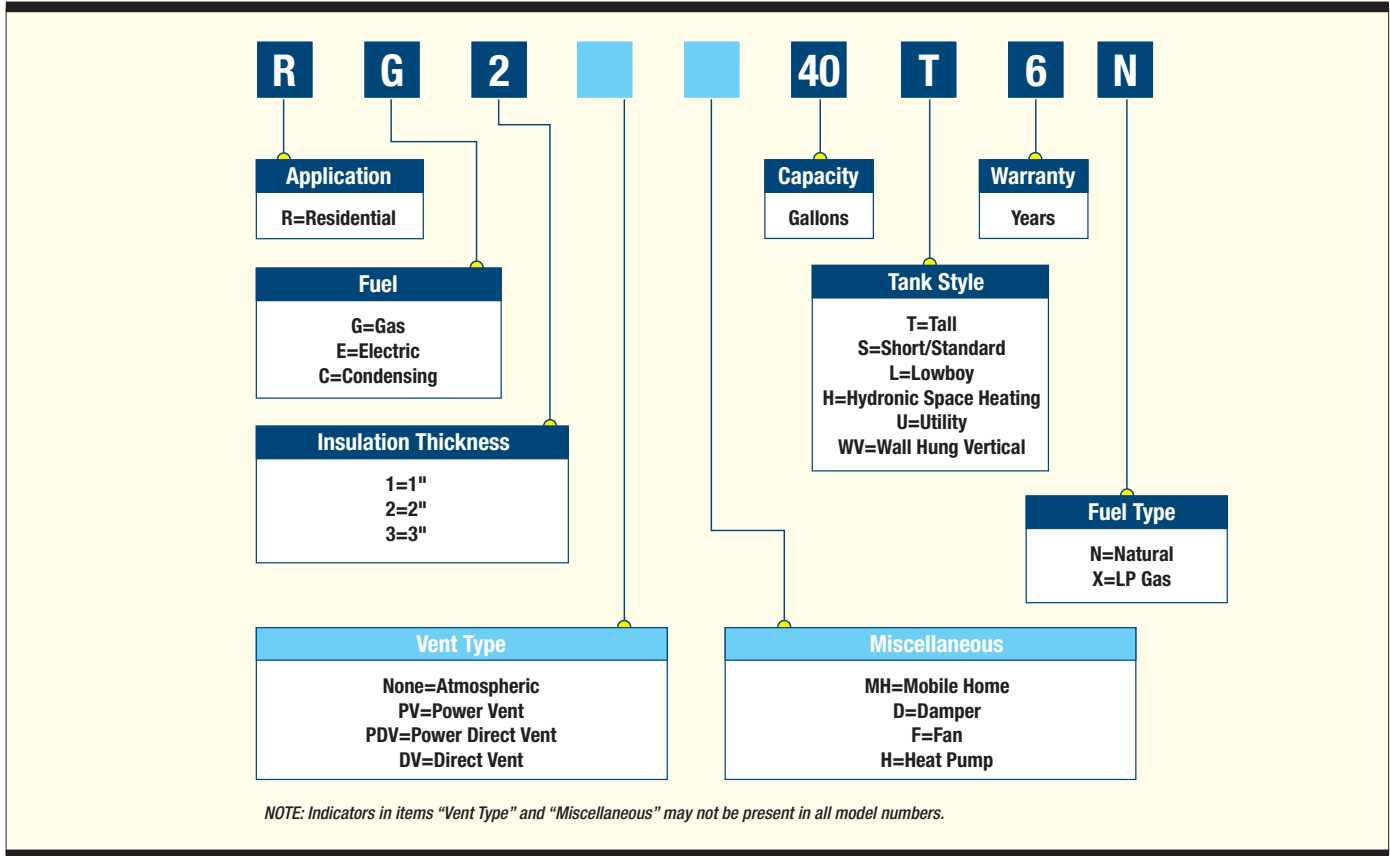

Light Duty Commercial Model Number Structure

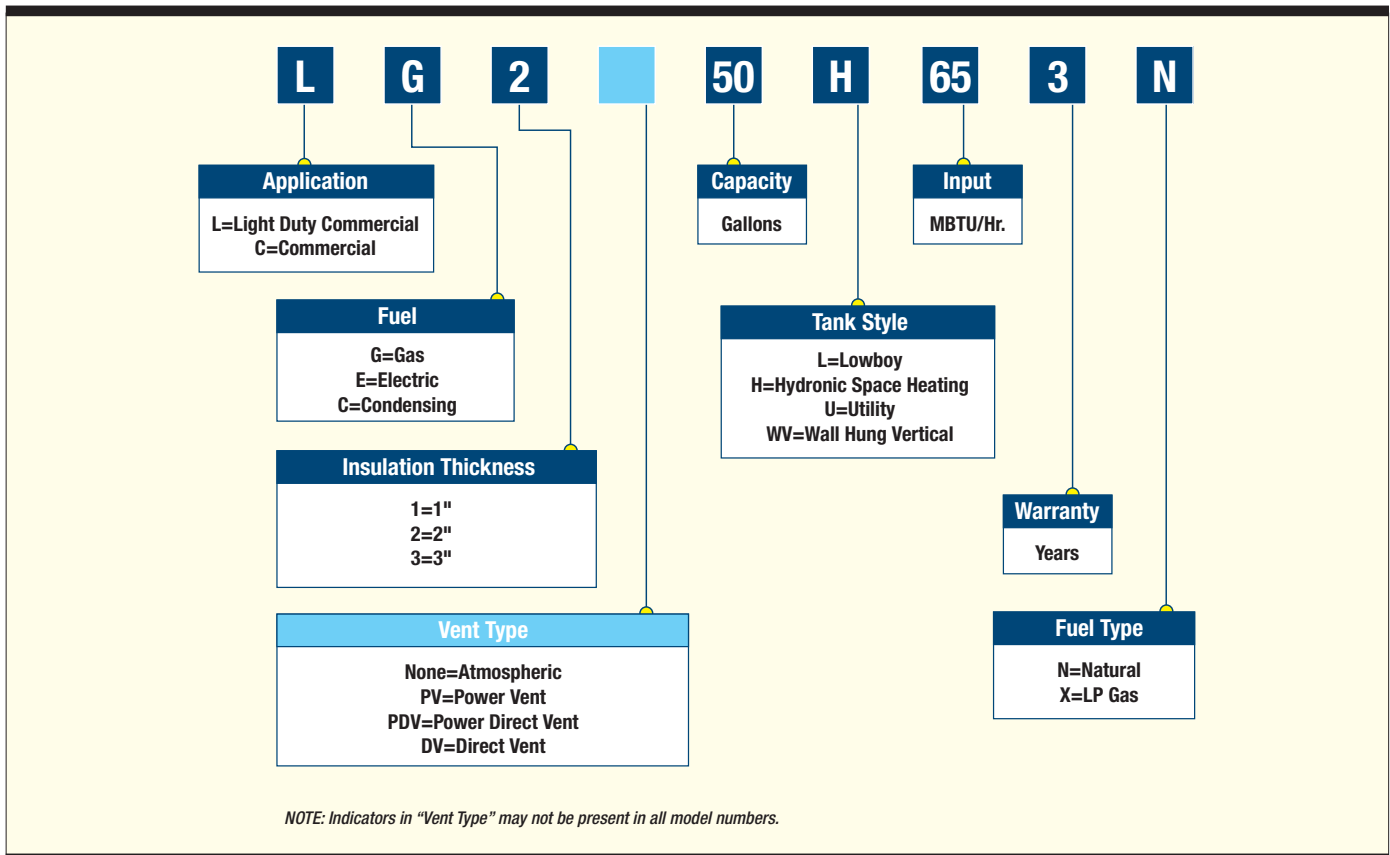

Residential Gas Models



High Tech Innovation
Meets Intelligent Simplicity



The Perfect Choice in Gas Control Technology

- 1.) Model numbers shown are for Natural Gas. For LP Gas (Propane) change suffix "N" to "X" and add \$40.00 to Natural Gas net prices where applicable.
- 2.) LP Gas Inputs may vary from their Natural Gas counterparts. Consult current specification sheets for accurate information.
- 3.) Recoveries based on manufacturer's rated recovery efficiency.
- 4.) All gas water heaters are certified at 300 psi test pressure and 150 psi working pressure. All water connections are 3/4" NPT on 8" centers unless specified otherwise. All gas connections are 1/2" unless specified otherwise.
- 5.) All models include a drain valve.
- 6.) All models meet or exceed efficiency requirements of the Department of Energy, ASHRAE 90.1b (current standard), the National Appliance Energy Conservation Act of 1987 recent amendment effective April 16, 2015 which supersedes all state and local efficiency requirements and are CEC listed.
- 7.) All residential gas water heaters are design certified by CSA International (formerly AGA and CGA). Closed Combustion Manufactured Home models are listed by Intertek (ETL).

High Efficiency and Damper

Atmospheric Vent Fan Assist Models

2" Non-CFC Foam Insulation - 120 VAC required



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
★RG2F40S6N	40	38	38,000	41	69	Standard	54 1/4"	22"	3" x 4"	150	\$1,925.00	\$2,091.00
★RG2F50S6N	50	48	38,000	41	81	Standard	55 1/4"	24"	3" x 4"	176	2,083.00	2,249.00

T&P Valve installed. Heat traps installed.

★ = ENERGY STAR® Qualified.



Atmospheric Vent Damper Models

1" Non-CFC Foam Insulation (RG2D = 2" Non-CFC Foam Insulation) - 120 VAC required



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
RG1D30T6N•	30	28	32,000	34	59	Tall	63"	16"	3" x 4"	116	\$1,256.00	\$1,422.00
RG1D40S6N•	40	38	40,000	43	73	Standard	57 7/8"	20"	3" x 4"	147	1,359.00	1,525.00
RG1D40T6N•	40	38	40,000	43	74	Tall	63 3/8"	18"	3" x 4"	134	1,359.00	1,525.00
RG1D50T6N•	50	48	40,000	43	86	Tall	63 3/8"	20"	3" x 4"	160	1,441.00	1,607.00
★RG2D40S6N*	40	38	38,000	41	71	Standard	54 1/2"	22"	3" x 4"	155	1,596.00	1,762.00
★RG2D50S6N*	50	47	40,000	43	83	Standard	63 1/2"	22"	3" x 4"	174	1,723.00	1,889.00

T&P Valve installed. Heat traps installed.

* = Water connections are 11" centers.

• = Models feature optional top T&P location. Must be specified when ordering.

★ = ENERGY STAR® Qualified.



Residential Gas Models

Atmospheric and Atmospheric High Input Models



Atmospheric Vent Models

2" Non-CFC Foam Insulation (RG1 Models have 1" Non-CFC Foam Insulation)



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
RG130T6N•	30	28	27,000	29	53	Tall	59 ¹ / ₈ "	16"	3" x 4"	109	\$1,059.00	\$1,164.00
RG140T6N•	40	38	34,000	37	69	Tall	61 ¹ / ₄ "	18"	3" x 4"	132	1,149.00	1,254.00
RG150T6N•	50	47	34,000	37	80	Tall	59 ⁵ / ₈ "	20"	3" x 4"	150	1,267.00	1,372.00
RG230T6N•	30	28	32,000	34	59	Tall	59 ³ / ₄ "	18"	3" x 4"	116	1,033.00	1,138.00
RG230S6N	30	28	30,000	32	57	Short	49 ¹ / ₄ "	20"	3" x 4"	113	1,033.00	1,138.00
RG240T6N•	40	38	40,000	43	74	Tall	60 ¹ / ₈ "	20"	3" x 4"	134	1,087.00	1,192.00
RG240S6N•	40	38	40,000	43	73	Short	51 ¹ / ₂ "	22"	3" x 4"	139	1,087.00	1,192.00
RG250L6N	48	47	40,000	43	85	Lowboy	51 ⁵ / ₈ "	24"	3" x 4"	170	1,234.00	1,339.00
RG250T6N•	50	48	40,000	43	86	Tall	60 ¹ / ₂ "	22"	3" x 4"	154	1,213.00	1,318.00
RG250S6N•	50	47	50,000	54	89	Standard	60 ¹ / ₂ "	22"	4"	167	1,282.00	1,387.00

T&P Valve Installed. Heat traps installed.

• = Models feature optional top T&P location. Must be specified when ordering.



Atmospheric Vent High Input Models

2" Non-CFC Foam Insulation (RG155H6N = 1" Non-CFC Foam Insulation)

Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
RG250H6N	48	46	65,000	70	104	Standard	60"	22"	4"	189	\$1,381.00	\$1,547.00
RG155H6N	55	55	80,000	86	117	Standard	59 ¹ / ₂ "	22"	4"	210	1,694.00	N/A
RG275H6N	75	72	76,000	82	126	Standard	62 ⁵ / ₈ "	26"	4"	249	1,773.00	1,939.00
RG2100H6N	100	95	85,000	92	137	Standard	69"	28 ¹ / ₄ "	4"	413	2,763.00	2,929.00

T&P Valve installed.

All models feature side connections for space heating.

Circulating Loop Installation Kit:

P/N 265-43103-00 (Dielectric unions, Isolation valves and Extended nipples) . . . **\$63.00**

Water Connection Centers as Follows:

- RG250H6N = 11"
- RG155H6N = 8"
- RG275H6N = 11"
- RG2100H6N = 16"

Water Connection Sizes as Follows:

- RG250H6N = ¾"
- RG155H6N = ¾"
- RG275H6N = 1"
- RG2100H6N = 1 ¼"

Hand Hole cleanout standard on 100 gallon model only.

Residential Gas Models

Direct Vent Models

Direct Vent Models

2" Non-CFC Foam Insulation



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Ht. to Center Line Vent (min.)	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
RG2DV40S6N-SLD	40	38	38,000	41	72	Short	63½"	20"	3" x 5"	189	\$1,389.00	\$1,555.00
RG2DV40S6N-FLX	40	38	38,000	41	72	Short	63½"	20"	3" x 5"	189	1,424.00	1,590.00
RG2DV40S6N-OLY	40	38	38,000	41	72	Short	63½"	20"	3" x 5"	189	1,281.00	1,447.00
RG2DV50S6N-SLD	50	47	42,000	45	85	Standard	72½"	20"	3" x 5"	212	1,520.00	1,686.00
RG2DV50S6N-FLX	50	47	42,000	45	85	Standard	72½"	20"	3" x 5"	212	1,555.00	1,721.00
RG2DV50S6N-OLY	50	47	42,000	45	85	Standard	72½"	20"	3" x 5"	212	1,412.00	1,578.00
RG2DV50H6N-SLD	48	46	50,000	54	89	Standard	75⅞"	20"	4" x 6"	234	1,648.00	1,814.00
RG2DV50H6N-FLX	48	46	50,000	54	89	Standard	75⅞"	20"	4" x 6"	234	1,683.00	1,849.00
RG2DV50H6N-OLY	48	46	50,000	54	89	Standard	75⅞"	20"	4" x 6"	234	1,516.00	1,682.00

T&P Valve Installed. Heat traps installed.

A Telescoping Solid Vent Kit (-SLD), or Flexible Vent Kit (-FLX) is shipped with the water heater.

Ex: RG2DV40S6N-SLD. This model ships with a Telescoping Solid Vent Kit.

Ex: RG2DV40S6N-FLX. This model ships with a Flexible Vent Kit.

When a Vent Kit is not needed or is required to be shipped separately add (-OLY) to the model number.

EX: RG2DV40S6N-OLY. This model ships without a Vent Kit.

RG2DV40S6N and RG2DV50S6N

Solid Vent Kit shipped separately.	P/N 239-51283-00	\$108.00
Flexible Vent Kit shipped separately.	P/N 239-51284-00	\$143.00

Refer to Installation and Operating Manual for Vent Kit Components. Horizontal vent termination only.

Optional Telescoping Solid Vent Kits:

■ Kit "A" Telescopes from 4¼" to 5⅛"	P/N 239-41260-00	\$41.00
■ Kit "B" Telescopes from 6½" to 9⅞"	P/N 239-41331-00	\$48.00
■ Kit "C" Telescopes from 13¾" to 23⅛"	P/N 239-41029-00	\$58.00
■ Kit "D" Telescopes from 49⅜" to 95⅜"	P/N 239-41424-00	\$97.00

Refer to Installation and Operating Manual for Vent Kit Components. Horizontal vent termination only.

RG2DV50H6N

Solid Vent Kit shipped separately.	P/N 239-51286-00	\$132.00
Flexible Vent Kit shipped separately.	P/N 239-51287-00	\$167.00

Circulating Loop Installation Kit:

P/N 265-43103-00 (Dielectric unions, Isolation valves and Extended nipples)	\$63.00
---	---------

Optional Telescoping Solid Vent Kits:

■ Kit "F" Telescopes from 4¼" to 5⅛"	P/N 239-42516-00	\$44.00
■ Kit "G" Telescopes from 6½" to 9⅞"	P/N 239-42517-00	\$55.00
■ Kit "H" Telescopes from 13¾" to 23⅛"	P/N 239-42514-00	\$68.00
■ Kit "I" Telescopes from 49⅜" to 95⅜"	P/N 239-42512-00	\$119.00

eF Series®

High-Efficiency Residential Water Heaters

The Bradford White eF Series® Residential condensing power-vented water heater provides fuel-saving efficiency to today's energy-conscious homeowner.



- Outstanding Thermal Efficiency over 90% helps heat water faster to conserve energy and save money
- Vertical, dual-pass heat exchanger system is protected by Vitraglas® for unsurpassed protection against corrosion
- All heat exchanger tubes feature internal baffling to maximize heat transfer and fuel efficiency
- Large hot water dump capacity with no minimum flow rate activation or cold water sandwiching means a high volume of hot water is available whenever it's needed
- An internal self-priming condensate trap eliminates the need to provide an external trap configuration, saving installation time and cost
- Long vent lengths help resolve difficult venting situations with power venting through a roof or sidewall, adding installation flexibility

Committed to American Manufacturing,
Wholesale Distribution, and Professional Installation.


BRADFORD WHITE®
WATER HEATERS
www.bradfordwhite.com

Residential Gas Models

Power Vented Models



High Efficiency eF Series™ Power Vent Model

2" Non-CFC Foam Insulation - 120 VAC required



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
RC2PV50H6N	50	49	76,000	93	131	Standard	67¼"	24"	2", 3", or 4"	225	\$3,385.00	\$3,551.00

T&P Valve Installed. Heat traps installed.



Power Vent TTW® Models

2" Non-CFC Foam Insulation - 120 VAC required. (RG1 Models Have 1" Non-CFC Foam Insulation)



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
RG1PV40S6N	40	38	40,000	43	71	Short	57 ⁵ / ₁₆ "	20"	2" or 3"	140	\$1,623.00	\$1,789.00
RG1PV50S6N	50	48	40,000	43	83	Short	58 ¹ / ₄ "	22"	2" or 3"	166	1,815.00	1,981.00
★ RG2PV40S6N	40	38	40,000	43	71	Short	57 ⁵ / ₁₆ "	22"	2" or 3"	142	1,707.00	1,873.00
★ RG2PV50S6N	50	48	40,000	43	83	Short	58 ¹ / ₄ "	24"	2" or 3"	168	1,933.00	2,099.00
★ RG2PV40T6N	40	38	40,000	43	71	Tall	66 ⁷ / ₈ "	20"	2" or 3"	146	1,772.00	1,938.00
★ RG2PV50T6N	50	48	40,000	43	83	Tall	66 ⁷ / ₈ "	22"	2" or 3"	173	1,907.00	2,073.00
★ RG2PV50H6N	48	46	65,000	70	106	Standard	66 ¹ / ₈ "	22"	3" or 4"	187	2,034.00	2,200.00
RG1PV55H6N	55	55	78,000	84	117	Standard	64 ³ / ₁₆ "	22"	3" or 4"	219	2,208.00	N/A
RG2PV75H6N	75	72	76,000	82	126	Standard	69 ⁷ / ₁₆ "	26"	3" or 4"	260	2,428.00	2,594.00

T&P Valve Installed. Heat traps installed.

★ = ENERGY STAR® Qualified.



Power Direct Vent Models



Power Direct Vent Models

2" Non-CFC Foam Insulation - 120 VAC required.



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Exhaust Outlet	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
★ RG2PDV40S6N	40	38	40,000	43	71	Short	59 ¹¹ / ₁₆ "	22"	2" or 3"	161	\$1,604.00	\$1,770.00
★ RG2PDV50S6N	50	48	40,000	43	83	Short	60 ⁷ / ₈ "	24"	2" or 3"	192	1,725.00	1,891.00
★ RG2PDV50H6N	48	46	60,000	65	95	Tall	69"	22"	3" or 4"	204	2,019.00	2,185.00
RG2PDV75H6N	75	72	80,000	86	126	Tall	68 ¹ / ₄ "	26"	3" or 4"	291	2,860.00	3,026.00

T&P Valve Installed. Heat traps installed.

★ = ENERGY STAR® Qualified.



Circulating Loop Installation Kit:

P/N 265-43103-00 (Dielectric unions, Isolation valves and Extended nipples) . . . \$63.00

Optional Vent Kits:

■ 2" Concentric Vent Kit Termination P/N 239-44069-02 \$53.00

■ 3" Concentric Vent Kit Termination P/N 239-44069-01 \$62.00

■ Air Intake Relief Device P/N 239-48392-00 \$65.00

RG2PDV50H6N & RG2PDV75H6N have ¾" NPT water connections on 11" centers.

Residential Gas Models

Manufactured Home Models

All manufactured home models are design evaluated in accordance with H.U.D. Manufactured Home Construction and Safety Standard, Title 24 CFR, part 3280.707 (d)(2) for energy efficiency.

Manufactured Home Closed Combustion/Direct Vent Energy Saver Models 2" Non-CFC Foam Insulation



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
RG2DVMH30T6X	30	29	30,000	32	53	Tall	57 ⁹ / ₁₆ "	18"	3"	119	\$1,166.00	\$1,332.00
RG2DVMH40T6X	40	37	30,000	32	60	Tall	57 ¹ / ₄ "	20"	3"	139	1,252.00	1,418.00

T&P Valve Installed. Heat trap installed on hot water outlet.

For new installation these units must be ordered with vent kit package, which includes roof jack, air intake tube, and instructions.

The water heater includes a convertible control and a steel burner for Natural or LP gas.

Water connections are 3/4" NPT. The cold water inlet is on the side and the hot water outlet is on the top.

Roof Jack Kits:

12" Clearance	P/N 239-37022-01	\$146.00
18"/32" Clearance	P/N 239-37022-02	\$152.00
32"/60" Clearance	P/N 239-37022-03	\$176.00
48"/95" Clearance	P/N 239-37022-04	\$203.00

(Includes: roof jack, hardware, air intake, instructions).

Manufactured Home Atmospheric Combustion Energy Saver Models 2" Non-CFC Foam Insulation



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
RG2MH30T6X	30	29	32,000	34	56	Tall	59 ¹ / ₈ "	18"	3" x 4"	118	\$1,113.00	\$1,279.00
RG2MH40T6X	40	37	34,000	37	58	Tall	59 ³ / ₈ "	20"	3" x 4"	135	1,164.00	1,330.00

T&P Valve Installed. Heat trap installed on hot water outlet.

For new installation these units must be ordered with vent kit package, which includes roof jack and instructions.

The water heater includes a convertible control and a steel burner for Natural or LP gas.

Water connections are 3/4" NPT. The cold water inlet is on the side and the hot water outlet is on the top.

Not approved for installation where a sealed combustion system is required.

Roof Jack Kits:

12" Clearance	P/N 239-37030-01	\$123.00
18"/32" Clearance	P/N 239-37030-02	\$130.00
32"/60" Clearance	P/N 239-37030-03	\$158.00
48"/95" Clearance	P/N 239-37030-04	\$180.00

(Includes: roof jack, hardware, instructions)

Ultra Low NOx Models

Ultra Low NOx Atmospheric Vent Damper Models 2" Non-CFC Foam Insulation - 120 VAC Required



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
★ URG2D40S6N	40	38	38,000	40	70	Standard	54 ¹ / ₂ "	22"	3" x 4"	159	\$1,910.00	\$2,076.00
★ URG2D50S6N	50	47	40,000	42	79	Standard	54 ¹ / ₂ "	22"	3" x 4"	172	1,745.00	1,911.00

T&P Valve Installed. Heat traps installed on hot water outlet.

• = Models feature optional top T&P location. Must be specified when ordering.

★ = ENERGY STAR® Qualified.



Residential Gas Models

Ultra Low NOx Atmospheric Vent Models

2" Non-CFC Foam Insulation (URG1 Models have 1" Non-CFC Foam Insulation)



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
URG130T6N•	30	28	27,000	29	59	Tall	59 ¹ / ₈ "	16"	3"x 4"	112	\$1,295.00	\$1,400.00
URG140T6N•	40	28	34,000	37	71	Tall	60 ³ / ₄ "	18"	3"x 4"	130	1,386.00	1,491.00
URG150T6N•	50	47	34,000	37	79	Tall	59 ⁵ / ₈ "	20"	3"x 4"	153	1,501.00	1,606.00
URG230T6N•	30	28	32,000	34	63	Tall	59 ¹ / ₈ "	18"	3"x 4"	121	1,269.00	1,374.00
URG240T6N•	40	38	40,000	43	75	Tall	50"	20"	3"x 4"	139	1,324.00	1,429.00
URG240S6N•	40	38	40,000	43	73	Short	59 ³ / ₈ "	22"	3"x 4"	146	1,324.00	1,429.00
URG250T6N•	50	48	40,000	43	83	Tall	59 ⁵ / ₈ "	22"	3"x 4"	161	1,447.00	1,552.00
URG250L6N	48	47	40,000	43	83	Lowboy	49 ³ / ₄ "	24"	3"x 4"	172	1,471.00	1,576.00
URG250S6N•	50	47	50,000	54	86	Standard	58 ¹ / ₂ "	22"	4"	167	1,518.00	1,623.00

T&P Valve Included. Heat traps installed.

• = Models feature optional top T&P location. Must be specified when ordering.

Ultra Low NOx Atmospheric Vent High Input Models

2" Non-CFC Foam Insulation



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
URG250H6N	48	46	55,000	59	90	Tall	60 ⁵ / ₁₆ "	22"	4"	194	\$1,592.00	\$1,758.00
URG275H6N	75	72	76,000	82	126	Tall	64 ¹ / ₈ "	26"	4"	286	2,159.00	2,325.00
URG2100H6N	100	95	85,000	92	137	Tall	70 ⁷ / ₁₆ "	28 ¹ / ₄ "	4"	416	3,276.00	3,442.00

T&P Valve Installed. Heat traps installed (except URG275H & URG2100H).

The 75 gallon model has 1" NPT water connections on 11" centers.

The 100 gallon model has 1¹/₄" NPT water connections on 16" centers.

Side connections for space heating standard.

Hand Hole cleanout standard on 100 gallon model.

Ultra Low NOx Power Vent TTW® Models

2" Non-CFC Foam Insulation - 120 VAC required (URG1 Models have 1" Non-CFC Foam Insulation)



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
URG1PV40S6N	40	38	40,000	43	72	Short	57 ¹ / ₄ "	20"	2" or 3"	144	\$1,850.00	\$2,016.00
URG1PV50S6N	50	48	40,000	43	81	Short	58 ¹ / ₄ "	22"	2" or 3"	169	2,066.00	2,232.00
★ URG2PV40T6N	40	38	40,000	43	72	Tall	66 ⁷ / ₈ "	20"	2" or 3"	151	2,016.00	2,182.00
★ URG2PV50T6N	50	48	40,000	43	81	Tall	66 ⁷ / ₈ "	22"	2" or 3"	176	2,159.00	2,325.00
★ URG2PV50H6N	48	46	56,000	60	90	Tall	66 ³ / ₈ "	22"	3" or 4"	192	2,310.00	2,476.00
URG2PV75H6N	75	72	76,000	82	126	Tall	69 ¹ / ₄ "	26"	3" or 4"	270	3,223.00	3,389.00

T&P Valve Installed. Heat traps installed.

★ = ENERGY STAR® Qualified.



Residential Gas Models

Ultra Low NOx Power Direct Vent Models

2" Non-CFC Foam Insulation - 120 VAC required.



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Exhaust Outlet	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
★ URG2PDV40S6N	40	38	40,000	43	72	Short	59 1/2"	22"	2" or 3"	170	\$1,868.00	\$2,034.00
★ URG2PDV50S6N	50	48	40,000	43	81	Short	59"	24"	2" or 3"	196	1,987.00	2,153.00
★ URG2PDV50H6N	48	46	50,000	64	85	Tall	67 3/4"	22"	3" or 4"	208	2,375.00	2,541.00

T&P Valve Installed. Heat traps installed.

★ = ENERGY STAR® Qualified.



Circulating Loop Installation Kit:

P/N 265-43103-00 (Dielectric unions, Isolation valves and Extended nipples) **\$63.00**

Optional Vent Kits:

■ 2" Concentric Vent Kit Termination P/N 239-44069-02. **\$53.00**

■ 3" Concentric Vent Kit Termination P/N 239-44069-01. **\$62.00**

■ Air Intake Relief Device P/N 239-48392-00 **\$65.00**

URG2PDV50H6N has 3/4" NPT water connections on 11" centers.

Ultra Low NOx Direct Vent Models

2" Non-CFC Foam Insulation



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Ht. to Center Line Vent (min.)	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
											6 Year	10 Year
URG2DV40S6N-SLD	40	38	38,000	41	73	Short	63 1/2"	22"	3" x 5"	198	\$1,683.00	\$1,849.00
URG2DV40S6N-FLX	40	38	38,000	41	73	Short	63 1/2"	22"	3" x 5"	198	1,718.00	1,884.00
URG2DV40S6N-OLY	40	38	38,000	41	73	Short	63 1/2"	22"	3" x 5"	198	1,575.00	1,741.00
URG2DV50S6N-SLD	50	47	38,000	41	80	Short	72 1/2"	22"	3" x 5"	221	1,845.00	2,011.00
URG2DV50S6N-FLX	50	47	38,000	41	80	Short	72 1/2"	22"	3" x 5"	221	1,880.00	2,046.00
URG2DV50S6N-OLY	50	47	38,000	41	80	Short	72 1/2"	22"	3" x 5"	221	1,737.00	1,903.00
URG2DV50H6N-SLD	48	46	45,000	46	83	Standard	75 7/8"	22"	4" x 6"	240	1,982.00	2,148.00
URG2DV50H6N-FLX	48	46	45,000	46	83	Standard	75 7/8"	22"	4" x 6"	240	2,017.00	2,183.00
URG2DV50H6N-OLY	48	46	45,000	46	83	Standard	75 7/8"	22"	4" x 6"	240	1,850.00	2,016.00

T&P Valve Installed. Heat traps installed.

When a Vent Kit is not needed or is required to be shipped separately add (-OLY) to the model number.

EX: URG2DV40S6N-OLY. This model ships without a Vent Kit.

URG2DV40S6N and URG2DV50S6N

Solid Vent Kit shipped separately. P/N 239-51283-00 **\$108.00**

Flexible Vent Kit shipped separately. P/N 239-51284-00 **\$143.00**

Refer to Installation and Operating Manual for Vent Kit Components. Horizontal vent termination only.

Optional Telescoping Solid Vent Kits:

■ Kit "A" Telescopes from 4 3/4" to 5 1/8" P/N 239-41260-00 **\$41.00**

■ Kit "B" Telescopes from 6 1/2" to 9 3/8" P/N 239-41331-00 **\$48.00**

■ Kit "C" Telescopes from 13 3/4" to 23 1/8" P/N 239-41029-00 **\$58.00**

■ Kit "D" Telescopes from 49 1/8" to 95 1/8" P/N 239-41424-00 **\$97.00**

Refer to Installation and Operating Manual for Vent Kit Components. Horizontal vent termination only.

URG2DV50H6N

Solid Vent Kit shipped separately. P/N 239-51286-00 **\$132.00**

Flexible Vent Kit shipped separately. P/N 239-51287-00 **\$167.00**

Circulating Loop Installation Kit:

P/N 265-43103-00 (Dielectric unions, Isolation valves and Extended nipples) **\$63.00**

Optional Telescoping Solid Vent Kits:

■ Kit "F" Telescopes from 4 3/4" to 5 1/8" P/N 239-42516-00 **\$44.00**

■ Kit "G" Telescopes from 6 1/2" to 9 3/8" P/N 239-42517-00 **\$55.00**

■ Kit "H" Telescopes from 13 3/4" to 23 1/8" P/N 239-42514-00 **\$68.00**

■ Kit "I" Telescopes from 49 1/8" to 95 1/8" P/N 239-42512-00 **\$119.00**

Residential Gas Models


Tankless Models



Infiniti Tankless™ High Efficiency Models

Model Number	Installation	BTU/Hr. Input	GPM Flow Rate			A Height	B Width	C Depth	Approx. Shpg. Wt.	Limited Warranty
			°F Temperature Rise 45°F	75°F	90°F					
★RTG-199HE-N	Indoor/Outdoor*	19,900-199,000	8.3	5.0	4.2	30 ⁹ / ₁₆ "	17 ¹³ / ₁₆ "	10 ⁷ / ₁₆ "	74	\$1,199.00
★RTG-199HE-X	Indoor/Outdoor*	19,900-199,000	8.3	5.0	4.2	30 ⁹ / ₁₆ "	17 ¹³ / ₁₆ "	10 ⁷ / ₁₆ "	74	1,199.00

* Requires optional outdoor installation kit.

★ = ENERGY STAR® Qualified. 



Infiniti Tankless™ Mid Efficiency Models

Model Number	Installation	BTU/Hr. Input	GPM Flow Rate			A Height	B Width	C Depth	Approx. Shpg. Wt.	Limited Warranty
			°F Temperature Rise 45°F	75°F	90°F					
RTG-199ME-N	Indoor/Outdoor*	19,900-199,000	7.3	4.4	3.7	30 ⁹ / ₁₆ "	17 ¹³ / ₁₆ "	10 ⁷ / ₁₆ "	67	\$999.00
RTG-199ME-X	Indoor/Outdoor*	19,900-199,000	7.3	4.4	3.7	30 ⁹ / ₁₆ "	17 ¹³ / ₁₆ "	10 ⁷ / ₁₆ "	67	999.00

* Requires optional outdoor installation kit.

Meets or exceeds some utility rebate programs.

12-Year Heat Exchanger Warranty

5-Year Component Parts Warranty

Optional Venting Components - RTG-199HE Models Only:

■ Concentric "Up & Out" Vent Kit	P/N 7738004890	\$134.00
■ Common Vent Kit - Side to Side	P/N 7738004886	\$485.00
■ Common Vent Kit - Side to Side Extension	P/N 7738004887	\$199.00
■ Common Vent Kit - Back to Back	P/N 7738004888	\$439.00
■ Common Vent Kit - Back to Back Extension	P/N 7738004889	\$343.00
■ 3" Concentric Vent Termination	P/N 239-44069-01	\$62.00

Optional Accessories

■ Outdoor Kit	P/N 7736502748	\$125.00
■ Intelligent Cascading Kit (Up to 24 Units)	P/N 7736502750	\$30.00
■ High Temperature Kit (Up to 184°F Setpoint)	P/N 7736502749	\$21.00
■ Recess Box	P/N 239-51097-00	\$168.00
■ Pipe Cover	P/N 239-51098-00	\$168.00
■ Installation Kit - NPT Thread*	P/N MIVK-T-LW	\$135.32
■ Installation Kit - Sweat Connection*	P/N 239-45284-00	\$68.13

*Recommended with purchase of Infiniti Tankless Water Heaters; includes pressure relief valve and two isolation valves

Residential Electric Models

General

All models UL and/or ETL listed. All water connections are 3/4" NPT. All electrical connections 3/4". All models are certified at 300 psi test pressure and 150 psi working pressure.

Note: The **Upright** and **Lowboy** heaters will be wired interlocking (non-simultaneous) 240 volt with (2) 4500 watt elements (dual rated to 208 volt/3500 watt), unless otherwise specified. Other wattages are available up to (2) 6000 watts non-simultaneous (Reference chart to the right for simultaneous limitations). 4500 watt/240 volt elements require a 30 AMP circuit breaker. Maximum wattage at 120 volt is 3000 watts.

Note: The **Utility** and **Wall Hung** Heaters will be wired for 120 volt with (1) 1500 watt element. 1500 watt/120 volt element requires a 20 Amp breaker. Other wattages are available. Maximum wattage for 6 and 12 gallon tall utility models is 3000W. Maximum wattage for 10, 12 and 15 gallon utility models is 6000W. Maximum wattage 6 gallon wall hung is 3000W. Maximum wattage for 12, 20 and 30 gallon wall hung models is 6000W.

Maximum Wattage Limitations at Various Voltages for Simultaneous Operation

3000 Watts	1500W/1500W at 120V
10000 Watts	5000W/5000W at 208V
11000 Watts	5500W/5500W at 240V
12000 Watts	6000W/6000W at 277V, 480V



Highly efficient providing year-round energy and money savings.





Scan to learn more about the Bradford White AeroTherm® Series heat pump.

High Efficiency and Upright Models

Residential Electric Models



AeroTherm® Series Heat Pump Models 2" Non-CFC Foam Insulation

Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Style	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Approx. Shpg. Wt.	Limited Tank Warranty
										10 Year
★ RE2H50R10B-1NCWT	50	45	41	64	Upright	59 1/8"	60 3/4"	21 3/4"	150	\$1,416.00
★ RE2H80R10B-1NCWT	80	75	41	89	Upright	71 1/8"	73 1/2"	25"	176	1,809.00


T&P Valve Installed.

Models only available as 4500W/4000W operation.


★ = ENERGY STAR® Qualified. 

■ Optional Ducting Kit P/N: GVK8HS..... \$222.00


PARTS INCLUDED




Upper Inlet Duct Adapter




Outlet Duct Adapter




Lower Inlet Duct Adapter



Drilling Screws (6) Assembly Screws (8)



Inlet Duct Filter



8" Hose Clamps (2)

These Products Are Net And Not Subject To Performance Incentive Program.

Residential Electric Models

Residential Upright and Lowboy Models

Energy Saver Series - Non-CFC Foam Insulation

Upright Models



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Approx. Shpg. Wt.	Limited Tank Warranty	
									6 Year	10 Year
RE330S6	30	27	21	47	47"	47 ³ / ₄ "	20"	100	\$854.00	\$959.00
RE340S6	40	36	21	54	47 ⁷ / ₈ "	48 ⁵ / ₈ "	22"	114	904.00	1,009.00
RE340T6	40	36	21	55	60 ⁵ / ₈ "	61 ³ / ₈ "	20"	125	904.00	1,009.00
RE350S6	50	45	21	63	47"	47 ³ / ₄ "	24"	144	1,028.00	1,133.00
RE350T6	50	45	21	63	58 ⁵ / ₈ "	59 ³ / ₈ "	22"	138	1,028.00	1,133.00
RE240S6**	40	36	21	54	48"	48 ³ / ₄ "	20"	123	1,011.00	1,116.00
RE250S6**	50	45	21	63	47"	47 ³ / ₄ "	22"	143	1,201.00	1,306.00

T&P Valve Installed. Heat traps installed on all models.

*Dimension does not include additional insulation blanket.

**Models include supplied insulation blanket.

Lowboy Models



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	GPH Rec. 90°F Rise	First Hour Rating (Gal.)	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Approx. Shpg. Wt.	Limited Tank Warranty	
									6 Year	10 Year
RE120L6	19	—	21	—	24 ⁷ / ₈ "	25 ⁵ / ₈ "	18"	65	\$1,007.00	\$1,112.00
RE130L6**	28	26	21	42	29 ³ / ₄ "	31 ¹ / ₄ "	20"	99	1,050.00	1,155.00
RE230LN6	28	26	21	47	30"	30 ⁷ / ₈ "	23"	102	1,026.00	1,131.00
RE230L6**	28	26	21	46	29 ⁷ / ₈ "	30 ³ / ₄ "	22"	108	1,044.00	1,149.00
RE240LN6	37	34	21	50	32"	33 ¹ / ₄ "	24 ¹ / ₂ "	126	1,101.00	1,206.00
RE240L6**	38	35	21	54	32 ⁵ / ₈ "	33 ¹ / ₂ "	24"	140	1,122.00	1,227.00
RE250L6**	47	43	21	63	33 ⁵ / ₈ "	34 ³ / ₄ "	26"	173	1,283.00	1,388.00

T&P Valve Installed. Heat traps installed on all models.

*Dimension does not include additional insulation blanket.

**Models include supplied insulation blanket.

Residential Utility and Wall Hung Models

Wall Hung Models - Bottom Water Connections



Model Number	Gal. Cap.	GPH Rec. 90°F Rise	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Approx. Shpg. Wt.	Limited Tank Warranty	
							6 Year	10 Year
RE16WV6†	6	7	15 ³ / ₄ "	—	14"	37	\$659.00	\$764.00
RE112WV6	12	7	16 ³ / ₈ "	—	18"	54	678.00	783.00
RE120WV6	19	7	24 ³ / ₈ "	—	18"	67	838.00	943.00

†Maximum wattage at any voltage is 3000W

Utility Models - Side Water Connections



Model Number	Gal. Cap.	GPH Rec. 90°F Rise	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Approx. Shpg. Wt.	Limited Tank Warranty	
							6 Year	10 Year
RE16U6*†	6	7	16 ¹ / ₂ "	10 ¹ / ₈ "	14"	35	\$547.00	\$652.00
RE110U6	10	7	17 ¹ / ₂ "	15"	16"	44	575.00	680.00
RE112U6*	12	7	16 ⁷ / ₈ "	10 ¹ / ₄ "	18"	53	588.00	693.00
RE112T6*†	12	7	27 ³ / ₄ "	21 ¹ / ₈ "	14"	48	588.00	693.00
RE115U6	15	7	20 ¹ / ₄ "	17 ³ / ₄ "	18"	58	617.00	722.00
RE120U6	19	7	24 ³ / ₄ "	18 ¹ / ₄ "	18"	65	662.00	767.00

T&P Valve Included.

*The 6 and 12 gallon Utility Models have water connections standard on the side and plugged connections on the top.

†Maximum wattage at any voltage is 3000W

Residential Electric Models



Powerful Compact™ Model

Model Number	Gal. Cap.	GPH Rec. 90°F Rise	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Approx. Shpg. Wt.	Limited Tank Warranty	
							6 Year	10 Year
RE1-2U6	2	7	12¼"	13⅝"	9⅞"	13	\$483.00	\$588.00

Includes a 4ft. cord with 3 prong grounded plug (20 amp circuit required).
 For 10 year models, change suffix "6" to "10".
 Single element only.
 Based on 1500W operation.
 Only available as 120V / 1500W.

Residential Electric Model Number Suffix

Note: When ordering water heaters specify voltage, wattage, phase, and operation. The following tables are for informational purposes only.

Phase	1	Single Phase	Operation	N	Non-Simultaneous	Designator	A	C	E	H	J	L*
	3	Three Phase		S	Simultaneous		Voltage	120	208/240	277	480	600

EX: RE350S6-1NCWW

EX: RE350S6-1NCWW

EX: RE350S6-1NCWW

*Use "L" voltage designator if wiring 208V with 5000, 5500 or 6000 watt; also 2500W or 3000W on RE16U, RE112T, RE16WV models.

For 120V, 277V, 480V, and 600V operation

Designator	J	K	L*	M	N	P	R	S	T	W	X	Y	Z
Wattage	1000	1250	1500	2000	2500	3000	3500	3800	4000	4500	5000	5500	6000

EX: RE350S6-1NCWW

*Use "L" voltage designator if wiring 208V with 2500W or 3000W on RE16U, RE112T, & RE16WV models.

All 120V and 277V models are shipped standard single phase. Three phase not available.

For 240V and 208V operation (Dual rated elements show a value for both 240V and 208V)

Designator	J	K	L	M	N	P	R	S	T	W	X	Y	Z	X**	Y**	Z**
240V Wattage	1000	1250	1500	2000	2500	3000	3500	3800	4000	4500	5000	5500	6000	—	—	—
208V Wattage	—	—	1000	1500	2000	—	2500	—	3000	3500	—	4000	4500	5000	5500†	6000†

EX: RE350S6-1NCWW, will give 240V with 4500W/4500W. This same heater can also be energized at 208V with reduced wattage of 3500W/3500W.

**Use "L" voltage designator if wiring 208V with 5000, 5500 or 6000 watt.

†Available in non-simultaneous only.

Residential Electric Product Options

	Dash#	Add	Each Add	Deduct
■ Simultaneous Single Phase Operation		\$8.00		
■ Three Phase Wiring (Unbalanced)		\$8.00		
■ INCOLOY® Elements - (Does not apply to 277V/480V).....(-284)			\$8.00	
■ Low Watt Density Elements - Upper and Lower.....(-116)		\$8.00		
■ Low Watt Density Elements - Lower Only.....(-315)		\$4.00		
■ 277V Element (INCOLOY® element standard).....			\$14.00	
■ 480V Element (INCOLOY® element standard).....			\$14.00	
■ For Single Element Heaters, EX: RE350S6-1NCW.....				(\$6.00)

Maximum Wattage Limitations at Various Voltages for Simultaneous Operation

3000 Watts	1500W/1500W at 120V
10000 Watts	5000W/5000W at 208V
11000 Watts	5500W/5500W at 240V
12000 Watts	6000W/6000W at 277V, 480V

Residential Electric Models

KWICKSHOT® Electric Instantaneous Models - Single Phase



Additional voltages and wattages are available. For more information, please consult the Product Management Department.

Single Point Models



Model Number	kW Rating	Voltage	AMPS	Temp. Rise °F 0.5 gpm	Rec. Wire Size	Price		
						1-3 Units	4-17 Units	18+ Units
ES-3000-1-S-10	3.0	120	25	41	10 AWG	\$178.00	\$164.00	\$143.00
ES-3500-1-S-10	3.5	120	29	48	10 AWG	178.00	164.00	143.00
ES-3500-4-S-10*	3.5	240	15	48	14 AWG	178.00	164.00	143.00
ES-4100-2-S-10	4.1	208	20	56	12 AWG	181.00	167.00	147.00
ES-4100-5-S-10	4.1	277	15	56	14 AWG	181.00	167.00	147.00
ES-5500-4-S-10*	5.5	240	23	75	10 AWG	181.00	167.00	147.00

*This model is dual rated for 208V. (Approximately 25% reduced output.) No Change to model number required.

Thermostatic Models



Model Number	kW Rating	Voltage	AMPS	Temperature Rise °F					Rec. Wire Size	Price		
				0.5 gpm	0.75 gpm	1.0 gpm	1.5 gpm	2.0 gpm		1-3 Units	4-17 Units	18+ Units
EFT-7500-4-S-10*	7.5	240	32	—	68	51	34	25	8 AWG	\$230.00	\$213.00	\$194.00
EFT-9500-4-S-10*	9.5	240	40	—	86	65	43	32	8 AWG	230.00	213.00	194.00

*This model is dual rated for 208V. (Approximately 25% reduced output.) No Change to model number required.

Flow Controlled Models



Model Number	kW Rating	Voltage	AMPS	Temperature Rise °F					Rec. Wire Size	Price		
				0.5 gpm	0.75 gpm	1.0 gpm	1.5 gpm	2.0 gpm		1-3 Units	4-17 Units	18+ Units
EFC-5500-4-S-10*	5.5	240	23	75	50	38	25	18	10 AWG	\$178.00	\$164.00	\$143.00
EFC-6500-4-S-10*	6.5	240	27	88	59	44	30	22	10 AWG	178.00	164.00	143.00
EFC-7500-4-S-10*	7.5	240	32	—	68	51	34	25	8 AWG	178.00	164.00	143.00
EFC-8300-2-S-10	8.3	208	39	—	76	57	38	29	8 AWG	181.00	167.00	147.00
EFC-9500-4-S-10*	9.5	240	40	—	86	65	43	32	8 AWG	181.00	167.00	147.00

*This model is dual rated for 208V. (Approximately 25% reduced output.) No Change to model number required.

Series Two Heating Module With Thermostatic Control Model



Model Number	kW Rating	Voltage	AMPS	Temperature Rise °F				Rec. Wire Size (per mod)	Price		
				0.5 gpm	2.0 gpm	2.5 gpm	3.0 gpm		1-3 Units	4-17 Units	18+ Units
EFT-19000-4-D-10*	19.0	240	2 x 40	87	65	52	43	8 AWG	\$551.00	\$509.00	\$431.00

*This model is dual rated for 208V. (Approximately 25% reduced output.) No Change to model number required.

Series Three and Four Thermostatic Models



Model Number	kW Rating	Voltage	AMPS	Temperature Rise °F						Recommended Wire Size	Price
				2.0 gpm	2.5 gpm	3.0 gpm	4.0 gpm	5.0 gpm	6.0 gpm		
EFT-28000-4-T-10*	28.0	240	3 x 40	96	76	65	50	—	—	8 AWG per mod	\$1,108.00

*This model is dual rated for 208V. (Approximately 25% reduced output.) No Change to model number required.

KWICKSHOT® Electric Instantaneous Models - Three Phase

Additional voltages and wattages are available. For more information, please contact the Product Management Department.

Thermostatic Triple Module Models



Model Number	kW Rating	Voltage	AMPS	Temperature Rise °F						Recommended Wire Size	Price
				1.5 gpm	2.0 gpm	2.5 gpm	3.0 gpm	3.5 gpm	4.0 gpm		
EFTR-18000-6-T-10	18.0	480Y*	22	82	61	49	41	35	32	10 AWG	\$1,376.00
EFTR-24000-6-T-10	24.0	480Y*	29	—	82	65	54	47	41	10 AWG	1,376.00
EFTR-32000-6-T-10	32.0	480Y*	39	—	—	87	73	62	55	8 AWG	1,376.00

*Neutral leg required.

These Products Are Net And Not Subject To Performance Incentive Program.

SOLAR Models

Bradford White Solar Heating Solutions

The most comprehensive and innovative line-up you'll find anywhere. Our 36 eco-friendly solar water heating models are available in seven different configurations including:

- EcoStor2™ SC Solar Indirect System Double-Wall Single Coil Gas Backup Models
- EcoStor2™ SC Solar Indirect System Double-Wall Single Coil Eco-Defender Gas Backup Models
- EcoStor2™ SC Solar Indirect System Double-Wall Single Coil Power Vent Gas Backup Models
- EcoStor® SC Solar Indirect System Single-Wall Single Coil Electric Backup Models
- EcoStor2™ SC Solar Indirect System Double-Wall Single Coil Electric Backup Models
- EcoStor® DC Solar Indirect System Dual Coil Heat Exchanger Backup Models
- Solar Saver® Models



Eco-Effective Ways to Harness the Sun

EcoStor® Single-Wall Electric Backup Models

2" Non-CFC Foam Insulation



Model Number	Gal. Cap.	GPH Rec. 90°F Rise	Style	Floor to Heater Top	Jacket Dia.	Floor to Water Conn.	Approx. Shpg. Wt.	Limited Tank Warranty	
								6 Year	10 Year
S-SW2-60R6DS	60	20	Standard	59 1/4"	22"	63 1/4"	210	\$1,694.00	\$1,860.00
S-SW2-75R6DS	75	20	Standard	59 1/4"	24"	63 1/4"	236	1,812.00	1,978.00
S-SW2-115R6DS	115	20	Standard	62 3/4"	28 1/4"	66 3/4"	340	2,518.00	2,684.00

Includes T&P Valve and Mixing Device.

Includes two 4500 Watt Backup INCOLOY® Elements, two Surface Mount Thermostats and two anode rods.

For single element models change suffix "D" to "S".

Optional 5500 Watt Backup INCOLOY® Element(s).

EcoStor2™ Double-Wall Electric Backup Models

2" Non-CFC Foam Insulation



Model Number	Gal. Cap.	GPH Rec. 90°F Rise	Style	Floor to Heater Top	Jacket Dia.	Floor to Water Conn.	Approx. Shpg. Wt.	Limited Tank Warranty	
								6 Year	10 Year
S-DW2-60R6DS	60	20	Standard	59 1/4"	22"	63 1/4"	217	\$1,864.00	\$2,030.00
S-DW2-75R6DS	75	20	Standard	59 1/4"	24"	63 1/4"	241	1,993.00	2,159.00
S-DW2-115R6DS	115	20	Standard	62 3/4"	28 1/4"	66 3/4"	345	2,771.00	2,937.00

Includes T&P Valve and Mixing Device.

Includes two 4500 Watt Backup INCOLOY® Elements, two Surface Mount Thermostats and two anode rods.

For single element models change suffix "D" to "S".

Optional 5500 Watt Backup INCOLOY® Element(s).

EcoStor® Dual Coil Heat Exchanger Backup Models

2" Non-CFC Foam Insulation



Model Number	Gal. Cap.	Upper Coil Water Conn.	Lower Coil Water Conn.	Style	Floor to Heater Top	Jacket Dia.	Floor to Water Conn.	Approx. Shpg. Wt.	Limited Tank Warranty	
									6 Year	10 Year
S-DC-DW2-55R6SW	55	1"	3/4"	Standard	59 1/4"	22"	62 3/4"	282	\$2,305.00	\$2,471.00
S-DC-DW2-70R6SW	70	1"	3/4"	Standard	59 1/4"	24"	62 3/4"	313	2,367.00	2,533.00
S-DC-DW2-110R6SW	110	1"	3/4"	Standard	62 1/2"	28 1/4"	66"	442	3,018.00	3,184.00

Includes T&P Valve and Mixing Device.

Includes two internal heat exchange coils and two anode rods. Upper coil is single wall and lower coil is double wall.



EcoStor2™ Double-Wall Gas Backup Models

2" Non-CFC Foam Insulation

Model Number	Gal. Cap.	Input BTU/Hr.	GPH Rec. 90°F Rise	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
									6 Year	10 Year
S-DW2-504T6FBN	45	65,000	69	Standard	59¼"	22"	4"	223	\$2,006.00	\$2,172.00
S-DW2-65T6FBN	60	65,000	69	Standard	63"	24"	4"	264	2,071.00	2,237.00
S-DW2-75S6BN	70	76,000	82	Standard	62¾"	26"	4"	306	2,181.00	2,347.00

Includes T&P Valve and Mixing Device.

For LP gas (propane) change suffix "BN" to "SX" and add . . . \$40.00



EcoStor® Open Loop Gas Backup Models

2" Non-CFC Foam Insulation

Model Number	Gal. Cap.	Input BTU/Hr.	GPH Rec. 90°F Rise	Style	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
									6 Year	10 Year
S-2-65T6FBN	65	65,000	69	Standard	63"	24"	4"	215	\$1,850.00	\$2,016.00
S-2-75S6BN	75	76,000	82	Standard	62¾"	26"	4"	250	2,056.00	2,222.00
S-2-100T6BN	100	85,000	92	Standard	63 ¹¹ / ₁₆ "	28¼"	4"	400	2,709.00	2,875.00

Includes T&P Valve and Mixing Device.

For LP gas (propane) change suffix "BN" to "SX" and add . . . \$40.00



EcoStor2™ TTW® Power Vent Double-Wall Gas Backup Models

2" Non-CFC Foam Insulation- 120 VAC required

Model Number	Gal. Cap.	Input BTU/Hr.	GPH Rec. 90°F Rise	Style	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
									6 Year	10 Year
S-DW2-TW-50T6FBN	45	67,000	72	Standard	59¼"	22"	3" or 4"	247	\$2,362.00	\$2,528.00
S-DW2-TW-65T6FBN	60	70,000	75	Standard	63"	24"	3" or 4"	281	2,428.00	2,594.00
S-DW2-TW-75T6BN	70	76,000	82	Standard	62¾"	26"	3" or 4"	336	2,615.00	2,781.00

Includes T&P Valve and Mixing Device.

For LP gas (propane) change suffix "BN" to "SX" and add . . . \$40.00

Water Connection Extenders

P/N 239-48429-00 . . . \$29.00



EcoStor® TTW® Power Vent Open Loop Gas Backup Models

2" Non-CFC Foam Insulation- 120 VAC required.

Model Number	Gal. Cap.	Input BTU/Hr.	GPH Rec. 90°F Rise	Style	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
									6 Year	10 Year
S-2-TW65T6FBN	65	70,000	75	Standard	63"	24"	3" or 4"	225	\$2,562.00	\$2,728.00
S-2-TW75T6BN	75	76,000	82	Standard	62¾"	26"	3" or 4"	260	2,513.00	2,679.00

Includes T&P Valve and Mixing Device.

For LP gas (propane) change suffix "BN" to "SX" and add . . . \$40.00

Water Connection Extenders

P/N 239-48429-00 . . . \$29.00

Solar Models



EcoStor2™ Ultra Low NOx Double-Wall Gas Backup Models

2" Non-CFC Foam Insulation

Model Number	Gal. Cap.	Input BTU/Hr.	GPH Rec. 90°F Rise	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty	
									6 Year	10 Year
S-DW4-U5036FRN	45	40,000	43	Standard	59 ¹ / ₄ "	22"	3" x 4"	233	\$2,089.00	\$2,255.00
S-DW2-U65T6FRN	60	55,000	57	Standard	63"	24"	4"	272	2,295.00	2,461.00

Includes T&P Valve and Mixing Device.

These Products Are Net And Not Subject To Performance Incentive Program.



Solar Saver® Electric Backup Models

2" Non-CFC Foam Insulation

Model Number	Gal. Cap.	GPH Rec. 90°F Rise	Alternate Collector Conn.	Style	Floor to Heater Top	Jacket Dia.	Floor to Water Conn.	Approx. Shpg. Wt.	Limited Tank Warranty	
									6 Year	10 Year
MS65R6SS	65	21	No	Standard	59"	22"	60"	168	\$1,165.00	\$1,331.00
MS80R6SS	80	21	Yes	Standard	59"	24"	60"	210	1,311.00	1,477.00
MS120R6SS	119	21	Yes	Standard	62 ¹ / ₂ "	28"	66 ³ / ₄ "	310	1,722.00	1,888.00

T&P Valve Installed.

Includes one 4500 Watt Backup Element and one Surface Mount Thermostat.

Residential Hydronic/Space Heating Models

Combi1™ and Combi2® Series

For Space Heating and Domestic Hot Water

Greater Installation Flexibility



Direct Fired Water Heating/Space Heating Models



Combi1™ Single-Wall Atmospheric Energy Saver Models

2" Non-CFC Foam Insulation



Model Number	Gal. Cap.	Input BTU/Hr.	GPH Rec. 90°F Rise	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty 10 Year
C-SW2-504T10FBN	45	65,000	70	59¼"	22"	4"	236	\$2,410.00
C-SW2-75T10BN	72	76,000	81	62¼"	26"	4"	292	3,036.00

T&P Valve Installed. Includes Mixing Device.

For LP Gas, change "BN" to "SX" and add..... \$40.00

These water heaters have two anode rods.



Combi1™ TTW® Single-Wall Power Vent Energy Saver Models

2" Non-CFC Foam Insulation-120 VAC required



Model Number	Gal. Cap.	Input BTU/Hr.	GPH Rec. 90°F Rise	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty 10 Year
C-SW2-TW50T10FBN	45	67,000	72	65¾"	22"	3" or 4"	243	\$3,012.00
C-SW2-TW75T10BN	72	76,000	82	68¾"	26"	3" or 4"	313	3,294.00

T&P Valve Installed. Includes Mixing Device.

For LP Gas, change "BN" to "SX" and add..... \$40.00

These water heaters have two anode rods.

Water Connection Extenders:

P/N 239-48429-00 . . . \$29.00



Combi2® Double-Wall Atmospheric Energy Saver Models

2" Non-CFC Foam Insulation



Model Number	Gal. Cap.	Input BTU/Hr.	GPH Rec. 90°F Rise	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty 10 Year
C-DW2-504T10FBN	45	65,000	70	59¼"	22"	4"	238	\$2,549.00
C-DW2-75T10BN	72	76,000	81	62¼"	26"	4"	302	3,183.00

T&P Valve Installed. Includes Mixing Device.

For LP Gas, change "BN" to "SX" and add..... \$40.00

These water heaters have two anode rods.



Combi2® TTW® Double-Wall Power Vent Energy Saver Models

2" Non-CFC Foam Insulation-120 VAC required



Model Number	Gal. Cap.	Input BTU/Hr.	GPH Rec. 90°F Rise	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited Tank Warranty 10 Year
C-DW2-TW50T10FBN	45	67,000	72	65¾"	22"	3" or 4"	245	\$3,101.00
C-DW2-TW75T10BN	72	76,000	82	68¾"	26"	3" or 4"	315	3,390.00

T&P Valve Installed. Includes Mixing Device.

For LP Gas, change "BN" to "SX" and add..... \$40.00

These water heaters have two anode rods.

Water Connection Extenders:

P/N 239-48429-00 . . . \$29.00

Residential Hydronic/Space Heating Models

Residential Indirect-Fired Models

Indirect-Fired Models

The Bradford White PowerStor Series™ offers outstanding performance, high output, superior heat transfer, and faster recovery.



See why professionals choose PowerStor Series™ indirect water heaters.



Residential Indirect-Fired Models

PowerStor Series™ Single-Wall Indirect Models 2" Non-CFC Foam Insulation



Model Number	Gal. Cap.	First Hour Rating @ 135°F (Gal.)	AHRI Rating Continuous Draw @ 135°F Gal./Hr.	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Head Loss @ 8GPM	Approx. Shpg. Wt.	Limited Tank Warranty
									Lifetime
SW-2-30-L	30	255	235	33 ⁵ / ₈ "	34 ³ / ₈ "	22"	0.51 ft.	164	\$1,468.00
SW-2-40R-L	38	260	235	41 ¹ / ₈ "	41 ⁷ / ₈ "	22"	0.51 ft.	185	1,576.00
SW-2-50R-L	48	265	235	46 ¹ / ₄ "	47"	22"	0.51 ft.	195	1,825.00
SW-2-65-L	60	275	235	59 ¹ / ₄ "	60"	22"	0.51 ft.	225	2,096.00
SW-2-80-L	75	295	235	59"	59 ³ / ₄ "	22"	0.51 ft.	250	2,366.00
SW-2-120-L	116	325	235	62 ¹ / ₂ "	63 ¹ / ₄ "	28 ¹ / ₄ "	0.51 ft.	370	3,043.00

Immersed Aquastat. The "L" in the model number indicates Limited Lifetime Warranty.

Note: These certified ratings were obtained with a heat source output of 157,000 BTU/Hr., a flow rate of 13.7 GPM, and a 180°F boiler water supply temperature. Boiler Connections are 1" NPT.

Residential Indirect-Fired Models, Storage Tank



PowerStor2 Series™ Double-Wall Indirect Models

2" Non-CFC Foam Insulation

Model Number	Gal. Cap.	First Hour Rating @ 135°F (Gal.)	AHRI Rating Continuous Draw @ 135°F Gal./Hr.	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Head Loss @ 8GPM	Approx. Shpg. Wt.	Limited Tank Warranty
									Lifetime
DW-2-40-L	38	123	98	41"	41 ⁷ / ₈ "	22"	2.4 ft.	195	\$1,720.00
DW-2-50-L	48	133	98	46 ¹ / ₄ "	47 ¹ / ₄ "	22"	2.4 ft.	205	2,007.00
DW-2-65-L	64	148	98	59"	60"	22"	2.4 ft.	235	2,329.00
DW-2-80-L	75	158	98	59"	59 ³ / ₄ "	24"	2.4 ft.	255	2,651.00

Surface Mount Thermostat. The "L" in the model number indicates Limited Lifetime Warranty.

Note: These certified ratings were obtained with a heat source output of 65,000 BTU/Hr., a flow rate of 8.0 GPM, and a 180°F boiler water supply temperature. Boiler Connections are 3/4" NPT.



PowerStor Series SS™ Stainless Steel Single-Wall Indirect Models

2" Non-CFC Foam Insulation

Model Number	Gal. Cap.	First Hour Rating @ 135°F (Gal.)	AHRI Rating Continuous Draw @ 135°F Gal./Hr.	Min. Heat Req. Rate BTU/Hr.	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Head Loss ft.	Approx. Shpg. Wt.	Limited Tank Warranty
										Lifetime
RTV-40-L	40	158	133	87,500	35 ¹ / ₄ "	35 ¹ / ₂ "	24"	6.0 @ 8 GPM	83	\$1,642.00
RTV-52-L	52	200	165	113,000	45 ⁵ / ₈ "	45 ⁷ / ₈ "	24"	6.2 @ 8 GPM	93	1,765.00
RTV-75-L	75	225	165	113,000	63 ⁷ / ₈ "	64 ¹ / ₈ "	24"	6.2 @ 8 GPM	117	2,132.00
RTV-120-L	119	360	280	195,000	60 ⁵ / ₈ "	49 ¹ / ₂ "	30 ¹ / ₄ "	8.5 @ 11 GPM	315	4,354.00

Immersed Aquastat. The "L" in the model number indicates Limited Lifetime Warranty.

PowerStor Series SS™ Models can also be used commercially and carry a five year warranty when used in Commercial applications.

Note: These certified ratings were obtained with a heat output rate as specified and a 180°F boiler water supply temperature.

Boiler Connections are 3/4" NPT (RTV-120-L has 1¹/₄" NPT connections).

These Products Are Net And Not Subject To Performance Incentive Program.

Storage Tank Models



Storage Tank Models

2" Non-CFC Foam Insulation

Model Number	Gal. Cap.	Floor to Heater Top	Jacket Dia.	Floor to Water Conn.	Floor to Drain/Boiler Return	Water and Boiler Supply Conn.	Boiler Return Conn.	Weight	Limited Tank Warranty 6 Year
AST-40-6	40	46 ⁵ / ₈ "	20"	47 ⁵ / ₈ "	3 ³ / ₈ "	3/4"	3/4"	103	\$763.00
AST-50-6	50	46 ⁵ / ₈ "	22"	47 ⁵ / ₈ "	3 ³ / ₈ "	3/4"	3/4"	130	914.00
AST-80-6	80	58 ⁵ / ₈ "	24"	59 ⁵ / ₈ "	3 ³ / ₈ "	3/4"	3/4"	183	1,138.00
AST-120-6	119	62 ⁵ / ₈ "	28 ¹ / ₄ "	63 ⁵ / ₈ "	3 ³ / ₈ "	1"	3/4"	305	1,764.00

Surface Mount Thermostat.

BRADFORD WHITE COMMERCIAL WATER HEATERS

Big Solutions for Big Demands



When it comes to heating and hot water, Bradford White is proud to offer the specifier, engineer, mechanical contractor, building manager, and professional installer the perfect commercial solution. With gas and electric tank-type models up to 725,000 BTU/Hr., Bradford White has the products and technology ready for your largest demands.

These American-made commercial water heaters provide durability, energy efficiency, and exceptional performance in hotels, restaurants, hospitals, schools, universities, public buildings, apartments, health clubs, stadiums, prisons, office buildings, shopping centers, laundromats, and more.

Commercial water heaters from Bradford White - designed and built to satisfy your most extreme heating and hot water demands.

Built to be the Best™

©2016, Bradford White Corporation. All rights reserved.


BRADFORD WHITE®
WATER HEATERS
www.bradfordwhite.com

Commercial Gas Models

The Most Extensive Line of
Commercial Water Heaters
in the Industry



All Models meet or exceed both the Recovery Efficiency and Standby Loss Requirements of ASHRAE 90.1b (current standard) and are listed with the California Energy Commission (CEC).

Model numbers shown are for Natural Gas. For LP Gas (Propane) change the suffix "N" to "X" and add \$40.00 to Natural Gas net prices. EX: LG250H653N becomes LG250H653X.

Some LP Gas inputs and recoveries vary from their Natural Gas counterparts. Consult current specification sheets for accurate information. Because some states require that heaters 200,000 BTU/Hr. and over, or 120 gallons of storage and over, to be ASME constructed, check with local codes and authorities for applicability.

All Commercial Gas models are designed certified by CSA International (formerly AGA and CGA).

High Performance Models

Commercial Gas Models



Light Duty Commercial Atmospheric Vent High Input Models

Non-CFC Foam Insulation

Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 100°F Rise	First Hour Rating (Gal.)	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
LG250H653N	48	46	65,000	63	104	Standard	60"	22"	4"	193	\$2,166.00
LG155H803N	55	55	80,000	78	117	Standard	59 ¹ / ₂ "	22"	4"	207	3,056.00
LG275H763N	75	72	76,000	74	126	Standard	62 ⁵ / ₈ "	24"	4"	263	3,011.00
LG2100H853N	100	95	85,000	82	137	Standard	69"	28 ¹ / ₄ "	4"	424	3,754.00

T&P Valve installed. LG155H803N Includes Mixing Valve.

Temperature adjustment up to 180°F.

All models feature side connections for space heating and two anode rods.

*When tested to the industry standard Residential First Hour Delivery procedure.

Temperature adjustment up to 180°F.

NSF compliance kits available for all models.

Circulating Loop Installation Kit:

P/N 265-43103-00 (Dielectric unions, Isolation valves and Extended nipples) . . . \$63.00

Water Connection Centers as Follows:

- LG250H653N = 11"
- LG155H803N = 8"
- LG275H763N = 11"
- LG2100H853N = 16"

Water Connection Sizes as Follows:

- LG250H653N = 3/4"
- LG155H803N = 3/4"
- LG275H763N = 1"
- LG2100H853N = 1 1/4"

Hand Hole cleanout standard on 100 gallon model only.

Commercial Gas Models

Power Vent, Power Direct Vent Models



Light Duty Commercial High Efficiency eF Series® Power Vent Model

2" Non-CFC Foam Insulation — 120 VAC required



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 100°F Rise	First Hour Rating (Gal.)	Style	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
LC2PV50H763N	50	49	76,000	83	131	Standard	67¼"	24"	2"	225	\$4,488.00

T&P Relief Valve Installed.

Feature side connections for space heating.



Light Duty Commercial TTW® Power Vent Models

2" Non-CFC Foam Insulation - 120 VAC required

(LG1PV55H783N has 1" Non-CFC Foam Insulation)



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 100°F Rise	First Hour Rating (Gal.)	Style	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
LG2PV50H653N	48	46	65,000	63	106	Standard	66⅛"	22"	3"or 4"	186	\$3,057.00
LG1PV55H783N	55	55	78,000	76	118	Standard	64⅜"	22"	3"or 4"	253	3,846.00
LG2PV75H763N	75	72	76,000	74	126	Standard	69⅞"	26"	3"or 4"	252	3,522.00

T&P Relief Valve Installed. LG1PV55H783N Includes Mixing Valve.

All models feature side connections for space heating.

NSF compliance kits available for all models

Temperature adjustments up to 180°F.

Commercial Gas Models



Light Duty Commercial Power Direct Vent Models

2" Non-CFC Foam Insulation - 120 VAC required



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 100°F Rise	First Hour Rating (Gal.)	Style	Floor to Exhaust Outlet	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
LG2PDV50H603N	48	46	60,000	58	95	Standard	69"	22"	3"or 4"	205	\$2,961.00
LG2PDV75H803N	75	72	80,000	77	126	Standard	68¼"	26"	3"or 4"	392	4,098.00

T&P Relief Valve Installed.

All models feature side connections for space heating.

NSF compliance kits available for all models.

Temperature adjustments up to 180°F.

- 3" Concentric Vent Kit Termination
- Air Intake Relief Device

P/N 239-44069-01\$62.00

P/N 239-48392-00\$65.00

Commercial Gas Models

Direct Vent Models

Light Duty Commercial Direct Vent Models

2" Non-CFC Foam Insulation



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 100°F Rise	First Hour Rating (Gal.)	Style	Floor to Center Line Vent (min.)	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
LG2DV50H503N-SLD	48	46	50,000	47	89	Standard	72 ⁵ / ₁₆ "	22"	4" / 6"	217	\$2,787.00
LG2DV50H503N-FLX	48	46	50,000	47	89	Standard	72 ⁵ / ₁₆ "	22"	4" / 6"	217	2,822.00
LG2DV50H503N-OLY	48	46	50,000	47	89	Standard	72 ⁵ / ₁₆ "	22"	4" / 6"	217	2,655.00

T&P Relief Valve Installed.

All models feature side connections for space heating.

NSF compliance kits available for all models. Water connections are 3/4" on 11" centers.

Temperature adjustments up to 180°F.

Telescoping Solid Vent Kit (-SLD), or Flexible Vent Kit (-FLX) is shipped with the water heater.

Ex: LG2DV50H503N-SLD. This model ships with Telescoping Solid Vent Kit

Ex: LG2DV50H503N-FLX. This model ships with Flexible Vent Kit

When a Vent Kit is not needed or is required to be shipped separately add (-OLY) to the model number.

EX: LG2DV50H503N-OLY. This model ships without a Vent Kit.

Solid Vent Kit shipped separately.

P/N 239-51286-00 \$132.00

Flexible Vent Kit shipped separately.

P/N 239-51287-00 \$167.00

Refer to Installation and Operating Manual for Vent Kit Components. Horizontal vent termination only.

Optional Telescoping Solid Vent Kits:

■ Kit "F" Telescopes from 4³/₄" to 5¹/₁₆" P/N 239-42516-00 \$44.00

■ Kit "G" Telescopes from 6¹/₂" to 9⁹/₁₆" P/N 239-42517-00 \$55.00

■ Kit "H" Telescopes from 13³/₄" to 23¹/₁₆" P/N 239-42514-00 \$68.00

■ Kit "I" Telescopes from 49¹/₁₆" to 95¹/₁₆" P/N 239-42512-00 \$119.00

Ultra Low NOx Models

Light Duty Commercial Ultra Low NOx Atmospheric Vent High Input Models

2" Non-CFC Foam Insulation



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 100°F Rise	First Hour Rating (Gal.)	Style	Floor to Flue Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
ULG250H553N	48	46	55,000	59	90	Standard	60 ⁵ / ₁₆ "	22"	4"	193	\$3,168.00
ULG275H763N	75	72	76,000	74	126	Standard	64 ¹ / ₈ "	26"	4"	263	3,726.00
ULG2100H853N	100	95	85,000	82	137	Standard	70 ⁷ / ₁₆ "	28 ¹ / ₄ "	4"	424	4,526.00

T&P Relief Valve Installed.

All models feature side connections for space heating.

NSF compliance kits available for all models.

Temperature adjustments up to 180°F.

Commercial Gas Models

Light Duty Commercial Ultra Low NOx Direct Vent Models

1" Non-CFC Foam Insulation



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 100°F Rise	First Hour Rating (Gal.)	Style	Floor to Vent Conn. (min.)	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
ULG2DV50H453N-SLD	48	46	45,000	43	83	Standard	74 1/4"	22"	4"x 6"	201	\$3,075.00
ULG2DV50H453N-FLX	48	46	45,000	43	83	Standard	74 1/4"	22"	4"x 6"	201	3,110.00
ULG2DV50H453N-OLY	48	46	45,000	43	83	Standard	74 1/4"	22"	4"x 6"	201	2,943.00

T&P Relief Valve Installed. All models feature side connections for space heating. NSF compliance kits available for all models. Water connections are 3/4" on 11" centers. Temperature adjustments up to 180°F.

Telescoping Solid Vent Kit (-SLD), or Flexible Vent Kit (-FLX) is shipped with the water heater.

Ex: ULG2DV50H453N-SLD. This model ships with Telescoping Solid Vent Kit

Ex: ULG2DV50H453N-FLX. This model ships with Flexible Vent Kit

When a Vent Kit is not needed or is required to be shipped separately add (-OLY) to the model number.

EX: ULG2DV50H453N-OLY. This model ships without a Vent Kit.

Solid Vent Kit shipped separately. P/N 239-51286-00

Flexible Vent Kit shipped separately. P/N 239-51287-00 \$132.00

Refer to Installation and Operating Manual for Vent Kit Components. Horizontal vent \$167.00. Vertical vent \$177.00.

Optional Telescoping Solid Vent Kits:

■ Kit "F" Telescopes from 4 3/4" to 5 1/8" P/N 239-42516-00

■ Kit "G" Telescopes from 6 1/2" to 9 3/8" P/N 239-42517-00 \$44.00

■ Kit "H" Telescopes from 13 3/4" to 23 1/8" P/N 239-42514-00 \$55.00

■ Kit "I" Telescopes from 49 1/8" to 95 1/8" P/N 239-42512-00 \$68.00

\$119.00

Light Duty Commercial Ultra Low NOx TTW® Power Vent Models

2" Non-CFC Foam Insulation - 120 VAC required



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 100°F Rise	First Hour Rating (Gal.)	Style	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
ULG2PV50H563N	48	46	56,000	54	90	Standard	66 3/8"	22"	3" or 4"	190	\$3,331.00
ULG2PV75H763N	75	72	76,000	74	126	Standard	69 1/4"	26"	3" or 4"	270	4,744.00

T&P Relief Valve Installed. All models feature side connections for space heating. NSF compliance kits available for all models. Temperature adjustments up to 180°F.

Light Duty Ultra Low NOx Power Direct Vent Models

2" Non-CFC Foam Insulation - 120 VAC required



Model Number	Nominal Capacity (Gal.)	DOE Rated Storage Volume (Gal.)	Input BTU/Hr.	GPH Rec. 100°F Rise	First Hour Rating (Gal.)	Style	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
ULG2PDV50H503N	48	46	50,000	48	85	Tall	69 1/4"	22"	3" or 4"	201	\$3,613.00

T&P Relief Valve Installed. Feature side connections for space heating. NSF compliance kits available for all models. Water connections are 3/4" on 11" centers. Temperature adjustments up to 180°F.

■ 3" Concentric Vent Kit Termination P/N 239-44069-01 \$62.00

■ Air Intake Relief Device P/N 239-48392-00 \$65.00

Light Duty Commercial Gas Product Options

Add

■ NSF Compliance Kit: (All models except (U)LG100H
P/N 243-41203-00 \$71.00

■ NSF Compliance Kit: (U)LG2100H Only
P/N 243-41209-00 \$71.00

■ For LP gas (propane) change suffix "N" to "X" and add \$40.00
to natural gas net prices where applicable.

■ Circulating Loop Installation Kit:
P/N 265-43103-00 (Dielectric unions, Isolation valves and Extended nipples) \$63.00

The NSF kit for Light Duty Commercial Gas water heaters is ordered as a separate line item with the water heater using the applicable part number. The kits are also available for order through our parts department for field conversions.

Commercial Gas Models

The versatile Commander Series™ commercial gas water heater, with its small footprint, light weight, and shorter height, fits just about anywhere.



Featuring Bradford White's ICON HD™ Integrated Commercial Control System.



Scan to learn more about the Bradford White Commander Series™

Heavy Duty Atmospheric Vent Models



Commander Series™ Atmospheric Vent Models

Non-CFC Foam Insulation - 120 VAC Required

Model Number	Gal. Cap.	Input BTU/Hr.	GPH Rec. 100°F Rise	Style	Floor to Vent Conn.	Jacket Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
UCG-80H-125-3N	80	125,000	123	Standard	63"	28 ¹ / ₄ "	5"	535	\$7,050.00
UCG-80H-199-3N	80	199,999	197	Standard	64 ³ / ₄ "	28 ¹ / ₄ "	6"	535	9,273.00
UCG-80H-270-3N	80	270,000	266	Standard	64 ³ / ₄ "	28 ¹ / ₄ "	6"	545	10,554.00
UCG-80H-399-3N	80	399,999	384	Standard	68 ³ / ₄ "	28 ¹ / ₄ "	8"	545	14,858.00
UCG-100H-199-3N	100	199,999	197	Standard	73 ¹ / ₄ "	28 ¹ / ₄ "	6"	632	9,410.00
UCG-100H-270-3N	100	270,000	266	Standard	73 ¹ / ₄ "	28 ¹ / ₄ "	6"	632	10,870.00
UCG-100H-399-3N	98	399,999	398	Standard	77 ¹ / ₄ "	28 ¹ / ₄ "	8"	657	14,309.00

T&P Relief Valve Installed.

NSF compliance kits available for all models.

Product Options

■ For propane gas models change suffix "N" to "X" (Propane Gas not available on UCG-100H-399-3N)

Example: UCG-100H-199-3X, and add \$40.00
to natural gas net prices where applicable.

Commercial Gas Models

Flue Damper and Induced Draft Models

Electronic Ignition Models — Non-ASME

Non-CFC Foam Insulation - 120 VAC required



Model Number	Gal Cap.	Input BTU/Hr.	GPH Rec. 100°F Rise	Floor to Heater Top	Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
D-38T-155-3N	38	155,000	150	43"	28¼"	6"	438	\$7,302.00
D-65T-370-3N	65	370,000	359	64½"	28¼"	8"	665	10,177.00
D-65T-399-3N††	65	399,999	388	64½"	28¼"	8"	665	11,384.00
D-75T-125-3N	75	125,000	121	65½"	28¼"	5"	520	5,781.00
D-75T-160-3N	75	160,000	155	65½"	28¼"	6"	520	7,334.00
D-75T-300-3N	75	300,000	291	64½"	28¼"	7"	590	9,058.00
D-80T-180-3N	80	180,000	175	64¾"	28¼"	6"	540	7,560.00
D-80T-199-3N	80	199,999	194	64¾"	28¼"	6"	540	7,604.00
D-80T-250-3N	80	250,000	242	64¾"	28¼"	6"	540	8,113.00
D-80L-399-3N	80	399,999	388	64½"	30¼"	8"	800	12,276.00
D-80L-450-3N	80	450,000	436	64½"	30¼"	10"	800	13,426.00
D-80T-425-3N	80	425,000	412	75½"	28¼"	10"	750	13,242.00
D-80L-505-3N	80	505,000	489	64½"	30¼"	10"	800	14,215.00
D-80T-505-3N	80	505,000	489	75½"	28¼"	10"	750	14,215.00
D-100L-199-3N	100	199,999	194	65"	30¼"	6"	725	7,759.00
D-100S-199-3N	100	199,999	194	67¾"	28¼"	6"	667	7,759.00
D-100T-199-3N	98	199,999	194	75½"	28¼"	6"	610	7,759.00
D-100L-250-3N	100	250,000	242	65"	30¼"	6"	725	8,630.00
D-100S-250-3N	100	250,000	242	67¾"	28¼"	6"	667	8,630.00
D-100T-250-3N	98	250,000	242	75½"	28¼"	6"	610	8,630.00
D-100L-270-3N††	100	270,000	262	65"	30¼"	6"	725	8,878.00
D-100L-300-3N	100	300,000	291	65"	30¼"	7"	725	9,098.00

††Available in Natural Gas only.

Electronic Ignition Models — ASME

Non-CFC Foam Insulation - 120 VAC required



Model Number	Gal Cap.	Input BTU/Hr.	GPH Rec. 100°F Rise	Floor to Heater Top	Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
D-65T-370-3NA	65	370,000	359	64½"	28¼"	8"	720	\$11,812.00
D-65T-399-3NA††	65	399,999	388	64½"	28¼"	8"	720	12,487.00
D-75T-300-3NA	75	300,000	291	64½"	28¼"	7"	645	10,904.00
D-80T-250-3NA	80	250,000	242	64¾"	28¼"	6"	590	10,013.00
D-80L-399-3NA	80	399,999	388	64½"	30¼"	8"	835	14,013.00
D-80L-450-3NA	80	450,000	436	64½"	30¼"	10"	835	15,599.00
D-80T-425-3NA	80	425,000	412	75½"	28¼"	10"	800	15,378.00
D-80L-505-3NA	80	505,000	489	64½"	30¼"	10"	835	15,818.00
D-80T-505-3NA	80	505,000	489	75½"	28¼"	10"	800	15,818.00
D-100L-250-3NA	100	250,000	242	65"	30¼"	6"	765	10,563.00
D-100S-250-3NA	100	250,000	242	67¾"	28¼"	6"	702	10,563.00
D-100T-250-3NA	98	250,000	242	75½"	28¼"	6"	690	10,563.00
D-100L-270-3NA††	100	270,000	262	65"	30¼"	6"	765	10,797.00
D-100L-300-3NA	100	300,000	291	65"	30¼"	7"	765	11,030.00

††Available in Natural Gas only.

Low NOx Models: For Low NOx models add "E" to the model number as displayed, EX: D-100T-199E-3N and increase net price by: **\$175.00**
 The Low NOx option is available on Natural Gas Models ONLY, with inputs from 125,000 to 399,999.

T&P Relief Valve Installed and Hand Hole Cleanout is standard.

Commercial Gas Models



Induced Draft Models — Non-ASME

Non-CFC Foam Insulation - 120 VAC required

Model Number	Gal Cap.	Input BTU/Hr.	GPH Rec. 100°F Rise	Floor to Heater Top	Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
D-65T-625-3N	65	625,000	606	69 $\frac{3}{8}$ "	28 $\frac{1}{4}$ "	8"	720	\$16,415.00
D-80T-725-3N	80	725,000	703	79 $\frac{5}{8}$ "	28 $\frac{1}{4}$ "	8"	800	16,891.00

Induced Draft Models — ASME

Non-CFC Foam Insulation - 120 VAC required

Model Number	Gal Cap.	Input BTU/Hr.	GPH Rec. 100°F Rise	Floor to Heater Top	Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
D-65T-625-3NA	65	625,000	606	69 $\frac{3}{8}$ "	28 $\frac{1}{4}$ "	8"	775	\$16,823.00
D-80T-725-3NA	80	725,000	703	79 $\frac{5}{8}$ "	28 $\frac{1}{4}$ "	8"	880	17,505.00

Product Options

- Power Vent Kits Available for Electronic Ignition models ONLY with inputs from 125,000 to 505,000 BTU's/Hr.
 - 125,000 - 270,000 BTU/Hr. P/N 239-81764-00 \$587.00
 - 300,000 - 399,999 BTU/Hr. P/N 239-81766-00 \$696.00
 - 400,000 - 505,000 BTU/Hr. P/N 239-82148-00 \$780.00
- NSF Compliance Kits: P/N 265-44541-01 (D-Series T and S Models) \$71.00
 P/N 265-44541-02 (D-Series L Models) \$71.00

Commercial Gas Models

Millivolt Models — Non-ASME

Non-CFC Foam Insulation - No electricity required



Model Number	Gal Cap.	Input BTU/Hr.	GPH Rec. 100°F Rise	Floor to Heater Top	Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
DM-38T-155-3N	38	155,000	150	43"	28¼"	6"	438	\$7,596.00
DM-75T-125-3N	75	125,000	121	65"	28¼"	5"	520	6,343.00
DM-75T-160-3N	75	160,000	155	65"	28¼"	6"	520	7,752.00
DM-80T-180-3N	80	180,000	175	64½"	28¼"	6"	540	7,973.00
DM-80T-199-3N	80	199,999	194	64½"	28¼"	6"	540	8,025.00
DM-80T-250-3N	80	250,000	242	64½"	28¼"	6"	540	8,564.00
DM-100L-199-3N	100	199,999	194	65"	30¼"	6"	725	8,236.00
DM-100S-199-3N	100	199,999	194	72⅞"	28¼"	6"	667	8,236.00
DM-100T-199-3N	98	199,999	194	75½"	28¼"	6"	610	8,236.00
DM-100L-250-3N	100	250,000	242	65"	30¼"	6"	725	9,142.00
DM-100S-250-3N	100	250,000	242	72⅞"	28¼"	6"	667	9,142.00
DM-100T-250-3N	98	250,000	242	75½"	28¼"	6"	610	9,142.00
DM-100L-270-3N††	100	270,000	262	65"	30¼"	6"	725	9,423.00

††Available in Natural Gas only.

Millivolt Models — ASME

Non-CFC Foam Insulation - No electricity required

Model Number	Gal Cap.	Input BTU/Hr.	GPH Rec. 100°F Rise	Floor to Heater Top	Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
DM-80T-250-3NA	80	250,000	242	64½"	28¼"	6"	590	\$10,741.00
DM-100L-250-3NA	100	250,000	242	65"	30¼"	6"	765	11,333.00
DM-100S-250-3NA	100	250,000	242	72⅞"	28¼"	6"	702	11,333.00
DM-100T-250-3NA	98	250,000	242	75½"	28¼"	6"	690	11,333.00
DM-100L-270-3NA††	100	270,000	262	65"	30¼"	6"	765	11,622.00

††Available in Natural Gas only.

■ **Low NOx Models:** For Low NOx models add "E" to the model number as displayed, EX: DM-100T-199E-3N and increase net price by: **\$175.00**

The Low NOx option is available on Natural Gas Models ONLY, with inputs from 125,000 to 270,000.

T&P Relief Valve Installed and Hand Hole Cleanout is standard.

Product Options

■ NSF Compliance Kits:

P/N 265-44541-05	DM-Series T and S Models	\$71.00
P/N 265-44541-06	DM-Series L Models	\$71.00

Commercial Gas Models

eF Series® Ultra High Efficiency Models



Ultra high efficiency water heaters available in 60-gallon and 100-gallon models with BTU's ranging from 125,000 to 399,999

The highest rating of any water heater in its class.



Scan to learn more about the Bradford White's eF Series® water heaters.



Ultra High Efficiency Models — Non-ASME

Non-CFC Foam Insulation - 120 VAC required



Model Number	Gal Cap.	Input BTU/Hr.	GPH Rec. 100°F Rise	Floor to Heater Top	Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
★ EF-60T-125E-3N	60	125,000	145	57"	28¼"	3" or 4"	570	\$6,611.00
EF-60T-150E-3N	60	150,000	169	57"	28¼"	3" or 4"	570	7,037.00
EF-60T-199E-3N	60	199,999	223	57"	28¼"	3" or 4"	570	7,327.00
★ EF-100T-150E-3N	100	150,000	180	77½"	28¼"	3" or 4"	900	8,772.00
★ EF-100T-199E-3N	100	199,999	239	77½"	28¼"	3" or 4"	900	9,002.00
★ EF-100T-250E-3N	100	250,000	294	77½"	28¼"	3" or 4"	900	10,120.00
EF-100T-300E-3N	100	300,000	335	77½"	28¼"	3" or 4"	900	11,417.00
★ EF-100T-399E-3N	100	399,999	451	77½"	28¼"	3" or 4"	950	12,379.00

★ = ENERGY STAR® Qualified.



Ultra High Efficiency Models — ASME

Non-CFC Foam Insulation - 120 VAC required

Model Number	Gal Cap.	Input BTU/Hr.	GPH Rec. 100°F Rise	Floor to Heater Top	Dia.	Vent Size	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
★ EF-60T-125E-3NA	60	125,000	145	57"	28¼"	3" or 4"	570	\$8,469.00
EF-60T-150E-3NA	60	150,000	169	57"	28¼"	3" or 4"	570	8,980.00
EF-60T-199E-3NA	60	199,999	223	57"	28¼"	3" or 4"	570	9,270.00
★ EF-100T-150E-3NA	100	150,000	180	77½"	28¼"	3" or 4"	900	10,797.00
★ EF-100T-199E-3NA	100	199,999	239	77½"	28¼"	3" or 4"	900	11,033.00
★ EF-100T-250E-3NA	100	250,000	294	77½"	28¼"	3" or 4"	900	11,961.00
EF-100T-300E-3NA	100	300,000	335	77½"	28¼"	3" or 4"	900	13,341.00
★ EF-100T-399E-3NA	100	399,999	451	77½"	28¼"	3" or 4"	950	14,208.00

★ = ENERGY STAR® Qualified.



Product Options

■ Direct Spark Ignition Conversion Kit: P/N 265-48866-01 (125,000 - 199,000 BTU/Hr.)	\$625.00
P/N 265-48866-02 (250,000 & 300,000 BTU/Hr.)	\$681.00
P/N 265-51090-00 (399,999 BTU/Hr.)	\$699.00
■ 2" Concentric Vent Kit Termination: P/N 239-44069-02	\$53.00
■ 3" Concentric Vent Kit Termination: P/N 239-44069-01	\$62.00
■ NSF Compliance Kit: P/N 265-44542-04	\$70.00
■ Maxitrol Pressure Regulator:	
For separate part order 243-45517-00 (except for EF-100T-399E)	\$95.00
■ Low Inlet Gas Pressure (3.5" w.c.):	
For eF heater (except EF-100T-300 and EF-100T-399) with Low Inlet Gas Pressure option order with a "-879", and add	\$75.00
■ For propane gas models change suffix "N" to "X" and remove "E" from the model number.	
Example: EF-100T-150-3X, and add	\$40.00
to natural gas net prices where applicable. Low NOx construction standard.	
T&P Relief Valve installed and Hand Hole Cleanout is standard.	
■ Optional Condensate Neutralizer: P/N A2123601 (125,000 - 250,000 BTU/Hr.)	\$134.00
P/N A2123602 (300,000 - 399,999 BTU/Hr.)	\$217.00

Commercial Electric Models

All models are UL and/or ETL listed. All water connections are 3/4" NPT (LE2120T3-3 has 1" NPT). All electrical connections are 3/4". All models are certified at 300 psi test pressure and 150 psi working pressure. All models come equipped with two installed heat traps (except LE2120T, LE120L, and Utility and Wall Hung Models). T&P Valve Installed.

Commercial Light Duty Upright and Lowboy Model Number Suffix

NOTE: WHEN ORDERING WATER HEATERS SPECIFY VOLTAGE AND KW INPUT ONLY. THE FOLLOWING TABLES ARE FOR INFORMATIONAL PURPOSES ONLY.

Phase and Operation are determined by the voltage.

All 208V, 240V and 480V models are shipped standard three phase, non-simultaneous.

Can be converted to single phase and/or simultaneous operation in the field.

All 120V and 277V models are shipped standard single phase, non-simultaneous.

Can be converted to simultaneous operation in the field. Three phase not available.

Wattage Limitations	Voltage				
	120V	208V	240V	277V	480V
1500W / 1500W	yes	yes	yes	yes	yes
2000W / 2000W	no	yes	yes	yes	yes
2500W / 2500W	no	yes	yes	yes	yes
3000W / 3000W	no	yes	yes	yes	yes
3500W / 3500W	no	yes	yes	no	no
4000W / 4000W	no	yes	yes	yes	yes
4500W / 4500W	no	yes	yes	yes	yes
5000W / 5000W	no	yes	yes	yes	yes
5500W / 5500W	no	no	yes	yes	yes
6000W / 6000W	no	no	no	yes	yes

Phase	1	Single Phase	Operation	N	Non-Simultaneous
	3	Three Phase		S	Simultaneous

EX: LE250S3-3NCWW

EX: LE250S3-3NCWW

Designator	A	C	E	H	J	L*
Voltage	120	208/240	277	480	600	208

EX: LE250S3-3NCWW

*Use "L" voltage designator if wiring 208V with 4500W or 5000W.

For 120V, 277V, 480V, and 600V operation

Designator	J	K	L	M	N	P	R	S	T	W	X	Y	Z
Wattage	1000	1250	1500	2000	2500	3000	3500	3800	4000	4500	5000	5500	6000

EX: LE250S3-3NCWW

For 240V and 208V operation (Dual rated elements show a value for both 240V and 208V)

Designator	J	K	L	M	N	P	R	S	T	W	X	Y	Z	X**	Y**	Z**
240V Wattage	1000	1250	1500	2000	2500	3000	3500	3800	4000	4500	5000	5500	—	—	—	—
208V Wattage	—	—	1000	1500	2000	—	2500	—	3000	3500	—	4000	4500	5000	—	—

EX: LE250S3-3NCWW, will give 240V with 4500W/4500W. This same heater can also be energized at 208V with reduced wattage of 3500W/3500W.

**Use "L" voltage designator if wiring 208V with 4500W or 5000W.

ElectriFLEX LD™ Light Duty Commercial Upright Models

Non-CFC Foam Insulation



Model Number	Gal. Cap.	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
LE230S3-3	30	46 $\frac{1}{8}$ "	48 $\frac{1}{8}$ "	18"	85	\$1,802.00
LE240S3-3	40	46 $\frac{1}{8}$ "	47 $\frac{1}{8}$ "	20"	103	1,983.00
LE250S3-3	50	46 $\frac{1}{2}$ "	47 $\frac{1}{2}$ "	22"	130	2,225.00
LE265T3-3	65	59 $\frac{1}{4}$ "	60 $\frac{1}{4}$ "	22"	156	2,530.00
LE280T3-3	80	59 $\frac{1}{4}$ "	60 $\frac{1}{4}$ "	24"	183	2,808.00
LE2120T3-3	119	62 $\frac{3}{4}$ "	60 $\frac{1}{4}$ "	28"	305	3,932.00

■ NSF Kit: P/N 265-44542-04 \$71.00

For voltage and wattage conversions, order one of the kits from chart below.

For INCOLOY® Elements add . . . \$8.00 for each element. No additional charges for 277 volt or 480 volt.

ElectriFLEX LD™ Light Duty Commercial Lowboy Models

Non-CFC Foam Insulation



Model Number	Gal. Cap.	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
LE120L3-3	19	24 $\frac{3}{4}$ "	26"	18"	58	\$948.00
LE130L3-3**	30	29 $\frac{3}{4}$ "	31"	20"	86	1,920.00
LE140L3-3**	40	31 $\frac{1}{4}$ "	32 $\frac{3}{4}$ "	22"	115	2,095.00
LE150L3-3**	47	31 $\frac{3}{4}$ "	33 $\frac{3}{4}$ "	24"	140	2,303.00

*Dimension does not include additional insulation blanket.

**Models include supplied insulation blanket.

■ NSF Kit: P/N 265-44542-04 \$71.00

For voltage and wattage conversions, order one of the kits from chart below.

For INCOLOY® Elements add . . . \$8.00 for each element. No additional charges for 277 volt or 480 volt.

Commercial Electric Models

Voltage and Wattage Conversion Kits for Upright and Lowboy Models

Simultaneous and Non-Simultaneous Wattage	Voltage						
	120	208	240	277	380	415	480
1500/1500 Price	265-46409-01 \$32.00	265-46409-05 \$32.00	265-46409-13 \$32.00	265-46409-16 \$32.00	265-46409-24 \$53.00	265-46409-41 \$53.00	265-46409-32 \$32.00
2000/2000 Price	N/A N/A	265-46409-06 \$32.00	265-46409-05 \$32.00	265-46409-17 \$32.00	265-46409-43 \$53.00	265-46409-24 \$53.00	265-46409-33 \$32.00
2500/2500 Price	N/A N/A	265-46409-07 \$32.00	265-46409-06 \$32.00	265-46409-18 \$32.00	265-46409-25 \$53.00	265-46409-43 \$53.00	265-46409-34 \$32.00
3000/3000 Price	N/A N/A	265-46409-08 \$32.00	265-46409-14 \$32.00	265-46409-19 \$53.00	265-46409-26 \$53.00	265-46409-25 \$53.00	265-46409-35 \$53.00
3500/3500 Price	N/A N/A	265-46409-09 \$32.00	265-46409-07 \$32.00	N/A N/A	265-46409-27 \$53.00	265-46409-26 \$53.00	N/A N/A
4000/4000 Price	N/A N/A	265-46409-10 \$32.00	265-46409-08 \$32.00	265-46409-20 \$53.00	265-46409-29 \$53.00	265-46409-27 \$53.00	265-46409-36 \$53.00
4500/4500 Price	N/A N/A	265-46409-11 \$32.00	265-46409-09 \$32.00	265-46409-21 \$53.00	265-46409-30 \$53.00	265-46409-28 \$53.00	265-46409-37 \$53.00
5000/5000 Price	N/A N/A	265-46409-12 \$32.00	265-46409-15 \$32.00	265-46409-22 \$53.00	265-46409-31 \$53.00	265-46409-29 \$53.00	265-46409-38 \$53.00
5500/5500 Price	N/A N/A	N/A N/A	265-46409-10 \$32.00	265-46409-40** \$53.00	265-46409-44 \$53.00	265-46409-30 \$53.00	265-46409-42** \$53.00
6000/6000 Price	N/A N/A	N/A N/A	N/A N/A	265-46409-23 \$53.00	265-46409-45 \$53.00	265-46409-31 \$53.00	265-46409-39 \$53.00

Note: Above chart can be used to determine maximum wattage at certain voltages.

**INCOLOY® element only.

Each kit will include two replacement elements, two gaskets, a rating plate overlay and one set of instructions. For water heaters with only one element, please retain the extra element and gasket as a service part.

All models are UL and/or ETL listed. All water connections are 3/4" NPT (LE2120T has 1" NPT). All electrical connections are 3/4". All models are certified at 300 psi test pressure and 150 psi working pressure. All models come equipped with two installed heat traps (Except LE2120T, LE120L, and Utility and Wall Hung Models). T&P Valve Installed.

Commercial Light Duty Utility and Wall Hung Model Number Suffix

NOTE: WHEN ORDERING WATER HEATERS SPECIFY VOLTAGE AND kW INPUT ONLY. THE FOLLOWING TABLES ARE FOR INFORMATIONAL PURPOSES ONLY.

All models (120V, 208V, 240V, 277V and 480V) are shipped standard single phase, non-simultaneous. Three phase, simultaneous operation is not available.

Phase	1	Single Phase	Operation	N	Non-Simultaneous
	3	Three Phase		S	Simultaneous

EX: LE120U3-1NAL

EX: LE120U3-1NAL

Designator	A	C	E	H	J	L*
Voltage	120	208/240	277	480	600	208

EX: LE120U3-1NAL

*Use "L" voltage designator if wiring 208V with 5000, 5500 or 6000 watt; also 2500W or 3000W on LE16U, LE112T, & LE16VV models

For 120V, 277V, 480V, and 600V operation

Designator	J	K	L*	M	N	P	R	S	T	W	X	Y	Z
Wattage	1000	1250	1500	2000	2500	3000	3500	3800	4000	4500	5000	5500	6000

EX: LE120U3-1NAL

* Use "L" voltage designator if wiring 208V with 2500W or 3000W on LE16U, LE112T, & LE16VV models.

For 240V and 208V operation (Dual rated elements show a value for both 240V and 208V)

Designator	J	K	L	M	N	P	R	S	T	W	X	Y	Z	X**	Y**	Z**
240V Wattage	1000	1250	1500	2000	2500	3000	3500	3800	4000	4500	5000	5500	6000	—	—	—
208V Wattage	—	—	1000	1500	2000	—	2500	—	3000	3500	—	4000	4500	5000	5500†	6000†

EX: LE120U3-1NAL, will give 240V with 4500W/4500W. This same heater can also be energized at 208V with reduced wattage of 3500W/3500W.

**Use "L" voltage designator if wiring 208V with 5000, 5500 or 6000 watt.

†Available in non-simultaneous only.

Commercial Electric Models



ElectriFLEX LD™ Light Duty Commercial Utility Models — Non-CFC Foam Insulation

Model Number	Gal. Cap.	Floor to Heater Top	Floor to Hot Water Conn.	Jacket Dia.	Approx. Shpg. Wt.	Price
LE16U3-1†	6	16½"	10½"	14"	33	\$708.00
LE110U3-1	10	17½"	1"	16"	48	756.00
LE112T3-1†	12	27¾"	21½"	14"	48	853.00
LE115U3-1	15	20¼"	17¾"	18"	55	853.00
LE120U3-1	19	24¾"	18¾"	18"	59	853.00

†Maximum wattage at any voltage is 3000W.

*Height bottom to top.

■ **NSF Kit:** Kit Utility 265-44542-04 **\$71.00**

For voltage and wattage conversions, order one of the kits from chart below.

The 6 and 12 gallon Utility models have water connections standard on the side and optional connections on the top.

For INCOLOY® Elements add . . . **\$8.00** for each element. No additional charges for 277 volt or 480 volt.



ElectriFLEX LD™ Light Duty Commercial Wall Hung Models

Non-CFC Foam Insulation

Model Number	Gal. Cap.	Floor to Heater Top	Jacket Dia.	Approx. Shpg. Wt.	Price
LE16WV3-1†	6	15¼"	14"	33	\$880.00
LE112WV3-1	12	16¼"	18"	48	939.00
LE120WV3-1	19	24¼"	18"	59	1,028.00

†Maximum wattage at any voltage is 3000W.

*Height bottom to top.

■ **NSF Kit:** Wall Hung 265-44542-05 **\$37.00**

For voltage and wattage conversions, order one of the kits from chart below.

For INCOLOY® Elements add . . . **\$8.00** for each element. No additional charges for 277 volt or 480 volt.

Commercial Electric Models

Voltage and Wattage Conversion Kits for Utility, Wall Hung and Single Element Heaters

Single Element Wattage	Voltage						
	120	208	240	277	380	415	480
1500	265-46409-01	265-46409-05	265-46409-13	265-46409-16	265-46409-24	265-46409-41	265-46409-32
Price	\$32.00	\$32.00	\$32.00	\$32.00	\$53.00	\$53.00	\$32.00
2000	265-46409-02*	265-46409-06	265-46409-05	265-46409-17	265-46409-43	265-46409-24	265-46409-33
Price	\$24.00	\$32.00	\$32.00	\$32.00	\$53.00	\$53.00	\$32.00
2500	265-46409-03*	265-46409-07	265-46409-06	265-46409-18	265-46409-25	265-46409-43	265-46409-34
Price	\$24.00	\$32.00	\$32.00	\$32.00	\$53.00	\$53.00	\$32.00
3000	265-46409-04*	265-46409-08	265-46409-14	265-46409-19	265-46409-26	265-46409-25	265-46409-35
Price	\$24.00	\$32.00	\$32.00	\$53.00	\$53.00	\$53.00	\$53.00
3500	N/A	265-46409-09	265-46409-07	N/A	265-46409-27	265-46409-26	N/A
Price	N/A	\$32.00	\$32.00	N/A	\$53.00	\$53.00	N/A
4000	N/A	265-46409-10	265-46409-08	265-46409-20	265-46409-29	265-46409-27	265-46409-36
Price	N/A	\$32.00	\$32.00	\$53.00	\$53.00	\$53.00	\$53.00
4500	N/A	265-46409-11	265-46409-09	265-46409-21	265-46409-30	265-46409-28	265-46409-37
Price	N/A	\$32.00	\$32.00	\$53.00	\$53.00	\$53.00	\$53.00
5000	N/A	265-46409-12	265-46409-15	265-46409-22	265-46409-31	265-46409-29	265-46409-38
Price	N/A	\$32.00	\$32.00	\$53.00	\$53.00	\$53.00	\$53.00
5500	N/A	265-46409-46*	265-46409-10	265-46409-40**	265-46409-44	265-46409-30	265-46409-42**
Price	N/A	\$53.00	\$32.00	\$53.00	\$53.00	\$53.00	\$53.00
6000	N/A	265-46409-47*	265-46409-48*	265-46409-23	265-46409-45	265-46409-31	265-46409-39
Price	N/A	\$53.00	\$53.00	\$53.00	\$53.00	\$53.00	\$53.00

Note: Above chart can be used to determine maximum wattage at certain voltages.

**INCOLOY® element only. * 265-46409-02, -03, -04, -46, -47, & -48 contain only one element.

These kits cannot be wired as simultaneous. These are non-simultaneous kits only. Except where noted above, each kit will include two replacement elements, two gaskets, a rating plate overlay and one set of instructions. For water heaters with only one element, please retain the extra element and gasket as a service part.

Commercial Electric Models

Commercial ElectriFLEX MD™ Model Number Suffix

NOTE: WHEN ORDERING WATER HEATERS SPECIFY VOLTAGE, PHASE AND WATTAGE. THE FOLLOWING TABLES ARE FOR INFORMATIONAL PURPOSES ONLY.

Phase	1	Single Phase
	3	Three Phase

EX: E32-120R-3-3C18, Three Phase 240V, 18kW.

Designator	L	C	E	H
Voltage	208	240	277	480

EX: E32-120R-3-3C18

Designator	06	09	12	135	15	18
Wattage	6000	9000	12000	13500	15000	18000

EX: E32-120R-3-3C18



ElectriFLEX MD™ Commercial Models 2" Non-CFC Foam Insulation

Model Number	Gal. Cap.	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Floor to T&P Conn.	Floor to Control Box	Control Box to Back of Heater	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
E32-50S-3	50	46½"	47½"	22"	47¾"	44¾"	24¾"	137	\$2,893.00
E32-80R-3	80	59"	60"	24"	60¾"	57¾"	26¾"	190	3,718.00
E32-120R-3	119	63"	64"	28¼"	64¾"	61¾"	30¾"	312	4,683.00

All Medium Duty water heaters are wired 240v, 3 phase, 18kW as standard.
Other wattages, wiring phase, and kW are available and must be specified when ordering.
All 277V models are shipped standard single phase. Three phase not available.
No additional charges for 277 volt or 480 volt.

Product Options

■ NSF Compliance Kits:

P/N 265-45446-01 (50S)	\$37.00
P/N 265-45446-02 (80R)	\$37.00
P/N 265-45446-03 (120R)	\$37.00

Field Conversion Kit For ElectriFLEX MD™ Models

Required Total Heater kW	Kit Part Numbers			
	208 Volts	240 Volts	480 Volts	Price
6	265-43942-13	265-43942-07	265-43942-01	\$70.00
9	265-43942-14	265-43942-08	265-43942-02	70.00
12	265-43942-15	265-43942-09	265-43942-03	70.00
13.5	265-43942-16	265-43942-10	265-43942-04	70.00
15	265-43942-17	265-43942-11	265-43942-05	70.00
18	—	265-43942-12	265-43942-06	70.00
18	265-43942-18	—	—	143.00

Commercial Electric Models

Immersion Thermostat Models

NOTE WHEN ORDERING WATER HEATERS SPECIFY VOLTAGE AND KW INPUT. THE FOLLOWING TABLES ARE FOR INFORMATIONAL PURPOSES ONLY.

All 208V, 240V and 480V models are shipped standard three phase.

Can be converted to single phase in the field.

All 277V models are shipped standard single phase. Three phase not available.

ElectriFLEX HD™ Commercial Models 3" Non-CFC Foam Insulation



Model Number	Gal Cap.	Input kW	Number of Elements	GPH Rec. 100°F Rise	Jacket Dia.	Floor to Htr. Top	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty
CEHD-50(A)-6-3CF	50	6	3	25	24"	50 ⁵ / ₁₆ "	270	\$3,163.00
CEHD-50(A)-9-3CF	50	9	3	37	24"	50 ⁵ / ₁₆ "	270	3,372.00
CEHD-50(A)-12-3CF	50	12	3	50	24"	50 ⁵ / ₁₆ "	270	3,406.00
CEHD-50(A)-13.5-3CF	50	13.5	3	56	24"	50 ⁵ / ₁₆ "	270	3,472.00
CEHD-50(A)-15-3CF	50	15	3	62	24"	50 ⁵ / ₁₆ "	270	3,472.00
CEHD-50(A)-18-3CF	50	18	3	74	24"	50 ⁵ / ₁₆ "	270	3,502.00
CEHD-50(A)-24-3CF	50	24	6	99	24"	50 ⁵ / ₁₆ "	270	5,070.00
CEHD-50(A)-27-3CF	50	27	6	112	24"	50 ⁵ / ₁₆ "	270	5,151.00
CEHD-50(A)-30-3CF	50	30	6	124	24"	50 ⁵ / ₁₆ "	270	5,231.00
CEHD-50(A)-36-3CF	50	36	6	149	24"	50 ⁵ / ₁₆ "	270	5,313.00
CEHD-50(A)-45-3CF	50	45	9	186	24"	50 ⁵ / ₁₆ "	270	6,728.00
CEHD-50(A)-54-3CF	50	54	9	223	24"	50 ⁵ / ₁₆ "	270	6,921.00
CEHD-80(A)-6-3CF	80	6	3	25	26"	60"	335	\$4,162.00
CEHD-80(A)-9-3CF	80	9	3	37	26"	60"	335	4,232.00
CEHD-80(A)-12-3CF	80	12	3	50	26"	60"	335	4,272.00
CEHD-80(A)-13.5-3CF	80	13.5	3	56	26"	60"	335	4,348.00
CEHD-80(A)-15-3CF	80	15	3	62	26"	60"	335	4,348.00
CEHD-80(A)-18-3CF	80	18	3	74	26"	60"	335	4,403.00
CEHD-80(A)-24-3CF	80	24	6	99	26"	60"	335	5,523.00
CEHD-80(A)-27-3CF	80	27	6	112	26"	60"	335	6,061.00
CEHD-80(A)-30-3CF	80	30	6	124	26"	60"	335	6,087.00
CEHD-80(A)-36-3CF	80	36	6	149	26"	60"	335	6,137.00
CEHD-80(A)-45-3CF	80	45	9	186	26"	60"	335	7,704.00
CEHD-80(A)-54-3CF	80	54	9	223	26"	60"	335	7,765.00
CEHD-120(A)-6-3CF	119	6	3	25	30 ¹ / ₄ "	64 ¹ / ₂ "	430	\$4,818.00
CEHD-120(A)-9-3CF	119	9	3	37	30 ¹ / ₄ "	64 ¹ / ₂ "	430	4,945.00
CEHD-120(A)-12-3CF	119	12	3	50	30 ¹ / ₄ "	64 ¹ / ₂ "	430	5,011.00
CEHD-120(A)-13.5-3CF	119	13.5	3	56	30 ¹ / ₄ "	64 ¹ / ₂ "	430	5,043.00
CEHD-120(A)-15-3CF	119	15	3	62	30 ¹ / ₄ "	64 ¹ / ₂ "	430	5,043.00
CEHD-120(A)-18-3CF	119	18	3	74	30 ¹ / ₄ "	64 ¹ / ₂ "	430	5,108.00
CEHD-120(A)-24-3CF	119	24	6	99	30 ¹ / ₄ "	64 ¹ / ₂ "	430	6,561.00
CEHD-120(A)-27-3CF	119	27	6	112	30 ¹ / ₄ "	64 ¹ / ₂ "	430	6,604.00
CEHD-120(A)-30-3CF	119	30	6	124	30 ¹ / ₄ "	64 ¹ / ₂ "	430	6,657.00
CEHD-120(A)-36-3CF	119	36	6	149	30 ¹ / ₄ "	64 ¹ / ₂ "	430	6,696.00
CEHD-120(A)-45-3CF	119	45	9	186	30 ¹ / ₄ "	64 ¹ / ₂ "	430	8,545.00
CEHD-120(A)-54-3CF	119	54	9	223	30 ¹ / ₄ "	64 ¹ / ₂ "	430	8,607.00

Specify Voltage, Wattage, and Phase when ordering.

Product Options

For 277/480 volt (INCOLOY® Elements standard) **Add \$60.00**

ASME Construction

For ASME Construction add "A" to model number as displayed

and increase net price by:..... **\$490.00**

For ASME Shipping Weight add:

32 lbs. to CEHD-50 for total weight of 302 lbs.

43 lbs. to CEHD-80 for total weight of 378 lbs.

55 lbs. to CEHD-120 for total weight of 485 lbs.

NSF Compliance Kits:

265-44542-01 CEHD-50 Models **\$70.00**

265-44542-02 CEHD-80 Models **\$70.00**

265-44542-03 CEHD-120 Models **\$70.00**

Commercial Electric Models

Model Number	Desired Input		Conversion Kit Part Numbers***						
	Total kW	Element kW	208 Volts	240 Volts	277 Volts	380 Volts	415 Volts	480 Volts	600 Volts*
CEHD with 3 Elements	6	2	265-51043-73 Price \$70.00	265-51043-61 Price \$70.00	265-51043-49 Price \$70.00	265-51043-37 Price \$70.00	265-51043-25 Price \$70.00	265-51043-13 Price \$70.00	265-51043-01 Price \$70.00
	9	3	265-51043-74 Price \$70.00	265-51043-62 Price \$70.00	265-51043-50 Price \$70.00	265-51043-38 Price \$70.00	265-51043-26 Price \$70.00	265-51043-14 Price \$70.00	265-51043-02 Price \$70.00
	12	4	265-51043-75 Price \$70.00	265-51043-63 Price \$70.00	265-51043-51 Price \$70.00	265-51043-39 Price \$70.00	265-51043-27 Price \$70.00	265-51043-15 Price \$70.00	265-51043-03 Price \$70.00
	13.5	4.5	265-51043-76 Price \$70.00	265-51043-64 Price \$70.00	265-51043-52 Price \$70.00	265-51043-40 Price \$70.00	265-51043-28 Price \$70.00	265-51043-16 Price \$70.00	265-51043-04 Price \$70.00
	15	5	265-51043-77 Price \$70.00	265-51043-65 Price \$70.00	265-51043-53 Price \$70.00	265-51043-41 Price \$70.00	265-51043-29 Price \$70.00	265-51043-17 Price \$70.00	265-51043-05 Price \$70.00
	18	6	265-51043-78 Price \$70.00	265-51043-66 Price \$70.00	265-51043-54 Price \$70.00	265-51043-42 Price \$70.00	265-51043-30 Price \$70.00	265-51043-18 Price \$70.00	265-51043-06 Price \$70.00
CEHD with 6 Elements	24	4	265-51043-79 Price \$120.00	265-51043-67 Price \$120.00	265-51043-55 Price \$120.00	265-51043-43 Price \$120.00	265-51043-31 Price \$120.00	265-51043-19 Price \$120.00	265-51043-07 Price \$120.00
	27	4.5	265-51043-80 Price \$120.00	265-51043-68 Price \$120.00	265-51043-56 Price \$120.00	265-51043-44 Price \$120.00	265-51043-32 Price \$120.00	265-51043-20 Price \$120.00	265-51043-08 Price \$120.00
	30	5	265-51043-81 Price \$120.00	265-51043-69 Price \$120.00	265-51043-57 Price \$120.00	265-51043-45 Price \$120.00	265-51043-33 Price \$120.00	265-51043-21 Price \$120.00	265-51043-09 Price \$120.00
	36	6	265-51043-82 Price \$120.00	265-51043-70 Price \$120.00	265-51043-58 Price \$120.00	265-51043-46 Price \$120.00	265-51043-34 Price \$120.00	265-51043-22 Price \$120.00	265-51043-10 Price \$120.00
CEHD with 9 Elements	45	5	265-51043-83 Price \$170.00	265-51043-71 Price \$170.00	265-51043-59 Price \$170.00	265-51043-47 Price \$170.00	265-51043-35 Price \$170.00	265-51043-23 Price \$170.00	265-51043-11 Price \$170.00
	54	6	265-51043-84** Price \$170.00	265-51043-72 Price \$170.00	265-51043-60 Price \$170.00	265-51043-48 Price \$170.00	265-51043-36 Price \$170.00	265-51043-24 Price \$170.00	265-51043-12 Price \$170.00

* Only kW conversion is allowed for models rated 600V. Models rated 480V and below must not be converted to 600V.

** Only available as a three phase conversion kit.

*** Converting 3 Element Configurations (6-18kW)			*** Converting 6 or 9 element configurations (24-54kW)		
From	To	Transformer Required	From	To	Transformer Required
208/240/480 Volt	277/380/415 Volt	264-41994-02	208/240/480 Volt	277/380/415 Volt	264-41995-02
277/380/415 Volt	208/240/480 Volt	264-41994-01	277/380/415 Volt	208/240/480 Volt	264-41995-01
208/240/480 Volt	208/240/480 Volt	No Transformer Change Required	208/240/480 Volt	208/240/480 Volt	No Transformer Change Required
277/380/415 Volt	277/380/415 Volt	No Transformer Change Required	277/380/415 Volt	277/380/415 Volt	No Transformer Change Required

Note

3 element models may convert 6 kW thru 18 kW ONLY

6 element models may convert 24 kW thru 36 kW ONLY

9 element models may convert 45 kW thru 54 kW ONLY

Commercial Electric Models

Heavy Duty Commercial Models

3" Non-CFC Foam Insulation



Model Number	Gal Cap.	Input kW	Number of Elements		GPH Rec. 100°F Rise	Jacket Dia.	Floor to Htr. Top	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty	
			Single Phase	Three Phase					Surface Thermostats-SF	Immersion Thermostats-CF
M-II-50(A)-6-3SF	50	6	1	3	25	24"	47¾"	270	\$3,163.00	\$4,348.00
M-II-50(A)-9-3SF	50	9	3	3	37	24"	47¾"	270	3,372.00	4,427.00
M-II-50(A)-12-3SF	50	12	3	3	50	24"	47¾"	270	3,406.00	4,575.00
M-II-50(A)-13.5-3SF	50	13.5	3	3	56	24"	47¾"	270	3,472.00	4,722.00
M-II-50(A)-15-3SF	50	15	3	3	62	24"	47¾"	270	3,472.00	4,722.00
M-II-50(A)-18-3SF	50	18	3	3	74	24"	47¾"	270	3,502.00	4,754.00
M-II-50(A)-24-3SF	50	24	4	6	99	24"	47¾"	270	5,070.00	6,193.00
M-II-50(A)-27-3SF	50	27	6	6	112	24"	47¾"	270	5,151.00	6,350.00
M-II-50(A)-30-3SF	50	30	6	6	124	24"	47¾"	270	5,231.00	6,542.00
M-II-50(A)-36-3SF	50	36	6	6	149	24"	47¾"	270	5,313.00	6,738.00
M-II-50(A)-45-3SF	50	45	9	9	186	24"	47¾"	270	6,728.00	8,247.00
M-II-50(A)-54-3SF	50	54	9	9	223	24"	47¾"	270	6,921.00	8,545.00
M-II-80(A)-6-3SF	80	6	1	3	25	26"	60¼"	335	\$4,162.00	\$5,420.00
M-II-80(A)-9-3SF	80	9	3	3	37	26"	60¼"	335	4,232.00	5,500.00
M-II-80(A)-12-3SF	80	12	3	3	50	26"	60¼"	335	4,272.00	5,586.00
M-II-80(A)-13.5-3SF	80	13.5	3	3	56	26"	60¼"	335	4,348.00	5,744.00
M-II-80(A)-15-3SF	80	15	3	3	62	26"	60¼"	335	4,348.00	5,744.00
M-II-80(A)-18-3SF	80	18	3	3	74	26"	60¼"	335	4,403.00	5,760.00
M-II-80(A)-24-3SF	80	24	4	6	99	26"	60¼"	335	5,523.00	7,203.00
M-II-80(A)-27-3SF	80	27	6	6	112	26"	60¼"	335	6,061.00	7,405.00
M-II-80(A)-30-3SF	80	30	6	6	124	26"	60¼"	335	6,087.00	7,567.00
M-II-80(A)-36-3SF	80	36	6	6	149	26"	60¼"	335	6,137.00	7,754.00
M-II-80(A)-45-3SF	80	45	9	9	186	26"	60¼"	335	7,704.00	9,239.00
M-II-80(A)-54-3SF	80	54	9	9	223	26"	60¼"	335	7,765.00	9,527.00
M-II-120(A)-6-3SF	119	6	1	3	25	30¼"	64½"	430	\$4,818.00	\$6,166.00
M-II-120(A)-9-3SF	119	9	3	3	37	30¼"	64½"	430	4,945.00	6,290.00
M-II-120(A)-12-3SF	119	12	3	3	50	30¼"	64½"	430	5,011.00	6,589.00
M-II-120(A)-13.5-3SF	119	13.5	3	3	56	30¼"	64½"	430	5,043.00	6,770.00
M-II-120(A)-15-3SF	119	15	3	3	62	30¼"	64½"	430	5,043.00	6,770.00
M-II-120(A)-18-3SF	119	18	3	3	74	30¼"	64½"	430	5,108.00	6,964.00
M-II-120(A)-24-3SF	119	24	4	6	99	30¼"	64½"	430	6,561.00	7,744.00
M-II-120(A)-27-3SF	119	27	6	6	112	30¼"	64½"	430	6,604.00	8,051.00
M-II-120(A)-30-3SF	119	30	6	6	124	30¼"	64½"	430	6,657.00	8,240.00
M-II-120(A)-36-3SF	119	36	6	6	149	30¼"	64½"	430	6,696.00	8,386.00
M-II-120(A)-45-3SF	119	45	9	9	186	30¼"	64½"	430	8,545.00	10,068.00
M-II-120(A)-54-3SF	119	54	9	9	223	30¼"	64½"	430	8,607.00	10,344.00

Model numbers shown are for surface mount thermostats (SF). For immersion thermostats (CF), change suffix "SF" to "CF".
 Example: M-II-50-12-3CF, 240 volt, 3 phase. Specify Voltage, Wattage, and Phase when ordering.
 All 277V models are shipped standard single phase. Three phase not available.

Product Options

For 277/480 volt on M-II water heaters (INCOLOY® Elements standard) **Add Each Add \$60.00**

ASME Construction

For ASME Construction add "A" to model number as displayed
 and increase net price by: **\$490.00**
 For ASME Shipping Weight add: 32 lbs. to M-II-50 for total weight of 302 lbs.
 43 lbs. to M-II-80 for total weight of 378 lbs.
 55 lbs. to M-II-120 for total weight of 485 lbs.

INCOLOY® Elements

Standard on Immersion Thermostat Models.
 For Surface Mount Thermostat Models, for each element, (208v/240v) **\$8.00**

NSF Compliance Kits:

265-44542-01 M-II-50 Models **\$70.00**
 265-44542-02 M-II-80 Models **\$70.00**
 265-44542-03 M-II-120 Models **\$70.00**

Low Temperature Surface Mount Thermostat. **\$11.00**

Commercial Electric Models

ASME Models

Commercial ASME Models

2" Non-CFC Foam Insulation



Model Number	Gal. Cap.	Input kW	Number of Elements		Floor to Heater Top	Floor to CW Inlet	Floor to HW Outlet	Jacket Dia.	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
			Single Phase	Three Phase						
6A-3-3	6	3	1	1	17¼"	6¼"	18¼"	16"	83	\$3,546.00
12A-3-3	12	3	1	1	28"	6¼"	29"	16"	118	3,698.00
12A-6-3	12	6	3	3	28"	6¼"	29"	16"	118	3,933.00
12A-9-3	12	9	3	3	28"	6¼"	29"	16"	118	4,271.00
20A-3-3	20	3	1	1	27½"	6¼"	28½"	20"	145	3,864.00
20A-6-3	20	6	3	3	27½"	6¼"	28½"	20"	145	4,049.00
20A-9-3	20	9	3	3	27½"	6¼"	28½"	20"	145	4,422.00
20A-12-3	20	12	3	3	27½"	6¼"	28½"	20"	145	4,497.00
20A-13.5-3	20	13.5	3	3	27½"	6¼"	28½"	20"	145	4,740.00
20A-15-3	20	15	3	3	27½"	6¼"	28½"	20"	145	4,740.00
20A-18-3	20	18	3	3	27½"	6¼"	28½"	20"	145	4,882.00
30A-3-3	30	3	1	1	38"	6¼"	39"	20"	180	4,025.00
30A-6-3	30	6	3	3	38"	6¼"	39"	20"	180	4,236.00
30A-9-3	30	9	3	3	38"	6¼"	39"	20"	180	4,467.00
30A-12-3	30	12	3	3	38"	6¼"	39"	20"	180	4,681.00
30A-13.5-3	30	13.5	3	3	38"	6¼"	39"	20"	180	4,826.00
30A-15-3	30	15	3	3	38"	6¼"	39"	20"	180	4,826.00
30A-18-3	30	18	3	3	38"	6¼"	39"	20"	180	5,055.00
30A-24-3	30	24	4	6	38"	6¼"	39"	20"	180	5,229.00
30A-27-3	30	27	6	6	38"	6¼"	39"	20"	180	6,407.00
30A-30-3	30	30	6	6	38"	6¼"	39"	20"	180	6,950.00
30A-36-3	30	36	6	6	38"	6¼"	39"	20"	180	7,023.00
40A-3-3	40	3	1	1	48¼"	6¼"	49¼"	20"	220	\$4,172.00
40A-6-3	40	6	3	3	48¼"	6¼"	49¼"	20"	220	4,368.00
40A-9-3	40	9	3	3	48¼"	6¼"	49¼"	20"	220	4,580.00
40A-12-3	40	12	3	3	48¼"	6¼"	49¼"	20"	220	4,826.00
40A-13.5-3	40	13.5	3	3	48¼"	6¼"	49¼"	20"	220	5,011.00
40A-15-3	40	15	3	3	48¼"	6¼"	49¼"	20"	220	5,011.00
40A-18-3	40	18	3	3	48¼"	6¼"	49¼"	20"	220	5,184.00
40A-24-3	40	24	4	6	48¼"	6¼"	49¼"	20"	220	5,387.00
40A-27-3	40	27	6	6	48¼"	6¼"	49¼"	20"	220	6,626.00
40A-30-3	40	30	6	6	48¼"	6¼"	49¼"	20"	220	7,146.00
40A-36-3	40	36	6	6	48¼"	6¼"	49¼"	20"	220	7,733.00
50A-3-3	50	3	1	1	47¾"	6"	49¼"	24"	270	\$5,322.00
50A-6-3	50	6	3	3	47¾"	6"	49¼"	24"	270	5,374.00
50A-9-3	50	9	3	3	47¾"	6"	49¼"	24"	270	5,428.00
50A-12-3	50	12	3	3	47¾"	6"	49¼"	24"	270	5,585.00
50A-13.5-3	50	13.5	3	3	47¾"	6"	49¼"	24"	270	5,607.00
50A-15-3	50	15	3	3	47¾"	6"	49¼"	24"	270	5,666.00
50A-18-3	50	18	3	3	47¾"	6"	49¼"	24"	270	5,738.00
50A-24-3	50	24	4	6	47¾"	6"	49¼"	24"	270	7,560.00
50A-27-3	50	27	6	6	47¾"	6"	49¼"	24"	270	7,932.00
50A-30-3	50	30	6	6	47¾"	6"	49¼"	24"	270	8,014.00
50A-36-3	50	36	6	6	47¾"	6"	49¼"	24"	270	8,251.00
50A-45-3	50	45	9	9	47¾"	6"	49¼"	24"	270	9,773.00
50A-54-3	50	54	9	9	47¾"	6"	49¼"	24"	270	9,924.00
50A-81-3	50	81	9	9	47¾"	6"	49¼"	24"	270	16,348.00

Specify Voltage, Wattage, and Phase when ordering.

All models available in 208, 240, 277 and 480 volt at above prices.

All 277V models are shipped standard single phase. Three phase not available.

INCOLOY® elements standard.

Hand Hole cleanout opening standard, except 6 and 12 gallon models.

T&P relief valve supplied (not installed) with heater.

Commercial Electric Models

Commercial ASME Models

2" Non-CFC Foam Insulation



Model Number	Gal. Cap.	Input kW	Number of Elements		Floor to Heater Top	Floor to CW Inlet	Floor to HW Outlet	Jacket Dia.	Approx. Shpg. Wt.	Limited 3 Year Tank Warranty Price
			Single Phase	Three Phase						
80A-3-3	80	3	1	1	60¼"	6"	61¼"	26"	335	\$6,549.00
80A-6-3	80	6	3	3	60¼"	6"	61¼"	26"	335	6,612.00
80A-9-3	80	9	3	3	60¼"	6"	61¼"	26"	335	6,612.00
80A-12-3	80	12	3	3	60¼"	6"	61¼"	26"	335	6,656.00
80A-13.5-3	80	13.5	3	3	60¼"	6"	61¼"	26"	335	6,697.00
80A-15-3	80	15	3	3	60¼"	6"	61¼"	26"	335	6,764.00
80A-18-3	80	18	3	3	60¼"	6"	61¼"	26"	335	6,810.00
80A-24-3	80	24	4	6	60¼"	6"	61¼"	26"	335	8,520.00
80A-27-3	80	27	6	6	60¼"	6"	61¼"	26"	335	8,859.00
80A-30-3	80	30	6	6	60¼"	6"	61¼"	26"	335	8,948.00
80A-36-3	80	36	6	6	60¼"	6"	61¼"	26"	335	9,196.00
80A-45-3	80	45	9	6	60¼"	6"	61¼"	26"	335	10,626.00
80A-54-3	80	54	9	9	60¼"	6"	61¼"	26"	335	10,763.00
80A-81-3	80	81	9	9	60¼"	6"	61¼"	26"	335	16,843.00

120A-3-3	119	3	1	1	64½"	6"	66"	30¼"	430	\$7,856.00
120A-6-3	119	6	3	3	64½"	6"	66"	30¼"	430	7,936.00
120A-9-3	119	9	3	3	64½"	6"	66"	30¼"	430	7,936.00
120A-12-3	119	12	3	3	64½"	6"	66"	30¼"	430	8,016.00
120A-13.5-3	119	13.5	3	3	64½"	6"	66"	30¼"	430	8,096.00
120A-15-3	119	15	3	3	64½"	6"	66"	30¼"	430	8,180.00
120A-18-3	119	18	3	3	64½"	6"	66"	30¼"	430	8,415.00
120A-24-3	119	24	4	6	64½"	6"	66"	30¼"	430	9,312.00
120A-27-3	119	27	6	6	64½"	6"	66"	30¼"	430	9,666.00
120A-30-3	119	30	6	6	64½"	6"	66"	30¼"	430	9,762.00
120A-36-3	119	36	6	6	64½"	6"	66"	30¼"	430	9,995.00
120A-45-3	119	45	9	9	64½"	6"	66"	30¼"	430	11,351.00
120A-54-3	119	54	9	9	64½"	6"	66"	30¼"	430	11,487.00
120A-81-3	119	81	9	9	64½"	6"	66"	30¼"	430	17,320.00

No additional charges for 277 volt or 480 volt.

Options

Low Water Cut-Off Switch	\$277.00
Safety Door Interlock	\$495.00
High and Low Pressure Limit Switches	\$471.00
Alarm Horn	\$529.00
Temperature and Pressure Gauge	\$150.00
Time Delay Step Sequence (24 kW & above).	\$343.00
BMS Relay.	\$85.00

NSF Compliance Kit: P/N 265-44542-04 \$70.00

Commercial Electric Models

Electric Brute™ Models

Electric Brute™ Vertical Round

Immersion Thermostats

VERTICAL ROUND MODELS

Three Year Limited Tank Warranty

Commercial multipliers (CSDs) are not applicable to this product. Please call your local Bradford White sales representative for pricing.



Volts: 208V, 240V, and 277V							
Model Number	12kW	15kW	18kW	30kW	36kW	Max kW Load	Approx. Shpg. Wt.
VR-150-(kW)	\$17,429.00	\$17,554.00	\$17,704.00	\$18,169.00	\$18,568.00	90	650
VR-200-(kW)	18,252.00	18,375.00	18,527.00	18,953.00	19,308.00	162	750
VR-250-(kW)	18,805.00	18,929.00	19,080.00	19,567.00	20,132.00	162	1165
VR-300-(kW)	20,089.00	20,210.00	20,364.00	20,770.00	21,096.00	162	1350
VR-400-(kW)	24,062.00	24,185.00	24,337.00	24,757.00	25,021.00	162	1590
VR-500-(kW)	27,990.00	28,111.00	28,265.00	28,696.00	28,919.00	162	1700
VR-600-(kW)	32,662.00	32,783.00	32,937.00	33,346.00	33,577.00	216	2010
VR-800-(kW)	38,148.00	38,148.00	38,296.00	38,728.00	38,929.00	270	2450
VR-1000-(kW)	42,831.00	42,831.00	42,986.00	43,405.00	43,625.00	360	3160
VR-1250-(kW)	44,559.00	44,559.00	44,559.00	45,190.00	45,822.00	360	3792
VR-1500-(kW)	48,821.00	48,821.00	48,821.00	49,454.00	50,088.00	360	4550
VR-2000-(kW)	63,174.00	63,174.00	63,174.00	63,856.00	64,540.00	360	5460
VR-2500-(kW)	67,754.00	67,754.00	67,754.00	68,384.00	69,015.00	360	6553

Volts: 208V, 240V, and 277V							
Model Number	45kW	54kW	60kW	72kW	90kW	Max kW Load	Approx. Shpg. Wt.
VR-150-(kW)	\$19,729.00	\$20,925.00	\$21,104.00	\$21,962.00	\$22,956.00	90	650
VR-200-(kW)	20,920.00	22,124.00	22,295.00	23,293.00	24,290.00	162	750
VR-250-(kW)	21,792.00	22,995.00	23,167.00	24,031.00	25,110.00	162	1165
VR-300-(kW)	22,714.00	22,916.00	24,089.00	24,953.00	25,963.00	162	1350
VR-400-(kW)	26,434.00	27,633.00	27,809.00	28,672.00	29,616.00	162	1590
VR-500-(kW)	30,077.00	31,270.00	31,452.00	32,284.00	33,266.00	162	1700
VR-600-(kW)	34,529.00	35,725.00	35,904.00	36,599.00	37,344.00	216	2010
VR-800-(kW)	39,471.00	40,681.00	41,436.00	42,140.00	42,792.00	270	2450
VR-1000-(kW)	44,127.00	45,223.00	45,923.00	46,623.00	47,298.00	360	3160
VR-1250-(kW)	46,701.00	47,580.00	48,459.00	49,339.00	51,565.00	360	3792
VR-1500-(kW)	51,201.00	52,314.00	53,427.00	54,540.00	56,766.00	360	4550
VR-2000-(kW)	65,653.00	66,766.00	67,879.00	68,992.00	71,218.00	360	5460
VR-2500-(kW)	70,128.00	71,241.00	72,354.00	73,467.00	67,693.00	360	6553

These Products Are Net And Not Subject To Performance Incentive Program.

Commercial Electric Models



Volts: 208V, 240V, and 277V							
Model Number	108kW	120kW	135kW	144kW	162kW	Max kW Load	Approx. Shpg. Wt.
VR-150-(kW)	—	—	—	—	—	90	650
VR-200-(kW)	\$25,962.00	\$25,533.00	\$26,462.00	\$26,968.00	\$29,444.00	162	750
VR-250-(kW)	26,634.00	26,855.00	27,186.00	27,620.00	29,951.00	162	1165
VR-300-(kW)	27,638.00	27,838.00	28,389.00	28,606.00	30,779.00	162	1350
VR-400-(kW)	31,274.00	31,485.00	31,824.00	32,335.00	34,609.00	162	1590
VR-500-(kW)	35,621.00	35,929.00	36,593.00	36,276.00	38,940.00	162	1700
VR-600-(kW)	38,943.00	39,148.00	39,483.00	39,604.00	42,572.00	216	2010
VR-800-(kW)	44,019.00	44,242.00	44,476.00	44,702.00	47,392.00	270	2450
VR-1000-(kW)	48,424.00	48,630.00	48,849.00	49,066.00	49,066.00	360	3160
VR-1250-(kW)	53,790.00	54,973.00	56,156.00	57,339.00	60,041.00	360	3792
VR-1500-(kW)	58,991.00	60,467.00	61,943.00	63,421.00	65,477.00	360	4550
VR-2000-(kW)	73,443.00	75,091.00	76,739.00	78,387.00	80,594.00	360	5460
VR-2500-(kW)	77,918.00	78,667.00	79,415.00	80,165.00	80,165.00	360	6553

*May require additional control box

Standard Equipment:

- ASME Construction
- 150 psi
- INCOLOY® heating elements
- Internal fusing (above 120 amps)
- Painted steel jacket
- Lifting Lug Access
- Magnesium anode rods
- Immersion Thermostats
- Magnetic contactors
- Manual reset high limit
- Hinged door with keyed lock
- ASME temperature & pressure relief valve
- Approved for 180°F (82.2°C) operation

Options

Alarm Bell	\$258.00
BMS Contacts	\$225.00
Manway	\$449.00
Low Water Cut-off (LWCO)	\$333.00
High or Low Water Pressure Switch	\$246.00
Pilot Lights and Switches.....	\$116.00
Safety Door Interlock	\$342.00
Seismic Bracing	\$216.00
Shunt Trip Disconnect.....	Consult Factory
Temperature Gauge	\$135.00
Pressure Gauge.....	\$135.00
Time Clock (24 hour).....	\$315.00
Time Clock (7 day)	\$560.00
Double Vitraglas® Lining (6-Year Limited Tank Warranty)	Consult Factory

Solid State Step Controls:

1-4 steps.....	\$652.00
5-8 steps.....	\$1,572.00
9-12 steps.....	\$2,543.00

These Products Are Net And Not Subject To Performance Incentive Program.

Commercial Electric Models

Electric Brute™ Models

Electric Brute™ Vertical Round

Immersion Thermostats

VERTICAL ROUND MODELS

Three Year Limited Tank Warranty

Commercial multipliers (CSDs) are not applicable to this product. Please call your local Bradford White sales representative for pricing.



Volts: 380V, 400V, 415V, 480V and 600V							
Model Number	12kW	15kW	18kW	30kW	36kW	Max kW Load	Approx. Shpg. Wt.
VR-150-(kW)	\$16,558.00	\$16,743.00	\$16,976.00	\$17,476.00	\$17,732.00	90	650
VR-200-(kW)	17,559.00	17,744.00	17,977.00	18,389.00	18,648.00	162	750
VR-250-(kW)	18,127.00	18,312.00	18,545.00	19,209.00	19,476.00	162	1165
VR-300-(kW)	19,353.00	19,538.00	19,771.00	20,287.00	20,608.00	162	1350
VR-400-(kW)	23,723.00	23,908.00	24,141.00	24,677.00	24,912.00	162	1590
VR-500-(kW)	27,835.00	28,020.00	28,253.00	28,823.00	29,060.00	162	1700
VR-600-(kW)	31,438.00	31,623.00	31,856.00	32,371.00	32,599.00	216	2010
VR-800-(kW)	36,137.00	36,137.00	36,246.00	36,749.00	36,977.00	270	2450
VR-1000-(kW)	40,903.00	40,903.00	41,006.00	41,586.00	41,792.00	360	3160
VR-1250-(kW)	44,339.00	44,339.00	44,339.00	44,979.00	45,620.00	360	3792
VR-1500-(kW)	47,611.00	47,611.00	47,611.00	48,305.00	49,000.00	360	4550
VR-2000-(kW)	60,250.00	60,250.00	60,250.00	61,850.00	63,452.00	360	5460
VR-2500-(kW)	64,712.00	64,712.00	64,712.00	66,319.00	67,927.00	360	6553

Volts: 380V, 400V, 415V, 480V and 600V							
Model Number	45kW	54kW	60kW	72kW	90kW	Max kW Load	Approx. Shpg. Wt.
VR-150-(kW)	\$18,358.00	\$18,915.00	\$19,457.00	\$20,274.00	\$20,766.00	90	650
VR-200-(kW)	19,752.00	20,309.00	20,851.00	21,593.00	22,128.00	162	750
VR-250-(kW)	20,753.00	21,310.00	21,852.00	22,584.00	23,074.00	162	1165
VR-300-(kW)	21,796.00	22,353.00	22,895.00	23,500.00	24,071.00	162	1350
VR-400-(kW)	25,873.00	26,430.00	26,972.00	27,526.00	27,992.00	162	1590
VR-500-(kW)	29,801.00	30,358.00	30,900.00	31,490.00	31,915.00	162	1700
VR-600-(kW)	33,375.00	33,932.00	34,474.00	34,953.00	35,399.00	216	2010
VR-800-(kW)	37,564.00	38,290.00	38,797.00	39,305.00	39,727.00	270	2450
VR-1000-(kW)	42,313.00	43,203.00	43,694.00	44,206.00	44,639.00	360	3160
VR-1250-(kW)	46,005.00	46,390.00	46,776.00	47,162.00	48,844.00	360	3792
VR-1500-(kW)	49,840.00	50,681.00	51,522.00	52,363.00	54,045.00	360	4550
VR-1500-(kW)	49,840.00	50,681.00	51,522.00	52,363.00	54,045.00	360	5460
VR-2500-(kW)	68,768.00	69,608.00	70,449.00	71,290.00	72,973.00	360	6553

Commercial Electric Models

These Products Are Net And Not Subject To Performance Incentive Program.

Commercial Electric Models



Volts: 380V, 400V, 415V, 480V and 600V							
Model Number	108kW	120kW	135kW	144kW	162kW	Max kW Load	Approx. Shpg. Wt.
VR-150-(kW)	\$22,484.00	\$22,616.00	\$22,805.00	—	—	90	650
VR-200-(kW)	23,738.00	24,870.00	25,059.00	\$25,561.00	\$26,325.00	162	750
VR-250-(kW)	24,718.00	24,850.00	25,039.00	25,530.00	27,026.00	162	1165
VR-300-(kW)	25,540.00	25,672.00	25,861.00	26,203.00	27,981.00	162	1350
VR-400-(kW)	29,204.00	29,336.00	29,525.00	30,024.00	31,812.00	162	1590
VR-500-(kW)	33,058.00	33,190.00	33,379.00	33,821.00	35,778.00	162	1700
VR-600-(kW)	36,596.00	36,728.00	36,917.00	37,261.00	39,264.00	216	2010
VR-800-(kW)	40,894.00	41,147.00	41,401.00	41,661.00	43,671.00	270	2450
VR-1000-(kW)	46,306.00	46,550.00	46,809.00	47,061.00	49,090.00	360	3160
VR-1250-(kW)	49,751.00	50,143.00	50,535.00	50,927.00	55,594.00	360	3792
VR-1500-(kW)	54,952.00	55,698.00	56,445.00	57,192.00	59,395.00	360	4550
VR-2000-(kW)	69,404.00	70,496.00	71,588.00	72,681.00	74,810.00	360	5460
VR-2500-(kW)	73,714.00	74,441.00	75,168.00	75,896.00	79,074.00	360	6553

*May require additional control box

Standard Equipment:

- ASME Construction
- 150 psi
- INCOLOY® heating elements
- Internal fusing (above 120 amps)
- Painted steel jacket
- Lifting Lug Access
- Magnesium anode rods
- Immersion Thermostats
- Magnetic contactors
- Manual reset high limit
- Hinged door with keyed lock
- ASME temperature & pressure relief valve
- Approved for 180°F (82.2°C) operation

Options

- Alarm Bell \$258.00
- BMS Contacts \$225.00
- Manway \$449.00
- Low Water Cut-off (LWCO) \$333.00
- High or Low Water Pressure Switch \$246.00
- Pilot Lights and Switches \$116.00
- Safety Door Interlock \$342.00
- Seismic Bracing \$216.00
- Shunt Trip Disconnect Consult Factory
- Temperature Gauge \$135.00
- Pressure Gauge \$135.00
- Time Clock (24 hour) \$315.00
- Time Clock (7 day) \$560.00
- Double Vitraglas® Lining
(6-Year Limited Tank Warranty) Consult Factory

Solid State Step Controls:

- 1-4 steps \$652.00
- 5-8 steps \$1,572.00
- 9-12 steps \$2,543.00

These Products Are Net And Not Subject To Performance Incentive Program.

Commercial Indirect-Fired Models/Commercial Storage Tanks

Indirect Fired Models



PowerStor Series™ Single-Wall Indirect Models

2" Non-CFC Foam Insulation

Model Number	Gal. Cap.	First Hour Rating @ 135°F (Gal.)	AHRI Rating Continuous Draw @ 135°F Gal./Hr.	Floor to Heater Top	Floor to Water Conn.	Jacket Dia.	Head Loss @ 8GPM	Approx. Shpg. Wt.	Limited Tank Warranty
									Lifetime
SW-65C-5	58	405	370	59¼"	60"	22"	1.63 ft.	273	\$3,201.00
SW-80C-5	73	415	370	59"	59¾"	24"	1.63 ft.	300	3,625.00
SW-120C-5	114	445	370	62½"	63¼"	28¼"	1.63 ft.	422	4,695.00

Immersed Aquastat



Note: These certified ratings were obtained with a heat source output of 245,000 BTU/Hr, a flow rate of 14.0 GPM, and a 180°F boiler water supply temperature.

These Products Are Net And Not Subject To Performance Incentive Program.

Storage Tank Models



Commercial Jacketed Storage Tanks - Non-ASME

2" Non-CFC Foam Insulation

Model Number	Gal. Cap.	Floor to Heater Top	Floor to Hot Water Conn.	Jacket Dia.	Floor to Bottom Circ. Conn.	Floor to Aquastat. & Top Circ. Conn.	Water Conn. Size	Approx. Shpg. Wt.	Limited 5 Year Tank Warranty Price
M-3-ST-80R5	80	58¾"	59¾"	24"	9¼"	14¼"	2"(F&T)	192	\$1,823.00
M-3-ST-120R5	119	62½"	63½"	28"	9½"	14½"	2" (F,T & R)	312	1,926.00

Hand Hole cleanout standard on M-3-ST-80R5.

F=Front water connections. R=Rear water connections.

T=Top Hot Outlet

Commercial Jacketed Storage Tanks - ASME

2" Non-CFC Foam Insulation

Model Number	Gal. Cap.	Floor to Heater Top	Floor to Hot Water Conn.	Jacket Dia.	Floor to Bottom Circ. Conn.	Floor to Aquastat. & Top Circ. Conn.	Water Conn. Size	Approx. Shpg. Wt.	Limited 5 Year Tank Warranty Price
M-3-ST-80R5A	80	58¾"	59¾"	24"	9¼"	14¼"	2"(F&T)	278	\$3,352.00
M-3-ST-120R5A	119	62½"	63½"	28"	9½"	14½"	2½"(F),2"(R)	366	3,903.00
M-3-ST-200R5A	200	77"	78"	32"	11¼"	16¼"	2½"(F&T)	633	5,041.00

Hand Hole cleanout standard.

F=Front water connections. R=Rear water connections.

T=Top Hot Outlet

Product Options

	Dash#	Add
■ 2" Connections in brass (Except M-3-ST-200R5A)	(-869)	\$62.00
■ 2½" Connections in brass, M-3-ST-120R5A and M-3-ST-200R5A models only	(-870)	\$74.00
■ Hand Hole cleanout option, M-3-ST-120R5 model only	(-874)	\$56.00

These Products Are Net And Not Subject To Performance Incentive Program.

Commercial Storage Tanks

Large Volume Storage Tank Models



Large Volume Jacketed, Unjacketed, and Top Coat Models With Gallon Capacities Ranging From 193 to 6,138 Gallons.

Warranty Information

Commercial Large Tank Models	Limited Tank Warranty	Limited Tank Warranty
Commercial Glass-lined large volume storage tanks (Bare, Jacketed, and Top Coated models)	5 Year	1 Year
Commercial Double Glass-lined large volume storage tanks (Bare, Jacketed, and Top Coated models)	10 Year	1 Year

Product Selection & Crossover Information

Vessel Dimensions

The **Actual Capacity** listed in this Schedule refer to the actual measurements of the storage actual vessel. They do not include added size of jacketing, insulation, base rings, or cradles. The area inside the blue dashed lines in the drawing on the next page represent the **Vessel Dimensions**. These dimensions can be useful when crossing over other brands of tanks. Please refer to the Specification Sheet for the overall dimensions of the tank.

Nominal Capacity vs. Actual Capacity

The **Nominal Capacity** of a storage tank is the internal capacity of a cylinder based on the diameter and length of the tank. The **Nominal Capacity** assumes the ends of the tank (also referred to as "heads") are flat. The **Nominal Capacity** includes the blue and white shaded portions of tank drawing on the next page.


The **Actual Capacity** of a storage tank factors in the rounded shape of the tank heads, and represents the tank's true capacity. The white area in the tank drawing on the next page shows the tank's **Actual Capacity**.

These Products Are Net And Not Subject To Performance Incentive Program.

Commercial Storage Tanks

Storage Tank Model Number Structure

This is a Vertical 504-Gallon, Jacketed & Insulated, 150 PSI model

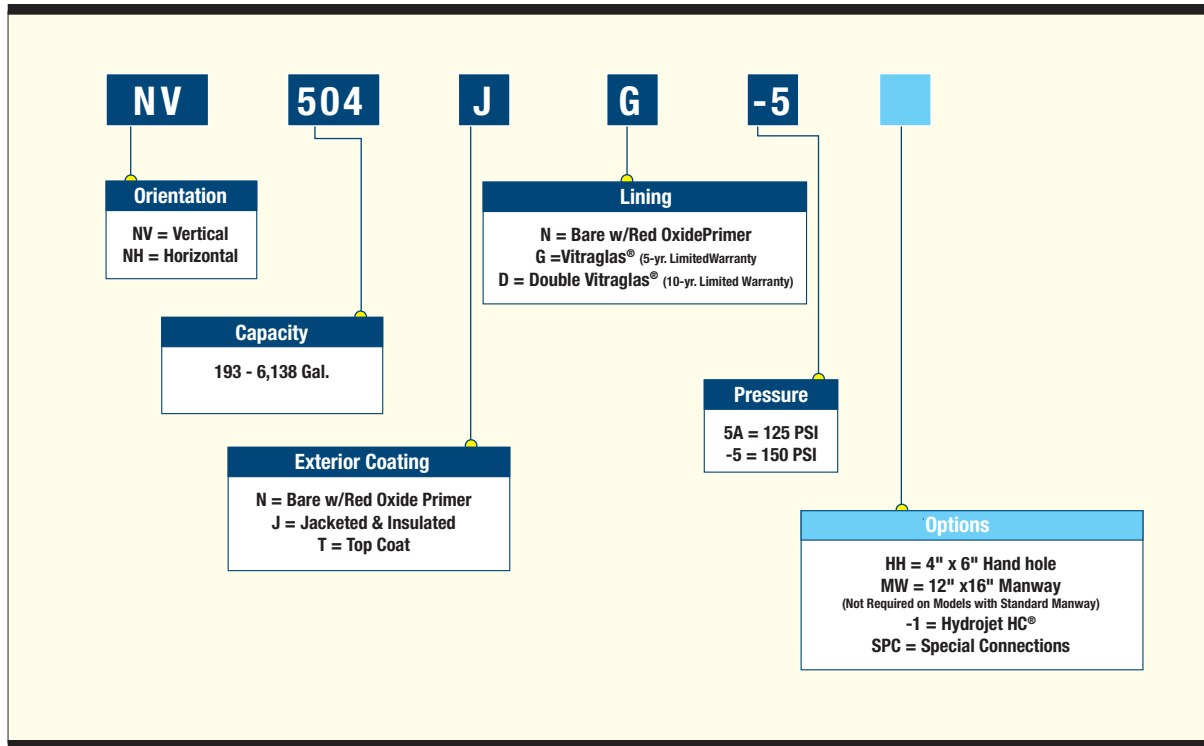


Pricing:

- To calculate the List Price of a tank with 150 psi Rating, or Top Coat or Double Vitraglas® Lining options, select the appropriate List Price adder for the option, and add it to the List Price of the tank.
- Use the Tank Price Worksheet to calculate the total List Price and proper Model Designator.

Ordering

- Large Volume Storage Tanks must be ordered on a separate Purchase Order, and cannot be combined with other Bradford White Products.
- When changing the quantity or locations of tank connections, clearly draw and label the location on the Tank Dimension Template, and submit with the Purchase Order. An Engineering Drawing will be sent to the distributor for signed customer approval. Custom Tank Orders are finalized and scheduled upon receipt of customer-approved Engineering Drawing to Order Service.
- Custom tanks cannot be modified or cancelled after the customer approved Engineering Drawing has been returned to Order Service.
- Custom tanks cannot be returned to Bradford White Corporation.

Commercial Storage Tanks

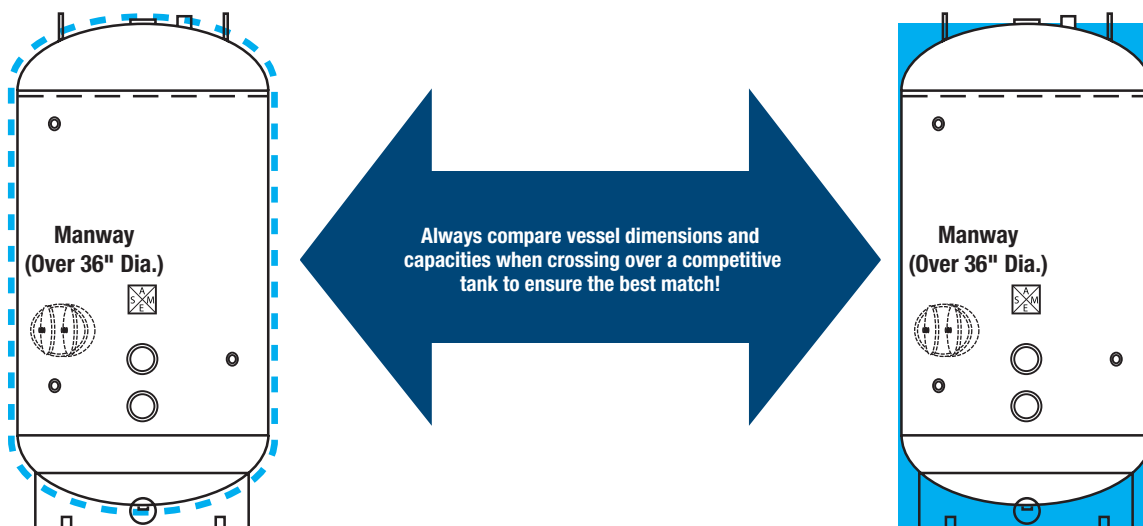

Standard Features:

- **Bare Tanks** Feature Heavy gauge steel primed in red oxide color
- **Water Connections:** Heater Supply, Heater Return, ¼" NPT Aquastat, 1¼" NPT Relief Valve, 1" NPT Drain (Horizontal models include two additional 3" NPT fittings)
- **12" x 16" Manway is standard & included on all tanks with Vessel Diameter of 42" or larger.**
- **Base Ring:** Standard on Vertical Models
- **Vitraglas®-lined** Carcon Steel tanks include 5-Year Limited Tank Warranty, & 1-Year Limited Warranty on Component Parts.
- **Magnesium Anode Rods:** provide additional corrosion resistance for trouble-free service
- **Maximum Storage Temperature** of Potable Water up to 180° F
- All tanks are Constructed and certified in accordance with ASME Sect. IV, Part HLW for 125 psi

Optional Equipment:

- **Jacketed & Insulated Tanks:** Features Steel Jacket with 2", R-12 Rated High Density Non-CFC Foam Insulation.
- **Top Coated Tanks:** Spayed-on rigid Top Coat polyurethane insulation, 2½", R-16 Rated layer of high density foam insulation is formulated to withstand extreme weather and a full range of conditions
- **Double Vitraglas® Lining:** Adds an additional layer of protective coating for added corrosion resistance. All Double Vitraglas® tanks include 10-Year Limited Tank Warranty & 1-Year Limited Warranty on Component Parts.
- **150 psi** Models constructed and certified in accordance with ASME Sect. IV, Part HLW for **150 psi**.
- **Optional Lift Lugs:** Inc. 2 lugs on top of tank allow connection to rigging without removal of jacket components.
- **Hydrojet HC®:** Stainless steel, dielectrically isolated recirculation tube minimizes turbulence, resulting in greater draw-down capacity from the tank - Available Only With Standard 3" NPT Heater Supply Fitting.
- **Additional / Custom Water Connections:** (NPT or Flanged)
- **Hand Hole Cleanout and Manway:** 4" x 6" Hand Hole cleanout and 12" x 16" Manway opening allows removal of sediment and inspection of interior surface (See "Standard Features" for availability).

These Products Are Net And Not Subject To Performance Incentive Program.

Commercial Storage Tanks

Commercial multipliers (CSDs) are not applicable to this product. Please call your local Bradford White sales representative for pricing.

Model Number	Vessel Dimensions (in.) ¹	Tank Capacity (Gal.)	Price			List Price Adders	
			Bare Vitraglas® Lined Tanks	Insulated & Top Coat Vitraglas® Lined Tanks	Jacketed & Insulated Vitraglas® Lined Tanks	Double Vitraglas® Lined Tanks (Add to Tanklist Price)	150 psi (Add to Tanklist Price)
NV193†G5A	30 X 63	193	\$5,314.00	\$6,700.00	\$7,583.00		
NV229†G5A	30 X 75	229	\$5,515.00	\$7,153.00	\$7,959.00		
NV260†G5A	30 X 85	260	\$5,755.00	\$7,607.00	\$8,518.00	\$1,092.00	\$903.00
NV303†G5A	30 X 99	303	\$6,034.00	\$8,163.00	\$9,618.00		
NV340†G5A	30 X 111	340	\$6,252.00	\$8,598.00	\$9,422.00		
NV318†G5A	36 X 72	318	\$6,647.00	\$8,499.00	\$9,972.00		
NV344†G5A	36 X 78	344	\$6,821.00	\$8,858.00	\$9,967.00		
NV375†G5A	36 X 85	375	\$7,136.00	\$9,358.00	\$10,389.00		
NV397†G5A	36 X 90	397	\$7,250.00	\$9,565.00	\$11,111.00	\$1,495.00	\$903.00
NV449†G5A	36 X 102	449	\$7,580.00	\$10,205.00	\$11,698.00		
NV502†G5A	36 X 114	502	\$7,859.00	\$10,790.00	\$12,196.00		
NV555†G5A	36 X 126	555	\$8,186.00	\$11,399.00	\$12,781.00		
NV432†G5A	42 X 72	432	\$8,675.00	\$10,975.00	\$12,400.00		
NV486†G5A	42 X 81	486	\$8,923.00	\$11,392.00	\$12,794.00		
NV504†G5A	42 X 84	504	\$9,158.00	\$11,720.00	\$13,029.00		
NV558†G5A	42 X 93	558	\$9,402.00	\$12,210.00	\$14,189.00	\$1,966.00	\$1,229.00
NV630†G5A	42 X 105	630	\$9,776.00	\$12,989.00	\$14,910.00		
NV702†G5A	42 X 117	702	\$10,100.00	\$13,590.00	\$15,495.00		
NV774†G5A	42 X 129	774	\$10,471.00	\$14,215.00	\$16,166.00		
NV834†G5A	42 X 139	834	\$10,811.00	\$14,917.00	\$16,805.00		
NV572†G5A	48 X 73	572	\$10,756.00	\$13,318.00	\$15,088.00		
NV658†G5A	48 X 84	658	\$11,388.00	\$14,319.00	\$16,447.00		
NV752†G5A	48 X 96	752	\$12,279.00	\$15,584.00	\$18,165.00	\$2,688.00	\$1,229.00
NV846†G5A	48 X 108	846	\$13,007.00	\$16,713.00	\$18,431.00		
NV940†G5A	48 X 120	940	\$14,180.00	\$18,256.00	\$21,619.00		
NV1128†G5A	48 X 141	1,128	\$15,692.00	\$20,448.00	\$21,647.00		
NV1306†G5A	48 X 168	1,306	\$17,324.00	\$22,963.00	N/A		
NV981†G5A	54 X 99	981	\$18,612.00	\$22,436.00	N/A		
NV1119†G5A	54 X 113	1,119	\$19,600.00	\$23,856.00	\$31,500.00		
NV1219†G5A	54 X 123	1,219	\$20,382.00	\$25,072.00	N/A		
NV1327†G5A	54 X 134	1,327	\$22,300.00	\$27,500.00	N/A	\$5,000.00	\$2,205.00
NV1457†G5A	54 X 147	1,457	\$22,804.00	\$28,386.00	N/A		
NV1635†G5A	54 X 165	1,635	\$24,200.00	\$30,450.00	N/A		
NV1814†G5A	54 X 183	1,814	\$25,279.00	\$32,159.00	N/A		
NV1395†G5A	60 X 114	1,395	\$26,025.00	\$30,868.00	\$40,331.00		
NV1689†G5A	60 X 138	1,689	\$28,703.00	\$34,533.00	\$43,544.00		
NV1983†G5A	60 X 168	1,983	\$31,097.00	\$38,132.00	N/A		
NV2165†G5A	60 X 177	2,165	\$33,335.00	\$40,885.00	N/A	\$6,200.00	\$2,331.00
NV2276†G5A	60 X 186	2,276	\$34,042.00	\$41,816.00	N/A		
NV2570†G5A	60 X 210	2,570	\$36,647.00	\$45,377.00	N/A		
NV1761†G5A	72 X 100	1,761	\$28,110.00	\$33,410.00	N/A		
NV2061†G5A	72 X 117	2,061	\$30,510.00	\$36,610.00	N/A		
NV2115†G5A	72 X 120	2,115	\$30,920.00	\$37,027.00	N/A		
NV2256†G5A	72 X 128	2,256	\$31,195.00	\$37,695.00	N/A		
NV2538†G5A	72 X 144	2,538	\$34,170.00	\$41,446.00	N/A		
NV2765†G5A	72 X 157	2,765	\$35,885.00	\$43,705.00	N/A	\$8,600.00	Contact Factory for Pricing
NV2959†G5A	72 X 168	2,959	\$37,295.00	\$45,748.00	N/A		
NV3382†G5A	72 X 192	3,382	\$41,321.00	\$50,918.00	N/A		
NV3805†G5A	72 X 216	3,805	\$44,154.00	\$54,916.00	N/A		
NV4404†G5A	72 X 250	4,404	\$48,277.00	\$60,678.00	N/A		
NV2901†G5A	84 X 121	2,901	\$42,650.00	\$49,950.00	N/A		
NV3308†G5A	84 X 138	3,308	\$47,200.00	\$54,900.00	N/A		
NV3884†G5A	84 X 162	3,884	\$51,800.00	\$60,855.00	N/A		
NV4459†G5A	84 X 186	4,459	\$55,000.00	\$65,400.00	N/A	\$10,200.00	Contact Factory for Pricing
NV5038†G5A	84 X 210	5,038	\$59,745.00	\$71,395.00	N/A		
NV6138†G5A	84 X 256	6,138	\$67,385.00	\$81,495.00	N/A		

Refer to page for Optional Configurations and connections

■ Denotes Vitraglas® and Double Vitraglas®-lined tank sizes with standard 12" x 16" manway

Tank Style: NV = Vertical, NH = Horizontal (for horizontal tanks change "NV" to "NH" and add saddles from options pricing)

† = Tank Exterior: N = Red oxide primer, T = Top coat (requires list price adder), J = Jacketed & Insulated (use jacketed & insulated tank price)

Tank Lining: G = Vitraglas®, D = Double Vitraglas® (requires list price adder), S = Stainless (contact factory for price)

Pressure Rating: 5A = 125 psi, -5 = 150 psi (requires list price adder)

¹Vessel Dimensions are for storage only, and do not include base rings, saddles, Top Coat or Jacket & Insulation. See spec sheet for overall dimensions.

These Products Are Net And Not Subject To Performance Incentive Program.

Commercial Storage Tanks

Commercial Storage Tanks

Tank Options: Add Designator to Tank Model Number to Order



Description	Designator	List Price	
		Jacketed / Top Coat Tanks	Bare Tanks
Hand Hole Clean-out (4" x 6")	"HH"	\$485.00	\$365.00
12" x 16" Manway ¹	"MW"	\$1,020.00	\$710.00
Hydrojet HC [®] —Stainless steel, dielectrically isolated recirculation tube (Available only with standard 3"NPT Heater Supply connection)	"-1"	\$330.00	\$330.00
Tank Saddles - Required for Horizontal Tanks (Includes Two 9" welded Saddles)	Use "NH" Designator in Model Number		
Vessel Diameter	30" & 36"	\$483.00	
	42", 48", & 54"	\$1,176.00	
	60", 72", 84"	\$2,142.00	

¹Manway is standard & included in List Price on 42" through 72" Diameter vessels
The Hydrojet HC[®] Recirculation Tube threads into 3" NPT tank fittings, and diffuses the flow of water entering the tank. The unique design minimizes turbulence, resulting in greater draw-down capacity from the tank.

Optional: Optional Fittings, Flanges, & Accessories

Order as separate line items on PO

Use Custom Tank Template to specify type, quantity and location of optional Fittings, Flanges, & Connections.



OPTIONAL NPT FITTINGS



OPTIONAL FLANGED CONNECTIONS

Optional NPT Fittings List Price			Optional Flanged Connections		
Size / Type	List Price		Size / Type	List Price	
	Jacketed / Top Coat Tanks	Bare Tanks		Jacketed / Top Coat Tanks	Bare Tanks
¾" NPT	\$135.00	\$105.00	4" Flange	\$395.00	\$300.00
1" NPT	\$140.00	\$110.00	6" Flange	\$505.00	\$420.00
1¼" NPT	\$145.00	\$115.00	8" Flange	\$820.00	\$560.00
1½" NPT	\$205.00	\$145.00	10" Flange	\$1,285.00	\$950.00
2" NPT	\$215.00	\$150.00	12" Flange	\$2,060.00	\$1,260.00
2½" NPT	\$235.00	\$175.00	14" Flange	\$1,020.00	\$1,550.00
3" NPT	\$265.00	\$205.00			
4" NPT	\$440.00	\$390.00			

	List Price	
	Jacketed / Top Coat Tanks	Bare Tanks
Seismic Clips Can be added when Seismic Certification of the tanks is required. Seismic Clips vary by the size and configuration of tank. To ensure certification for the proper seismic zone, please include the address where the tank is to be installed on the Custom Tank Template.	\$370.00	\$370.00
Extended Lift Lugs Protrude through the top jacket panel of Jacketed & Insulated storage tanks, providing a convenient lift point. Extended Lift Lugs are optional on Jacketed & Insulated tanks, and standard on Bare and Top Coat tanks. List Price Adder includes two Extended Lift Lugs per tank.	\$150.00	Included
Stainless Steel Fittings Standard NPT tank fittings constructed of stainless steel. Consult Factory for additional or upsized Stainless Steel Fittings.	\$1,725	

Replacement Parts

Boxed ICON System™ Direct Replacement Gas Controls and Valves Up to 65 Gallon Models — Net Prices

Can be utilized as a Direct Replacement on all Atmospheric Vent and Direct Vent Residential and Light Duty Bradford White ICON System™, Robertshaw or White Rodgers models up to 65 gallons*

Includes: Pre-assembled ICON System™ Gas Control Valve, Pilot Assembly, Feedline Spring, and Feedline Adaptor.
Residential Suffix Examples: Natural Gas (FBN, BN, LN, CN, EN) LP Gas (FSX, FCX, CX).

Light Duty Commercial Suffix Examples: Natural Gas (FB-3N, B-3N, E-3N) LP Gas (FS-3X, C-3X).



UP TO 65 GALLON
DIRECT
REPLACEMENT
KIT

Part Number	Description	Price
239-47463-01	Res. (160°F) Direct Replacement Nat. ICON System™ Gas Control Kit 1" Cavity	\$108.00
239-47463-02	Res. (160°F) Direct Replacement Nat. ICON System™ Gas Control Kit 2" Cavity	111.00
239-47465-01	Res. (160°F) Direct Replacement LP ICON System™ Gas Control Kit 1" Cavity	142.00
239-47465-02	Res. (160°F) Direct Replacement LP ICON System™ Gas Control Kit 2" Cavity	146.00
239-47464-01	Com. (180°F) Direct Replacement Nat. ICON System™ Gas Control Kit 1" Cavity	119.00
239-47464-02	Com. (180°F) Direct Replacement Nat. ICON System™ Gas Control Kit 2" Cavity	123.00
239-47466-01	Com. (180°F) Direct Replacement LP ICON System™ Gas Control Kit 1" Cavity	153.30
239-47466-02	Com. (180°F) Direct Replacement LP ICON System™ Gas Control Kit 2" Cavity	156.00

* Except High Performance Series (GX), Eco-Defender (U1, U2, U4) and Mobile Home (MIMH, MIMS) Models.

Boxed ICON System™ Direct Replacement Gas Controls and Valves MI75S, DH175S and DH75S Models — Net Prices

Can be utilized as a Direct Replacement on MI75S, DH175S, and DH75S Bradford White ICON System™, Robertshaw or White Rodgers models.

Includes: Pre-assembled ICON System™ Gas Control Valve, Gas Control Service Tool, Feedline, Pilot Assembly, and Feedline Adaptor.

Residential Suffix Examples: Natural Gas (FBN, BN, LN, CN, EN) LP Gas (FSX, FCX, CX).

Light Duty Commercial Suffix Examples: Natural Gas (FB-3N, B-3N, E-3N) LP Gas (FS-3X, C-3X).



75 GALLON
DIRECT
REPLACEMENT
KIT

Part Number	Description	Price
239-48275-01	Res. (160°F) Direct Replacement Nat. ICON System™ Gas Control Kit 1" Cavity	\$146.00
239-48275-02	Res. (160°F) Direct Replacement LP ICON System™ Gas Control Kit 1" Cavity	179.00
239-48275-03	Com. (180°F) Direct Replacement Nat. ICON System™ Gas Control Kit 1" Cavity	156.45
239-48275-04	Com. (180°F) Direct Replacement LP ICON System™ Gas Control Kit 1" Cavity	190.05

Boxed ICON System™ Direct Replacement Gas Controls and Valves M2XR75S, 75T80, C(D,S)W275S, MI100T, 100T88, RG275H, LG275H, RG2100H and LG2100H Models — Net Prices

Can be utilized as a Direct Replacement on M2XR75S, 75T80, C(D,S)W275S, MI100T and 100T88 Bradford White ICON System™, Robertshaw or White Rodgers models.

Includes: Pre-assembled ICON System™ Gas Control Valve, Gas Control Service Tool, 75 Gal. Feedline, 100 Gal. Feedline, Pilot Assembly, and Feedline adaptor.

Residential Suffix Examples: Natural Gas (FBN, BN, LN, CN, EN) LP Gas (FSX, FCX, CX).

Light Duty Commercial Suffix Examples: Natural Gas (FB-3N, B-3N, E-3N) LP Gas (FS-3X, C-3X).



75 AND 100 GALLON
DIRECT
REPLACEMENT
KIT

Part Number	Description	Price
239-48275-05	Res. (160°F) Direct Replacement Nat. ICON System™ Gas Control Kit 2" Cavity	\$149.00
239-48275-06	Res. (160°F) Direct Replacement LP ICON System™ Gas Control Kit 2" Cavity	182.00
239-48275-07	Com. (180°F) Direct Replacement Nat. ICON System™ Gas Control Kit 2" Cavity	160.00
239-48275-08	Com. (180°F) Direct Replacement LP ICON System™ Gas Control Kit 2" Cavity	193.00

These Products Are Net And Not Subject To Performance Incentive Program.

Replacement Parts



UP TO 65 GALLON
UNIVERSAL
REPLACEMENT
KIT

Boxed ICON System™ Universal Replacement Gas Controls and Valves Up to 65 Gallon Models — Net Prices

Can be utilized as a Universal Replacement on all Atmospheric Vent and Direct Vent Residential and Light Duty Bradford White ICON System™, Robertshaw or White Rodgers models up to 65 gallons*
Includes: Gas Control Cover, Gas Valve Body, 1" Thermowell, 2" Thermowell, 1" Insertion Stick, 2" Insertion Stick, Piezo Igniter, Temperature Sensor, Pilot Assembly, Feedline Spring, and Feedline Adaptor.
Residential Suffix Examples: Natural Gas (FBN, BN, LN, CN, EN) LP Gas (FSX, FCX, CX).
Light Duty Commercial Suffix Examples: Natural Gas (FB-3N, B-3N, E-3N) LP Gas (FS-3X, C-3X).

Part Number	Description	Price
239-47851-00	Res. (160°F) Universal Replacement Nat. ICON System™ Gas Control Kit 1" and 2" Cavity	\$130.00
239-47856-00	Res. (160°F) Universal Replacement LP ICON System™ Gas Control Kit 1" and 2" Cavity	164.00
239-47857-00	Com. (180°F) Universal Replacement Nat. ICON System™ Gas Control Kit 1" and 2" Cavity	142.00
239-47858-00	Com. (180°F) Universal Replacement LP ICON System™ Gas Control Kit 1" and 2" Cavity	176.00

* Except High Performance Series (GX), Eco-Defender (U1, U2, U4) and Mobile Home (MIMH, MIMS) Models.

ICON System™ Direct and Universal Replacement Kit Individual Parts — Net Prices

Part Number	Description	Price
239-47853-00	Valve Body Nat.	\$48.00
239-47859-00	Valve Body LP	64.00
233-47845-05	Pilot Assembly Nat. (up to 65 gallon models)	17.00
233-47846-05	Pilot Assembly LP (up to 65 gallon models)	17.00
233-48408-01	Pilot Assembly Nat. (75 and 100 gallon models)	25.74
233-48407-01	Pilot Assembly LP (75 and 100 gallon models)	25.74
239-47852-00	Control Cover (includes temperature sensor) 160°F	28.00
239-47861-00	Control Cover (includes temperature sensor) 180°F	32.00
239-47855-01	1" Thermowell Nat.	12.00
239-47855-02	2" Thermowell Nat.	12.00
239-47860-01	1" Thermowell LP	12.00
239-47860-02	2" Thermowell LP	12.00
239-47954-00	Piezo Igniter	5.00
239-47854-01	1" Insertion Stick	4.00
239-47854-02	2" Insertion Stick	4.00

These Products Are Net And Not Subject To Performance Incentive Program.

Replacement Parts

Residential Gas Energy Saver Defender Safety System® Parts — Net Prices




Part Number	Description	Fits	Price
239-43676-01	Resettable Thermal Switch 240°F (Blue)	MI30S6F**5, MI40T6FCX5, MI50L6F**5, MI504S6F**5	\$3.68
239-43676-02	Resettable Thermal Switch 270°F (Yellow)	MI303T6FCX5, MI403S6F**5 & MI5036F**5	3.68
239-43676-03	Resettable Thermal Switch 290°F (Red)	MI30T6F**5, MI303T6FBN5, MI40T6FBN5, MI404T6F**5	3.68
239-44078-00	Inner Door Gasket Kit	All models referenced below this row	3.68
243-43450-00	Piezo Ignitor	All models referenced below this row	3.68
228-42506-00	BN Burner Only	All Nat Gas models referenced below this row	6.49
233-46277-03**	Nat Gas Pilot Assembly w/thermocouple	MI30T6FBN5, MI30S6FBN5, MI303T6FBN5, MI40T6FBN5, MI403S6FBN5, MI404T6FBN5, MI5036FBN5, MI504S6FBN5, MI50L6FBN5	23.90
233-46278-03**	LP Gas Pilot Assembly w/thermocouple	MI30T6FCX5, MI30S6FCX5, MI303T6FCX5, MI40T6FCX5, MI404T6FCX5, MI403S6FCX5, MI5036FCX5, MI504S6FCX5, MI50L6FCX5	23.90
239-43968-14	Left Side Inner Door w/gasket	MI30T6F**2 & MI303T6F**5	3.68
239-43968-16	Left Side Inner Door w/gasket	MI30S6F**2, MI40T6F**5, MI504S6F**5	3.68
239-43968-18	Left Side Inner Door w/gasket	MI403S6F**5, MI404T6F**2, MI504S6F**5	3.68
239-43968-20	Left Side Inner Door w/gasket	MI504S6F**5	3.68
239-43963-02	Right Side Inner Door Assy	MI30T6F**5	10.82
239-43963-03	Right Side Inner Door Assy	MI30S6F**5	10.82
239-43963-05	Right Side Inner Door Assy	MI404T6F**5	10.82
239-43963-06	Right Side Inner Door Assy	MI403S6F**5 & MI504S6F**5	10.82
239-43963-07	Right Side Inner Door Assy	MI5036F**5	10.82
239-43963-09	Right Side Inner Door Assy	MI50L6F**5	10.82

For cast iron burners, consult the Parts Department.
**Requires Inner Door Gasket, p/n 239-44078-00.

Replacement Parts

Boxed Gas Controls and Valves — Net Prices

Part Number	Description	Price
265-40148-01	SCP SC-300 NES MI Natural Gas Valve TTW®1	\$105.99
265-40148-02	SCP SC-300 LES MI LP Gas Valve TTW®1	116.80
222-40762-01	Honeywell Smart Valve SV9501M -5109 Natural Gas Valve TTW®1 (-12) TTW®2 "T" Models	162.08
222-40762-02	Honeywell Smart Valve SV9501M -5117LP Gas Valve TTW®1 (-12) TTW®2 "T" Models	162.08
265-46181-01	White Rodgers 37C730-724 Natural Gas Valve	83.11
265-46182-01	White Rodgers 37C724-719 LP Valve	90.85



UPPER,
LOWER SINGLE
THERMOSTATS

Bagged Electric Thermostats — Net Prices

Part Number	Description	Price
265-51046-00	Upper Thermostat w/Hi-Limit 59T66T and Lower Thermostat 59TSPST	\$18.44
265-50691-00	Single Element Thermostat w/Hi-Limit 59T66T	10.61
265-42034-00	Thermostat w/Hi-Limit "T Models" 89TV13	15.48

Bagged Elements, Screw-in Style — Net Prices

Part Number	Watts - Volts	Price
265-42540-01	1000W 120V	\$6.92
265-42540-02	1500W 120V	6.92
265-42540-03	1500W 120V Low Watt Density	7.25
265-42541-02	1500W 120V INCOLOY®	12.76
265-42540-04	2000W 120V	7.25
265-42540-05	2500W 120V	7.35
265-42540-07	3000W 120V	7.25
265-42547-10	1000W 240V and 1500W 277V	7.93
265-42544-13	1250W 240V	7.25
265-42544-01	1500W 240V and 1000W 208V	6.92
265-42544-02	1500W 240V Low Watt Density	7.25
265-42545-13	1500W 240V INCOLOY®	12.77
265-42544-03	2000W 240V and 1500W 208V	7.25
265-42545-02	2000W 240V and 1500W 208V INCOLOY®	14.56
265-42544-04	2500W 240V and 2000W 208V	7.38
265-42545-14	2500W 240V and 2000W 208V INCOLOY®	16.55
265-42544-15	3000W 240V	9.21
265-42545-15	3000W 240V INCOLOY®	16.55
265-42544-06	3500W 240V and 2500W 208V	6.92



SCREW-IN
ELEMENTS:
STANDARD
AND INCOLOY®

These Products Are Net And Not Subject To Performance Incentive Program.

Replacement Parts



Bagged Elements — Net Prices — Screw In Style

Part Number	Watts - Volts	Price
265-42545-11	3500W 240V and 2500W 208V INCOLOY®	\$16.55
265-42544-14	4000W 240V	\$7.32
265-42545-12	4000W 240V and 3000W 208V INCOLOY®	16.73
265-48642-00	4500W 240V and 3500W 208V (2 Per Kit)	12.50
265-51333-09	4500W 240V Low Watt Density	10.09
265-51328-07	4500W 240V and 3500W 208V INCOLOY®	16.90
265-42544-10	5000W 240V	11.00
265-42545-08	5000W 240V INCOLOY®	16.77
265-42544-11	5500W 240V and 4000W 208V	10.38
265-42545-09	5500W 240V and 4000W 208V INCOLOY®	21.63
265-42544-12	6000W 240V and 4500W 208V	11.07
265-42545-10	6000W 240V and 4500W 208V INCOLOY®	16.87

TTW® Condensate Trap Kit — Net Prices

Part Number	Description	Price
239-45216-00	2" Exhaust Adapter (MITW)	\$10.17
239-46263-00	2" Exhaust Adapter w/Vent Terminal (M1TW)	11.46
239-43869-00	2" Condensate Discharge Tubing Kit (MITW)	7.03
239-45875-00	2" Condensate Discharge Tubing Kit (M1TW, M2TW)	13.41
239-45218-00	3" Exhaust Adapter (MIITW)	8.76
239-46264-00	3" Exhaust Adapter w/Vent Terminal (M2TW)	21.91
239-43870-00	3" Condensate Discharge Tubing Kit (MIITW)	7.04

Thermocouples — Net Prices

Part Number	Description	Price
233-46501-24**	Thermocouple Lead-Threaded 24"	\$4.43



THERMOCOUPLE KITS

Packed Thermocouples — Net Prices

Part Number	Description	Price
265-34790-12	Thermocouple Kit 24" Long	\$9.51
265-37128-12	Thermocouple Kit 36" Long	9.52

Boxed T&P Valves — Net Prices

Residential and Commercial

Part Number	Description	Price
230-32920-01***	Residential T&P Valve with 3/4" NPT Male x 4" Shank (150psi/210°F)	\$8.11
230-30246-00	Commercial T&P Valve with 3/4" NPT Female x 4 1/2" Shank (150psi/210°F)	48.73
230-33630-04	Commercial T&P Valve with 1" NPT Female x 4 3/4" Shank (150psi/210°F)	65.76

** Requires Inner Door Gasket, p/n 239-44078-00.

*** The T&P valve listed above will work with all Residential models unless specified otherwise.

These Products Are Net And Not Subject To Performance Incentive Program.

Replacement Parts

Bagged Gas and Electric Installation Kits — Net Prices

Part Number	Description	Price
265-34788-12	Electric Installation Kit	\$38.29
265-34789-12	Gas Installation Kit	43.26



GAS AND ELECTRIC INSTALLATION KITS

Brass Drain Valves — Net Prices

Part Number	Description	Price
227-48070-01	Low Restriction Brass Drain Valve ¼" NPT Male x 2½" Shank	\$4.95
227-48070-02	Low Restriction Brass Drain Valve ¼" NPT Male x 3½" Shank	5.43
227-48070-03	Low Restriction Brass Drain Valve ¼" NPT Male x 4½" Shank	6.54



BRASS DRAIN VALVES

Other Bagged Parts — Net Prices

Part Number	Description	Price
265-36968-12	Adapt-A-Flange Kit	\$6.08
265-35897-12	Screw-In Element Wrench	5.41



ELEMENT WRENCH

Magnesium and Aluminum Anodes — Net Prices

Part Number	Description	Price
224-47776-05	38" Magnesium Anode with ¼" NPT x 2" Nipple	\$14.06
224-47776-07	46½" Magnesium Anode with ¼" NPT x 2" Nipple	15.36
224-32999-06	42" Aluminum Anode with ¼" NPT x 2" Nipple	16.91
224-32999-26	53" Aluminum Anode with ¼" NPT x 2" Nipple	32.33
224-47776-09	35½" Magnesium Anode with ¼" NPT x 2½" Nipple	13.95
224-32999-21	42½" Aluminum Anode with ¼" NPT x 2½" Nipple	12.49

Replacement Parts

Replacement Heat Traps — Net Prices

Part Number	Description	Price
239-45167-00	Anode / Hot Water Outlet Heat Trap (White)	\$3.00
239-45073-00	Diptube / Cold Water Inlet Heat Trap (Blue)	3.00
265-45419-00	Heat Trap Kit (Anode/Dip Tube Inserts with Instructions)	3.68



MAGNESIUM AND ALUMINUM ANODE RODS

A420 Anodes — Net Prices

Part Number	Description	Price
224-49560-05	47½" Aluminum Anode - A420 ¼" NPT x 2½" Nipple	\$35.91
224-49560-08	39½" Aluminum Anode - A420 ¼" NPT x 3" Nipple	30.78
224-49560-03	46½" Aluminum Anode - A420 ¼" NPT x 2" Nipple	30.78
224-49560-07	27½" Aluminum Anode - A420 ¼" NPT x 3" Nipple	29.53

Magnesium and Aluminum Anodes with Heat Traps — Net Prices

Part Number	Description	Price
224-47776-13	50½" Magnesium Anode with ¼" NPT x 2½" Nipple	\$16.33
224-32999-13	51½" Aluminum Anode with ¼" NPT x 2½" Nipple	13.86

Secondary Magnesium Anode Rod Assy. w/T&P Valve Fitting — Net Prices

Part Number	Description	Price
243-42492-00	42" Magnesium Anode with ¼" NPT x 3" Nipple	\$63.27

These Products Are Net And Not Subject To Performance Incentive Program.

Replacement Parts

Water Heater Stand — Net Prices

Part Number	Description	Price
239-38926-00	Durable Water Heater Stand Kit (Adjustable Width – 16” High)	\$71.00



WATER HEATER
REMOVAL SYSTEM

Heater Hauler — Net Prices

Part Number	Description	Price
265-39965-00	Heater Hauler Kit (Spec Sheet #2138-B)	\$142.76

Thermopile Tester — Net Prices

Part Number	Description	Price
239-49265-00	Thermopile Tester	\$109.23

These Products Are Net And Not Subject To Performance Incentive Program.



BRADFORD WHITE[®]
WATER HEATERS

Wholesale Price Schedule
2017



Ambler, PA | 800-523-2931 | www.bradfordwhite.com

WPB 09/17 ©2017, Bradford White Corporation. All rights reserved.