

BI-SEARCH INTEGRATED DISPLAY BUNDLE

BrightSign's line of digital sign controllers have been integrated into a new display package provided by Bi-Search International, Inc (BSI). This BSI Integrated Display Bundle provides an all-inclusive digital signage solution for any application - without a PC. The packaged solution includes BSI's high-definition commercial grade display, which can be installed in either landscape or portrait mode, and a mounted and connected BrightSign unit. In addition, BrightAuthor software is included free of charge for easy creation of signage presentations. Simply select a display size and the BrightSign model of your choice for a complete signage solution that is highly affordable and simple to deploy. With seven BrightSign models to choose from, this packaged solution can support a wide variety of applications from basic looping videos, to engaging interactivity, synchronized video walls, networking, and more.

Features

- BSI Commercial grade Full HD LCD display which can be mounted in landscape or portrait modes
- BrightSign digital sign controller mounted to the display and connected to power and HDMI
- BrightAuthor software to easily create, publish and network presentations
- BrightControl functionality to control screen functions such as power and volume via the HDMI connection using CEC commands



Pricing


Model	SKU	List Price*	SKU	List Price*
	42" BSI Display		47" BSI Display	
HD110	BSI42-110	\$1,430.00	BSI47-110	\$1,740.00
HD210	BSI42-210	\$1,540.00	BSI47-210	\$1,850.00
HD210w	BSI42-210w	\$1,590.00	BSI47-210w	\$1,900.00
HD410	BSI42-410	\$1,490.00	BSI47-410	\$1,800.00
HD810	BSI42-810	\$1,590.00	BSI47-810	\$1,900.00
HD1010	BSI42-1010	\$1,790.00	BSI47-1010	\$2,100.00
HD1010w	BSI42-1010w	\$1,840.00	BSI47-1010w	\$2,150.00

* Distributor pricing available upon request. Shipping weight is 40lbs for 42" displays and 49lbs for 47" displays.

Display Specifications

Items		SD470WUN	SD420WUN
LCD Panel	Active Screen Size	46.96 inches (1192.87mm)	42.02 inches (1067.31mm)
	Panel Technology	S-IPS	S-IPS
	Resolution	1920 x 1080 (16:9)	1920 x 1080 (16:9)
	Refresh Rate	60/50Hz	60/50Hz
	Contrast Ratio	1300:1	1300:1
	Color Depth	1.07 Bil. Colors	1.07 Bil. Colors
	Response Time (Typ)	9ms (G to G)	9ms (G to G)
	Brightness (Max)	500nit	500nit
	Viewing Angle	178° / 178°	178° / 178°
Connectivity	Video	HDMI 1.3(1), DVI(1), RGB(1)	HDMI 1.3(1), DVI(1), RGB(1)
	Audio	Φ3.5 Line out	Φ3.5 Line out
	Power	AC in / outlet	AC in / outlet
	Remote Control	RS232C(In / out), IR, HDMI CEC	RS232C(In / out), IR, HDMI CEC
Mechanical Spec	Speaker/ Stand	None	None
	Front Bezel Width	39.5mm	38mm
	Dimension (mm)	1125.60 x 670.74 x 87.60	1012.89 x 605.9 x 84.50
	Weight (kg)	17.6 (38.93lb)	13.6 (29.98lb)
	VESA Mount (mm)	400 x 200	200 x 200
Power Supply		AC 100 -240V, 50/60Hz	AC 100 -240V, 50/60Hz
Power Consumption	Typ. / Max.	170W / 225W	135W / 165W
	Standby	< 0.5W	< 0.5W
Operation	Display Mode	Landscape, Portrait	Landscape, Portrait
	Operation Temp.	0~40°C	0~40°C
	Operation Humidity	10~90% Non-Condensing	10~90% Non-Condensing
Certification	Safety	UL, CSA , CB, TUV	UL, CSA , CB, TUV
	EMC	FCC, CE, ICES	FCC, CE, ICES
	Energy Saving	EnergyStar 5.1, CEC, ErP	EnergyStar 5.1, CEC, ErP
Accessories		User Manual, Quick Setup Guide, HDMI Cable, Power Cord, Remote Controller, Batteries, Warranty Card	User Manual, Quick Setup Guide, HDMI Cable, Power Cord, Remote Controller, Batteries, Warranty Card
Warranty		3yr, 24/7 uses	3yr, 24/7 uses

Display Interfaces and Control Panel

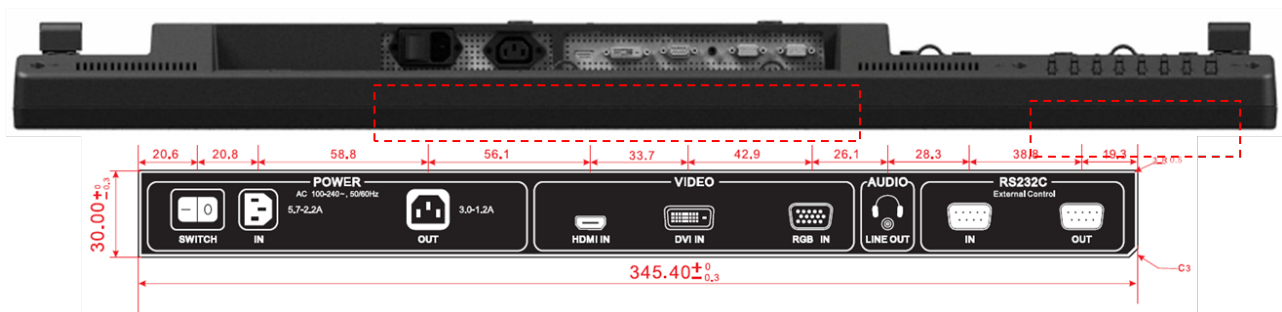

BrightSign, LLC. 16795 Lark Ave., Suite 200 Los Gatos, CA 95032

USA 408.959.0262 | International +1 415.223.0149 | www.brightsign.com