



Download Bryton Active App





00


Rider 750

Quick Start Guide

www.brytonsport.com

Bryton





A. POWER/LOCK (⁽⁾ ⁽⁾):

- •Press to turn the device ON/lock the screen.
- •Long Press to turn the device OFF.
- B. LAP (0): When recording, press to mark the lap.
- C. RECORD (11):
- •In Cycling mode, press to start recording.
- •When recording, press to pause recording and enter the Menu.
- **D. PAGE** (**≡**):

In Cycling mode, press to switch meter screen pages.

Reboot Rider

Press (\circlearrowleft / \circlearrowleft /•II/ \equiv) at the same time to reboot the device.

Getting Started

Please charge your device for at least 4 hours.

- 1. Press \circlearrowleft to turn on the device.
- Select the display language.
 Select the units of measurement.
- 6. To record, press 11 to start recording.
- *Check and update your device firmware version via Bryton Active.
- *To acquire GPS, allow the device access to an open sky, outdoor environment.





Sync Data to / from Bryton Active App

With the access to the internet, your Rider computer can upload recorded tracks, and check for available firmware updates by selecting Data Sync. It is required to add your device to your Bryton Active account before syncing data for the first time.

To add. 1. Scan the QR code printed on the cover page of the Quick Start Guide with your smartphone to download Bryton Active App. 2. Sign up / log in to your Bryton Active App account. 3. In the App, go to "Settings"> "Device Manager" > "+". 4. Select your device and tap "Yes" to add your device to your Bryton Active account. 5. Your device is now successfully paired with the Bryton Active App.

Icon Description

2	Profile	*	Heart Rate Sensor Active	0	Recording Stopped
∷≡	Result	<i>'</i> Q,	Cadence Sensor Active	₽	Voice Search
(3)	Settings	M	Speed Sensor Active	<u> د د</u>	Route
A A	GPS Off/No Signal(not fixed)	(E)	Dual Sensor Active	₽	History
*l / *l	Weak Signal (fixed)/ Strong Signal (fixed)	Di2	Di2 Active	$\stackrel{\wedge}{\square}$	Favorite
⊕	Data Sync Settings	43	Electronic Shifting Active	8	Default View
	Power Status	watt	Power Meter Active	O / O	Zoom in/Zoom out
	Grid Settings	((0))	Radar Active	©	Locate Current Position
*	Backlight	<u>\$=6</u>	Smart Bike Trainer Active	Q	Search POI
(Notification On	0	Recording Paused	•	Add a PIN


Note:

- ullet For Video Instructions, please go to www.brytonsport.com> lacktriangle (Menu) > Support > Tutorial.
- For User Manual, please go to www.brytonsport.com> (Menu) > Support > Download > Manual > User Manuals.

Rider 750 Specifications

Item	Description			
Display	2.3" FSTN positive transflective dot-matrix LCD			
Physical Size	83.9 X 53.7 X 18.2 mm			
Weight	71g			
Operating Temperature	-10°C ~ 60°C			
Battery Charging Temperature	0°C ~ 40°C			
Battery	Li polymer rechargeable battery			
Battery Life	32 hours with open sky			
ANT+™	Featuring certified wireless ANT+™ connectivity. Visit www.thisisant.com/directory for compatible products. Sign of the product of the pro			
GNSS	Integrated high-sensitivity GNSS receiver with embedded antenna			
BLE Smart	Bluetooth smart wireless technology with embedded antenna; 2.4GHz band 0dBm			
Water Resistant	Water resistant to a depth of 1 meter for up to 30 minutes.			
Barometer	Equipped with barometer			

Install Rider 750

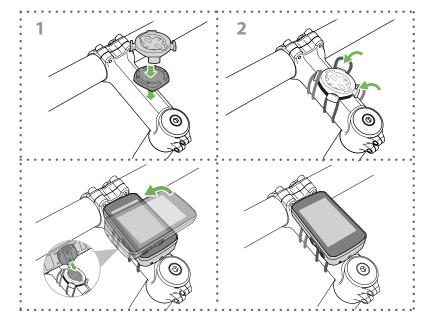

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- . Reorient or relocate the receiving antenna.
- . Increase the separation between the equipment and receiver.
- . Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- . Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

FCC Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 0.5 centimeters between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The antennas used for this transmitter must be installed to provide a separation distance of at least 0.5 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

電子標籤顯示路徑

Step 1, Turn on the device and you should see the home screen.

Step 2, select Settings.

Step 3, select About.

You will find this in the About page.





access Setting



access About



About



