

WUS-AC14USER MANUAL

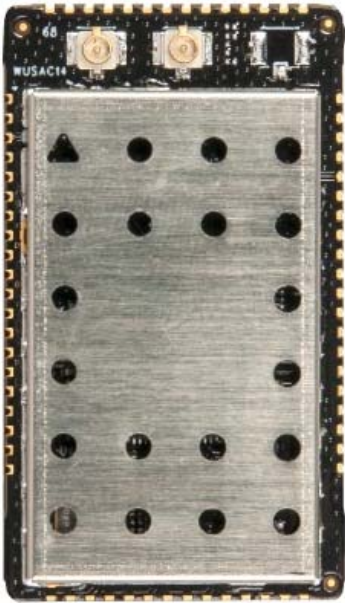

CONTENTS

Introduction.....3

Specifications.....3

Wi-Fi driver installation – Linux OS.....4

Regulatory Warning Statements5

Integrator Instructions7

- INTRODUCTION

The wireless dual-band WUS-AC13 USB interface adapter delivers powerful wireless AC technology to your host devices. Simply plug the adapter into an available USB interface, through the wafer connector, and then connect to a 2.4GHz or a 5GHz wireless network to access a secure, high-speed Internet connection at up to 300Mbps or up to 433Mbps respectively. With the integrated dual-band technology, Wi-Fi interference will be reduced to maximize throughput for a faster data connection.

- SPECIFICATIONS


Item	Descriptions
External Interfaces	Wi-Fi: IEEE 802.11a/b/g/n/ac standards Supports 2.4GHz or 5GHz for dual-band wireless operation 2x2 MIMO with two spatial streams with a data rate of up to 866Mbps (AC900) Antenna: U.FL connectors & Stamp hole
Connectors and Buttons	2 x U.FL connectors for Wi-Fi
Power Supply	3.3 VDC from USB Interface
Dimensions	Module Size: 40.5mm x 23mm
Environmental	Operating Temperature: 0°C to 50 °C
Regulatory Certification	FCC ,IC,CE,TELEC
voltage regulator	MT7662U DC 3.3V input via Wi-Fi TX mode: 800mA Wi-Fi RX mode: 350mA

- **WI-FI DRIVER INSTALLATION – LINUX OS**

In the terminal and navigate to the folder where the driver file is located.


For example, `cd CE_MT7662U_CFG80211`.

Build driver: **make**

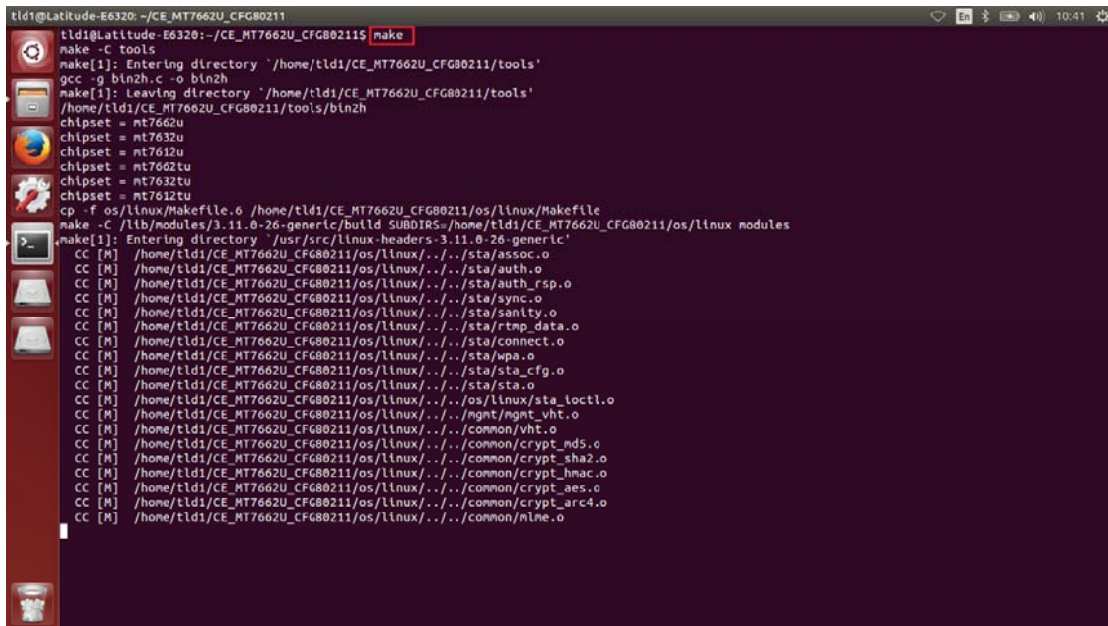

```
tld1@Latitude-E6320: ~/CE_MT7662U_CFG80211
make -C tools
make[1]: Entering directory '/home/tld1/CE_MT7662U_CFG80211/tools'
gcc -g bin2h.c -o bin2h
make[1]: Leaving directory '/home/tld1/CE_MT7662U_CFG80211/tools'
/home/tld1/CE_MT7662U_CFG80211/tools/bin2h
chipset = mt7662u
chipset = mt7632u
chipset = mt7612u
chipset = mt7662tu
chipset = mt7632tu
chipset = mt7612tu
cp -f os/linux/Makefile.6 /home/tld1/CE_MT7662U_CFG80211/os/linux/Makefile
make -C /lib/modules/3.11.0-26-generic/build SUBDIRS=/home/tld1/CE_MT7662U_CFG80211/os/linux modules
make[1]: Entering directory '/usr/src/linux-headers-3.11.0-26-generic'
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../sta/assoc.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../sta/auth.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../sta/auth_rsp.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../sta/sync.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../sta/sanlty.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../sta/rtmp_data.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../sta/connect.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../sta/wpa.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../sta/sta_cfg.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../sta/sta.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../os/linux/sta_ioctl.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../mgmt/mgmt_vht.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/vht.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/crypt_md5.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/crypt_sha2.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/crypt_hmac.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/crypt_aes.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/crypt_arc4.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/mlme.o
```

1. Install the driver on the OS with administrator permission: **sudo make install**

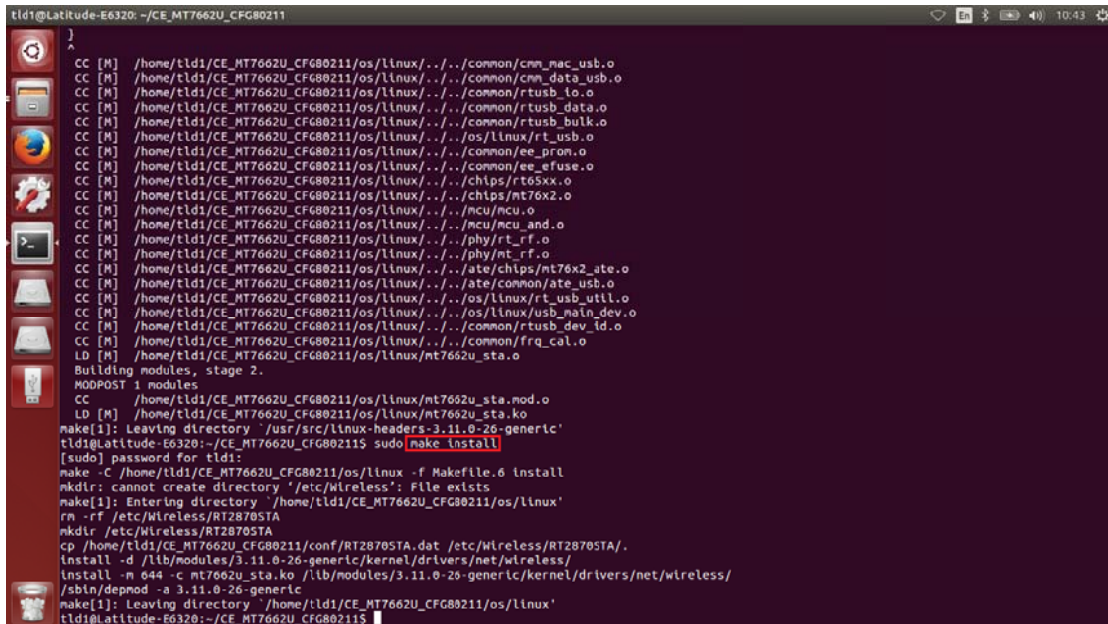

```
tld1@Latitude-E6320: ~/CE_MT7662U_CFG80211
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/cmn_mac_usb.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/cmn_data_usb.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/rtsusb_io.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/rtsusb_data.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/rtsusb_bulk.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../os/linux/rt_usb.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/ee_pron.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/ee_efuse.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../chips/rt65xx.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../chips/mt76x2.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../mcu/mcu.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../mcu/mcu_and.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../phy/rt_rf.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../phy/mt_rf.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../ate/chips/mt76x2_ate.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../ate/common/ate_usb.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../os/linux/rt_usb_util.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../os/linux/usb_main_dev.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/rtsusb_dev_id.o
CC [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/../../common/frq_cal.o
LD [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/mt7662u_sta.o
Building modules, stage 2.
MODPOST 1 modules
CC /home/tld1/CE_MT7662U_CFG80211/os/linux/mt7662u_sta.mod.o
LD [M] /home/tld1/CE_MT7662U_CFG80211/os/linux/mt7662u_sta.ko
make[1]: Leaving directory '/usr/src/linux-headers-3.11.0-26-generic'
tld1@Latitude-E6320:~/CE_MT7662U_CFG80211$ sudo make install
[sudo] password for tld1:
make -C /home/tld1/CE_MT7662U_CFG80211/os/linux -f Makefile.6 install
mkdir: cannot create directory '/etc/Wireless': File exists
make[1]: Entering directory '/home/tld1/CE_MT7662U_CFG80211/os/linux'
rm -rf /etc/Wireless/RT2870STA
mkdir /etc/Wireless/RT2870STA
cp /home/tld1/CE_MT7662U_CFG80211/conf/RT2870STA.dat /etc/Wireless/RT2870STA/.
install -d /lib/modules/3.11.0-26-generic/kernel/drivers/net/wireless/
install -m 044 -c mt7662u_sta.ko /lib/modules/3.11.0-26-generic/kernel/drivers/net/wireless/
/sbin/depmod -a 3.11.0-26-generic
make[1]: Leaving directory '/home/tld1/CE_MT7662U_CFG80211/os/linux'
tld1@Latitude-E6320:~/CE_MT7662U_CFG80211$
```

2. Remove the USB adapter and then re-insert the USB adapter to activate the newly installed driver.

- **REGULATORY WARNING STATEMENTS**

Federal Communication Commission Interference Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

FCC ID Label on the final system must be labeled with "Contains FCC ID: 2AGM4-WUS14"

Radiation Exposure Statement:

The product complies with the FCC portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. The further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available. The Device should at least 20cm separation distance away from the human body

Industry Canada statement:

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme à la norme CNR-210 d'Industrie Canada applicable aux appareils radio exempts de licence. Son fonctionnement est sujet aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) le dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

- **INTEGRATOR INSTRUCTIONS**

Part Number: WUS-AC14

FCC ID: 2AGM4-WUS14

IC: 20960-WUS14

1. Additional Regulatory Conformance Testing and/or Submissions Required by the Integrator

The global modular certifications apply to radio conformance for the Module only.

The OEM integrator is responsible for additional system-level EMI/EMC and Product Safety testing and certification that applies in the U.S. and other countries to the host system containing the Module. This includes, but is not limited to, Federal Communications Commission (“FCC”) Part 15 Class B Digital Emissions, and ETSI EN 301 489-17.

These system-level EMC tests are to be done with the Module installed and included in the scope of the submission.

Some of the countries for which modular certifications are provided require additional submissions, authorizations or import permission by the system-vendor or importer. The integrator is responsible for these additional actions.

By way of example, the OEM integrator must take additional action for radio certification in these countries:

Malaysia	Each importer/distributor needs to file for import permission
Singapore	Recommend use of importer’s own local radio dealer number
Israel	Additional approval certificate required for importer


Indonesia	Certificate B is required for each importer
China	Modular approval not accepted. Requires system approval
Brazil	Tablets require system level SAR evaluation and submission to Anatel.
Philippines	Modular approval not accepted. Requires system approval
Vietnam	Modular approval not accepted. Requires system approval
Indonesia	Modular approval not accepted. Requires system approval

Modular radio certification is not possible in some countries. For such countries, OEM integrators must ensure radio certification for the end system is obtained, before placing the product on the market.

2. ALLOWABLE ANTENNAS TO USE WITH THE RADIO MODULE

The module is certified to support following external PCB antennas with IPEX connector.

Table 1 Allowed Maximum Gain (dBi), Including Antenna Cable Loss

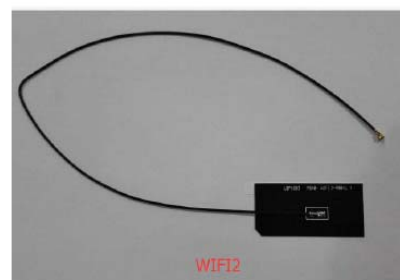

UD1603-WIFI-1 (263线长)-效率增益					
Frequency	Efficiency	Peak Gain	Frequency	Efficiency	Peak Gain
2400	65.06%	2.90	5100	35.56%	2.35
2410	65.44%	2.77	5140	37.37%	2.90
2420	65.42%	2.61	5180	38.82%	3.35
2430	65.55%	2.75	5220	41.19%	2.69
2440	65.14%	2.90	5260	43.11%	2.83
2450	64.54%	2.98	5300	44.62%	2.86
2460	64.08%	2.87	5340	41.79%	2.68
2470	63.97%	2.83	5380	37.59%	2.70
2480	63.77%	2.61	5420	34.62%	2.83
2490	63.85%	2.73	5460	35.33%	2.69
2500	64.00%	2.73	5500	35.45%	2.92
			5540	39.52%	2.79
			5580	37.78%	2.65
			5620	37.23%	2.69
			5660	36.45%	2.97
			5700	36.34%	2.82
			5740	35.47%	2.54
			5780	34.50%	2.77
			5820	36.46%	2.83
			5860	35.80%	2.68
			5900	35.73%	2.88

UD1603-WIFI-2 (345线长)-效率增益					
Frequency	Efficiency	Peak Gain	Frequency	Efficiency	Peak Gain
2400	46.07%	2.64	5100	36.58%	2.75
2410	47.01%	2.84	5140	39.21%	2.95
2420	47.08%	2.67	5180	40.21%	2.83
2430	47.26%	2.83	5220	39.75%	2.74
2440	47.44%	2.89	5260	40.10%	2.80
2450	47.26%	2.94	5300	40.47%	2.79
2460	47.43%	2.80	5340	40.41%	2.68
2470	47.41%	2.83	5380	38.82%	2.63
2480	47.05%	2.91	5420	41.69%	2.87
2490	47.54%	2.72	5460	43.35%	2.71
2500	46.81%	2.85	5500	43.44%	2.83
			5540	44.25%	2.95
			5580	43.55%	2.69
			5620	42.70%	2.76
			5660	46.09%	2.81
			5700	45.52%	2.72
			5740	46.18%	2.61
			5780	44.92%	2.90
			5820	46.00%	2.95
			5860	46.11%	2.88
			5900	42.13%	2.84

WARNING: Use of other antenna types or the same type of external antenna with higher gain is not allowed without additional testing and appropriate FCC approval.

3. ANTENNA PLACEMENT INSIDE THE HOST SYSTEM AND RF SAFETY

The FCC and other countries' regulatory bodies impose strict conditions and limitations on the RF exposure levels of end products. Acceptable RF exposure levels for this Module depend on transmit power, the location of the transmitting antenna(s) inside the host system, the expected separation of the transmitting antennas to the end user, as well as if there is/are collocated RF transmitter(s) in the same host system. OEM integrators must take great care to ensure each host system complies with the applicable RF exposure requirements.

4. SIMULTANEOUS TRANSMISSION WITH OTHER INTEGRATED OR PLUG-IN RADIOS

The FCC imposes conditions and limitations when additional radio(s) are co-located in the same host system as the Module *with capability to transmit simultaneously*. The detailed rules from the FCC are described in various Knowledge Database publications that may be found using the instructions below. Co-locating other radios such as an integrated or plug in Wireless WAN/cellular radio with the module requires additional evaluation and possibly submission for authorization from the FCC.

Because the rules are highly dependent on the characteristics of the particular radios that are co-located and simultaneously transmitting, the OEM integrator should seek guidance from a knowledgeable test lab or consultant to determine if additional testing and FCC certification is required. In this case, failure to evaluate and follow the required FCC procedures will invalidate the FCC certification of the Module and end system.

To download the FCC rules for collocated radios:

1. <https://apps.fcc.gov/oetcf/kdb/index.cfm>
2. Enter 616217 in the 'publication number' search box
3. Download latest applicable version of KDB 616217 document.

For expert advice regarding collocation rules, we recommend you contact an FCC-approved

Telecommunication Certification Body ("TCB")::

4. <https://apps.fcc.gov/oetcf/kdb/index.cfm>.
5. Choose your country and or state from the pull-down list.
6. Scroll through the search results and choose a TCB contact from which to seek advice.

5. MODULE MAY NOT BE INSTALLED BY END USERS

FCC rules require this Module to be installed in host systems at the factory by the OEM integrator. Thus, end users of the system may not install the Module. Therefore, the host product user instructions must not advise the end user on how to access or remove the Module. Additional FCC authorization/filing is needed to allow end user installation of radio modules.

6. REQUIRED LABELING ON THE OUTSIDE OF THE HOST

NOTE: Explanatory text in red font must not be included in the final label.

5.1 FCC

The FCC requires a label on the outside of the host system visible to the end user. Example wording is:

Contains:

FCC ID: XXX-XXXXXXX

IC: XXXXX-XXXXXX

(Replace X's with actual IDs found in section 2).

The FCC requires a logo signifying emissions compliance on the outside of the host system.

Additional options are available for placement of the FCC label on the host. Please refer to the FCC Knowledge Database KDB784748 found at <https://apps.fcc.gov/oetcf/kdb/index.cfm>.

NOTE: The Integrator is responsible to perform FCC Part 15 Class B digital emissions testing on the end system with the radio Module installed. The FCC logo below should not be affixed unless the OEM integrator has obtained the necessary Part 15 approval, e.g., self-declaration of conformity.

If the host system is approved to FCC Class B digital emissions limits under a grant of certification issued by a TCB, the FCC ID number shown on the grant should be used on the label instead of the FCC logo below.



5.2 European Community R&TTE

The European Community R&TTE Directive requires the CE Marking shown below on the outside of the host AND on the outside of the shipping container/packaging:



The European Community R&TTE Directive also requires the following note to consumers on the outside of the shipping container/packaging:

Important Notice: This product is a Radio LAN device operating in 2.4 & 5 GHz bands for Home and Office use in the E.E.A. States with restrictive use are highlighted in grey. Refer to user documentation for details.			
AT	BE	CH	CY
CZ	DE	DK	ES
FI	FR	GB	GR
EE	HU	IT	IE
IS	LI	LT	LU
LV	MT	NL	NO
PL	PT	SE	SI
SK			

NOTE: The Integrator is expected to translate the text in this Section into the appropriate local languages for the European countries in which the product will be marketed or sold.

5.3 FCC labeling on the Module

The Integrator must ensure that the FCC ID (as indicated in section 2) is affixed on the Module along with other country certification numbers and logos as described herein.

NOTE: The Module ODM may affix regulatory labeling at time of Module manufacturing. However, the OEM Integrator must ensure the Module label is complete, correct and applicable for all countries to which the host system is to be imported, marketed, or sold.

RF Exposure Information and Statement

This equipment complies with FCC and IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

RF exposure assessment has been performed below to prove that this unit will not generate the harmful EM emission above the reference level as specified in EC Council Recommendation (1999/519/EC). The Maximum Permissible Exposure (MPE) level has been calculated based on a distance of $d=20$ cm between the device and the human body. To maintain compliance with RF exposure requirement, use product that maintain a 20cm distance between the device and human body.

The FCC and other countries' regulatory bodies impose strict conditions and limitations on the RF exposure levels of end products. Acceptable RF exposure levels for this Module depend on transmit power, the location of the transmitting antenna(s) inside the host system, the expected separation of the transmitting antennas to the end user, as well as if there is/are collocated RF transmitter(s) in the same host system. OEM integrators must take great care to ensure each host system complies with the applicable RF exposure requirements.