

BC100 Transmitter: Product Features and Specification Version 2.0

1. Introduction – BC100 Transmitter

BC100 Transmitter is part of ESG6000 system consists of combination of BC100 3D Emitter, BC10 IR sensor (Used only if 3D TV does not provide 3D Glasses Emitter/3D SYNC Out Port), and ESG6000 LCD shutter glasses. The BC100 3D Emitter (transmitter) connects a 3D-Ready TV to the ESG6000 LCD Shutter Glasses for the ultimate in 3D stereoscopic viewing. BC10 IR sensor allows ESG6000 system to be compatible with multiple 3D displays. BC10 will pick up the IR sync signal from the 3D TVs and provides this signal to the BC100 3D Emitter.

BC100 Transmitter: Item ID = 101245-00

Component ID	Description	QTY
101101-00	Glasses- RF std active 3D shutter glasses RF	0
101102-00	Transmitter, RF std for active 3D glasses	1
101103-00	Sensor, IR std for RF active 3D glasses	0
101104-00	Cable, 3 ft micro USB cable for 3D glasses or for transmitter power	1
101105-00	Cable, 3 ft Vesa to TRRS cable for 3D glasses	1



2. Features

- 3D synchronization using Radio Frequency Technology
- Compatible with 3D Ready TVs equipped with a 3D Emitter Port
- IR sync learning capability for use with IR 3D sync based frame sequential 3D Ready TVs
- LED indicators assist with IR Sensor placement
- Management Software enables Upgrade functionality for compatibility with future 3D TVs
- Manual performance adjustment capability
- IR signal strength indicator mode.
- Manual performance tuning of Glasses mode.
 - Brightness (Ghosting) adjustment
 - TV sync timing adjustment
 - Left/Right polar
- Pairing of BC100 with ESG6000 Glasses for multi-emitter environment.
- IR Signal Search and Learning mode.
- Restore Factory Defaults mode.
- Rechargeable lithium polymer battery
 - Simple micro USB port charging
 - 60 hours of continuous use per charge*
- Light weight comfortable design, 70 grams
- Power On/Off with LED confirmation
 - On with LED battery fuel gauge
 - Auto OFF

* Battery time depends on many factors including signal quality.

3. Specification

Transmitter = Emitter

Emitter (BC100)


- Temperature range 32 °F – 104 °F, (0 °C – 40 °C)
- Power supply VESA Cable from TV or DC 5 V (USB power adapter sold separately)
- Dimensions: Width: 1.8" (46mm), Height: 1.3" (32mm), Depth: 0.7" (17mm)
- Weight 0.077 lb (35 g)
- Micro B - USB cable 3 feet
- VESA – TRRS cable 3 feet

4. Individual Component Photos

101102-00 - Transmitter, RF std for active 3D glasses



101104-00 - Cable, 3 ft micro USB cable for 3D glasses or for transmitter power

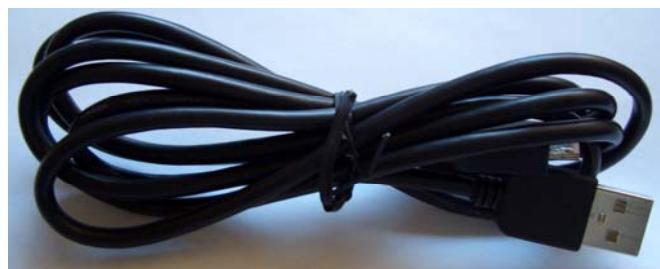

101105-00 - Cable, 3 ft Vesa to TRRS cable for 3D glasses



5. BC100 PCBA

See BC100_Schematic.pdf file.


6. BC100 Gerber files and pick and place

See files in folder BC100_PCB\Artwork.

7. BC100 PCBA Component List

See BC100_BOM.pdf file.

8. VESA/TRRS cable spec

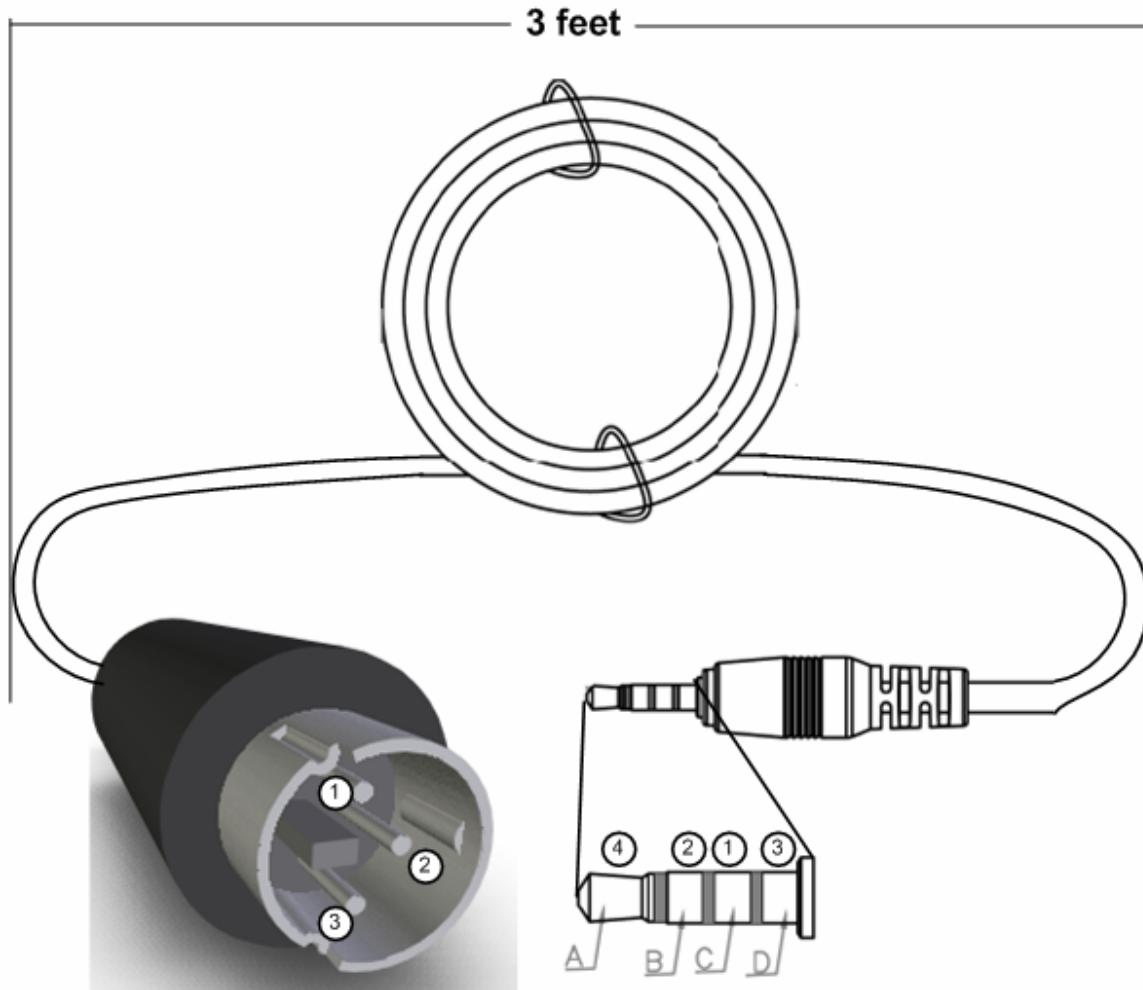

1: V_VESA – Voltage In from VESA 97 plug

2: D_IN – Sync Signal In

3: GND – GND

4: NC

Copyright @ Bit Cauldron Corporation (2011). All rights reserved. Licensed software products are owned by Bit Cauldron Corporation, and are protected by national copyright laws and international treaty provisions.

Bit Cauldron products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specifications and price change privileges reserved.

The information contained in this document is provided "as is." Bit Cauldron Corporation reserves the right to make corrections, modifications, enhancements, improvements, and other changes to this document and its products and services at any time and to discontinue any product or service without notice. Other names and copyrights are property of their respective owners.

Contacting Bit Cauldron

Bit Cauldron Corporation.
1411 NW 7th Road
Gainesville, FL 32603
USA

For product information, sales, service, and technical support:

In North America, info@bitcauldron.com.

Worldwide, visit www.bitcauldron.com to find contacts in your area.

FCC information to the user

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.