

FEDERAL COMMUNICATION COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WIRELESS ZOOM CAMERA CONTROL BOX

ITEM NO.: 15-AU15/25TR

OVERVIEW



15-AU15/25T



15-AU15/25R

FEATURES

TRANSMITTER (15-AU15/25T)

- Transmission frequency: 433.92MHz
- 16 code setting
- Transmission range: 300M in open area
- 9V battery operation
- Size: 141x50x30mm
- Transmission Cycle : 1 CYCLE
- Duty Cycle: < 35%




RECEIVER (15-AU15/25R)

- Transmission frequency: 433.92MHz
- Up to 16 set code available
- Zoom In/Out control
- Receiver range: 300M in open area
- DC 12V operation
- Size: 85x45x20mm

DIAGRAM

Structure 1

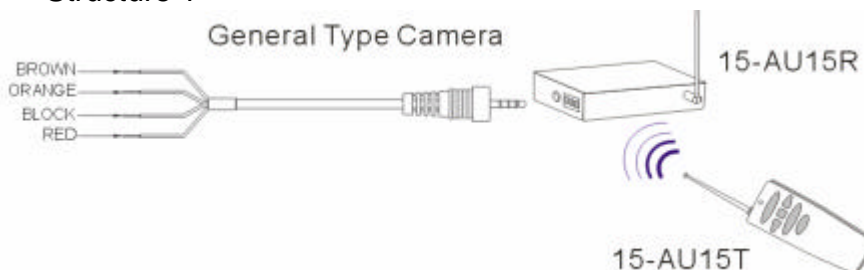

WIRE CONNECTION 1.25mm/4P

FUNCTION	COLOR
ZOOM OUT	ORANGE
ZOOM IN	BROWN
+12V	RED
GND	BLACK

FUNCTION DEFINITION OF 15-AU15/25T

NOTE: It has two function of 15-AU15/25T. One is Zoom In/Out function, another is for P/T/Z control. It will

be used on Zoom In/Out function for 15-AU15/25R.


Zoom In/Out function: It is no light of power indicator when push down button of ◀/ Near or ▶/ Far.

P/T/Z control function: It is to shine of power indicator when push down button of ◀/ Near or ▶/ Far.

REMARK: Press Lens button to change function.

OPERATION INSTRUCTION

1. Set the dip switch at same code for 15-AU15/25T/R
2. Connect cable to the 15-AU15/25R and camera (see fig.)
3. Set 15-AU15/25T at Zoom In/Out function
4. Press button of ▲/ Tele or ▼/ Wide to Zoom In/Out.

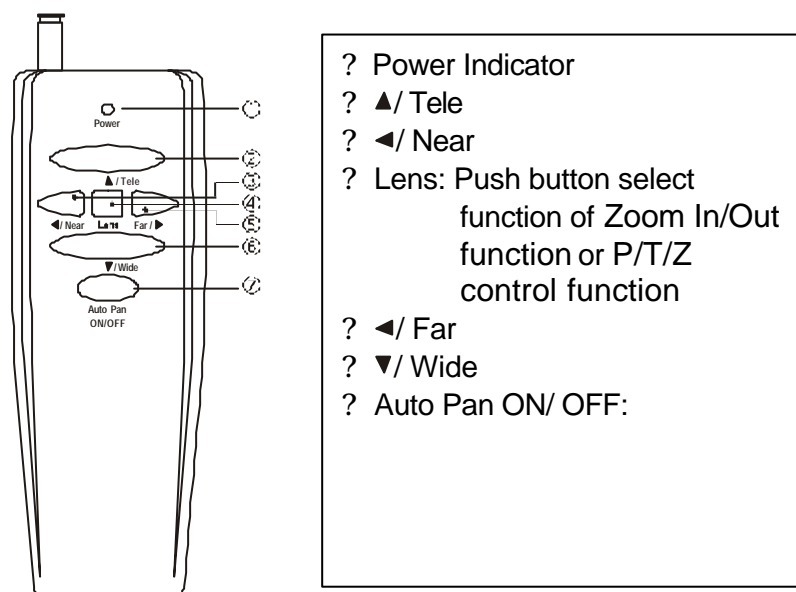

SPECIFICATION

ITEMS	15-AU15/25R	15-AU15/25T
Code Setting	16	
Transmission frequency	433.92MHz	
Transmission range	300M in open area	
POWER SOURCE	DC 12V	DC 9V
POWER CONSUMPTION	80 ±5mA	10 ±1mA
DIMENSIONS L× W× Hmm	85×45×20	141×50×30
WEIGHT KG	60g	110g(include battery)

PACKING

Controller	×1
Receiver	×1
Cable	X1
Manual	X1