

**Annex acc. to FCC Title 47 CFR Part 15
relating to
CSAE GmbH
ADMITTO-A-1200-D_advant**

Annex no. 5 User Manual Functional Description

**Title 47 - Telecommunication
Part 15 - Radio Frequency Devices
Subpart C – Intentional Radiators
ANSI C63.4-2014
ANSI C63.10-2013**



Deutsche
Akkreditierungsstelle
D-PL-12053-01-00

OEM RFID-Module ADMITTO USB

ADMITTO USB

Interface: USB

Versions:

Standard	RFID Technologie	Special Feature
ADMITTO-A-1200-D	LEGIC[®] prime / advant Basis LEGIC [®] SM 4200M	Multi-ISO-Platform ■ LEGIC
ADMITTO-A-1400-D	LEGIC[®] prime / advant basis LEGIC [®] SM 4500M Information: Support the initialization of LEGIC transponder medias	prime/advant ■ MIFARE Classic DESFire / EV1 ■ ISO14443 A+B ■ ISO15693
ADMITTO-A-2000-D	125 kHz	
ADMITTO-A-3100-D	MIFARE Classic / DESFire / EV1 (basis NXP)	

Designs:



Table design



Mounting design

OEM RFID-Module ADMITTO USB

General Data

Applications

- Universally applicable for reading and writing of RFID transponder media
e.g. for
 - Data collection
 - Cashless payment
 - PC-access
 - Writing of biometric data (fingerprint template)
 - General read- / write applications

Special features

- Shapely and compact plastic casing with bottom or mounting plate of stainless steel
- Directly applicable to metal substrate

Technical data

- Power supply
4,5 - 5,5 V/DC (direkt from USB)

- Power consumption

ADMITTO-A-1200	typ.	260 mA
	max.	400 mA
ADMITTO-A-1400	typ.	260 mA
	max.	400 mA
ADMITTO-A-2000	typ.	200 mA
	max.	280 mA
ADMITTO-A-3100	typ.	220 mA
	max.	350 mA

- Temperature range:
 - storage temperature -30°C to +70°C
 - operating temperature -25°C to +60°C
- Standard colour RAL 7015

Protection class

- table design IP 40
- mounting design IP 54

Dimensions

- Table design
112 x 54 x 27 mm (LxWxD)

- Mounting design
112 x 54 x 45 mm (LxWxD)

Interface

- Table design
USB / Version 2.0
- Mounting design
USB / Version 2.0

Signal elements

- 3 LEDs green, yellow, red

USB- connection cable

(type of connection / length / colour)

- Table design
 - USB male connector: Type A
 - Cable length: approx. 2 m
 - Colour: black
- Mounting design
 - USB male connector: Type A
 - Cable length: approx. 15 cm
 - Colour: black

Function mode

- Composite Device

CDC (Communication Device Class)
or

HID (Human Interface Device)



Configurable with PC-Tool

Firmware / Software protocol

- "active sending" / can be parameterized
- phg_crypt
- transparent LEGIC instruction set (only for LEGIC licensee)
- phg 1685
- LEGIC RW_01
- LEGIC RW_01_advant
- additional on request



The support and availability of the different software protocols depends on the current RFID-technology and available RFID reader hardware.

Detailed information on request

OEM RFID-Module ADMITTO USB

Supported transponder medias



The support of the transponder media listed below is generally dependent on the respective variant reader technology (hardware platform) and on the respective reader firmware. The listing of the transponder media is without guarantee of completeness. Further information can be received on request.

Transponder medias	Reader technology		
	LEGIC ADMITTO-A-1200 ADMITTO-A-1400	Mifare ADMITTO-A-3100	125 kHz ADMITTO-A-1200
LEGIC MIM 22 / MIM 256 / MIM 1024	X		
LEGIC ATC512-MP110 (ISO 14443A)	X	X (CSN/UID)	
LEGIC ATC2048-MP110 (ISO 14443A)	X	X (CSN/UID)	
LEGIC ATC4096-MP310 (ISO 14443A)	X	X (CSN/UID)	
LEGIC ATC4096-MP311 (ISO 14443A)	X	X (CSN/UID)	
LEGIC AFS4096-JP10/JP11 (ISO 14443A)	X	X (CSN/UID)	
LEGIC ATC128-MV210 (ISO 15693)	X		
LEGIC ATC256-MV210 (ISO 15693)	X		
LEGIC ATC1024-MV110 (ISO 15693)	X		
ISO 14443A-Transponder(UID/CSN)	X	X	
ISO 15693-Transponder(UID/CSN)	X		
SONY FeliCa subset	X		
INSIDE Secure (UID/CSN)	X		
Classic 1k / 4k	X	X	
DESFire 4k	X	X	
DESFire EV1, 2k / 4k / 8k	X	X	
Transparent, ISO14443A		X	
Transparent, ISO14443A Layer 3	X		
Transparent, ISO14443A/B Layer 4 subset	X		
Transparent, ISO15693 Layer 3	X		
Transparent, NFC Forum Type 2 Tag	X		
Transparent, NFC Forum Type 3 Tag	X		
hitag 1			X
hitag 2			X
hitag S			X
µem 4102 (read only)			X
µem V4150			X



Attention:

Recommendation at use of smart card chips for LEGIC “card in card“Solutions


A aptitude examination of the corresponding medium should be carried out before use or intended use.

Detailed information about the procedure are available on request.

OEM RFID-Module ADMITTO USB


Mounting design

Measures

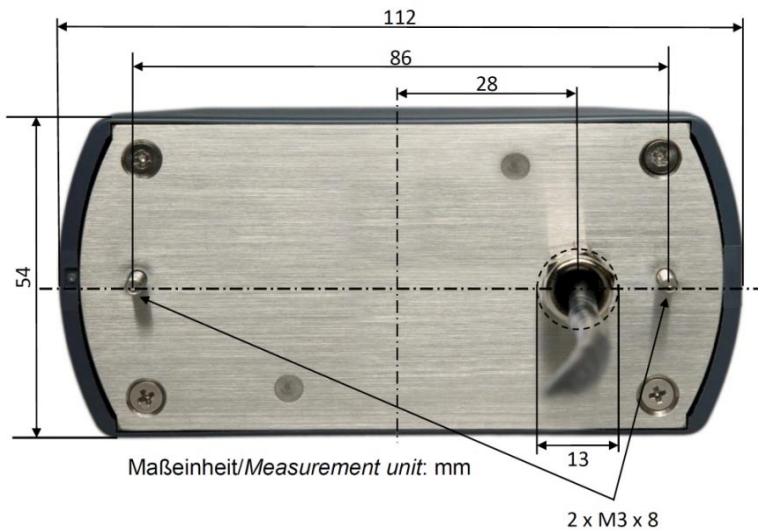


Mounting example

Touch-panel PC

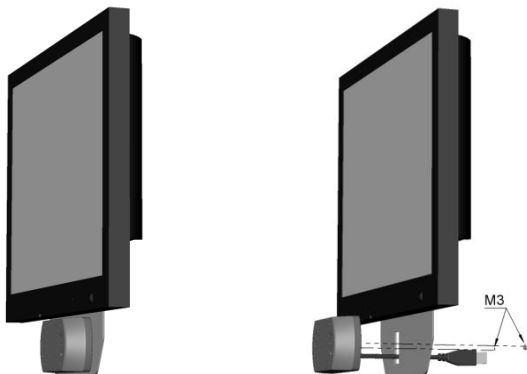

Dimensions of the installation mounting angle (recommendation)

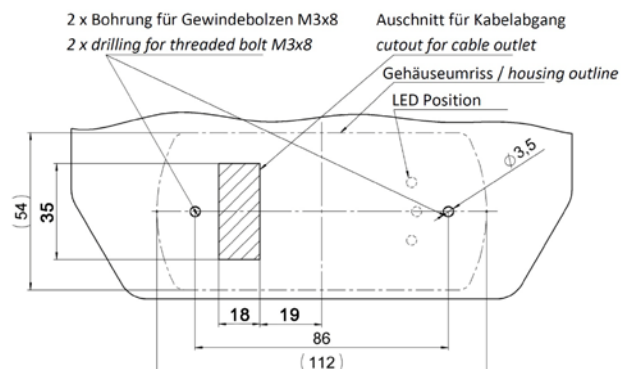

EG Conformity

The device complies with the essential legal requirements, if used for its intended use. The EG-Declaration of Conformity can be received on request.

Care and cleaning instruction

The use of hard or sharp objects (rings, fingernails etc.) can cause scratches and damage the device. Wipe the device with a soft lint-free cloth, or one that has been lightly dampened with water. The use of caustic liquids such as benzene, thinners, alcohol, solvents, or any kind of abrasive cleaners will lead to surface deterioration and damage.

OEM RFID-Module ADMITTO USB

Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.