



MLU270-S Series Intelligent Processing
Card User Manual
V1.0.0

Revision History

Document Name		MLU270-S Series Intelligent Processing Card User Manual	
Revision		V1.0.0	
Created Date		2019.08.20	
Revision History			
	Date	Revision No.	Notes
0	2019.08.20	V1.0.0	First Release
1			
2			
3			
4			
5			

Technical Supports contacts: service@cambricon.com

www.cambricon.com

Content

1. Product Brief.....	4
2. Product Specifications.....	6
2.1 Performance specifications.....	6
2.2 Software specifications.....	6
2.3 Operating Environment.....	8
2.4 Mechanical Specifications.....	8
2.5 Package Size and Weight.....	9
2.6 Thermal Specifications.....	9
2.7 Power Supplies Specifications.....	12
3. Cambricon NeuWare Development Environment.....	13
4. Compliance.....	14

1. Product Brief

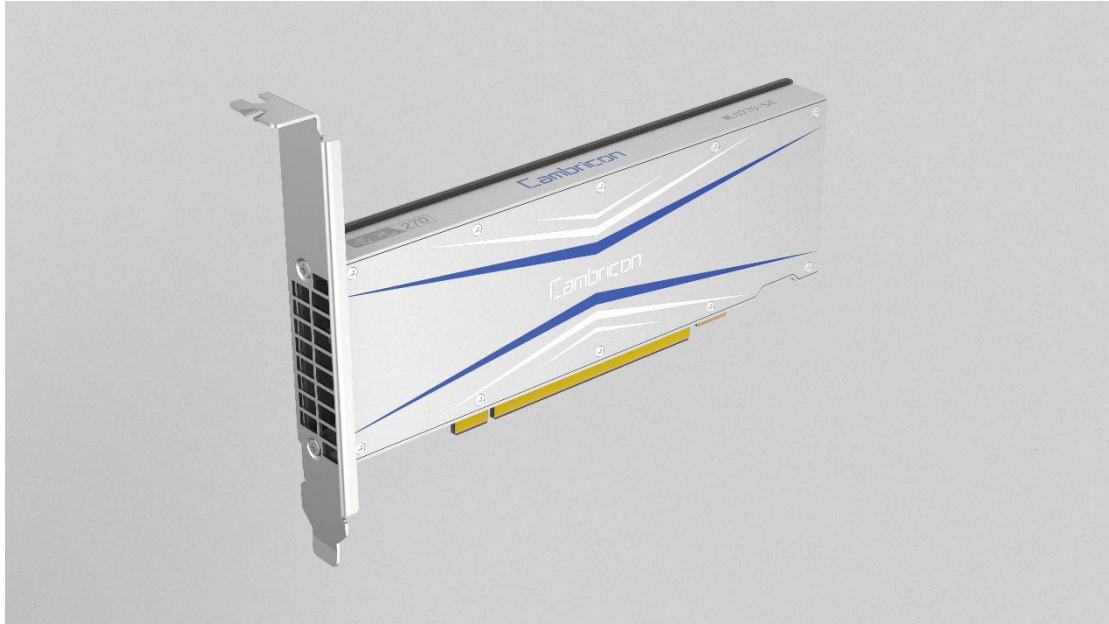


Figure.1 MLU270-S Series Intelligent Processing Card

Specially designed MLU270-S series dedicated to AI inferences and data center accelerations with high EER (Energy Efficiency Rate)

The SIYUAN 270 ASIC has been designed based on several innovative technologies in the architecture of processors owned by Cambricon. Along with it, many up-to-date features have been integrated into a standard HHHL PCIe card, which can be inserted into a modern AI PC/server so as to provide a huge extension of calculation power of AI inferences. MLU270-S series has a moderate TDP of 70W and it can provide a calculation power as high as 4 times of the previous generation. It can be widely used in applications such as vision, voice, natural language processing, legacy machine learning, and many other AI scenarios, and it can be used in an AI inferences platform to make it work with even higher EER.

Brand-new Cambricon MLUv02 Architecture

The MLUv02 architecture is not just a simple update from previous generation, but a brand new design based on NOC (Network on Chip), which will guarantee the parallel efficiency of execution of 16 NPU cluster within the SIYUN 270 ASIC. The dataflow will be compressed within the chip by dedicated hardware engine and this will increase the volume and bandwidth effectively. The new architecture can fully support all the AI accuracies such as INT16, INT8, INT4, FP32, FP16, and provide necessary calculation power to many kinds of Neural Network. In a word, the new architecture can provide both good universality and best performances to customers at the same time.

One more step on the performances of inferences

When using INT8 accuracy for AI inference calculations, the performance of non-sparse networks is improved up to 4 times as much as that of the previous generation. MLU270-S series can provide a great EER as high as 40 times of a normal CPU. There are embedded newly designed code/decode hardware for videos and pictures, so when the system have to handle this kind of tasks, MLU270-S series will decrease the load of CPU and the occupation

for PCIe bandwidth, so as to increase the performances even more.

Calculating flexibility and programmability

SIYUAN 270 ASIC can provide supports to many kinds of Neural Networks. Cambricon NeuWare software stack can easily deploy inference environment. BANG Lang. CHENG environment can be directly customized for computing resources , meeting all kinds of AI customization requirements, professional but not specialized.

2. Product Specifications

2.1 Performance specifications

Table 1 MLU270-S Series Intelligent Processing Card Hardware Specifications

Card Type	MLU270-S4/V4/D4/S4K/V4K/D4K
Processor Architecture	Cambricon MLUv02
Core Clock	MLU270-S4/V4/D4:1 GHz, MLU270-S4K/V4K/D4K:1.2 GHz
Peak INT8	MLU270-D4/D4K 64TOPS (Dense) , MLU270-S4/V4 128TOPS (Dense), MLU270-S4K/V4K 160TOPS(Dense)
Calculation accuracy	INT16, INT8, INT4, FP32, FP16
Video Decoding Support	Yes
Total Memory Size	16GB
Memory Bus Width	256-bit
Memory Bandwidth	102.4 GB/s
System Interfaces	PCI Express Gen3, x16, Supporting Lane Reversal
PCIe ID	PCIe Vendor ID 0xCABC PCIe Device ID 0x0270 PCIe Sub-Vendor ID 0xCABC PCIe Sub-System ID 0x0012
Outline	68.9mm * 167.5mm, Single Slot
TDP	70W
ECC Supporting	Yes
Heat Dissipation	Passive

2.2 Software specifications

Table 2 MLU270-S Series Intelligent Processing Card Software Specifications

PCIe Base address	PF (1, 64bit) : BAR0: 256MB prefetchable BAR2: 64 MB prefetchable BAR4: 64 MB prefetchable VF (4, 64bit) : BAR0: 256MB prefetchable BAR2: 64 MB prefetchable BAR4: 64 MB prefetchable
SMBus (8bit Address)	0x8E(Write) 0x8F (Read)

SMBUS Register is 32-bit wide, and below describes how to read a register (S:Slave, M:Master) :

Table 3 SMBUS Registers Reading

Direction	Bits	Content
M → S	1	START
M → S	8	SLAVE ADDRESS (Write)
S → M	1	ACK
M → S	8	REGISTER ADDRESS
S → M	1	ACK
M → S	1	RE START
M → S	8	SLAVE ADDRESS (Read)
S → M	1	ACK
S → M	8	DATA[7:0]
M → S	1	ACK
S → M	8	DATA[15:8]
M → S	1	ACK
S → M	8	DATA[23:16]
M → S	1	ACK
S → M	8	DATA[31:24]
M → S	1	NACK
M → S	1	STOP

Table 4 SMBUS Registers Description

Registers	Address	ACCESS	Description
Total Card Power	0x01	RO	Card Power consumption, Float Data, Unit W
Card Temperature	0x02	RO	Card Temperature, Float Data, Unit °C
Chip Temperature	0x03	RO	Chip Temperature, Float Data, Unit °C
Power Brake	0x05	WO	The main frequency is reduced to 25% of current frequency when write 0x04,and restore to pre-frequency when write 0x01
PCIE Vendor ID and Device ID	0xA0	RO	[15:0] Vendor ID :0xCABC [31:16] Device ID:0x0270
PCIE Sub-Vendor ID and Sub-System ID	0xA1	RO	[15:0] Sub-Vendor ID:0xCABC [31:16] Sub-System ID,for example 0x0012
Device Name	0xF0	RO	Display device type, e.g 0X12 means device type is S4
Vendor Name	0xF1	RO	Display vendor name
Hardware Revision	0xF2	RO	Display hardware revision
Firmware Revision	0xF3	RO	Display Firmware Revision, e.g 0x02120016 means the main chip version is 0x02,device type is 0x12,main version is 0x00,subversion is 0x1,patch number is 0x6
Manufacturing Time	0xF4	RO	Dispaly manufacturing time,e.g 0x1811 means manufactured in 2018.11
Device ID	0xF5	RO	Display Device ID, e.g 0x20023 means device id is 20023

2.3 Operating Environment

Table 5 MLU270-S Series Intelligent Processing Card Working Environment

Operating Temperature	0°C ~ 45°C
Storage Temperature	-40°C ~ 75°C
Operating Humidity	5%—95% Relative Humidity
Storage Humidity	5%—95% Relative Humidity

2.4 Mechanical Specifications

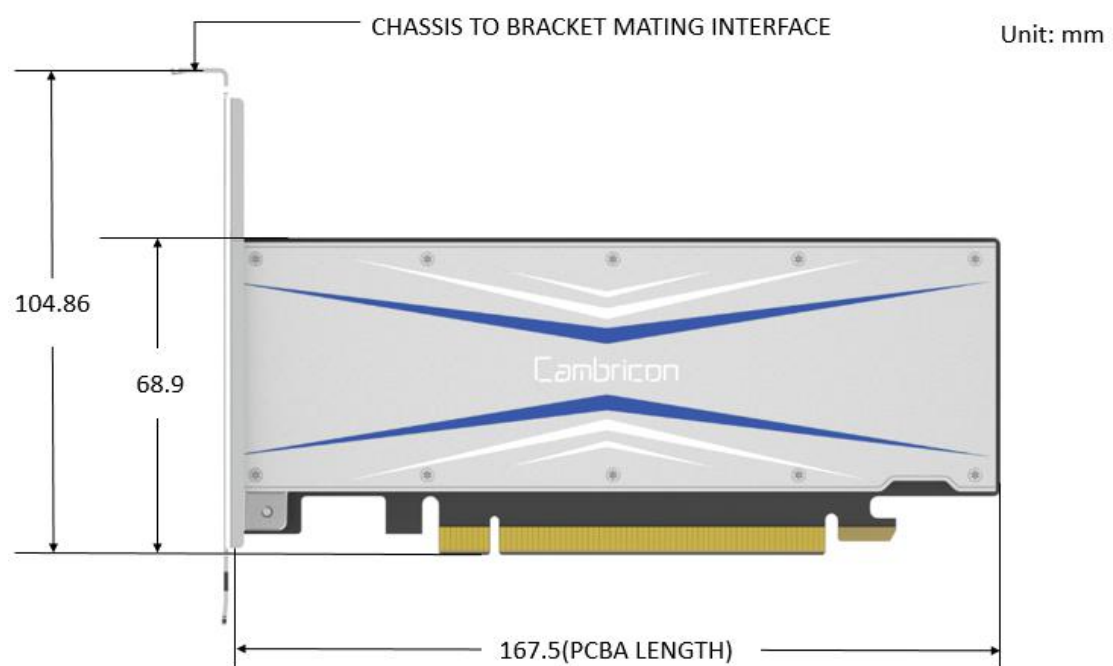


Figure. 2 MLU270-S Series Intelligent Processing Card Dimensions (High bracket)

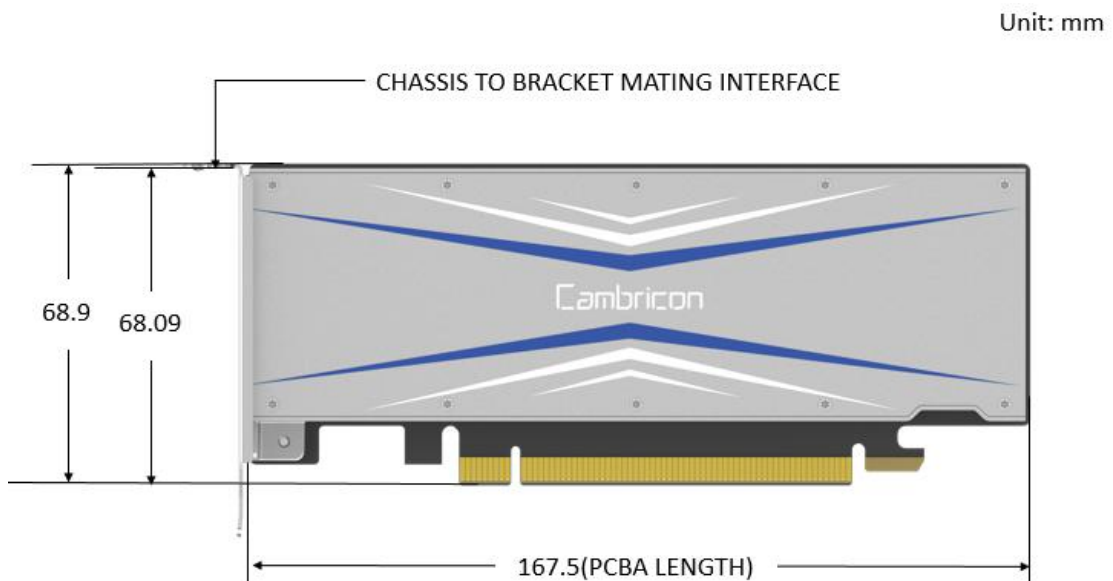


Figure.3 MLU270-S Series Intelligent Processing Card Dimensions (Low bracket)

2.5 Package Size and Weight

Table 6 MLU270-S Series Package Size and Weight

Type	Weight	Size	Notes
Single Card	310g	167.5mm*68.9mm*18.1mm	NA
Gift package with single card	760g	385mm*230mm*97mm	Including gift package,MLU270 series card,standby panel,PE bag,desiccant
Industrial Box	7.7kg	600mm*400mm*253mm	16 cards each box
Gift Box	5.6kg	600mm*400mm*253mm	6 gift packages each box

Notes:The weight is a measured value with a tolerance of + -10%

2.6 Thermal Specifications

2.6.1 MLU270-S Power and Temperature Specifications

Table 7 MLU270-S Series Thermal Design Specifications

Item	Parameters
TDP(Thermal Design Power)	70W
Recommended Operating Tj	0-85°C
Slowdown Tj	87°C
Slowdown rate	50%
Shutdown Tj	95°C

2.6.2 MLU270-S Series System Pressure Drop

The figure below is got by measurement :

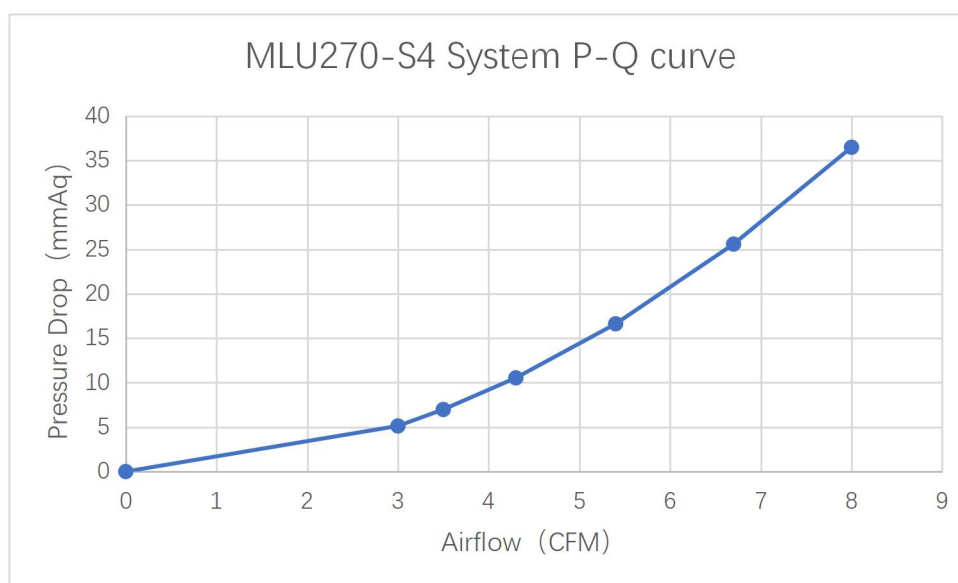


Figure.4 MLU270-S System Pressure Drop

Table 8 MLU270-S Heatsink

Airflow Rate (CFM)	Pressure Drop (mmAq)
3	5.1
3.5	7.0
4.3	10.5
5.4	16.6
6.7	25.6
8	36.5

2.6.3 MLU270-S Series Airflow Directions Support

MLU270-S series can be placed at the front and rear part of the chassis, and the airflow can be in either directions as below:

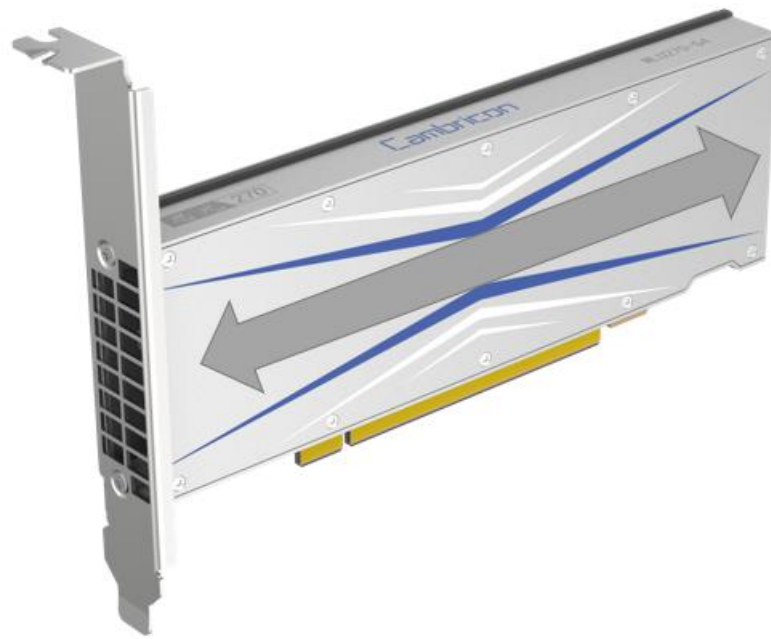


Figure.5 Airflow Directions Support

2.6.4 MLU270-S Series Operating Temperature and Airflow Requirements

MLU270-S Series can support operating (TDP) at Temperature of 0-50 °C (Temperature at the entrance of heatsink). Refer to below table for more information about minimum Airflow requirement :

Table 9 MLU270-S Temperature of Ambient vs Min Airflow Requirement

Air Temperature at Card Inlet (°C)	Min Airflow Requirements (CFM)
30	3
35	3.5
40	4.3
45	5.4
50	6.7
55 (not recommend)	8

2.6.5 MLU270-S Average Temperature of Inlet vs Min Airflow Requirement

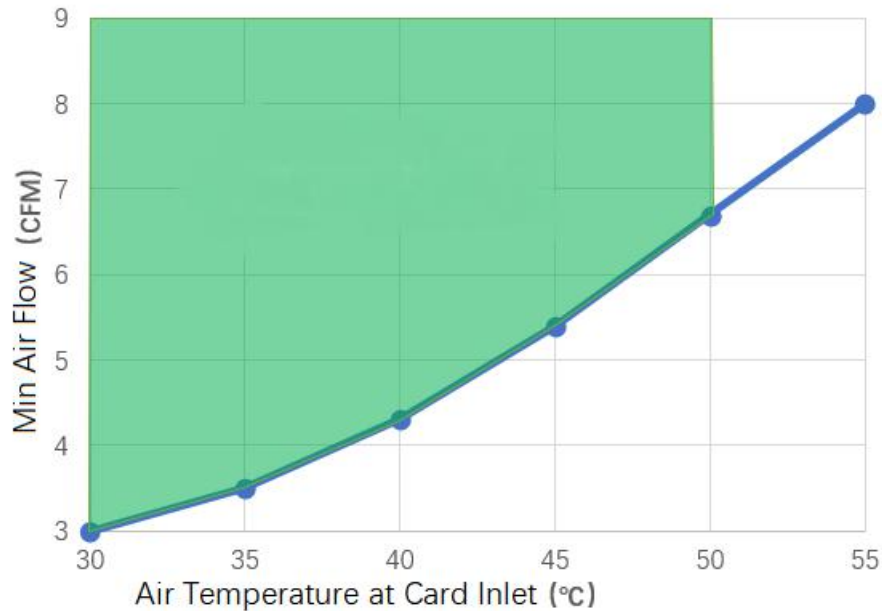


Figure.6 Air Inlet Temperature vs Min Airflow Requirement

2.7 Power Supplies Specifications

Table 10 Input Voltage Requirement

Power Supply	Min	Normal	Max
PCIe edge connector (12V)	11.04V	12V	12.96V
PCIe edge connector (3V3)	3.0V	3.3V	3.63V

Table 11 Current Requirement

Power Supply	Peak Current	Moving Average
PCIe edge connector (12V)	20A	200us
	17A	1ms
	13A	5ms

Table 12 Power Capping

Power Capping Threshold	70W
Power Capping Response time (typical)	50ms
Power Capping Response time (max)	100ms

Table 13 Power Brake

PB# PCIe pin assignment	B30
Power Brake response time (typical)	150us
PB# input insertion low time (min)	250ms
Power brake hardware slowdown factor	4x

3. Cambricon NeuWare Development Environment

NeuWare can fully support all kinds of mainstream programming framework, such as TensorFlow, Caffe, PyTorch, MXNet and so on. With above mentioned Programming Frameworks, users can easily and conveniently develop and deploy their Deep Learning Applications on Cambricon MLU270-S Series Intelligent Processing Cards. At the same time, NeuWare provides complete runtime system and driver software to speed up the system integration procedure.

NeuWare also provides a full set of software tools such as Application Development, Function Debugging and Performance Optimization. The Application Development Tools include Machine Learning Library, Runtime Library, Compiler, Model retraining tools and Domain-Specific (for example Video Analysis) SDK; The Function Debugging Tools can fulfill all the requirements from different levels of Programming Framework and Function Library; The Performance Optimization Tools include tools for performances analysis and system monitoring.

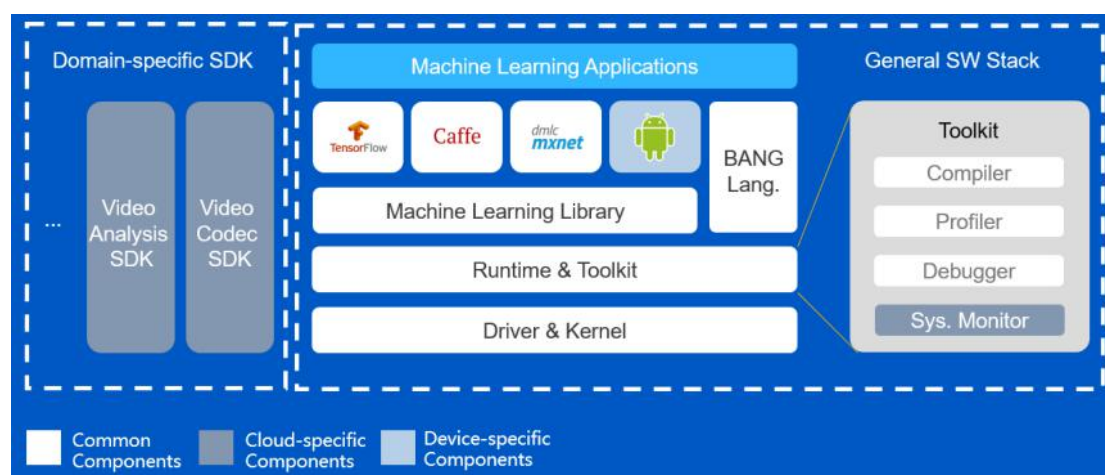


Figure.7 Cambricon NeuWare

For more information, please visit www.cambricon.com

Tel: 86-10-83030003

E-mail: business@cambricon.com

Address: 11/F, Block D, Zhizhen Tower, No.7 Zhichun Road, Haidian District, Beijing, China

4. Compliance

The MLU270-S Series is compliant with the regulations listed in this section. Compliance marks, including the FCC ID numbers, can be found on the labels of each devices.

United States

Federal Communications Commission (FCC)

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Underwriters Laboratories (UL)

UL Listed Product Logo for MLU270-S Series Intelligent Processing Cards, model name

MLU270-S.

