

# Canon

imageRUNNER®  
3570 / 4570



Corporate  
Systems



meap  
POWERED BY


## EXPERIENCE A BREAKTHROUGH IN MULTIFUNCTION TECHNOLOGY

Your growing business can no longer conform to the rigid workflow processes forced upon it by yesterday's office technology. You need an office solution that can be shaped around your specific needs. Now you can have it with the Canon imageRUNNER® 3570 device and imageRUNNER 4570 device.

Take control of your office workflow with these new-generation Canon imageRUNNER devices. Delivering output at speeds of up to 35 and 45 pages per minute (Letter), respectively, the imageRUNNER 3570 and imageRUNNER 4570 devices support advanced digital copying and Mail Box features, network printing and scanning functions, Super G3 fax capabilities,\* and the ability to send electronic information across a digital landscape. Featuring Canon's MEAP® (Multifunctional Embedded Application Platform) technology and a host of Internet-enabled capabilities, these devices offer the tightest possible integration across entire corporate networks so you can streamline costs and improve efficiency.

### imageRUNNER 3570/4570 Specifications

Type:	Digital, Multifunction Imaging System	File Format:	TIFF, PDF, Optional PDF (OCR)	Finisher-S1	
Imaging System:	Laser Dry Electrostatic Transfer	Sending Sizes:	Statement to 11" x 17"	Number of Trays:	One (Second Tray Optional)
Developing System:	Dry Mono Component Toner	Duplexing Automatic Document Feeder-N1		Tray Capacity	
Fixing System:	Projection	Acceptable Originals:	Statement to 11" x 17"	Non-collate, Collate,	
Image Server Memory:	RAPID Fusing System™	Capacity:	50 Sheets (20 lb. Bond/Letter)	Group Mode:	1,000 Sheets (Letter, Statement) 500 Sheets (11" x 17", Legal, Letter-R)
First-copy Time:	Standard 512MB RAM/20GB HDD	Max. Paper Weight:	13 lb. to 32 lb. Bond	Staple Mode:	1,000 Sheets/30 Sets (Letter) 500 Sheets/30 Sets (11" x 17", Legal, Letter-R)
Warm-up Time:	3.9 Seconds from Platen Glass	Scanning Speed:	Up to 28 Images per Minute (ipm) (Letter @ 600 dpi), 45 ipm (Letter @ 300 dpi)	Tray Capacity (with Additional Finisher Tray-B1)	
Copy/Print Speed:	5.9 Seconds from Feeder	Power Source:	From Main Unit	Non-collate, Collate,	
Max. Mail Boxes Supported:	10 Seconds or Less from Sleep Mode	Dimensions (H x W x D):	8-7/8" x 22-1/4" x 21-1/4" (122mm x 565mm x 538mm)	Group Mode:	300 Sheets per Tray (Letter, Statement)
Max. Copy Reservation:	30 Seconds from Main Power Off	Weight:	Approx. 18.7 lb. (8.5kg)	Staple Mode:	300 Sheets/30 Sets per Tray (Letter) 150 Sheets/30 Sets (11" x 17", Legal, Letter)
Actual Resolution:	Up to 35/45 ppm (Letter)	Cassette Feeding Unit-Y2		Staple Position/Size:	150 Sheets/30 Sets (11" x 17", Legal, Letter)
Interpolated Resolution:	1200 dpi x 600 dpi (Copy)	Paper Capacity:	Dual 550-sheet Paper Cassettes (1,100 Sheets/20 lb. Bond)	Max. Stapling Capacity:	50 Sheets (Letter-Up to 20 lb. Bond)
Half-tone:	2400 dpi x 600 dpi (Print)	Acceptable Paper Sizes:	Statement-R to 11" x 17"	Power Source:	From Main Unit
Duplexing:	256 Gradations of Gray	Acceptable Paper Weights:	17 lb. to 20 lb. Bond	Dimensions (H x W x D):	11-7/8" x 18-7/8" x 20-1/2" (300mm x 480mm x 520mm)
Magnification Reduction/ Enlargement:	Standard Automatic Trayless Duplexing	Power Source:	From Main Unit	Weight:	Approx. 26.5 lb. (12kg)
Exposure Control:	25% to 400% — Platen	Dimensions (H x W x D):	9-7/8" x 22-1/4" x 27-5/8" (251mm x 565mm x 700mm)	Attachable Accessories:	Additional Finisher Tray-B1 Puncher Unit-R1 Copy Tray-J1
Paper Sources	25% to 200% — Feeder (in 1% increments)	Weight:	Approx. 50.7 lb. (23kg)	Additional Finisher Tray-B1 (Option for Finisher-S1)	
Standard:	Automatic or Manual (9 levels)	Envelope Feeder Attachment-C1		Dimensions (H x W x D):	3-1/8" x 7-7/8" x 15-5/8" (80mm x 200mm x 395mm)
Optional:		Copy Speed:	12 cpm (All Envelopes)	Weight:	Approx. 3.7 lb. (1.7kg)
Multiple Copies:	Dual 550-sheet Paper Cassettes (1,100 Sheets)	Acceptable Envelopes:	COM10, DL, Monarch, ISO-B5, ISO-C5, Yougata-4	Puncher Unit-R1 (Option for Finisher-S1)	
Paper Weights:	Stack Bypass (50 Sheets)	Feeder Capacity:	Approx. 50 Envelopes or 1-1/4" (31.75mm)	Max. Paper Weight:	17 lb. to 32 lb. Bond
Network Interface	Dual 550-sheet Cassette Feeding Unit (4,750 Sheets Max.)	Dimensions (H x W x D):	3-1/4" x 12-1/8" x 11-5/8" (82mm x 306mm x 295mm)	Paper Sizes	
Connections:		Weight:	Approx. 2.4 lb (1.1kg)	2-hole:	Legal, Letter-R
Dimensions (H x W x D):	19-7/8" x 22-1/4" x 27-5/8" (761mm x 565mm x 700mm)	Paper Deck-Q1		3-hole:	11" x 17", Letter
Installation Space: (W x D):	34" x 27-5/8"	Paper Deck Capacity:	2,500 Sheets (20 lb. Bond)	Punch Method:	Sequential Processing System
Weight:	136 lb. (61.6kg)	Paper Size:	Letter	Punch Dust Stock	
Power Requirements:	120V AC, 60Hz, 10A	Acceptable Paper Weights:	17 lb. to 20 lb. Bond	2-hole:	2,500 Sheets
Power Consumption:	1.35kW (Max.)	Power Source:	From the Main Unit	3-hole:	1,500 Sheets
Toner Yield:	24,000 @ 6% Coverage	Dimensions (H x W x D):	18-5/8" x 14-5/8" x 23-1/4" (473mm x 372mm x 591mm)	Power Source:	From Main Unit
Optional Accessories		Weight:	Approx. 65.3 lb (29.6kg)	Dimensions (H x W x D):	6-7/8" x 19-7/8" x 5-1/8" (175mm x 505mm x 130mm)
Universal Send Kit-B1		Inner 2-Way Tray-D1		Weight:	Approx. 8.6 lb. (3.9kg)
Sending Methods:	E-mail, I-fax, Super G3 Fax (Optional), User Inbox, File Server (IPX, FTP, SMB)	Number of Trays:	Two	Copy Tray-J1 (Option for Inner 2-Way Tray and Finisher-S1)	
Address Book Capacity:	Max. 1,800 Destinations Max. 5 LDAP Servers	Tray Capacity		Tray Capacity:	150 Sheets (Letter) 75 Sheets (Other Sizes)
		Lower Output Tray:	250 Sheets (Letter) 100 Sheets (Other Sizes)	Dimensions (H x W x D):	4-3/4" x 13-5/8" x 13-7/8" (120mm x 347mm x 351mm)
		Upper Output Tray:	100 Sheets (Letter) 50 Sheets (Other Sizes)	Weight:	Approx. 1 lb. (471kg)
		Acceptable Paper Sizes:	Statement to 11" x 17"		
		Dimensions (H x W x D):	6" x 7" x 21-1/2" (151mm x 176mm x 546mm)		
		Weight:	Approx. 8.6 lb (3.9kg)		
		Attachable Accessories:	Copy Tray-J1		

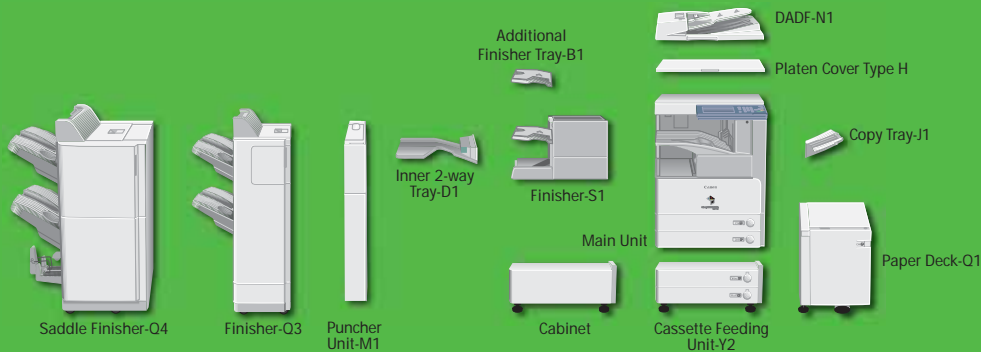

imageRUNNER®  
3570 / 4570

### imageRUNNER 3570/4570 Specifications (continued)

<p><b>Finisher-Q3</b> Number of Trays: Two Tray Capacity Non-collate, Collate, and Group Mode: 1,000 Sheets (Letter, Statement, Executive) 500 Sheets (11" x 17", Legal, Letter-R) Staple Mode: 1,000 Sheets/30 Sets (Letter, Executive) 500 Sheets/30 Sets (11" x 17", Legal, Letter-R) Max. Stapling Capacity: 50 Sheets (Letter, Executive) 30 Sheets (11" x 17", Legal, Letter-R) Staple Position: Any Corner Staple Double Staple in Right or Left Margin Power Source: From Main Unit Dimensions (H x W x D): 40-3/4" x 25-3/8" x 25-7/8" (1,036mm x 643mm x 657mm) Weight: Approx. 91.7 lb. (41.6kg) Attachable Accessories: Puncher Unit-M1</p> <p><b>Saddle Finisher-Q4</b> Number of Trays: Two Tray Capacity Non-collate, Collate, and Group Mode: 1,000 Sheets (Letter, Statement, Executive) 500 Sheets (11" x 17", Legal, Letter-R) Staple Mode: 1,000 Sheets/30 Sets (Letter) 500 Sheets/30 Sets (11" x 17", Legal, Letter-R) Max. Stapling Capacity: 50 Sheets (Letter, Executive) 30 Sheets (11" x 17", Legal, Letter-R) Staple Position: Any Corner Staple Double Staple in Right or Left Margin Saddle-stitch (Center Staple)</p> <p><b>Saddle-stitch</b> Acceptable Paper Sizes: 11" x 17", Legal, Letter-R Capacity/Tray: 1 to 5 Sheets/25 Sets 6 to 10 Sheets/15 Sets 11 to 15 Sheets/10 Sets Max. Stapling Capacity/Set: 15 Sheets Folding: V-fold Power Source: From Main Unit Dimensions (H x W x D): 40-3/4" x 29-3/4" x 25-7/8" (1,036mm x 756mm x 657mm) Weight: Approx. 162 lb. (73.4kg) Attachable Accessories: Puncher Unit-M1</p> <p><b>Puncher Unit-M1 (Option for Finisher-Q3 and Saddle Finisher-Q4)</b> Max. Paper Weight: 17 lb. to 32 lb. Bond Paper Sizes 2-hole: Legal, Letter 3-hole: 11" x 17", Letter, Executive Punch Method: Sequential Processing System</p>	<p><b>Punch Types:</b> 2-hole/3-hole (Auto Change)Punch <b>Dust Stock:</b> Approx. 3,000 Sheets <b>Power Source:</b> From Main Unit <b>Dimensions (H x W x D):</b> 34-1/8" x 4-1/4" x 24-1/2" (941mm x 107mm x 614.8mm) <b>Weight:</b> Approx. 15.9 lb. (7.2kg)</p> <p><b>Super G3 Fax Board-Q1/G3 Multi-Line Fax Board-D1</b> <b>Applicable Line:</b> Public Switched Telephone Network (PSTN)</p> <p><b>Connection Lines</b> Super G3 Fax Board-Q1: One Super G3 Multi-Line Fax Board-D1: Two <b>Sending/Original Sizes:</b> Statement to 11" x 17" (from Document Feeder) Statement to 11" x 17"</p> <p><b>Recording/Printing Sizes:</b> Statement to 11" x 17" <b>Transmission Times*</b> ECM-MMR: Approx. 3.2 Seconds G3MR: Approx. 13 Seconds G3MH: Approx. 13 Seconds JBIG: Approx. 2.6 Seconds</p> <p><b>Scan Line Density</b> Standard: 8 pels/mm x 3.85 lines/mm Fine: 8 pels/mm x 7.7 lines/mm Super-fine: 8 pels/mm x 15.4 lines/mm Ultra-fine: 16 pels/mm x 15.4 lines/mm <b>Auto Dial Function:</b> Address Book: 1,800 Destinations <b>Image Memory:</b> Approx. 8,000 Pages</p> <p><b>Multi-PDL Printer Kit-E1</b> <b>Processor:</b> Canon Custom Processor—Shared <b>RAM:</b> 512MB—Shared <b>Hard Disk:</b> 20GB—Shared <b>PDL Support:</b> PCL 5e, PCL 6, PostScript® 3™ Emulation, UFR II</p> <p><b>Interface Connections</b> Standard: RJ-45 (10/100Base-T), USB 2.0 High-speed</p> <p><b>Network OS:</b> Windows® 98/Me/2000/XP Windows NT® 4.0/Server 2003 Macintosh® OS 8.0 or Later (PPD) Solaris™ 1.1x, 2.5x, or Later Novell® NetWare® v3.2, 4.1, 4.11, 4.2, 5, 5.1, 6, 6.5 (IPX/SPX™)</p> <p><b>Print Drivers</b> UFR II: Windows 2000/XP: Windows Server 2000, Citrix MetaFrame, Macintosh OS X (OS 10.1.5 or Later) Windows 98/Me/2000/XP Windows NT 4.0/Server 2003 Citrix MetaFrame</p> <p><b>PCL 5e/6:</b></p>	<p><b>PS 3 Emulation:</b> Windows 98/Me/2000/XP Windows NT 4.0/Server 2003 Citrix MetaFrame Macintosh OS X (OS 10.2 or Later) PS: 136 Scalable Fonts PCL 5e/6: 80 Scalable Fonts 30 Bar code Fonts, 2 OCR Fonts 10 Bitmap Fonts</p> <p><b>Internal Fonts:</b> Network ScanGear Remote UI Netspot Console Netspot Job Monitor Netspot Resource Downloader Netspot Device Installer USB Class Driver Fax Driver JBIG ImageViewer Canon LPR 2 Canon NDPS Gateway Canon Font Manager BMC PATROL® CA Unicenter® Tivoli® NetView® HP Web Jetadmin HP OpenView Microsoft® Management Console Canon Watermark Add-in DSE (Device Status Extension) Address Book Conversion Utility</p> <p><b>Utility Software:</b></p> <p><b>Other Optional Accessories and Utilities</b> Platen Cover Type H Cabinet-P1 Accessibility Handle-A1 Braille Label Kit-A1 Document Tray-J1 Card Reader-C1 Card Sets Universal Send PDF Enhancement Kit-B1 imageRUNNER Security Kit-A2 eCopy Suite/ShareScan OP Web Access Software-A1** Remote Operator's Software Kit-A1** Bar Code Printing Kit-A1** Voice Guidance Kit-A2** Removable HDD Kit**</p>
--	---	--

\* Approximate 3-second-per-page fax transmission time based on ITU-T No. 1 Chart (MMR, Standard Mode) at 33.6 Kbps modem speed when transmitting to another V.34 machine. The Public Switched Telephone Network (PSTN) currently supports 28.8 Kbps modem speeds or lower, depending on telephone line conditions.

\*\* Check with your local Authorized Canon Dealer for availability.



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. eCopy ShareScan is a trademark of eCopy, Inc. PostScript is a registered trademark of Adobe Systems Incorporated in the United States and/or other countries. Microsoft, Windows, and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries. Macintosh is a registered trademark of Apple Computer, Inc. Solaris is a trademark of Sun Microsystems, Inc. in the United States and other countries. Novell and NetWare are registered trademarks of Novell, Inc. in the United States and/or other countries. IPX/SPX is a trademark of Novell, Inc. PATROL is a registered trademark of BMC Software in the United States. Unicenter is a registered trademark of Computer Associates International, Inc. Tivoli and Netview are registered trademarks of IBM in the United States. CANON, IMAGERUNNER, MEAP, and NETSPOT are registered trademarks, and UNIVERSAL SEND, RAPID FUSING SYSTEM, and the GENUINE logo are trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. REMOTE UI is a trademark of Canon U.S.A., Inc. IMAGEWARE is a registered trademark of Canon U.S.A., Inc. in the United States and is a trademark of Canon Inc. in certain other countries. IMAGEANYWARE is a trademark of Canon. All referenced product names and other marks are trademarks of their respective owners.

All specifications are subject to change without notice.  
©2006 Canon U.S.A., Inc. All rights reserved.

Some products shown with optional accessories and equipment.

1-800-OK-CANON  
[www.usa.canon.com](http://www.usa.canon.com)

Canon U.S.A., Inc.  
One Canon Plaza  
Lake Success, NY 11042

