

Home Center 2


FIBARO SYSTEM 2



Thank You for purchasing Home Center 2

To start using Fibaro System Home Center 2, please connect the device to power and LAN sockets, as shown below.


1. Unscrew left side panel

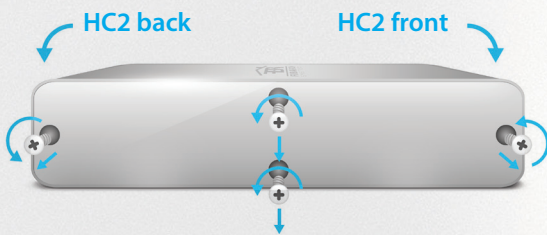

2. Take side panel off



3. Connect wires as shown on figure below

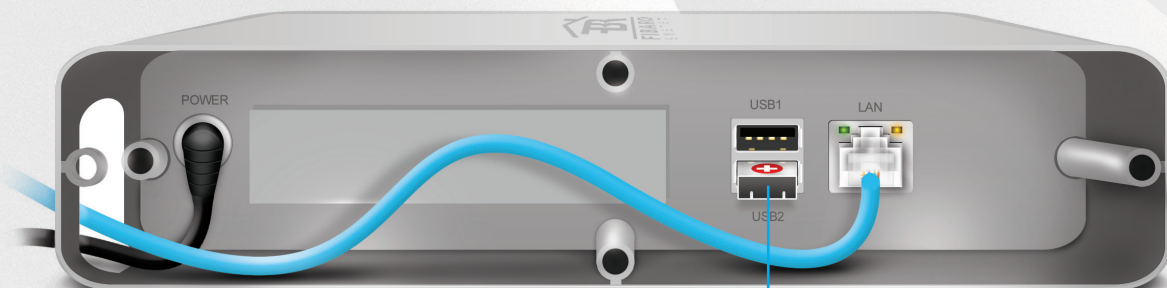


WARNING! Do not turn Home Center 2 on without RECOVERY pendrive.

4. Connect HC2







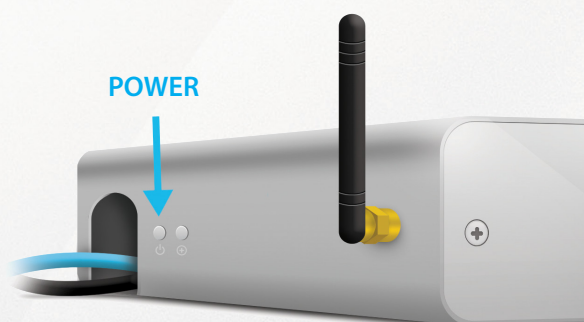



Connect power cable to the mains, and network cable to LAN socket in your router (Home Center 2 requires an outside router).

5. Start Home Center 2

Start HC2 with a POWER button and wait approx. 2 minutes for the device to start. Correct connection will be signalled by diodes 1, 2, 3 (see the glossary below).



LED Indicators

-  POWER - power ON
-  LAN - HC2 connected to Ethernet
-  INTERNET - HC2 connected to Internet
-  Z-WAVE - communication within Z-Wave network
-  LEARN MODE [blinking slowly] - new device being added to the Z-Wave network
-  LEARN MODE [blinking] - device being deleted from the Z-Wave network
-  LEARN MODE [blinking quickly] - device has been added/removed.
-  RECOVERY - Recovery Mode active
-  UPDATE - New software version available for download
-  SERVICE - Software update in progress.

6. Login to Home Center 2





Go to www.fibaro.com, find Support section, download and install HC2 Finder designated for your operating system.

Start the HC2 Finder and click "Refresh". After the list of Home Center 2, available within your local network appears, choose the one you wish to connect and click "connect".

After successful connection you will access HC2 control panel. Choose your language version, enter user name and password. Defaults are: admin / admin.

Back panel buttons

-  **POWER**
 - click to turn HC2 ON
 - click (when HC2 ON) to reset the device
 - press and hold for approx 10 seconds to turn HC2 OFF
-  **RECOVERY**
 - to enter Recovery Mode disconnect the power supply. Press and hold Recovery button when reconnecting the power supply (release the button after entering Recovery Mode)*.
 - click once - entering Learn Mode (add new Z-Wave device),
 - click twice - entering Learn Mode (delete Z-Wave device),
 - press and hold to set static IP: 192.168.81.1*

* NOTE: after setting static IP Home Center 2 will lose the router connection.

FCC ID: 2AA9MHC2

THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1. This device may not cause harmful interference, and 2. This device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



FCC ID: 2AA9MHC2
I.T.E. E364701