



User Guide


© 2008 Verizon. All rights reserved.
Verizon and the Verizon logos are trademarks of Verizon Trademark Services LLC.
All other trademarks are the trademarks of their respective owners.

Product photo may differ from actual product, however functionality remains
as stated above.
Specifications are subject to change without notice.



V100 DIGITAL CORDLESS PHONE
V100AM DIGITAL CORDLESS PHONE with DIGITAL ANSWERING MACHINE
DECT 6.0 DIGITAL TECHNOLOGY

The handset at a glance

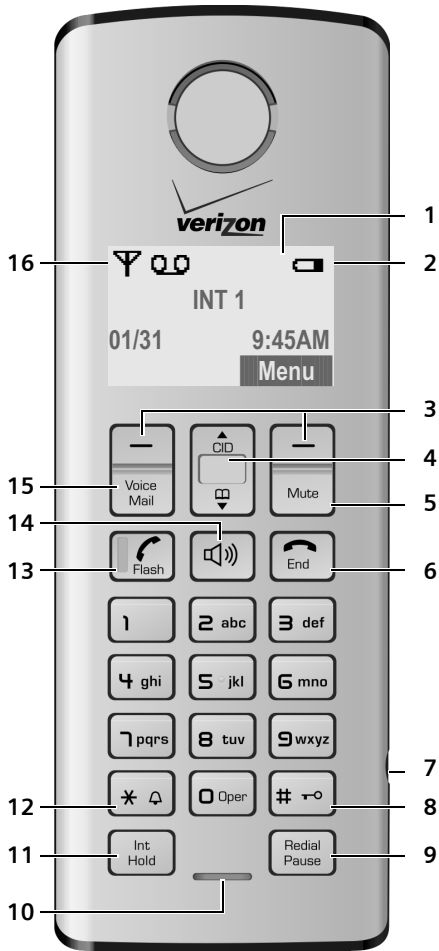

Note:

Pictures in this user manual may differ from the actual product.

- 1 **Display** in idle status
- 2 **Charge status of the batteries**
 - ☐ ☐ ☐ (empty to full)
 - ☐ flashes: batteries almost empty
 - ☐ ☐ flashes: batteries charging
- 3 **Display keys** (page 11)

4 **Control key**

- ☐ Access to Call Log list.
- ☐ Access to directory.

5 **Mute key**

Mute/unmute microphone.

6 **End Call key, On/Off key**

End call, cancel function, go back to idle status, activate/deactivate handset (press and hold in idle status)

7 **2.5 mm socket** (mono) for headset

8 **Pound (#) key**

Enter symbol #
Keypad lock on/off (press and hold in idle status)
Switch between uppercase/lowercase letters for text entry.

9 **Redial/Pause key**

Open redial list (in idle status) or insert a dialing pause (when editing a number).

10 **Microphone**

11 **Intercom/Hold/Conference key**

Set up an internal call

Switch between external call and internal handset, or transfer a call during external call.

Set up a conference call with an external line and an internal handset (press and hold in hold-intercom mode).

Note:

When only one handset is registered to the base station, the key is redundant and therefore has no function.

12 **Star (*) key**

Ring tone on/off (press and hold)

Switch temporarily to tone dialing (DTMF).

Switch between AM and PM during time setting.

Switch call list display format.

13 **Talk/Flash key**

Answer or start a call.

Key flashes: incoming call.

Add a flash (in the directory)

Send FLASH (when off hook).

14 **Handsfree key**

Answer or place a call in speaker mode.

Switch between speaker on and speaker off (in off hook mode).

15 **Voice mail**

Connect to your voice mailbox.

16 **Signal strength**


☐ Handset is linked with the base station.

☐ flashes: out of range

The base station at a glance

The base station at a glance

Base station with answer machine

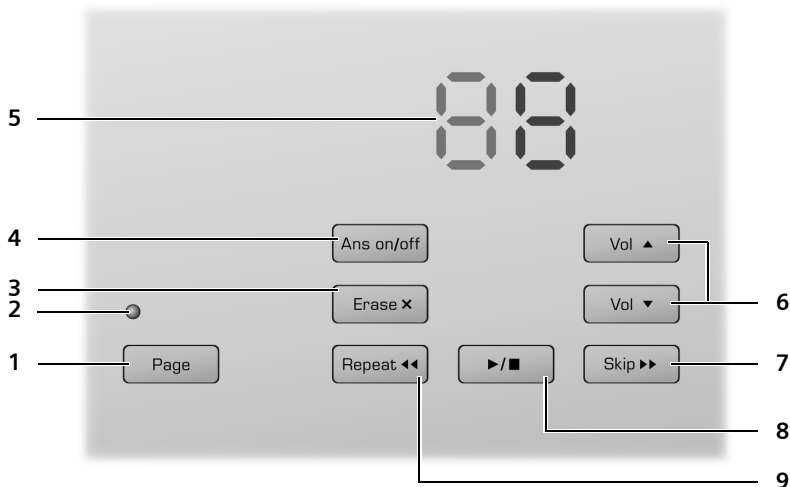

You can use the keys on the base station to operate the integrated answer machine and register the handset to the base station.

- 1 Page key
 - Paging handsets (press briefly)
 - Start the registration procedure (press and hold in idle mode). You will hear a beep.
- 2 LED
 - Is off when the line is free
 - Is on when any handset links to the base
 - Flashes when paging handsets and during registration mode
- 3 Erase key
 - Erase current message during playback
 - Erase all old messages (press and hold in idle mode)
- 4 On/Off key
 - Activate/deactivate answer machine.
- 5 Message counter (page 16)
 - Status information for answer machine
- 6 Volume keys
 - Change ring tone volume (in idle mode or during incoming calls)
 - Change volume of message playback or call screening.

During message playback:

- 7 Skip key
 - Skip to next message.
- 8 ▶/■ key
 - Start/stop playback.
- 9 Repeat key
 - Skip back to beginning of the current message (press once) or to the previous message (press twice).
- 10 Skip to beginning of the next message.

Please remember:

If the answer machine is being operated from a handset, or if it is recording a message, you cannot operate it from the base station.

Base station without answer machine



1 Registration/Paging key (see page 22)

Contents

Contents

The handset at a glance	1
The base station at a glance	2
Safety precautions	5
Notes on the operating instructions	6
Symbols used	6
Example: menu input	6
Verizon V100 and Verizon V100AM—more than just a telephone	7
First Steps	7
Pack contents	7
Installing the base station	7
Setting up the handset for use	8
Making calls	10
Making an external call	10
Putting an external call on hold	10
Ending a call	10
Answering a call	10
Caller ID	10
Handsfree operation	10
Operating the handset	11
Control key	11
Display keys	11
Returning to idle status	11
Menu guidance	12
Correcting incorrect entries	12
Using the directory and lists	13
Directory	13
Last number redial list	14
Calls list	14
Writing and editing names	15
Operating the answer machine	16
Operation using the base station keys	16
Operation using the handset	16
Setting up the answer machine	19
Operating when on the move (remote operation)	20
Using the network mailbox	21

Configuring the network mailbox for fast access	21
Using several handsets	22
Registering handsets	22
De-registering handsets	22
Locating a handset ("paging")	22
Changing the base station	22
Making internal calls	22
Accepting/rejecting call waiting	23
Linking internal callers to an external call	23
Handset settings	24
Changing the name of a handset	24
Changing the display language	24
Setting the display contrast	24
Activating/deactivating auto answer	24
Adjusting the loudspeaker and earpiece volume	25
Changing ring tones	25
Activating/deactivating the key-touch tone	25
Base station settings	25
Changing ring tones	25
System settings	26
Restoring the default settings	26
Appendix	27
Care	27
Contact with liquid	27
Questions and answers	27
Troubleshooting	27
Specifications	28
FCC / ACTA Information	29
Safety precautions	30
Service (Customer Care)	32
End-user limited Warranty	32
Index	36

Safety precautions^{*)}



Only use the **power supply unit supplied** as indicated on the underside of the device.



Only insert **approved rechargeable batteries of the same type**. Never use ordinary (non-rechargeable) batteries as they may pose a health hazard or cause injury.

Do not charge the handset in charging unit or base station while the headset is connected.



Make sure the rechargeable battery is inserted the right way round.



Use the battery specified in these operating instructions.



The phone may affect medical equipment so always switch your phone off before entering hospitals or doctors' practices.



Notice to Hearing Aid Wearers:
This phone system is compatible with inductively coupled hearing aids.



Do not operate the phone in places where there is a risk of explosion (such as paint workshops).



Do not install the base station in bathrooms or shower rooms. The handset and base station are not splash-proof (see page 42).



Drivers must not use the phone while driving.



The phone must be switched off at all times in an aircraft. Make sure it cannot be switched on accidentally.



If you give your telephone to someone else you should also give them the operating instructions.



Dispose of batteries and the phone carefully. Do not pollute the environment.

Emergency numbers cannot be dialed if the keypad lock is activated!

^{*)} also see page 30

Notes on the operating instructions

Notes on the operating instructions

This section explains the meaning of certain symbols and typographical conventions used in this user guide.

Symbols used

On/Off (example)

Select one of the two menu functions specified.



Back

Enter digits or letters.

The display keys' current functions are shown reverse highlighted in the bottom display line. Press the display key below to launch the function.



Press the top or the bottom of the control key: scroll up or down.



/ * 0 etc.

Press the corresponding key of the handset.

Example: menu input

In the user guides, the steps you need to perform are shown in abbreviated form. This is illustrated below using "Changing the display language" as an example.

Please proceed as described in the box below.

Menu → **Settings** → **Handset** → **Language**
→ **English/ Español/ Français**

- ▶ With the handset in idle status, press the right display key to open the main menu.
- ▶ Select **Settings** using the control key – press the control key at the top or bottom.
- ▶ Press the **OK** display key to confirm the function **Settings**.

The **Settings** submenu is displayed.

- ▶ Press the bottom of the control key repeatedly until **Handset** is selected.
- ▶ Press the **OK** display key to confirm the function.

The **Handset** submenu is displayed.

- ▶ Press the bottom of the control key repeatedly until **Language** is selected.
- ▶ Press the **OK** display key to confirm the function.

The **Language** submenu is displayed.

- ▶ Select the language you want using the control key – press the control key at the top or bottom.
- ▶ Press the **OK** display key to confirm the selected language.

The language is now changed for all text.

Verizon V100 and Verizon V100AM— more than just a telephone

Your phone not only lets you store up to 50 phone numbers (page 13), it can do a whole lot more:

- ◆ View missed calls on your phone (page 14).
- ◆ Select the 12- or 24-hour format for displaying the time (page 9).
- ◆ ECO DECT uses a power supply with low power consumption. Your handset reduces the transmission power depending on its distance from the base station (close-up range).

Note:

The transmission power of the base station is nearly turned off when the handset is placed in the base station and only one handset is registered on the base station.

Headset socket

Which headsets are compatible?

Please call the Verizon Service number 1-866 374 3864 or contact us at <http://www.verizon.com> for information.

Caution:

Do not charge the handset in charging unit or base station while the headset is connected.

Have fun using your new phone!

First Steps

Pack contents

- ◆ One Verizon V100 or Verizon V100AM base station
- ◆ One telephone line cord
- ◆ One AC adapter for base station
- ◆ One User Guide

For Verizon V100-1 or Verizon V100AM-1

- ◆ One Verizon V100H handset with battery cover
- ◆ Two batteries
- ◆ One belt clip

For Verizon V100-2 or Verizon V100AM-2

- ◆ Two Verizon V100H handsets with battery cover
- ◆ One Verizon V100C charging cradle
- ◆ One AC adapter for charging cradle
- ◆ Four batteries
- ◆ Two belt clips

For Verizon V100-3 or Verizon V100AM-3

- ◆ Three Verizon V100H handsets with battery cover
- ◆ Two Verizon V100C charging cradles
- ◆ Two AC adapters for charging cradle
- ◆ Six batteries
- ◆ Three belt clips

Installing the base station

The base station is designed for use in closed, dry rooms in a temperature range of +41°F to +113°F.

Set up the base station at a central point on the premises.

Please note:

- ◆ Never expose the phone to heat sources, direct sunlight, or other electrical appliances.
- ◆ Protect your phone from moisture, dust, corrosive liquids, and vapors.

First Steps



Range and reception strength

Range:

- ◆ Up to 984 feet in the open
- ◆ Up to 165 feet in buildings


Reception strength:

The display shows if the handset is linked to the base station:

- ◆  is on: handset is linked to the base station.
- ◆  flashes: no reception, handset is out of range or not registered.

Connecting the base station

- ▶ **First** connect the power adapter and **then** the phone jack as shown below.

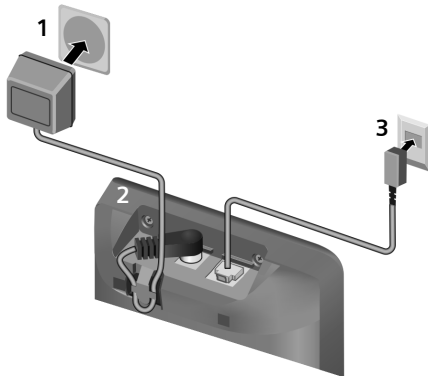

- 1 110-V power adapter
- 2 Back of the base station
- 3 Phone jack with phone cord

Please note:

- ◆ The power adapter must be **always connected**, as the phone will not operate without an electrical supply.
- ◆ Your answer machine is set to give a standard announcement.

Setting up the handset for use

Inserting the batteries


Caution:

Use only rechargeable UL-approved AAA batteries. Never use a conventional (non-rechargeable) battery or other battery types as this could result in significant health risks and personal injury. For example, the batteries could explode. The phone could also malfunction or be damaged as a result of using batteries that are not of the recommended type.


Note:

If attached, remove the belt clip before opening the battery cover.

- ▶ Open the battery cover.

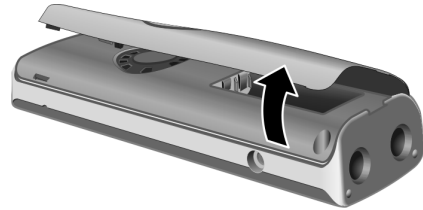

- ▶ Insert the batteries according to the correct polarity (see diagram).



- ▶ Close the cover, and press the top so that it clicks into place.

Attaching the belt clip

There are notches for attaching the belt clip on the side of the handset at the same height as the display.



- ▶ Press the belt clip onto the back of the handset so that the protrusions on the belt clip engage with the notches.

Placing the handset in the base station


- ▶ Place the handset in the base station with the handset's **display facing outwards**.

Charging the batteries for the first time

- ▶ To charge the batteries, leave the handset in the base station or charging cradle **continuously** for **ten** hours.

The alternately flashing battery icons   at the upper right of the display screen indicate that the batteries are being charged.

Note:

- If the handset has turned itself off because its batteries are empty, and you then place the handset into the base station, it will turn on automatically.
- Only place the handset into the base station or charging cradle specifically intended for it.
- During handset operation, the battery icon  indicates the charge status of the batteries (page 1).
- The batteries may feel warm as they are charging. This is not dangerous.

For questions and troubleshooting, see page 27.





Setting the date and time

You should set the date and time, for example, to ensure the correct time of incoming calls is recorded.

To change the time and date, open the input field using:

Menu →  → **Settings** → **Date/Time**
→ **Set Date/Time**



Enter the time and date with 10 digits, for example,    for January 15, 2008, 07:15 am. If the **12-hour** time format is set, use the  key to switch between am and pm.

OK

Press the display key to save changes.

You can change the date and time format:

Menu →  → **Settings** → **Date/Time**
→ **Set Format**

- ▶ Choose between day/month and month/day date formats:

 → **Date Format** → **DD/MM/MM/DD**

- ▶ Choose between 12- and 24-hour time formats:

 → **Time Format** → **12 Hours/24 Hours**

Area codes


To make a call using the incoming calls list (page 14), your phone's **area code** must be stored.


Menu →  → **Settings** → **System** → **Area Code**



Enter your area code and press **OK**.

Display in idle status

Once the phone is registered and the time set, the idle display looks as shown here (example). If the answer machine is activated, the header will also display the answer machine symbol .



Your phone is now ready to use.

Making calls

Making calls

Making an external call

External calls are calls using the outside telephone network.



Enter the number and press the Talk key or Handsfree key .

To cancel the dialing operation, press the End Call key .

You are shown the duration of the call while the call is in progress.

Note:

Dialing using the directory (page 13) or Calls list (page 14) saves time re-entering numbers.

Putting an external call on hold



Press the Int/Hold key.

The external call is put on hold..

Note:

If you have registered only **one** handset to your base station, the has no function. Use key, if you want to talk to somebody else without being heard by the external party.

Ending a call



Press the End Call key.

Answering a call

The handset indicates an incoming call in three ways: by ringing, by a display on the screen, and by the flashing Talk key .

You can accept the call by:

- ▶ Pressing the Talk key .
- ▶ Pressing the Handsfree key .

If the handset is in the base station or charger and the Auto Answer function is activated (page 24), the call will be answered automatically when you lift the handset from the base station or charger.

You can press the display key to mute the ring tone without answering the call. You can answer the call as long the call is shown on the display.

Caller ID

Caller ID (CID) is an optional subscription service provided by your telephone service provider. This feature supplies incoming caller identification information that will be displayed on your handset.

Call display with Caller ID/Name

If the number of the caller is stored in your directory, you will see the caller's name.

The following is displayed in place of the number:

- ◆ External, if no number is transmitted or the caller has not subscribed Caller ID.
- ◆ Withheld, if the caller has withheld Caller ID.

Handsfree operation

You can activate the speakerphone at any time to provide handsfree operation during a call.

Activating/deactivating handsfree

Activating while dialing



Enter the number and press the Handsfree key.

- ▶ You should inform your caller before you use the handsfree function so that the caller knows someone else is listening.

Switching between earpiece and handsfree mode



Press the Handsfree key.

During a call and when listening to the answer machine, turn handsfree on or off.

For how to adjust the volume, see page 25.

Operating the handset

Activating/deactivating the handset



Press and **hold** the End Call key.

Activating/deactivating the keypad lock




Press and hold the pound key.

Keypad Locked appears in the display when the keypad lock is activated.

The keypad lock is deactivated automatically if someone calls you. It is re-activated when the call is finished.

Control key



1 Control key

In the description below, the side of the Control key (up, down), which you must press depending on the operating situation, is marked in black, for example, for "press up on the Control key".

The Control key has different functions:

When the handset is in idle status

- Open the directory
- Open call log list (page 14)

In input fields

You can use the Control key to move the cursor backwards or forwards.

In the main menu, lists and submenus


- / Scroll up/down line by line.

When the handset is off the hook or when the answer machine plays

- / Increase/decrease volume

Display keys

The function of the display keys changes depending on the particular operating situation. Example:

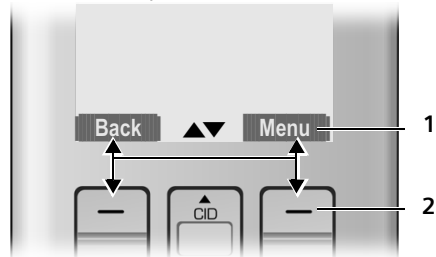

- 1 The display keys' current functions are shown on the bottom display line.
- 2 Display keys

The most important display symbols are:

- Menu** Open the main menu (in idle mode) or the context-dependent menu.
- Back** Go back one menu level.
- OK** Confirm your choice or save edited characters.
- Clear** Clear key: deletes one character at a time from right to left (press briefly) or all characters (hold).

Returning to idle status

You can return to idle status from anywhere in the menu as follows:

- ▶ Press the End Call key .

Or:

- ▶ Do not press any key: after 2 minutes, the display will **automatically** return to idle status.

Changes that you have not confirmed or saved by pressing **OK** will not be saved.

An example of the display in idle status is shown on page 9.

Operating the handset

Menu guidance


Your phone's functions are accessed using a menu that has a number of levels.

Main menu (first menu level)

- ▶ Press the display key **Menu** with the handset in idle status to open the main menu.

The main menu functions are shown on the screen in a list.

To access a function, open the corresponding submenu (next menu level):


- ▶ Navigate to the function using the control key .
- ▶ Press the display key **OK**.

Submenus

The functions in the submenus are displayed as lists.

To access a function:

- ▶ Scroll to the function with the control key  and press **OK**.

Pressing the display key **Back** returns you to the previous menu level.  cancels the operation.

Correcting incorrect entries

You can correct incorrect characters in the text by navigating to the incorrect entry using the control key. You can then:

- ◆ Press **Clear** to delete the character to the left of the cursor.
- ◆ Insert characters to the left of the cursor.
- ◆ Overwrite the (flashing) character when entering the time and date, etc.

Using the directory and lists

The options are:


- ◆ Directory
- ◆ Last Number Redial list
- ◆ Calls list

You can store a maximum of 50 entries in the directory. Each entry must consist of a name and a number.

The directory is stored in the base station and is shared by all registered handsets.

Directory

In the **directory**, you can store phone numbers and the names associated with them.

- ▶ With the handset in idle status, open the directory by pressing the  key.

Length of entries

Number: max. 24 digits
Name: max. 16 characters

Storing a number in the directory

Storing the first entry in the directory

Your handset is idle mode.



Enter the number and press **Save**.



Enter the name and press **OK**.
Correct the number if necessary and press **OK**.

Storing the following entries in the directory

 → **Menu** → **New Entry**



Enter the name and press **OK**.





Enter the number and press **OK**.

You can use the **Clear** key to delete one character at a time from right to left (press briefly) or all characters (press and hold).



Selecting a directory entry

 Open the directory.

You have the following options:

- ◆ Use  to scroll to the entry until the desired name is selected.
- ◆ Enter the first character of the name, or scroll to the entry with , if necessary.



Dialing with the directory

 →  (select entry)



Press the Talk key. The number is dialed.

Managing entries in the directory

 →  (select entry)

Viewing an entry

Menu → **View**

The entry is displayed.
Go back with **Back**.

Editing entries

Menu → **Edit Entry**



Edit the name and press **OK**.



Edit the number and press **OK**.

You can use the **Clear** key to delete one character at a time from right to left (press briefly) or all characters (press and hold).

Deleting entries

Menu → **Delete**

Delete the displayed entry.

Or:

Menu → **Delete List**

- ▶ Confirm question **Delete?** by pressing **OK**.

All entries in your directory will be deleted.

Using the directory and lists

Adding a displayed number to the directory

Numbers that appear in a list, such as the Calls list or the Last Number Redial list, can be added to the directory. If you have Caller ID and the name is transmitted, the first 16 characters of the transmitted name are copied to the name line.

A number is displayed:




Menu → **Copy To Dir.**

- ▶ Complete the entry as described in the paragraph "Storing a number in the directory" (see page 13).

Last number redial list

The Last Number Redial list contains the ten numbers last dialed with the handset (max. 32 digits). If one of the numbers is in the directory, then the corresponding name will be displayed.



Manual last number redial


-  Press the key.
-  Select the entry.
-  Press the Talk key or the Handsfree key.
The number is dialed.

When displaying a name, you can have the respective phone number displayed:

Menu → **View**

Managing entries in the Last Number Redial list

-  Press the key.
-  Select the entry.
- Menu** Open menu.

The following functions can be selected with :

View (as in the directory, page 13)

Copy To Dir.

Copy an entry to the directory (page 14)


Delete (as in the directory, page 13)

Delete List (as in the directory, page 13)



Calls list


Requirement: Caller ID Presentation (CIP, page 10)


The numbers of the last 10 incoming calls are stored.

- ▶ With the handset in idle status, open the directory by pressing the  (CID) key.



Dialing with the calls list

 →  (select entry)

If necessary, press  key to change number format for dialing.

-  Press the Talk key or the Handsfree key.
The number is dialed.

Viewing an entry

 →  (select entry)

View Press display key to view the entry.

List entry

New messages are at the top. A list entry contains the following information:




- ◆ List type (in header)
- ◆ Status of entry (new entries are marked with a star in the header)
- ◆ Name of caller, if name is transmitted via CID or stored in directory.
Number of caller, if only the number is transmitted.
External, if no number is transmitted or the caller has not subscribed Caller ID.
Withheld, if the caller has withheld Caller ID.
You can add the number of the caller to the directory (page 14).

- ◆ Date and time of call (if set, page 9)



You can manage the entries as the entries of the Last Number Redial list (see page 14).


Writing and editing names


The following rules apply when creating an entry:

- ◆ Control the cursor with .
- ◆ Characters are added to the cursor.
- ◆ Press the pound key  to switch between uppercase and lowercase. Press the pound key  **before** entering the letter.

Entering special characters

You can enter the special characters using the key  or .

 . 0 , / : ; " ' ! ? * + - % \ ^ ~ |

 SPACE 1 @ _ # = < >
() & \$ [] { }

Operating the answer machine

Operating the answer machine

You can operate the base station's answer machine using the handset, using the keypad of the base station (page 1), or using remote operation (from another phone/cell phone).

Announcement mode

You can use the answer machine in two different modes.

- ◆ In **Answer & Rec.** mode, the caller hears your announcement and can then leave a message.
- ◆ In **Answer Only** mode, the caller hears your announcement but cannot leave a message.

Operation using the base station keys

You can use the base station keys for the most commonly used functions of your answer machine. For more information, see page 2.

Status of message counter (see page 2)

Answer machine is off.

- ◆ Message counter is off.

Answer machine is on.


- ◆ "0": no new messages.
- ◆ Number above "0": number of old messages.
- ◆ Number flashes: number of new messages.
- ◆ "--" flashes: memory is full
- ◆ "A": answer machine is being accessed remotely or is playing an announcement.
- ◆ Segments scrolling in circle: answer machine is recording a message or announcement.

Operation using the handset

While recording a message, you can automatically listen through the loudspeakers of the base station, if you have activated call screening (see page 19).

You can also listen through the loudspeakers of registered handsets:


Screen Press the display key.

The handset loudspeaker is activated. You can switch it off with the Handsfree key .

Switching the answer machine on/off

Menu → Answer Machine → Ans On/Off → On/Off

OK Press the display key to activate/deactivate the answer machine.

The  icon is displayed on the screen.

The phone includes a prerecorded announcement for the answer and record mode and announce-only mode. If a personal announcement has not been recorded, the corresponding prerecorded announcement is used.

Recording a personal announcement/announce only

Menu → Answer Machine → Record OGM

Answer & Rec./Answer Only **OK**

Select the mode in which you want to record the personal announcement.

Record **OK** Press the display key to start recording.

You will hear the ready tone (short tone).

- ▶ Now record your announcement (must be at least 3 seconds long).

Note:

When recording your announcement, speak directly into handset's microphone, as if talking on the phone.

Operating the answer machine

OK Press the display key to end the recording.

Playback of the recorded announcement will start automatically. You can record the announcement again by repeating these steps.

Please note:

- ◆ Recording ends automatically if the maximum recording time of 60 seconds has been reached.
- ◆ If you cancel the recording, the prerecorded announcement will be used.
- ◆ The recording is canceled if the answer machine memory is full.
 - ▶ If necessary, delete old messages and repeat the recording.

Playing back announcements

Menu → **Answer Machine** → **Record OGM Answer & Rec./Answer Only** **OK**

Play **OK** Press the display key to start playback.

If a personal announcement has not been recorded, the corresponding prerecorded announcement is used.

Deleting announcements

Menu → **Answer Machine** → **Record OGM Answer & Rec./Answer Only** **OK**

Delete **OK** Press the display key to delete the personal announcement. If no personal announcement exists, you will hear an error tone.

After deletion, the corresponding prerecorded announcement will be used.

Selecting an announcement mode

You can choose between **Answer & Rec.** and **Answer Only**.

Menu → **Answer Machine** → **Answer Mode Answer & Rec./Answer Only** **OK**

The selected mode is saved even after the answer machine is deactivated.

Note:

If the message memory is full when in **Answer & Rec.** mode, the selection is interrupted and you will receive instructions to delete old messages.

- ▶ Delete old messages.

The answer machine automatically switches back to the mode set once deletion is complete, or you can select another recording mode.

Playing back messages


The date and time of each message is logged (provided this has been set, page 9) and displayed during playback.

Playing back new messages

New messages you have not yet listened to are indicated by the **NO** icon slowly flashing and by the number of new messages flashing in the message counter of the base station (page 2).

Play Press the display key to start playback.

The display now shows you the status of your answer machine when playing back new messages:

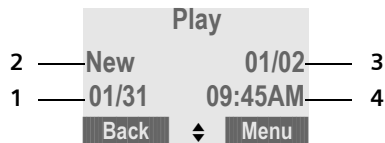

- 1 Date when message was recorded.
- 2 **New**: you have not yet listened to the message.
- 3 **01/02**: The first of two messages is played.
- 4 Time when message was recorded.

If you have...


- ◆ New messages:

Operating the answer machine

New (2) is displayed. The number of messages (3) indicates only the number of new messages: the first of two new messages is played back.


- ◆ Messages that you have already listened to:

New (2) is not displayed. The number of messages (3) indicates only the number of old messages: **01/02** means that the first of two old messages is displayed.



- ◆ No messages:

No Messages appears on the display screen.



An announcement tells you if there are any new messages, just old messages, or no messages.

If there are new messages, playback begins with the first new message. After the last new message, you will be returned to the Play menu.

After a new message has been played in full, its status becomes "old".

If the message concerned has been saved with the date and time, you will hear an appropriate announcement before playback begins.

Playing back old messages

You can listen to old messages if there are no more new messages.

Menu → Answer Machine → Play
→ Line 1/Line 2

- OK** Press the display key to start playback.

Controlling playback

During message playback:

- Menu** Press the display key to enter the Options menu.

- ◆ Repeat

Repeat playback of actual message.

- ◆ Next/Previous

Jump to playback of the following or previous message.

- ◆ Delete

Delete current message.

Deleting messages

You can delete old messages all at once or individually.

Deleting all old messages

Menu → Answer Machine → Delete Old
Msgs

- Delete? OK** Press the display key to confirm you want to delete all old messages.

If you have no old messages, you will hear an error tone and **No Messages** will display on the screen.

Deleting individual old messages

During playback:

Menu → Delete

- OK** Press the display key to delete the current message.

Picking up a call from the answer machine

You can pick up a call while the answer machine is recording a message or being operated remotely:

- Flash** Press the Talk key.

Recording stops and you can speak to the caller.

If two seconds of the call have already been recorded when you pick it up, the call will be displayed as a new message.

You can accept the call on every handset.

Recording a memo

You can record a memo on your answer machine, e.g. to leave a message to other members of your family. It will be signaled like a new message on your answer machine.

Menu → Answer Machine

Record Memo **OK**

Press the display key to start recording.

You will hear the ready tone (short tone).

- ▶ Now record your memo (must be at least 3 seconds long).

OK Press the display key to end the recording.

Recording ends automatically if the maximum recording time of 3 minutes has been exceeded.

Setting up the answer machine

The answer machine has already been preconfigured at the factory. Make individual settings using the handset.

Activating/deactivating call screening

While recording a message, you can listen through the loudspeakers of registered handsets and the base station.

Menu → Answer Machine → Settings
→ Call Screening

If you use the handset for this setting:

Base/Handset

Select if you want to make the setting for the handset or the base station.

On/Off Press the display key **OK** to confirm your selection.

The default setting for the base station is **On**; the default setting for the handset is **Off**.

For call screening on the handset:

Screen Press the display key to start call screening.

Toll-Saver Mode – Call acceptance/charge saving function for remote operation

You can set when you want the answer machine to respond to calls.

The options are: **2 Rings**, **4 Rings**, **6 Rings**, **8 Rings**, as well as the cost-saving setting **Toll Saver**.

Note:

The number of rings refers to the ring tones of the base station. If you have selected another ring tone, the number of rings you hear may differ from the selected number of ring tones.

When **Toll Saver** is set, the following determines when the answer machine accepts calls:

- ◆ If no new messages are present, the answer machine accepts calls after **4 Rings**.
- ◆ If new messages are present, the answer machine accepts calls after **2 Rings**.

When operating remotely, you know that there are no new messages after 2 rings have passed (otherwise the answer machine would already have accepted your call). There will be no call charges if you hang up now.

Menu → Answer Machine → Settings
→ Ring Delay → **2 Rings/4 Rings/6 Rings/8 Rings/Toll Saver**

OK Press the display key to confirm your selection.

Changing the language of voice prompts and prerecorded announcements

You can select English, Spanish, or French as the language of voice prompts and prerecorded announcements.

Menu → Answer Machine → Settings
→ Voice Language → **English/Español/Français**

OK Press the display key to confirm your selection.

Operating the answer machine

Operating when on the move (remote operation)

You can check or activate the answer machine from any other telephone (hotel, pay phone, etc.).

Requirements:




- ◆ The phone you are using for remote operation must have tone dialing (DTMF), such that you hear different tones when you press the keys.
- ◆ You must activate **Remote Access**.

Activating Remote Access

Menu → **Answer Machine** → **Settings**
→ **Remote Access** → **On/Off**

OK Press the display key to confirm your selection.







Calling the answer machine and playing back messages



-  Dial your own number.
-  While listening to your announcement, press the  key and enter the system PIN.

You will be informed whether any new messages have been recorded. The messages are then played back. You can now operate the answer machine using the keypad.

Operating the answer machine using the keypad

The following keys are used:





-  Delete the playing message.
-  Repeat the previous message.
-  Play the message.
-  Skip to the next message.
-  Turn on the answer machine.
-  Stop message playback.

-  Turn off the answer machine.
-  Enter the remote access code if the answer machine is on.

Note:






After message playback, if no key operation is detected for 10 seconds, the call will be terminated.

Activating the answer machine

-  Dial your own number.
- ▶ Allow the phone to ring until the ring back tone stops and the phone answers.
-  Enter system PIN.
-  Press the  key.

You will hear a beep. Your answer machine is now activated and the activated announcement is played back.

Deactivating the answer machine

-  Dial your own number.
-  While listening to your announcement, press the  key and enter the system PIN.
-  Press the  key.

You will hear a beep. Your answer machine is now deactivated.

Using the network mailbox

The network mailbox is your network provider's answer machine within the network. You cannot use the network mailbox unless you have **requested it** from your network provider.

Configuring the network mailbox for fast access

Entering the network mailbox number

Menu → **Voice Mail** → **Settings**



Enter the number of the network mailbox and press **OK**.

The setting for fast access applies to all Verizon V100H handsets.

If your network voice mail requires a password for access, it is possible to add a password by entering pauses immediately after entering the mailbox access number, then entering your password.

Calling your network mailbox




Press and hold.
You are connected directly to the network mailbox.

If you have new messages on your network mailbox:



Press the display key to call your network mailbox.



Press Handsfree key , if required. You hear the network mailbox announcement.

For further operating steps, please refer to the instructions provided by your mailbox operator.

Using several handsets

Using several handsets



Registering handsets


You can register up to a total of five handsets with your base station.

A Verizon V100H handset can be registered with up to four base stations.

Registering Verizon V100H handset

Menu → **Settings** → **Registration**
→ **Register HS**

 Select the base you want to register your handset with and press **OK**. Bases that have been registered will be marked by .


 Enter your PIN and press **OK**.


The handset will be registered.

De-registering handsets

You can de-register any registered handset from your Verizon V100/Verizon V100AM.

Menu → **Settings** → **Registration**
→ **Unregister HS**

 Enter your PIN and press **OK**.

 Select the handset you want to de-register and press **OK**.

OK Press the display key to confirm deletion.


Locating a handset ("paging")

You can locate your handset using the base station.

- ▶ Press the Registration/Paging key on the base station **briefly**.
- ▶ All handsets will ring at the same time ("paging"), even if the ring tones are switched off.

You can press the display key **Quiet** to mute the ring tone without answering the call.


Ending paging

- ▶ **Briefly** press the Registration/Paging key on the base station or press the Talk key  on the handset.

Changing the base station


If your handset is registered to more than one base station, you can set it to a particular base station or to the base station that has the best reception (**Best Base**).


Menu → **Settings** → **Registration**
→ **Select Base**

 Select one of the registered base stations or **Best Base** and press **OK**.


Making internal calls

Internal calls to other handsets registered with the same base station are free.


 Initiate internal call.

 Select the handset you want to call and press **OK**.

Note:

If only two handsets are registered to the base, the internal call will be established immediately after pressing  key.

Ending a call

 Press the End Call key.

Transferring a call to another handset

You can transfer an external call to another handset (connect).

- ▶ Initiate an internal call to the handset you want to transfer the call to (see above).

Attended call transfer

When the internal party answers:

Using several handsets

- ▶ If necessary, announce the external call.



Press the End Call key.

The external call is transferred to the other handset.

If the internal party does **not** answer or the line is busy, press the display key to return to the external call.

Unattended call transfer



Press the End Call key.

The external call is directly transferred to the other handset.

Then, if the internal party does not answer, the call will automatically return to you (the display will show **External Call**).

Hold while making internal call

When you are speaking to an **external** party, you can simultaneously call an **internal** party.

- ▶ Initiate an internal call as described in paragraph "Making internal calls" (see page 22).

The external party hears the hold melody.

Use key to switch between internal and external party.

Ending the internal call

- ▶ Ask the other internal party to end the call.

You are reconnected to the external caller.

Accepting/rejecting call waiting

If you get an **external** call while conducting another external or an **internal** call, you will hear the call waiting tone (short tone). The caller's number or name will appear on the screen if caller ID is enabled.

Call waiting while conducting an internal call



Press the End Call key to end the internal call.

- ▶ Answer the external call as described in paragraph "Answering a call" (see page 10).

You are connected to the caller who waited.

Call waiting while conducting an external call



Press the display key to answer the incoming external call.

The actual call is put on hold. You are connected to the caller who waited. You have got the following possibilities:

- Press talk key to switch between the callers.
- Press end call key to end the call with the online party.

Or:



Press the End Call key to end the existing external call.

- ▶ Answer the external call as described in paragraph "Answering a call" (see page 10).

You are connected to the caller who waited.

Linking internal callers to an external call

Important: The **Listening In** function must be activated.

You are conducting an external call. An internal caller can listen in on this call and take part in the conversation. The other parties are made aware of additional listeners by a signal tone.

Activating/deactivating Listening In


→ **Settings** → **System** → **Listening In**
→ **On/Off**

Default setting is **On**.

Handset settings



Internal conference call

There are two ways of starting an internal conference:

- ◆ another handset can join the call via Listening In
- ◆ you can call another handset via  and add it to a conference

Joining the call via Listening In

The line is engaged with an external call. You want to listen in on the existing external call.


  Press the Talk key or Handsfree key **briefly**.

You join the call. The other parties hear a signal tone. On both handsets, you will see **Conference** on the display.

Calling another handset and adding it to the conference


- ▶ Initiate an internal call as described in paragraph "Making internal calls" (see page 22).

When the called handset has answered the call:


 Press the display key to start the conference.

On both handsets, you will see **Conference** on the display.

Ending conference call

 Press the End Call key.

The other parties hear a signal tone.

If the **first** internal party presses the End Call key , the handset that has entered the conference call remains connected to the external caller.



Handset settings

Your handset is preconfigured, but you can change these settings to suit your individual needs.

Changing the name of a handset

The names "INT 1", "INT 2", etc., are assigned automatically during registration. You can change these names. The number of the handset, however, never changes. The changed name is only displayed on this handset.



 → Settings → Handset → Handset Name

 Enter the name and press . The name must be no more than 12 characters.

Changing the display language

You can view the display texts in different languages.



 → Settings → Handset → Language → English / Español / Français

 Select a language and press .


Setting the display contrast

You have a choice five different contrasts.

 → Settings → Handset → Display Contr.

 Select your preferred level and press .

Activating/deactivating auto answer

If you have activated this function, when you get a call, you can simply lift the handset out of the base station without having to press the Talk key .


 → Settings → Handset → Auto Answer → On/Off

Adjusting the loudspeaker and earpiece volume

You can set the loudspeaker volume and the earpiece volume to five different levels. You can only make these adjustments during a call.

The handsfree volume can only be adjusted when this function is set.


You are conducting a call.

-  Increase or decrease the volume.


Changing ring tones

For how to set the ring tones of the base station, see page 25.

Volume

You can choose between five volumes (0–5; for example, volume 3 = )


Menu → **Settings** → **Audio Settings** → **HS Ring Volume**

-  Select the volume and press **OK**.

Ring tone melodies

You can choose between 15 different melodies.


Menu → **Settings** → **Audio Settings** → **HS Ring Tones**


-  Select your preferred melody and press **OK**.

Activating/deactivating the ring tone


You can deactivate the ring tone on your handset before you answer a call or when the handset is in idle status; the ring tone can be deactivated permanently or just for the current call.

Deactivating the ring tone permanently

-  Press the star key and hold until you no longer hear the ring tone.

The  icon appears in the display.


Reactivating the ring tone

-  Press and **hold** the star key.


Deactivating the ring tone for the current call

- Quiet** Press the display key.

Deactivating the ring tone during incoming call

-  Press key until you do not hear the ring tone any more.

Activating the ring tone during incoming call

-  Press key until ring tone volume reaches the desired level.

Activating/deactivating the key-touch tone



Each key press is acknowledged by a beep. You can deactivate this function:

Menu → **Settings** → **Audio Settings** → **Key Touch Tone** → **On/Off**

Base station settings

Changing ring tones


Volume

- ▶ Use the volume keys  and  on the base station to adjust the volume of the base station ring tone.

Ring tones

You can choose between 5 different melodies.

Menu → **Settings** → **Audio Settings** → **Base Ring Tones**

-  Select your preferred melody and press **OK**.

System settings

System settings

The system settings are carried out using a registered Verizon V100H handset.

Protecting against unauthorized access

Protect the system settings of the base station with a PIN known only to you. The system PIN must be entered when registering/de-registering a handset with/from the base station.

Changing the system PIN

You can change the 4-digit system PIN set on the base station (default setting: 0000) to a 4-digit PIN known only to you.

Caution:

Do not forget the new system PIN! If you forget it, you must reset your phone to default settings (see below).

Menu → **Settings** → **System** → **Change PIN**



Enter the old PIN and press **OK**.



Enter the new PIN and press **OK**.



To confirm, enter the new PIN again and press **OK**.

Settings for connecting the base station to the PABX

The following settings are only needed when your PABX requires them. Please refer to the user guide of your PABX.

Changing the dialing mode

The following dialing modes can be selected:

- ◆ Tone dialing (DTMF)
- ◆ Pulse dialing (DP)

Menu → **Settings** → **System** → **Dialing Mode** → **Tone/Pulse**



Select dialing mode and press **OK**.

Setting the flash time

Menu → **Settings** → **System** → **Flash Time** → **Short/Long**



Select flash time (**Short** = 80ms, **Long** = 650 ms) and press **OK**.

Switching temporarily to tone dialing (DTMF)

If your PABX still operates with pulse dialing (DP), but you need tone dialing (DTMF) for a connection (for example to listen to the network mailbox), you must switch to tone dialing for the call.

Requirement: You are conducting a call or have already dialed an external number.

Menu → **Tone Dialing**



Press display key to confirm.

Tone dialing is now activated **for this call only**.

Restoring the default settings

You can restore the default values for most settings. When resetting, all handsets remain registered and the directory will not be deleted.

Menu → **Settings** → **System** → **Reset**



Press the display key to confirm reset.

Appendix

Care

- ▶ Wipe the base station and handset with a **damp** cloth (do not use solvents) or an antistatic cloth.

Never use a dry cloth. This can cause static.

Contact with liquid

If the handset has come into contact with liquid:

1. **Immediately switch the handset off and remove the batteries.**
2. Allow the liquid to drain from the handset.
3. Pat all parts dry, then place the handset, with the battery compartment open and the keypad facing down, in a dry, warm place **for at least 72 hours** (not in a microwave oven, convection oven, etc.).
4. **Do not switch on the handset again until it has completely dried.**

When it has fully dried, you should be able to use it again normally.

Questions and answers


If you have any questions about the use of your telephone, you can contact us at any time at

<http://www.verizon.com>

The table below (page 27) contains a list of common problems and possible solutions.


Troubleshooting

The display is blank.

1. The handset is not switched on.
 - ▶ Press  and hold the End Call key.
2. The batteries are empty.
 - ▶ Charge or replace the batteries (page 8).

The handset does not respond to a key press.

The keypad lock is activated.

- ▶ Press and **hold** the pound key  (page 11).

Base Search and is flashing on the display screen.

1. The handset is outside the range of the base station.
 - ▶ Reduce the distance between handset/ base station.
2. The handset has been de-registered. **Please Register** is flashing on the display screen.
 - ▶ Register the handset (page 22).
3. The base station is not switched on.
 - ▶ Check the base station power cord (page 8).

Handset does not ring.

The ring tone is switched off.


- ▶ Activate the ring tone (page 25).

You cannot hear the ring tone/dialing tone.

Base station's phone cord has been replaced.

- ▶ When purchasing a new cord, make sure that it has the correct pin connections.

▶ Correct phone jack assignment

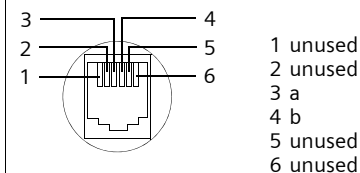

The other party cannot hear you.

You have pressed the  (INT) key. The handset is on hold.

- ▶ Switch the microphone on again (page 1).

Appendix

<p>The incoming call number is not displayed although CID is set.</p> <p>Caller ID is not enabled.</p> <ul style="list-style-type: none"> ▶ The caller must ask the network provider to activate Caller ID (CID).
<p>You hear an error tone when keying an input.</p> <p>Action has failed/invalid input.</p> <ul style="list-style-type: none"> ▶ Repeat the operation. ▶ Watch the display and refer to the operating instructions, if necessary.
<p>You cannot listen to messages left on the network mailbox.</p> <p>Your phone system is set for pulse dialing.</p> <ul style="list-style-type: none"> ▶ Set your phone system to tone dialing.
<p>The calls list does not indicate the correct time messages were received.</p> <p>The date/time is not set.</p> <ul style="list-style-type: none"> ▶ Set the date/time (page 9).
<p>You hear an error beep from the answer machine during remote operation.</p> <p>The system PIN entered is incorrect.</p> <ul style="list-style-type: none"> ▶ Enter the system PIN again.
<p>You cannot operate the answer machine via remote operation.</p> <p>Remote Access is not activated.</p> <ul style="list-style-type: none"> ▶ Activate Remote Access (see page 20)
<p>The answer machine does not record messages/has switched to "announce only".</p> <p>Its memory is full.</p> <ul style="list-style-type: none"> ▶ Delete old messages. ▶ Play back new messages and delete.

Specifications

Recommended batteries

Nickel-metal hydride (NiMH):

The handset is supplied with the authorized AAA batteries.

Handset operating times/charging times

Capacity	550 mAh
Standby time	Approx. 130 hours (5.5 days)
Talk time	Approx. 10 hours
Charge time	Approx. 10 hours

The operating and charge times apply only when using the recommended batteries.

Base station power consumption

In standby mode: approx. 1.5 watts

During a call: approx. 2 watts

General specifications

DECT 6.0	is supported
No. of channels	60 duplex channels
Radio frequency range	1920–1930 MHz
Duplex method	Time multiplex, 10 ms frame length
Channel grid	1728 kHz
Bitrate	1152 kbit/s
Modulation	GFSK
Language code	32 kbit/s
Transmission power	10 mW, average power per channel
Range	up to 984 feet outdoors, up to 165 feet indoors
Base station power supply	110 V ~/60 Hz
Environmental operating conditions	+41°F to +113°F; 20% to 75% relative humidity
Dialing mode	DTMF (tone dialing)/DP (pulse dialing)

FCC / ACTA Information

Warning: Changes or modifications to this unit not expressly approved by Siemens Cordless Products could void the FCC authority to operate the equipment. This includes the addition of any external antenna device.

This equipment complies with Part 68 of the FCC rules and the requirements adopted by the ACTA. On the bottom of the base station is a label that contains, among other information, a product identifier in the format US:AAAEQ##TXXXX. If requested, this number must be provided to the telephone company.

A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant. See installation instructions for details.

The REN is used to determine the number of devices that may be connected to a telephone line. Excessive RENs on a telephone line may result in the devices not ringing in response to an incoming call. In most but not all areas, the sum of RENs should not exceed five (5.0). To be certain of the number of devices that may be connected to a line, as determined by the total RENs, contact the local telephone company. For products approved after July 23, 2001, the REN for this product is part of the product identifier that has the format US:AAAEQ##TXXXX. The digits represented by ## are the REN without a decimal point (e.g., 03 is a REN of 0.3). For earlier products, the REN is separately shown on the label.

If this equipment causes harm to the telephone network, the telephone company will notify you in advance, that temporary discontinuance of service may be required. But if advance notice isn't practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary. The telephone company may make changes in its facilities, equipment, operations or procedures that could affect the operation of the equipment. If this happens the telephone company will provide advance notice in order for you to make necessary modifications to maintain uninterrupted service. If you experience trouble with this telephone system, disconnect it from the network until the problem has been

corrected or until you are sure that the equipment is not malfunctioning.

If trouble is experienced with this equipment, for repair or warranty information, please contact Verizon Support at 1-866 374 3864. If the equipment is causing harm to the telephone network, the telephone company may request that you disconnect the equipment until the problem is resolved. This equipment is of a type that is not intended to be repaired by the Customer (user).

This telephone system may not be used on coin service provided by the telephone company. Connection to party line service is subject to state tariffs. Contact the state public utility commission, public service commission or corporation commission for information. Privacy of communications may not be ensured when using this phone.

If your home has specially wired alarm equipment connected to the telephone line, ensure the installation of this equipment does not disable your alarm equipment. If you have questions about what will disable alarm equipment, consult your telephone company or a qualified installer.

This telephone system equipment has been tested and found to comply with the limits for Class B digital device, pursuant to Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. These limits are designed to provide reasonable protection against harmful interference in a residential installation. Some cordless telephones operate at frequencies that may cause interference to nearby TV's and VCR's; to minimize or prevent such interference, the system base should not be placed near or on top of a TV or VCR; and, if interference is experienced, moving the base farther away from the TV or VCR will often reduce or eliminate the interference.

However, there is no guarantee that interference will not occur in a particular installation. If this telephone system does cause harmful interference to radio or television reception, which can be determined by turning the system off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the base station and receiver.

Appendix

3. Connect the base station into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio TV technician for help.

Notice for Direct Inward Dialing ("DID")

ALLOWING THIS EQUIPMENT TO BE OPERATED IN SUCH A MANNER AS TO NOT PROVIDE FOR PROPER ANSWER SUPERVISION AS A VIOLATION OF PART 68 OF THE FCC'S RULES.

Notice to Hearing Aid Wearers:

This phone system is compatible with inductively coupled hearing aids.

Power Outage:

In the event of a power outage, your cordless telephone will not operate. The cordless telephone requires electricity for operation. You should have a telephone that does not require electricity available for use during power outages.

Notice:

The installation of the base unit should allow at least 8 inches between the base and persons to be in compliance with FCC RF exposure guidelines.

For body worn operation, the portable part (handset) has been tested and meets FCC RF exposure guidelines. Use with an accessory that contains metal parts may not ensure compliance with FCC RF exposure guidelines.

Notice to telephone company service:

If you need service from your telephone company, please provide them with the information

- Facility interface Code (FIC): 02LS2
- Service Order Code (SOC): 9.0Y
- Universal Service Order Code (USOC)
Jack: RJ11C

as indicated on the label on the bottom side of the base station.

Safety precautions

Before using your telephone equipment, basic safety instructions should always be followed to reduce the risk of fire, electric shock and injury to persons.

1. Read and understand all instructions.
2. Follow all warnings and instructions marked on the product.
3. Unplug this product from the wall telephone jack and power outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use damp cloth for cleaning.
4. Do not use this product near water, for example, near a bathtub, wash bowl, kitchen sink, or laundry tub, in a wet basement or near a swimming pool.
5. Place this product securely on a stable surface. Serious damage and/or injury may result if the unit falls.
6. Slots or openings in the cabinet and the back and bottom are provided for ventilation, to protect it from overheating. These openings must not be blocked or covered. This product should never be placed near or over a radiator or heat register, or in a place where proper ventilation is not provided.
7. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply to your home, consult your dealer or local power company.
8. Do not place objects on the power cord. Install the unit where no one can step or trip on the cord.
9. Do not overload wall outlets and extension cords as this can result in the risk of fire or electric shock.
10. Never push objects of any kind into this product through cabinet slots as they may touch dangerous voltage points or short out parts that could result in the risk of fire or electric shock. Never spill liquid of any kind on this product.
11. To reduce the risk of electric shock or burns, do not disassemble this product. Take it to a qualified service center when service is required. Opening or removing covers may expose you to dangerous voltages, dangerous electrical current or other risks. Incorrect reassembly can cause electric shock when the appliance is subsequently used.
12. Unplug the product from the wall outlet and refer servicing to qualified service personnel under the following conditions:

- a.) When the power cord is damaged or frayed.
- b.) If liquid has been spilled into the product.
- c.) If the product has been exposed to rain or water.
- d.) If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions because improper adjustment of other controls may result in damage and may require extensive work by a qualified technician to restore the product to normal operation.
- e.) If the product has been dropped or physically has been damaged.
- f.) If the product exhibits a distinct change in performance.

13. Avoid using a telephone (other than a cordless type) during a thunderstorm. There may be a remote risk of electrical shock from lightning. Therefore we suggest a surge arrestor.

14. Do not use the telephone to report a gas leak in the vicinity of the leak.

15. Emergency/911 numbers may not be dialed if the keypad is locked.

16. Minimum No. 26 AWG telecommunication line cord must be used with this phone.

BATTERY SAFETY PRECAUTIONS

To reduce the risk of fire, injury or electric shock, and to properly dispose of batteries, please read and understand the following instructions.

CONTAINS ALKALINE NICKEL METAL HYDRIDE BATTERY. BATTERY MUST BE RECYCLED OR DISPOSED OF PROPERLY. DO NOT DISPOSE OF IN MUNICIPAL WASTE.

1. Only use the batteries specified for use with this product.
2. DO NOT USE ALKALINE NICKEL CADMIUM OR ALKALINE LITHIUM BATTERIES, or mix batteries of different sizes or from different manufacturers in this product. DO NOT USE NONRECHARGEABLE BATTERIES.
3. Do not dispose of the batteries in a fire; the cells may explode. Do not expose batteries to water. Check with local codes for special disposal instructions.
4. Do not open or mutilate the batteries. Released electrolyte is corrosive and may cause damage to the eyes or skin. The electrolyte may be toxic if swallowed.
5. Exercise care in handling the batteries in order not to short the batteries with conducting materials such as rings, bracelets, and keys. The batteries or conducting material may overheat and cause burns or fire.
6. Charge the batteries provided with, or identified for use with, this product only in accord-

ance with the instructions and limitations specified in the user's manual. Do not attempt to charge the batteries with any means other than that specified in the users manual.

7. Periodically clean the charge contacts on both the charger and handset.

Appendix

Service (Customer Care)

Customer Care Warranty for Cordless Products
To obtain Customer Care Warranty service,
product operation information, or for problem resolution, call:
Toll Free: 1-866 374 3864
9:00 a.m. – 5:00 p.m. Monday-Saturday

System Information

When calling the Customer Care service, you may be asked to provide your phone's system information.

During the call, proceed as follows:

Menu →  → **System Info**

Operation Hours


Select entry and press **OK**.

The number of hours your system has been operating.

Back Press display key.

 **HS S/W Version**


Select entry and press **OK**.

The software version of the handset is displayed. Use  to scroll through all of the information.

Back Press the display key.

 **Base S/W Ver.**

Select entry and press **OK**.

The software version of the base station is displayed. Use  to scroll through all of the information.

Back Press the display key three times to return to normal telephone mode.

End-user limited Warranty

The Verizon brand and the Verizon trademark are used under license. This product is covered by a one year limited warranty. Any repair replacement or warranty service, and all questions about this product should be directed to: 1-866 374 3864.

This limited, non-transferable warranty is provided to the original buyer/end-consumer ("you") for systems, handsets and accessories (collectively, "Product") provided by Siemens Home and Office Communication Devices LLC ("Siemens"). Siemens warrants to you that at the date of purchase, the product is free of defects in workmanship and materials and the software included in the Product will perform in substantial compliance to its program specifications.

1. WARRANTY PERIOD

The Product warranty period is one (1) year from the original date of purchase by you. Proof of purchase (e.g., sales slip or invoice) must be provided with any Product returned during the Warranty Period. Batteries supplied with the Products are warranted to be free from defects at the time of purchase only.

2. EXCLUSIVE REMEDY

Siemens' entire liability and your exclusive remedy if the Product is defective in materials or workmanship during the Warranty Period and is returned shall be that the Product will be repaired or replaced as set forth in Section 4 below. Reconditioned replacement components, parts or materials may be used in the replacement or repair. Data in the memory of the Product may be lost during repair.

3. THIS LIMITED WARRANTY DOES NOT COVER AND IS VOID WITH RESPECT TO THE FOLLOWING:

- Cosmetic damage, physical damage to the surface of the Product, including, without limitation, breakage, cracks, dents, scratches or adhesive marks on the LCD screen or outside casing of the Product.
- Products which have been repaired, maintained or modified (including the antenna) by anyone other than Siemens or a Siemens-approved repair facility, or that have been improperly installed.
- Cost of installation, removal or reinstallation.
- "Damage due to any telephone, electronic, hardware or software program, network, Internet or computer malfunctions, failures, or difficulties of any kind, including without limitation, server failure or incomplete, incorrect, garbled or delayed computer transmissions.
- Equipment and components not manufactured, supplied or authorized by Siemens.
- Modification of the Product's components, or operation of the Product in an unsuitable environment or in a manner for which it is not intended, including but not limited to failures or defects caused by misuse, abuse, accidents, physical damage, abnormal operation, improper handling or storage, neglect, alterations, unauthorized installation, removal or repairs, failure to follow instructions, problems caused by the carrier's network coverage, exposure to fire, water or excessive moisture or dampness, floods, or extreme changes in climate or temperature, acts of God, riots, acts of terrorism, spills of food or liquids, viruses or other software flaws introduced into the Product, or other acts which are not the fault of Siemens and which the Product is not specified to tolerate, including damage caused by mishandling or blown fuses.
- Products which have had warranty stickers, electronic serial number and/or serial number label removed, altered, rendered illegible or fraudulently applied to other equipment.
- Signal reception problems (unless caused by defect in material or workmanship in the Product).
- Products operated outside published maximum ratings.
- Performance of the Products when used in combination with other products or equip-

ment not manufactured, supplied or authorized by Siemens.

- Consumables (such as batteries and fuses).
- Payments for labor or service to representatives or service centers not authorized to perform product maintenance by Siemens.
- Loss of data.
- Testing and examination discloses that the alleged defect or malfunction in the Product does not exist.

This warranty does not cover customer education, instruction, installation or removal, set up adjustments, problems related to service(s) provided by a carrier or other service provider, and/or signal reception problems. Siemens shall not be responsible for software, firmware, information, or memory data contained in, stored on, or integrated with any Products returned for repair, whether under warranty or not.

This warranty is valid only in the United States.

USE WITH ACCESSORIES NOT SUPPLIED BY SIEMENS OR NOT OTHERWISE EXPRESSLY AUTHORIZED BY SIEMENS MAY VOID WARRANTY.

4. WARRANTY CLAIM PROCEDURE

All warranty claims must be made by notifying Siemens prior to the expiration of the Warranty Period. Siemens' obligation to provide warranty support shall not extend past the end of the Warranty Period, except that any product repaired or replaced during the Warranty Period shall continue to be warranted for the balance of such Warranty Period or thirty (30) days, whichever is greater.

Throughout the Warranty Period, Verizon Support will be available Monday through Saturday from 9:00 a.m. to 5:00 p.m. Central Time, excluding National holidays. Support service will be provided for you by accessing the toll free customer service number:

1-866 374 3864

5. LIMITATION OF WARRANTY

Siemens makes no warranty or representation that the software in the Products will meet your requirements or will work in combination with any hardware or applications software products provided by third parties, that the operation of the software will be uninterrupted or error free,

Appendix

or that all defects in the software products will be corrected.

6. LIMITATION ON REMEDIES; NO CONSEQUENTIAL OR OTHER DAMAGES

Your exclusive remedy for any breach of this Limited Warranty is as set forth above. Except for any refund elected by Siemens, **YOU ARE NOT ENTITLED TO ANY DAMAGES, INCLUDING BUT NOT LIMITED TO CONSEQUENTIAL DAMAGES**, if the Product does not meet the Limited Warranty, and, to the maximum extent allowed by applicable law, even if any remedy fails of its essential purpose. The terms below ("Exclusion of Incidental, Consequential and Certain Other Damages") are also incorporated into this Limited Warranty. Some states/jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This Limited Warranty gives you specific legal rights. You may have others which vary from state/jurisdiction to state/jurisdiction.

7. DISCLAIMER OF WARRANTIES

SIEMENS AND ITS SUPPLIERS PROVIDE THE PRODUCT AND SUPPORT SERVICES (IF ANY) AS IS AND WITH ALL FAULTS. THE LIMITED WARRANTY IS IN LIEU OF ANY OTHER EXPRESS WARRANTIES (IF ANY) CREATED BY ANY DOCUMENTATION OR PACKAGING EXCEPT FOR THE LIMITED WARRANTY, AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW IS IN LIEU OF ANY IMPLIED OR STATUTORY WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, OF ACCURACY OR COMPLETENESS OR RESPONSES, OF RESULTS, OF WORKMANLIKE EFFORT, OF LACK OF VIRUSES AND OF LACK OF NEGLIGENCE, ALL WITH REGARD TO THE PRODUCT, AND THE PROVISION OF OR FAILURE TO PROVIDE SUPPORT SERVICES. ALSO, THERE IS NO WARRANTY OR CONDITION OF TITLE, QUIET ENJOYMENT, QUIET POSSESSION, OR CORRESPONDENCE TO DESCRIPTION OR NON-INFRINGEMENT WITH REGARD TO THE PRODUCT. Some states or provinces do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above exclusions or limitations may not apply to you (applies only in the U.S. and Canada). If an implied warranty or condition is created by your state/province and federal or state/provincial law prohibits disclaimer of it, you also have an

implied warranty or condition, **BUT ONLY AS TO DEFECTS DISCOVERED DURING THE PERIOD OF THIS LIMITED WARRANTY (ONE YEAR)**. AS TO ANY DEFECTS DISCOVERED AFTER THE ONE YEAR PERIOD, THERE IS NO WARRANTY OR CONDITION OF ANY KIND. This limited warranty gives you specific legal rights, and you may also have other rights which vary from state to state or from province to province (applies only in the U.S. and Canada). In no event shall Siemens' liability exceed the cost of repairing or replacing defective Products as provided herein, and any such liabilities will terminate upon expiration of the warranty period.

Any supplements or updates to the Product or the software in the Product, including without limitation, any (if any) software fixes or upgrades or bug fixes provided to you after the expiration of the one year Limited Warranty period are not covered by any warranty or condition, express, implied or statutory.

8. EXCLUSION OF INCIDENTAL, CONSEQUENTIAL AND CERTAIN OTHER DAMAGES

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL SIEMENS, SELLER OR THEIR SUPPLIERS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF PROFITS OR CONFIDENTIAL OR OTHER INFORMATION, FOR BUSINESS INTERRUPTION, FOR PERSONAL INJURY, FOR LOSS OF PRIVACY, FOR FAILURE TO MEET ANY DUTY INCLUDING OF GOOD FAITH OR OF REASONABLE CARE, FOR NEGLIGENCE, AND FOR ANY OTHER PECUNIARY OR OTHER LOSS WHATSOEVER) ARISING OUT OF OR IN ANY WAY RELATED TO THE USE OF OR INABILITY TO USE THE PRODUCT, THE PROVISION OF OR FAILURE TO PROVIDE SUPPORT SERVICES, OR OTHERWISE UNDER OR IN CONNECTION WITH ANY PROVISION OF THIS LIMITED WARRANTY, EVEN IN THE EVENT OF THE FAULT, TORT (INCLUDING NEGLIGENCE), STRICT LIABILITY, BREACH OF CONTRACT OR BREACH OF WARRANTY OF SIEMENS OR SELLER OR ANY SUPPLIER, AND EVEN IF SIEMENS OR SELLER OR ANY SUPPLIER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. REPAIR OR REPLACEMENT, AS PROVIDED UNDER THE WARRANTY, IS YOUR SOLE AND EXCLUSIVE REMEDY FOR BREACH OF THE LIMITED WARRANTY.

9. LIMITATION OF LIABILITY AND REMEDIES

NOTWITHSTANDING ANY DAMAGES THAT YOU MIGHT INCUR FOR ANY REASON WHATSOEVER (INCLUDING, WITHOUT LIMITATION, ALL DAMAGES REFERENCED ABOVE AND ALL DIRECT OR GENERAL DAMAGES), THE ENTIRE LIABILITY OF SIEMENS, SELLER AND ANY OF THEIR SUPPLIERS UNDER ANY PROVISION OF THIS LIMITED WARRANTY AND YOUR EXCLUSIVE REMEDY FOR ALL OF THE FOREGOING (EXCEPT FOR ANY REMEDY OF REPAIR OR REPLACEMENT ELECTED BY SIEMENS OR SELLER OR SUPPLIER WITH RESPECT TO ANY BREACH OF THE LIMITED WARRANTY) SHALL BE LIMITED TO THE GREATER OF THE AMOUNT ACTUALLY PAID BY YOU FOR THE PRODUCT OR FIVE DOLLARS (\$5.00 USD). THE FOREGOING LIMITATIONS, EXCLUSIONS AND DISCLAIMERS SHALL APPLY TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, EVEN IF ANY REMEDY FAILS ITS ESSENTIAL PURPOSE.

10. GOVERNING LAW

This limited warranty will be governed by the laws of Texas, and excluding the United Nations Convention on Contracts for the International Sale of Goods.

If you want to learn more about Verizon Service or for Support on your Verizon phone, visit our web site at <http://www.verizon.com> or please call 1-866 374 3864.

Issued by Siemens Cordless Products
Siemens is a registered trademark of Siemens Home and Office Communication Devices GmbH & Co. KG.

Siemens Cordless Products is a division of Siemens Home and Office Communication Devices GmbH & Co. KG.

Product attributes subject to change.

Siemens reserves the right, to make changes without notice in equipment design and/or components.

Part Number: A31008-M1908-R301-1-6019

© Copyright 2008 Verizon. All rights reserved.

Index

Index

Symbols

"External" (calls list)	14
"Withheld" (calls list)	14

A

Access protection	26
Activating	
answer machine	16
answer machine (remote operation)	20
auto answer	24
handset	11
internal conference call	23
keypad lock	11
key-touch tone	25
Adjusting loudspeaker volume	25
Announcement (answer machine)	17
Announcement mode (answer machine)	16, 17
Answer machine	16
activating/deactivating	16
deleting messages	18
playing back messages	17, 18
recording a personal announcement/ announce only	16, 20
remote operation	20
see also Network mailbox	
Area codes	9
Attended call transfer	22
Auto answer	10, 24
B	
Base station	
changing	22
connecting and setting up	7
connecting the device	8
range	8
restoring factory settings	26
settings for connecting to PABX	26
system PIN	26
Battery	
fitting	8
recommended batteries	28
Best base station	22

C

Call

answering	10
conference call	23
ending	10
external	10
internal	22
picking up from answer machine	18
transferring (connecting)	22
Call acceptance	19
Call duration	10
Call history	14
Call transfer	22
attended	22
unattended	23
Call waiting	23
internal call	23
Caller ID	10
Calling, external	10
Calls list	
"External"	14
"Withheld"	14
date and time	15
dialing	14
list type	14
name of caller	14
number of caller	14
status of entry	14
Care of the telephone	27
Changing	
dialing mode	26
display language	24
name of handset	24
ring toner	25
system PIN	26
Changing system PIN	26
Character set table	15
Charge saving function	19
Charge status display	1
Clear key	11, 13
Conference call	23
Connecting base station to PABX	26
Control key	1, 11
Controlling playback	18
Correcting incorrect input	12
Customer Care	32

D

Date	
calls list	15
Deactivating	
answer machine	16
auto answer	24
conference call	23
handset	11
keypad lock	11
key-touch tone	25
Deleting	
announcement for answer	
machine	17
characters	12
message	18
De-registering (handset)	22
Dialing	
calls list	14
dialing mode	26
from directory	13
Directory	13
managing entries	13
opening	11
storing entry	13
Display	
changing display language	24
contrast	24
in idle status	11
keys	1, 11
number (CID)	10
setting	24
DP (pulse dialing)	26

E

Earpiece mode	10
End Call key	1, 10
Ending call	10
Ending, see Deactivate	
Entry	
selecting (menu)	6
selecting from directory	13
status (calls list)	14
Example for menu input	6

F

Fast access	
answer machine	20
network mailbox	21
Flash time	26

H

Handset	
activating/deactivating	11
changing name	24
changing to best reception	22
changing to different base	
station	22
charge times	28
contact with liquid	27
de-registering	22
display language	24
idle status	9, 11
key-touch tone	25
loudspeaker volume	25
operating time	28
paging	22
reception strength	8
registering	22
registering with another	
base station	22
ring tone melodies	25
ring tone volume	25
settings	24
setup	8
transferring call	22
using several handsets	22
Handsfree talking	10
Hold with simultaneous internal call	23

I

Icon	
answer machine	16
display	11
keypad lock	11
new message	17
ring tone	25
Idle status	
display	9
returning to	11
Incorrect input (correction)	12
Internal	
conference call	23
making calls	22
simultaneous internal call	23
Internal call	22
call waiting	23

Index**K**

Keypad lock.	11
Keys	
clear key	11, 13
control key.	1, 11
display keys	1, 11
End Call key	1, 10
Last Number Redial key	14
menu key	11, 12, 13
mute/unmute microphone	1
On/Off key.	1
pound key	1, 11
star key	1, 25
Talk key	1
Key-touch tone	25

L

Last number redial	14
Liquid	27
List	
call history.	14
missed calls	14
Liste type (calls list)	14
Listening in during recording	19
Locating a handset	22
Lock	
activating/ deactivating keypad lock	11
Loudspeaker volume	25

M

Making calls	
answering a call	10
external	10
internal	22
Manual last number redial	14
Medical equipment	5
Menu	
key	11, 12, 13
menu guidance	12
menu input	6
Messages	16
deleting.	18
icon for new message.	17
playing back	17
playing back old messages	18
Microphone	1
mute/unmute	1
Missed call	14
Mute key.	1

N

Name of a handset	24
Name of caller (calls list)	14
Network mailbox	21
Number	
adding to directory	14
display caller ID (CID).	10
storing in directory	13
Number of caller (calls list)	14

O

On/Off key	1
----------------------	---

P

PABX	
base station settings	26
setting dialing mode	26
setting flash time	26
switching to touch tone dialing	26
Pack contents.	7
Paging	22
Playback	
announcement (answer	
machine)	17
controlling	18
messages	17
old messages	18
Pound key	1, 11
Power consumption	28
Power supply unit.	5
Protecting phone from access	26
Pulse dialing.	26

Q

Questions and answers.	27
--------------------------------	----

R

Range	8
Reception strength	8
Redial key.	14
Registering (handset)	22
Remote control.	20
Remote operation of answer machine	20
Ring tone	
changing	25
melodies (handset)	25
setting volume	25

S

Safety precautions	5
Searching in the directory	13
Service (Customer Care)	32
Setting	
date	9
time	9
Setting up base station	7
Setup handset	8
Sound, see Ring tone	
Special characters	15
Specifications	28
Star key	1, 25
System	
settings	26
System settings	26

T

Talk key	1
Time	
calls list	15
Touch tone dialing	26
Troubleshooting	27

U

Unattended call transfer	23
Unknown caller	10

V

Volume	
handset	25
handset loudspeaker	25
ring tone	25