

SPECIFICATION

Customer : _____

Customer's Model No. : _____

Model No. : MB200i/MB300i Series _____

Date: 2015.11.26 _____

Sample Serial No. : _____

Spec. Version & Revision Date:V01 2015.11.26

Received/Approved by

CHAMPTEK[®]
Web: <http://www.champtek.com>
Taiwan
E-mail: sales@champtek.com

ChampTek Incorporated
.5F, No. 2, Alley 2, Shih-Wei,Lane,
Chung Cheng Rd.
Hsin Tien District, New Taipei City 231,
Tel: 886-2-22192385
Fax: 886-2-22192387


Revision History

Version	Date	Context
V01	2015.11.26	Tony release

MB200/300 series Wireless Pocket Scanner



MB200

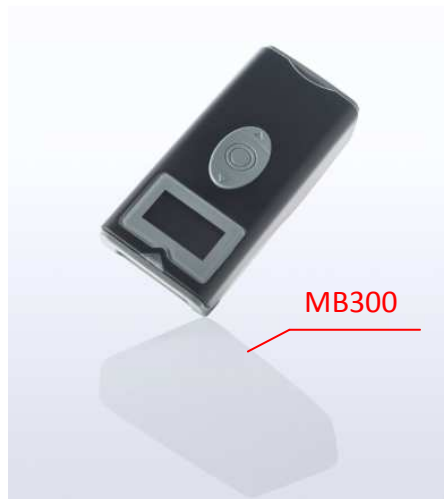

MB300

Technical Product Specification

System Architecture	
Micro Processor	32-bit
Operating Platform	Proprietary
Flash Memory	512 Kbyte program. 8 M bytes user data that can save over 100,000 items of 30 bytes barcode data.
RAM Memory	128 Kbytes
Display Size	0.96" OLED 128x64 dots Monochrome for MB300 series, MB200 series are without display.
Input Keys	3 buttons, include 1. scan and confirm trigger button, 2. upward scroll button ,
Indicator	1. LED x 1(White/Green/Blue/Red) 2. Beeper x 1
Environmental	
Operating Temp.	0°C to 50 °C
Storage Temp.	-20 °C to 70 °C
Power Source	
Battery	Lithium-Polymer (3.7V DC, 550mAh)
Battery Charging	via Micro USB connector (5V)
Physical Characteristics	
Dimensions	41.8mm x 89.9mm x 23.6mm (W x D x H)
Weight	Designed to be approx. 160 g(With Battery & OLED Panel)
Available color	Black cover and dark gray bottom cases
Hanger	1 Hanger Hole
Protection	IP54 sealing protection
Drop Spec.	1.5m (5 feet)
Data Input	
<p>[MB200i/MB300i] - 2D imager scanner</p> <p>Up to 120 scans per second in linear emulation and 60 images per second in 2D area mode</p> <p>Visible Red light 633nm</p> <p>Up to 180nm @ Code 39 ,PCS 90%(0.127mm)</p> <p>Ambient light, 100,000 Lux Max (Sunlight)</p>	

Communication Interface	
Wired	Micro USB V2.0 (for Power charging only)
Wireless	Bluetooth 2.1+EDR+ SSP (Class 2)
Functions	
Standby Duration	Over 3 months
Scan per charge	[BT off] over 10,000 scans / [BT On] over 5,000 scans under normal operating conditions after battery full charged.
Low Battery Alert	Battery levels are indicated by the LED illuminating color
Data Handling	Able to be chosen as on-line (via BT) or off-line (batch) mode.
Off-line Mode	Can save over 100,000 items of 50 bytes barcode data.
Indication combination	Can be configured as (1) Scan Review + LED indication (2) Vibration + LED indication (3) Beep + LED indication or (4) All indication Enable
Compatibility	Provides SDK to let customers develop AP on different OS.

Due to Champtek's continuing product improvement programs, specifications and features are subjected to change without prior notices.