

# Champion®

The Dishwashing Machine Specialists

Project \_\_\_\_\_

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

## STANDARD FEATURES

- **ENERGY STAR® Qualified (EUCCW6 & EUCCW8 only)**
- **Exclusive Dual Rinse Technology**
- All-purpose 29" wide peg belt
- Dish capacities up to 19,140 dishes per hour (NSF Certified)
- Automatic tank fill
- Chemical dispensing equipment connection provisions
- Choice of tank heat: electric, steam coils or direct steam injectors
- Common hot water connection
- Common drain connection
- Common electric connection (separate connection required for optional electric booster and blower-dryer)
- One piece stainless steel wash/rinse manifold system, easy to remove
- Door safety switch
- Electric eye energy sentinel (idle pump shut-off)
- Easy-to-reach top-mounted controls
- Heavy-gauge stainless construction
- Low-water tank heat protection
- Push-button start-stop station – load end
- Recirculating flushing nozzles – load end with prewash
- Rinse saver device
- Conveyor shut-off shelf – unload end
- Stainless steel enclosure panels – front & ends
- Vent fan control connection provided

## OPTIONAL WORLD CLASS FEATURES

- **Heat Recovery** – redirects lost steam to heat using less energy

*The DualRinse feature offers the **Lowest Water/Utility/Chemical Consumption** as low as 57 GPH usage while circulating as much as 400 gallons of water for **Consistently Good Results***

## EUCCW SERIES

Upright 29" Conveyor  
Dual Rinse Dishwashing Machine



*Photo is for general visual representation only. Please refer to specifications for the latest detailed product information.*

## SPECIFIER STATEMENT

Specified unit will be Champion model EUCCW4, EUCCW6 or EUCCW8 upright 29" conveyor water saver dishwashing machine.

Features automatic tank fill, chemical dispensing connection provisions, common water, drain and electrical connections, door safety switch, low water tank heat protection, rinse saver.

1 year parts and labor warranty.



2674 N. Service Road,  
Jordan Station, Ontario, Canada L0R 1S0  
Tel: 905-562-4195 Fax: 905/562-4618

Champion Industries, Inc.  
3765 Champion Boulevard, Winston-Salem, NC 27105 Tel:  
336/661-1556 Fax: 336/661-1979  
[www.championindustries.com](http://www.championindustries.com)





# EUCCW SERIES

Upright 29" Conveyor  
Dual Rinse  
Dishwashing Machine


# Champion®

The Dishwashing Machine Specialists

## MODULAR SECTIONS: Right to Left Operation

Dimensions shown in inches and [millimeters]

# EUCCW6

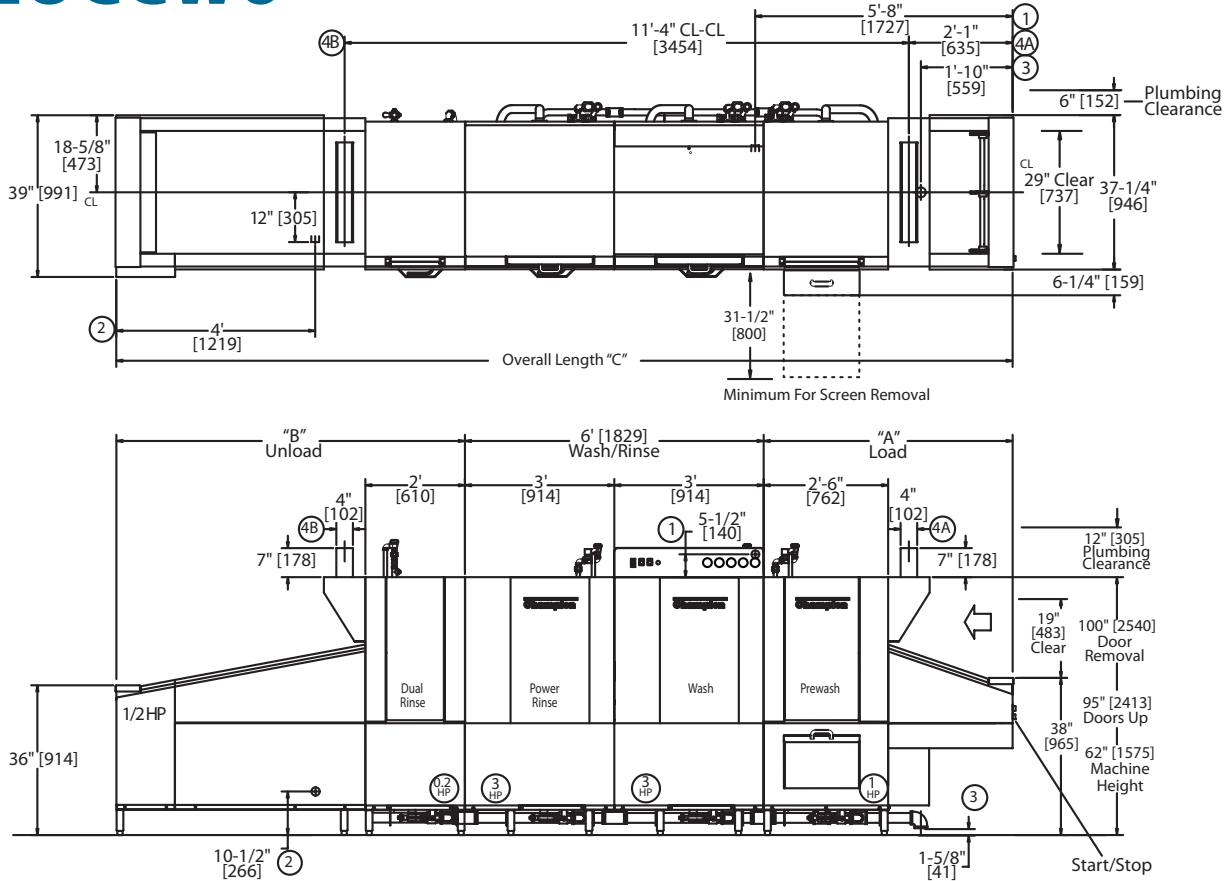

**TABLE A - Machine Connection**

Machine Only - Electric Heat			
Elec. Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/3	183	250	250
240/60/3	158	200	200
480/60/3	80	100	100

Machine-steam			
Elec. Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/3	29	40	40
240/60/3	26	35	35
480/60/3	14	20	20

**Notes:**

- Load Section (A) Standard 5', contains 30" Prewash
- Prewash also available in a 48" HD section
- Non-standard load section available in 12" increments
- Minimum load length 5' (includes 30" prewash)
- Unload Section (B) Standard 5 ft contains 24" Aux.
- Rinse and 36" belt, available in 12" increments
- Built in electric booster requires a 5' minimum unload
- Built in steam booster requires a minimum 6' unload
- Blow dryer section adds 4' to overall length of machine

**TABLE B - Booster Connection**

40°F/22°C Rise - 10kW Electric Built-in Booster			
Elec. Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/3	28	35	35
240/60/3	36	30	30
480/60/3	12	15	15

70°F/39°C Rise - 18kW Electric Built-in Booster			
Elec. Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/3	50	70	70
240/60/3	43	60	60
480/60/3	22	30	30

Contact Factory for additional voltages.

Due to an ongoing value analysis program at Champion, specifications contained in this catalog are subject to change without notice.

Champion Industries, Inc., 3765 Champion Boulevard, Winston-Salem, NC 27105 • 336/661-1556 • Fax: 336/661-1979 • www.championindustries.com  
2674 N. Service Road, Jordan Station, Ontario, Canada L0R 1S0 • 905/562-4195 • Fax: 905/562-4618

# EUCCW SERIES

Upright 29" Conveyor  
Dual Rinse  
Dishwashing Machine


# Champion®

The Dishwashing Machine Specialists

## MODULAR SECTIONS: Right to Left Operation

Dimensions shown in inches and [millimeters]

## EUCCW8

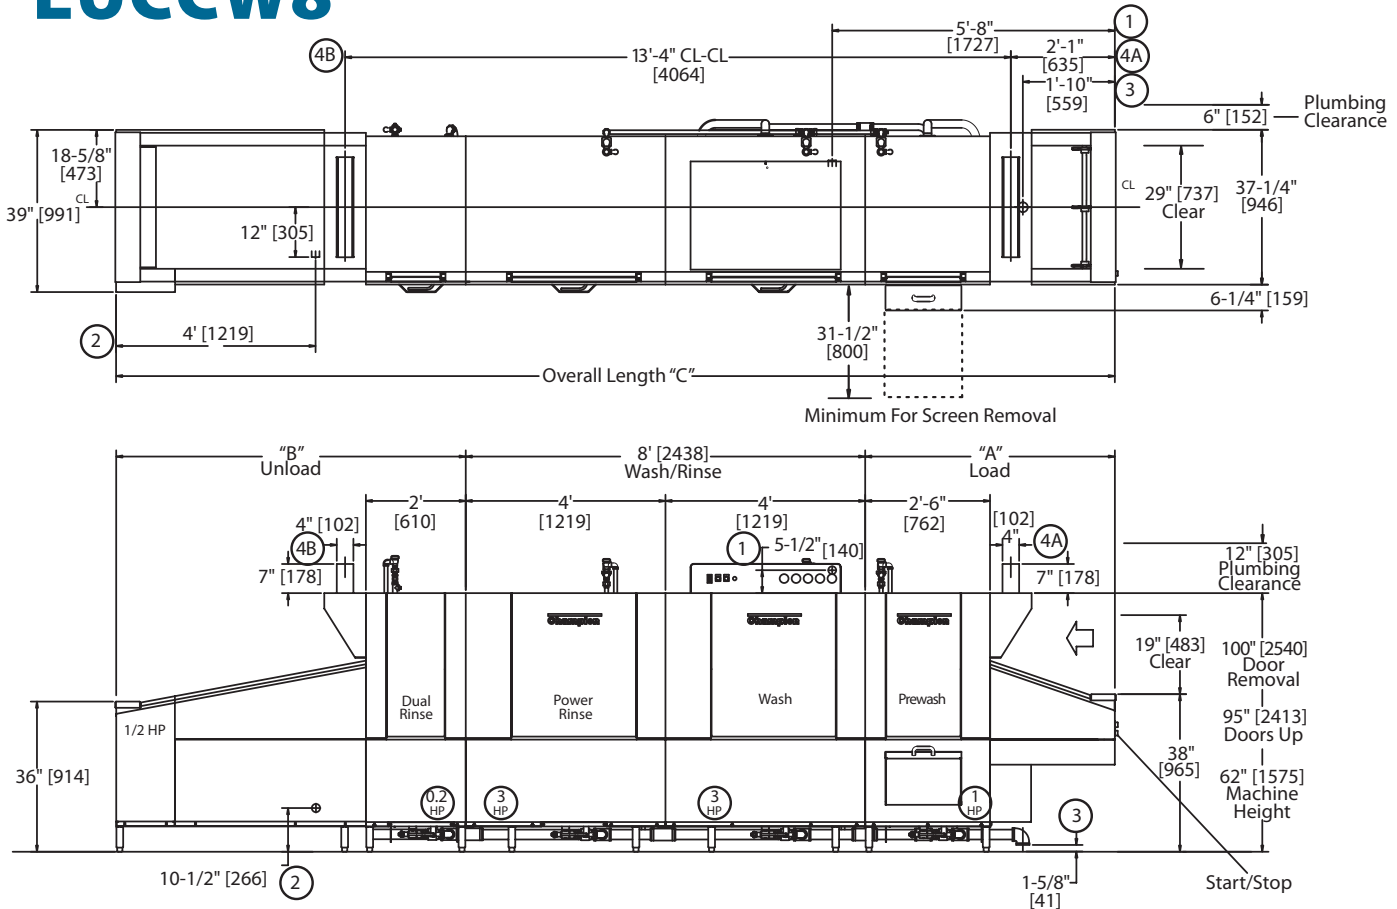

**TABLE A - Machine Connection**

Machine Only - Electric Heat			
Elec. Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/3	183	250	250
240/60/3	158	200	200
480/60/3	80	100	100

Machine-steam			
Elec. Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/3	29	40	40
240/60/3	26	35	35
480/60/3	14	20	20

**Notes:**

- Load Section (A) Standard 5', contains 30" Prewash
- Prewash also available in a 48" HD section
- Non-standard load section available in 12" increments
- Minimum load length 5' (includes 30" prewash)
- Unload Section (B) Standard 5 ft contains 24" Aux.
- Rinse and 36" belt, available in 12" increments
- Built in electric booster requires a 5' minimum unload
- Built in steam booster requires a minimum 6' unload
- Blow dryer section adds 4' to overall length of machine

**TABLE B - Booster Connection**

40°F/22°C Rise - 18kW Electric Built-in Booster			
Elec. Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/3	50	70	70
240/60/3	43	60	60
480/60/3	22	30	30

70°F/39°C Rise - 32kW Electric Built-in Booster			
Elec. Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/3	89	125	125
240/60/3	77	100	100
480/60/3	39	50	50

Contact Factory for additional voltages.

Due to an ongoing value analysis program at Champion, specifications contained in this catalog are subject to change without notice.

Champion Industries, Inc., 3765 Champion Boulevard, Winston-Salem, NC 27105 • 336/661-1556 • Fax: 336/661-1979 • www.championindustries.com  
2674 N. Service Road, Jordan Station, Ontario, Canada L0R 1S0 • 905/562-4195 • Fax: 905/562-4618

# Champion®

The Dishwashing Machine Specialists

## EUCCW SERIES

Upright 29" Conveyor  
Dual Rinse  
Dishwashing Machine

Shipping weight crated: **150 lbs./ft.[68kg./m.]**  
Height with doors up: **95"**  
Height to remove doors: **100"**

### SPECIFICATIONS

Capacities	EUCCW4	EUCCW6	EUCCW8
Dishes per hr. (NSF rated)	9,965	13,445	19,140
Conveyor speed (ft./min.)	6.3	8.5	12.1

#### Motor horsepower

	1/2 Hp	1/2 Hp	1/2 Hp
Drive	1/2 Hp	1/2 Hp	1/2 Hp
Prewash 30" [762]	1 Hp	1 Hp	1 Hp
Prewash 48" [1219]	3 Hp	3 Hp	3 Hp
Wash	3 Hp	3 Hp	3 Hp
Power Rinse*	N/A	3 Hp	3 Hp
Auxiliary Rinse	1/5 Hp	1/5 Hp	1/5 Hp

#### Water consumption

Gal. per hr. (max. use)	58	57	158

#### Temperatures °F

	160	150	150
Wash (min.)	160	150	150
Power Rinse (min.)*	N/A	160	160
Auxiliary Rinse (min.)	165	165	165
Final rinse (min.)	180	180	180

#### Heating

	Steam	Electric	
Tank heat			
Wash tank	125 lbs./hr.	25 kW	
Wash tank (EUCCW4)	225 lbs./hr.	45 kW	
Rinse tank *	100 lbs./hr.	20 kW	
Auxiliary rinse	50 lbs./hr.	10 kW	
Electric booster	10	10	18
(kW required for 40°F rise)			
Electric booster	18	18	32
(kW required for 70°F rise)			
Steam booster	50	50	90
(lbs./hr. required for 40°F rise)			
Steam booster	90	90	150
(lbs./hr. required for 70°F rise)			

#### Venting

Minimum CFM, load end	300
Minimum CFM, unload end	800

\*EUCCW4 has no power rinse tank

Booster connections may vary. Contact the Factory.

**Standard Voltages** (Specify choice): 208/60/3, 240/60/3, and 480/60/3. Available in 3-phase only. For non-standard 3-phase voltages, contact the Factory.

**Plumbing Notes** Because of the variation in house-supplied water pressure, a water pressure regulating valve (PRV) is needed (water PRV is standard with a booster). Steam PRV's may be required for pressure higher than 30 psi. The PRVs can either be purchased from Champion or obtained locally.

#### Utilities EUCCW4

<b>1 Electrical Connection</b>	<b>A</b> Machine connection (see table A) <b>B</b> Booster connection (see table A)
<b>2 Hot Water</b>	3/4" NPT 180°F hot water connection. (For machine without built-in booster)
<b>3 Drain</b>	2" NPT connection, 62 gpm max flow rate
<b>4 Vents</b>	<b>A</b> Load end: 300 CFM 1/4" S.P. <b>B</b> Unload end: 800 CFM 1/4" S.P. With blower-dryer, increase room ventilation by 600 CFM.

#### Utilities EUCCW6

<b>1 Electrical Connection</b>	Contact factory for specific machine electrical requirements <b>NOTE:</b> Electric booster connection – contact Factory
<b>2 Hot Water</b>	3/4" NPT 180°F hot water connection. (For machine without built-in booster)
<b>3 Drain</b>	2" NPT connection, 62 gpm max flow rate
<b>4 Vents</b>	<b>A</b> Load end: 300 CFM 1/4" S.P. <b>B</b> Unload end: 800 CFM 1/4" S.P. With blower-dryer, increase room ventilation by 600 CFM.

#### Utilities EUCCW8

<b>1 Electrical Connection</b>	Contact factory for specific machine electrical requirements <b>NOTE:</b> Electric booster connection – contact Factory
<b>2 Hot Water</b>	3/4" NPT 180°F hot water connection. (For machine without built-in booster)
<b>3 Drain</b>	2" NPT connection, 62 gpm max flow rate
<b>4 Vents</b>	<b>A</b> Load end: 300 CFM 1/4" S.P. <b>B</b> Unload end: 800 CFM 1/4" S.P. With blower-dryer, increase room ventilation by 600 CFM.

**Warning** Plumbing and electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary, safety codes and the National Electrical Code.

**Note** Water Hammer Arrestor (meeting ASSE-1010 standard or equivalent) to be supplied (by others) in common water supply line at service connection.

#### Venting Notes

Fabricated duct size: 3-7/8" x 23-7/8" (outside dimensions)

Due to an ongoing value analysis program at Champion, specifications contained in this catalog are subject to change without notice.

Champion Industries, Inc., 3765 Champion Boulevard, Winston-Salem, NC 27105 • 336/661-1556 • Fax: 336/661-1979 • www.championindustries.com  
2674 N. Service Road, Jordan Station, Ontario, Canada L0R 1S0 • 905/562-4195 • Fax: 905/562-4618

# EUCCW SERIES

Upright 29" Conveyor  
Dual Rinse  
Dishwashing Machine

# Champion<sup>®</sup>

The Dishwashing Machine Specialists

**Control Panel**



**Digital Gauges**




## OPTIONS & ACCESSORIES

- Tank heat; choices of electric, steam coil or steam injectors
- Booster Heaters – stainless steel (completely inter-plumbed, controls are inter-wired)
  - Electric: (40°F rise or 70°F rise)
  - Steam: (40°F or 70°F rise)
- 48" Blower Dryer, electric or steam (add 4' to overall length)
- Belts: standard peg belt, flat belt, thermal tray belt, silverware belt, belts with upper cross rods, and other select combination belts
- Start/Stop station, unload end
- Back panels, stainless steel
- Cold water thermostat (for pre-wash)
- External scrap bucket on 48" pre-wash (standard on 30" pre-wash)
- External scrap bucket on wash tank
- Insulated hoods, lower panels
- Motor pumps, 2 or 3 Hp optional in lieu of 1 Hp on pre-wash
- Bumper rail, machine mounted
- Steam pressure regulating valve (unmounted)
- Drain water tempering kit (mounted)
- Insulated hinged door

## Heat Recovery –

Redirects lost steam to heat using less energy.

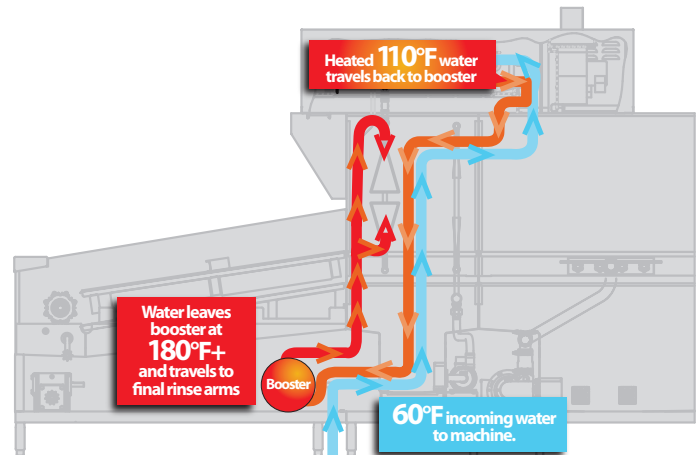

- Shock arrestor (water)
- Drain interlocks
- Heat Recovery Unit redirects lost steam to heat using less energy

Due to an ongoing value analysis program at Champion, specifications contained in this catalog are subject to change without notice.

Champion Industries, Inc., 3765 Champion Boulevard, Winston-Salem, NC 27105 • 336/661-1556 • Fax: 336/661-1979 • www.championindustries.com  
2674 N. Service Road, Jordan Station, Ontario, Canada L0R 1S0 • 905/562-4195 • Fax: 905/562-4618