



Packing List

- ① 2.4GHz Wireless Camera x 1
- ② 2.4GHz Wireless Receiver x 1
- ③ Earphone x 1
- ④ Lithium Battery for Receiver x 1
- ⑤ Adapter x 2
- ⑥ AV Cable x 1


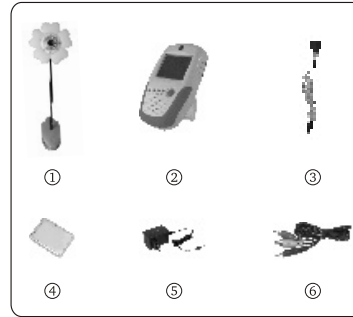


* 8219JD means GD8219 + GD7611

Diagram

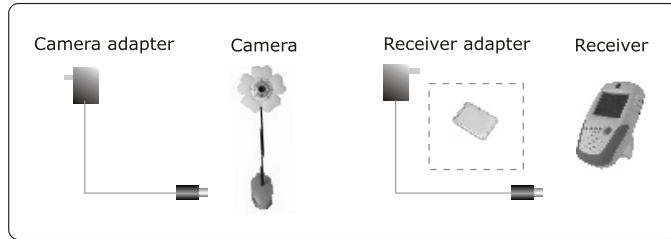

Structure

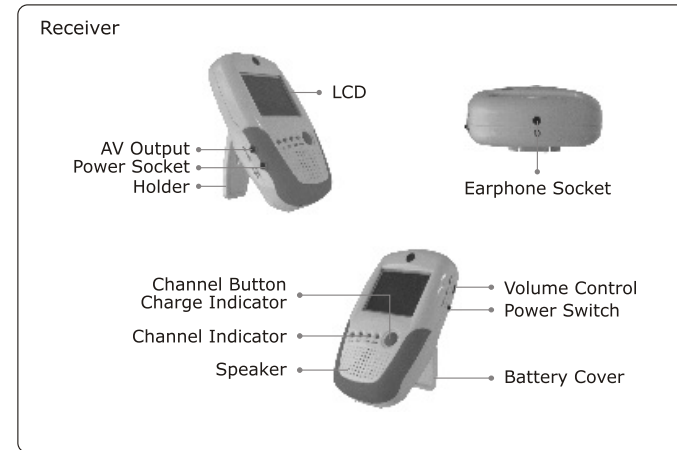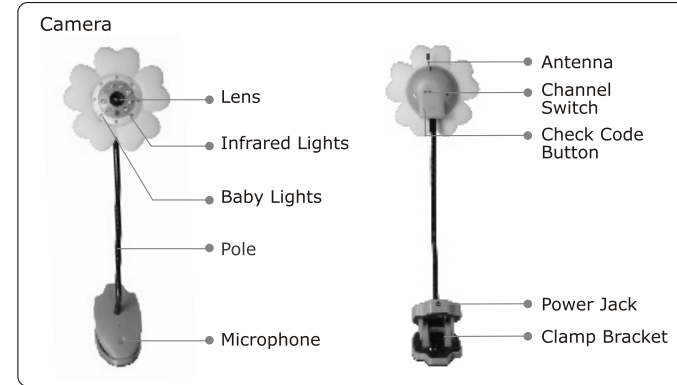


Installation

1. Locate the camera to a desired position and then adjust it to a suitable angle.




2. Connect the adapter to the camera.



Tip:

After the camera is powered on, touch the pole once with finger(s) to turn on the baby lights; touch again to turn it off; hold the pole and the lights will blink.

3. Install the accompanying Li-batteries to the battery compartment with its polarities matched.




Note:


- The Li-battery will be charged after the adapter is plugged in, and the charge indicator lights in red during charging and will turn off after a full charge.
- A full charge will take about 5 hours, which can power the receiver for about 5 hours continuously.
- You are recommended to have the battery fully charged before its first installation to optimize its life.
- Do not burn or disassemble the Li-battery.
- Do not short-circuit the battery, it may cause fire or electric shock.



4. Slide the power switch to the ON position.




5. By pressing the channel button of the receiver to switch be the same channel of the camera, and then an image will appear on the screen.




NOTE:

Generally the channel of the camera is matched to the receiver at factory. If it isn't, follow the steps below:

- 1) By pressing the channel button on the receiver and the check code button on back part of the camera at the same time for about 5 seconds, the receiver will automatically switch to the same channel of camera.
- 2) An image will appear on the screen, means the two devices are now matched to each other.

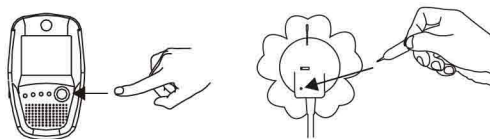


6. Tune the volume control to a desired level.



NOTE: for more clear pictures, please connect the receiver to a monitor/TV with the supplied video cable.

Camera Channel Setup

The receiver supports up to 4 cameras working at the same time. Please set the channel switch on the back cover as the following diagram:

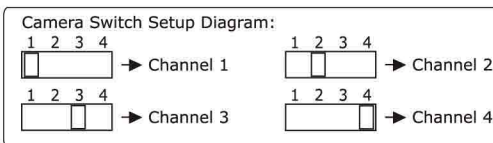**Specification**

	Item	Value
General	Transmission Frequency	ISM 2,400 ~ 2,4835MHz
	Transmission Power	16 dBm
	Unobstructed Effective Range	100m(Min.)
	Spread Spectrum	FHSS
	Modulation Mode	GFSK
	Operating Temperature	-40°C ~ +85°C / +40°F ~ +185°F
Camera	Operating Humidity	15%~85%
	Imaging Sensor Type	CMOS
	Picture Total Pixels	640 x 480
	Minimum Illumination	0Lux (IR ON) 5Lux(IR OFF)
	Night Vision Distance	3m(Min.)
	View Angle	40°
	Bandwidth	4 MHz
	Sound Detection Sensitivity	<-38dB
	Consumption Current(Max.)	300mA
	Power Supply	5V _{DC}
Receiver	Dimensions(W x D x H)	92 x 98 x 360mm
	Weight(About)	277g
	LCD Screen Type	2.36" TFT-LCD
	Effective Pixels	480(R,G,B)×234
	Receiving Sensitivity	≤-75dBm
	Consumption Current(Max.)	650mA
	Battery Working Time	5 hours
	Battery Charging Time	5 hours
	Power Supply	5V _{DC}
	Dimensions(W x D x H)	80 x 38 x 130 mm
Weight(About)	120 g	

- * Actual transmission range may vary according to weather, location, interference and building construction.
- * All the specifications are subject to minor change without prior notice.

Cautions

- The apparatus shall not be exposed to dripping or splashing and that no objects filled with liquids, such as vases, shall be placed on the apparatus.
- Turn off the camera/receiver if the system is not in use.
- The camera/receiver can only be completely disconnected from the mains by unplug the adapter.
- Do not cut the DC power cable of the apparatus to fit with another power source.
- Attention should be drawn to the environment aspects of battery disposal.

FCC information

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference.
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Operation Guide

Model No.: 8219JD

EU Environmental Protection

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.



Version No.:1.0

the graphics included are subject to minor change without notice.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.