

Grandstream Networks, Inc.

GXV3611IR_HD

Indoor Infrared Fixed Dome HD IP Camera





This page intentionally left blank

TABLE OF CONTENTS
GXV3611IR_HD User Manual

WELCOME	7
SAFETY COMPLIANCES	8
FCC CAUTION	9
RF EXPOSURE INFORMATION (SAR)	9
WARRANTY	10
CONNECT YOUR GXV3611IR_HD	11
EQUIPMENT PACKAGE CONTENTS	11
CONNECTING THE GXV3611IR_HD	12
PRODUCT OVERVIEW	13
GXV3611IR_HD CAMERA	13
GXV3611IR_HD SPECIFICATIONS	15
INSTALLATION GUIDE	16
MINIMUM RECOMMENDED COMPUTER SYSTEM REQUIREMENT	16
CONFIGURE THE GXV3611IR_HD VIA WEB BROWSER	16
CONNECT TO THE CAMERA USING STATIC IP	18
GXV3611IR_HD HOME WEB PAGE	20
GXV3611IR_HD CONFIGURATION & LANGUAGE PAGE	21
BASIC SETTINGS EXPLANATION	22
SYSTEM SETTINGS PAGE	22
VIDEO & AUDIO SETTING PAGE	24
CMOS SETTINGS PAGE	27
NETWORKING SETTING PAGE	28
DDNS SETTINGS PAGE	29
SIP SETTING PAGE	30
STATUS PAGE	34
ADVANCED SETTINGS EXPLANATION	35
USER MANAGEMENT PAGE	35
MAINTENANCE PAGE	36
SMTP SETTING PAGE (EMAIL ALARM)	37
FTP SETTINGS PAGE (UPLOAD ALARM)	39
ALARM SERVER SETTINGS PAGE (UPLOAD ALARM TO SUPPORTED VMS OR HTTP SERVER)	40
MOTION DETECTION CONFIGURATION PAGE (SET ALARM)	41
SYSLOG SETTINGS PAGE (TROUBLESHOOTING)	45
SOFTWARE UPGRADE	46
INSTRUCTIONS FOR LOCAL FIRMWARE UPGRADE USING TFTP SERVER:	47
CONFIGURATION FILE DOWNLOAD	47
RESTORE FACTORY DEFAULT SETTING	48
RESET FROM WEB INTERFACE	48
IP SURVEILLANCE FAQ	49



This page intentionally left blank

TABLE OF FIGURES
GXV3611IR_HD USER MANUAL

FIGURE 1: HOME PAGE OF GXV3611IR_HD	20
FIGURE 2: WEB LANGUAGE SWITCH	21
FIGURE 3: SYSTEM SETTINGS PAGE.....	22
FIGURE 4-1: VIDEO & AUDIO SETTINGS PAGE.....	24
FIGURE 4-2: VIDEO & AUDIO SETTINGS PAGE.....	25
FIGURE 5: CMOS SETTINGS PAGE.....	27
FIGURE 6: NETWORKING SETTING PAGE	28
FIGURE 7: DDNS SETTING PAGE.....	29
FIGURE 8-1: SIP SETTING PAGE.....	32
FIGURE 8-2: SIP SETTING PAGE.....	33
FIGURE 9: STATUS PAGE.....	34
FIGURE 10: USER MANAGEMENT PAGE.....	35
FIGURE 11: MAINTENANCE PAGE	36
FIGURE 12: SMTP SETTING PAGE	37
FIGURE 13: FTP SETTING PAGE.....	39
FIGURE 14: ALARM HTTP SERVER SETTING PAGE	40
FIGURE 15-1: MOTION DETECTION CONFIGURATION PAGE.....	41
FIGURE 15-2: MOTION DETECTION SCHEDULE CONFIGURATION PAGE	44
FIGURE 16: ALARM SERVER SETTING PAGE	45
FIGURE 17: FIRMWARE UPGRADE AND PROVISIONING	46
FIGURE 18: FACTORY RESET FROM WEB INTERFACE	48

TABLE OF TABLES
GXV3611IR_HD USER MANUAL

TABLE 1: GXV3611IR_HD TECHNICAL SPECIFICATIONS.....	15
---	----



This page intentionally left blank

WELCOME

Thank you for purchasing Grandstream's GXV3611IR_HD Day/Night Fixed Indoor Dome High Definition IP Camera, an innovative powerful infrared network camera.

GXV3611IR_HD is a next generation fixed dome day/night HD network camera of outstanding performance and quality. Its advanced ISP (Image Sensor Processor) powered with state-of-the-art auto-exposure/auto-white-balance algorithm and a high quality lens, ensures high fidelity video quality that matches digital still camera color grade in a wide range of light environments. It features cutting edge H.264 real-time video compression with excellent image clarity, industry leading SIP/VoIP for 2-way audio and video streaming to mobile phones and videophones, integrated microphone, speaker, PoE, IR-CUT for day/night mode, edge storage and advanced security protection.



The GXV3611IR_HD can be managed with GSurf Pro (Grandstream's intuitive FREE video management software that controls up to 72 cameras simultaneously), or grouped with GVR3550 Grandstream Network Video Recorder (NVR) via plug-n-play, as well as other ONVIF compliant video management systems. It also offers an advanced and flexible HTTP API and an SDK for easy integration with other surveillance systems.

Designed for indoor environment with 2.8mm lens, the GXV3611IR_HD is ideal for wide angle monitoring of nearby subjects in environments such as banks, hotels, schools, retail stores and small warehouses, offices or building entrances, and other small to median sized enclosed environments.

The GXV3611IR_HD is a powerful network camera for advanced indoor surveillance applications.

SAFETY COMPLIANCES

These instructions are intended to assist users to safely operate the GVR3550, avoid dangerous situations or damage the device.

	
<p>Warning: May cause serious injury or death if any of the warnings below are neglected.</p>	<p>Caution: Equipment may be damaged if any of the following caution messages are neglected.</p>



Warning:

Input voltage should meet both the SELV (Safety Extra Low Voltage) and the Limited Power Source with DC 12V according to the IEC60950-1 standard. Please refer to the technical specifications for more details. Do not use a third-party power adapter or power cord. When the device installed on the wall or ceiling, make sure that it is firmly attached.



Caution:

- Make sure that the power supply voltage is correct before using the camera.
- Do not drop the device or expose it to physical shock.
- Do not expose the device to temperatures outside the range of 0 °C to +50°C when the device is in operation.
- Do not expose the device to damp/wet conditions or high electromagnetism radiation.
- To avoid heat accumulation, make sure that your operating environment has proper ventilation.
- Do not damage the warranty sticker.

A few parts (e.g. electrolytic capacitor) of the equipment shall be replaced regularly according to their average lifetime. The average lifetime varies from the differences between operating environments and usage history. Regular maintenance checks are recommended for all users. Please contact your dealer for more details.

Compliance • Conformité • Conformidad

FCC Notices

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Ce dispositif est conforme à la partie 15 des directives FCC. L'utilisation du dispositif doit répondre aux deux conditions suivantes : (1) Ce dispositif ne doit pas générer d'interférences dangereuses et (2) ce dispositif doit supporter toutes les interférences reçues, y compris les interférences susceptibles de provoquer des dysfonctionnements.

Este dispositivo cumple con el apartado 15 de las reglas de la FCC. El funcionamiento queda sujeto a las siguientes dos condiciones: (1) Este dispositivo no puede causar interferencias perjudiciales y (2) este dispositivo debe admitir cualquier interferencia que reciba, incluidas aquellas que pudieran causar un funcionamiento no deseado.

Caution: Any changes or modifications to this device not explicitly approved by Legrand could void your authority to operate this equipment.

Mise en garde : Toute altération ou modification de ce dispositif non approuvée de manière explicite par Legrand peut invalider votre droit à utiliser cet appareil.

Precaución: Cualquier cambio o modificación que se realice en este dispositivo y que no esté aprobado/a explícitamente por Legrand podría anular su autoridad para operar este equipo.

WARRANTY

If the GXV3611IR_HD was purchased from a reseller, please contact the company where the device was purchased for replacement, repair or refund.

If the device was purchased directly from Grandstream, please contact our technical support team for a RMA (Return Materials Authorization) number before the product is returned.

Grandstream reserves the right to remedy warranty policy without prior notification.

Caution:

Changes or modifications to this product not expressly approved by Grandstream, or operation of this product in any way other than as detailed by this User Manual, could void your manufacturer warranty. Please do not use a different power adaptor with the GXV3611IR_HD as it may cause damage to the products and void the manufacturer warranty.

- This document is subject to change without notice. The latest electronic version of this user manual is available for download at:
http://www.grandstream.com/products/surveillance/GXV3611hd/documents/GXV3611IR_HD_usermanual_english.pdf


Reproduction or transmittal of the entire or any part, in any form or by any means, electronic or print, for any purpose is not permitted without the express written permission of Grandstream Networks, Inc.

CONNECT YOUR GXV3611IR_HD

Equipment Package Contents

The GXV3611IR_HD package contains:


- GXV3611IR_HD IP Camera
- 12V DC Universal Power Adaptor
- 1 Drill Template
- Quick Installation Guide
- GPL License

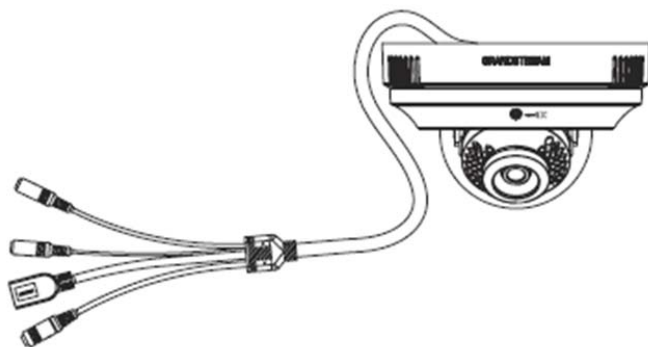


1 x GXV3611IR_HD



1 x 12V Power Supply



1 x Drill Template



1 x Quick Start Guide
1 x GPL License

Connecting the GXV3611IR_HD


Using the Power Adapter as power supply

- Connect the RJ45 Ethernet cable to the NETWORK port of the GXV3611IR_HD
- Connect the other end of the RJ45 cable to your network (switch or router or PC)
- Connect the power supply to the DC 12V power jack on the back of the GXV3611IR_HD

Using PoE as power supply

- Connect the RJ45 Ethernet cable to the NETWORK port of GXV3611IR_HD
- Connect the other end of the RJ45 cable to your PoE switch.


Please refer to following connection diagram to hook up the camera.

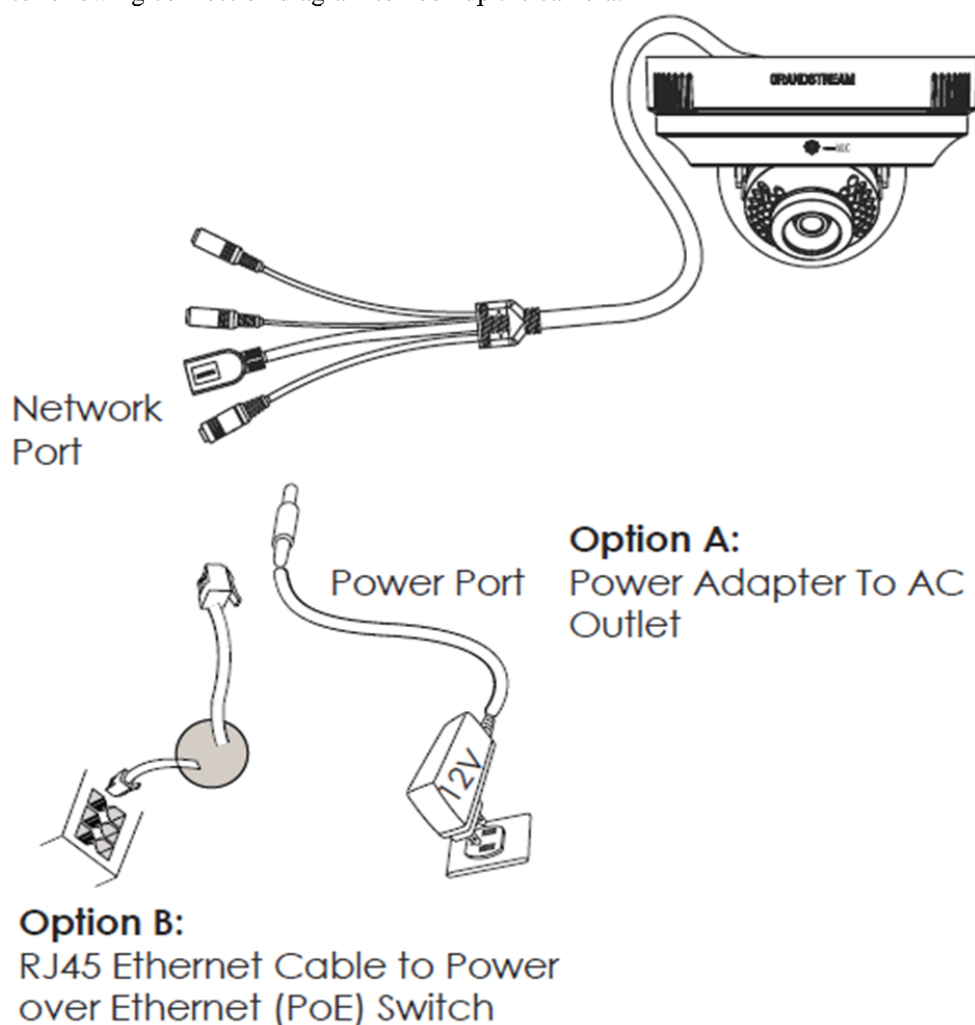


NOTE: Choose Option A if using the power supply; or choose Option B if using a Power over Ethernet (PoE) switch.

PRODUCT OVERVIEW

GXV3611IR_HD Camera

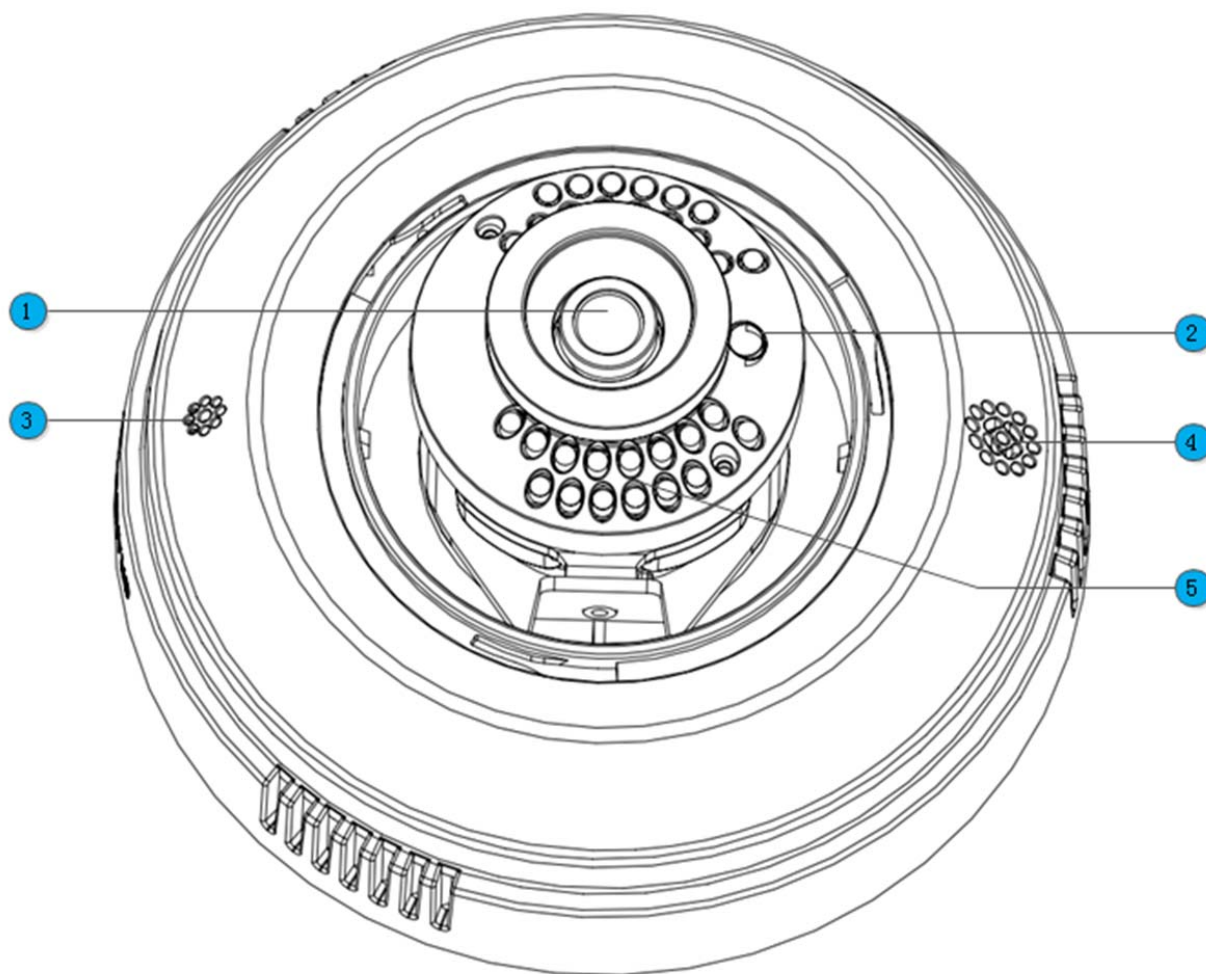

- | | |
|-----------------------------------|--|
| 1. <i>Lens</i> | GXV3611IR_HD Lens (2.8mm) |
| 2. <i>Light Sensor for IR-Cut</i> | Light Sensor for mechanical IR-Cut switching |
| 3. <i>Microphone</i> | Built-in Microphone |
| 4. <i>Speaker</i> | Built-in Speaker |
| 5. <i>IR LED Light Array</i> | Infrared Light Array |

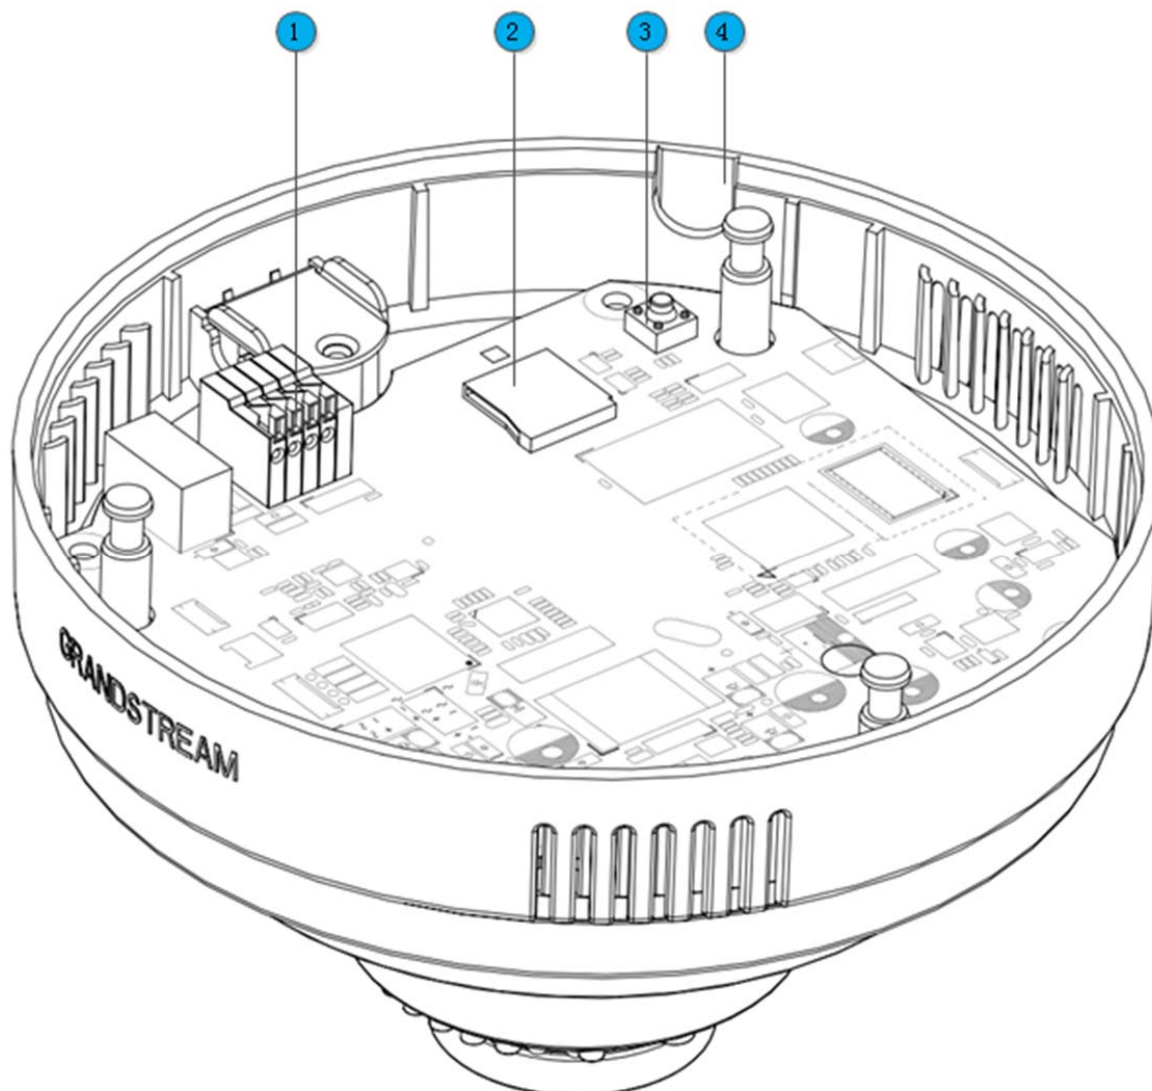

- | | |
|--|---|
| <ol style="list-style-type: none"> 1. Microphone 2. MicroSDHC Slot 3. Reset Button 4. Side Wiring Knockout | <p>PIN Interface for Alarm_In and Alarm_Out</p> <p>MicroSDHC card slot (max. 32GB card, not provided)</p> <p>Factory Reset Button</p> <p>Side knockout opening for wiring</p> |
|--|---|

GXV3611IR_HD Specifications

Model	GXV3611IR_HD
Video Compression	H.264, MJPEG
Image Sensor Resolution	Megapixel Progressive Scan CMOS, 1280H x 720V
Image Sensor Sensitivity	Day/Night mode, Exceptionally low noise, low light levels Shutter: 1/10000 – 1/30 second
Focal Length	2.8mm
Aperture	F1.8
IR Cut Filter	Yes, Mechanical
Day & Night Mode	IR LED with Full Software Control
Minimum Illumination	0 Lux
Pan	176°
Tilt	60°
Sensitivity	3300mV / (lux-sec)
Supported Maximum Video Resolution and Frame Rate	1280x720 (30fps)
Video Bit Rate	32 Kbps ~ 8 Mbps, Multi-rate for Preview & Recording
Audio Input	Built-in Microphone; 3.5mm Line-In
Audio Output	Built-in Speaker; 3.5mm Line-Out (600Ω, 0.707 Vrms)
Alarm Input	Yes, Vin≤15V, PINs
Alarm Output	Yes, 125VAC/0.5A, 30VDC/2A, Normal Open, PINs
Integrated Microphone	Yes
Integrated Speaker	Yes
SIP/VoIP Support	Yes
Privacy Mask Support	Yes, 4 Zones
Smart IR Support	Yes (Optimal White Balance and Exposures)
Time-Lapse Recording	Yes
Micro SDHC Card	Yes (up to 32GB)
Snapshots	Triggered upon Events, Send via email and/or FTP
Audio Compression	G.711u/A, AAC
Embedded Analytics	Motion Detection (up to 16 target areas)
Pre-/post-alarm Recording	Yes
Power over Ethernet (PoE)	IEEE 802.3af Class 2; 10M/100M Auto-sensing, 2KV Lighting Surge Protection
Network Protocol	TCP/UDP/IP, RTP/RTCP, RTSP, DHCP, DDNS, HTTP, HTTPS, SMTP, FTP, NTP
Cable Connections	<i>External:</i> RJ45 Ethernet 3.5mm Line-In 3.5mm Line-Out Power Input (12VDC/0.5A) <i>Internal:</i> PINs for Alarm-In & Alarm-Out
Dimensions (D x H)	138mm (D) x 86mm (H)
Weight	0.4kg
Temperature / Humidity	Operating: 0°C ~ +45°C (32°F ~ 113°F), 10 – 90% RH (Non-condensing) Storage: -20°C ~ +60°C (-4°F ~ 140°F)
Power Adapter	Output: 12VDC/0.5A; Input: 100–240VAC, 50–60Hz
Casing	Plastic Case for Indoor Only
Compliance	FCC Part 15, Subpart B Class B; EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 55024, EN 60950-1; RCM AS/NZS CISPR 22/24, AS/NZS 60950

TABLE 1: GXV3611IR_HD TECHNICAL SPECIFICATIONS

INSTALLATION GUIDE

Minimum Recommended Computer System Requirement

To install GXV3611IR_HD, you have to have a computer, PC recommend.
The minimum recommended PC system requirement listed below:

- Windows XP, Windows Vista, Windows 7 and Windows 8
- CPU: Intel Pentium 4 or higher, 2 GHz
- RAM: 1 GB (4 GB recommended for larger systems)
- Support for DirectX 8.0 and above.

Configure the GXV3611IR_HD via Web Browser

The GXV3611IR_HD has embedded Web server to respond to HTTP GET/POST requests. Embedded HTML pages allow user to configure the IP camera through Microsoft Internet Explorer (7.0 or above), Firefox and Chrome (plug-in from Grandstream required).


- Download WebControl Plug-in from Grandstream website:
http://www.grandstream.com/products/tools/surveillance/webcontrol_plugin.zip


NOTE:

- *Apple Safari is NOT yet supported and status pending.*
- *Please temporarily disable Antivirus or Internet Security Software when download and install the Grandstream WebControl Plug-in for Firefox/Chrome or “GSViewerX.cab” for Microsoft Internet Explorer.*

Connect the Camera to network with DHCP server (Recommended)

The GXV3611IR_HD by default enabled as DHCP client, it will automatically get IP address from the network with DHCP server running. User can know the IP address assigned to the camera from DHCP server log or using the Grandstream GS_Search tool.

1. Download the GS_Search tool from Grandstream website:
http://www.grandstream.com/products/tools/surveillance/GS_Search.zip
2. Run the Grandstream GS_Search tool by double click the unzipped “GS_Search.exe”.
3. Click on the  button to begin device detection
4. The detected devices will appear in the output field like below

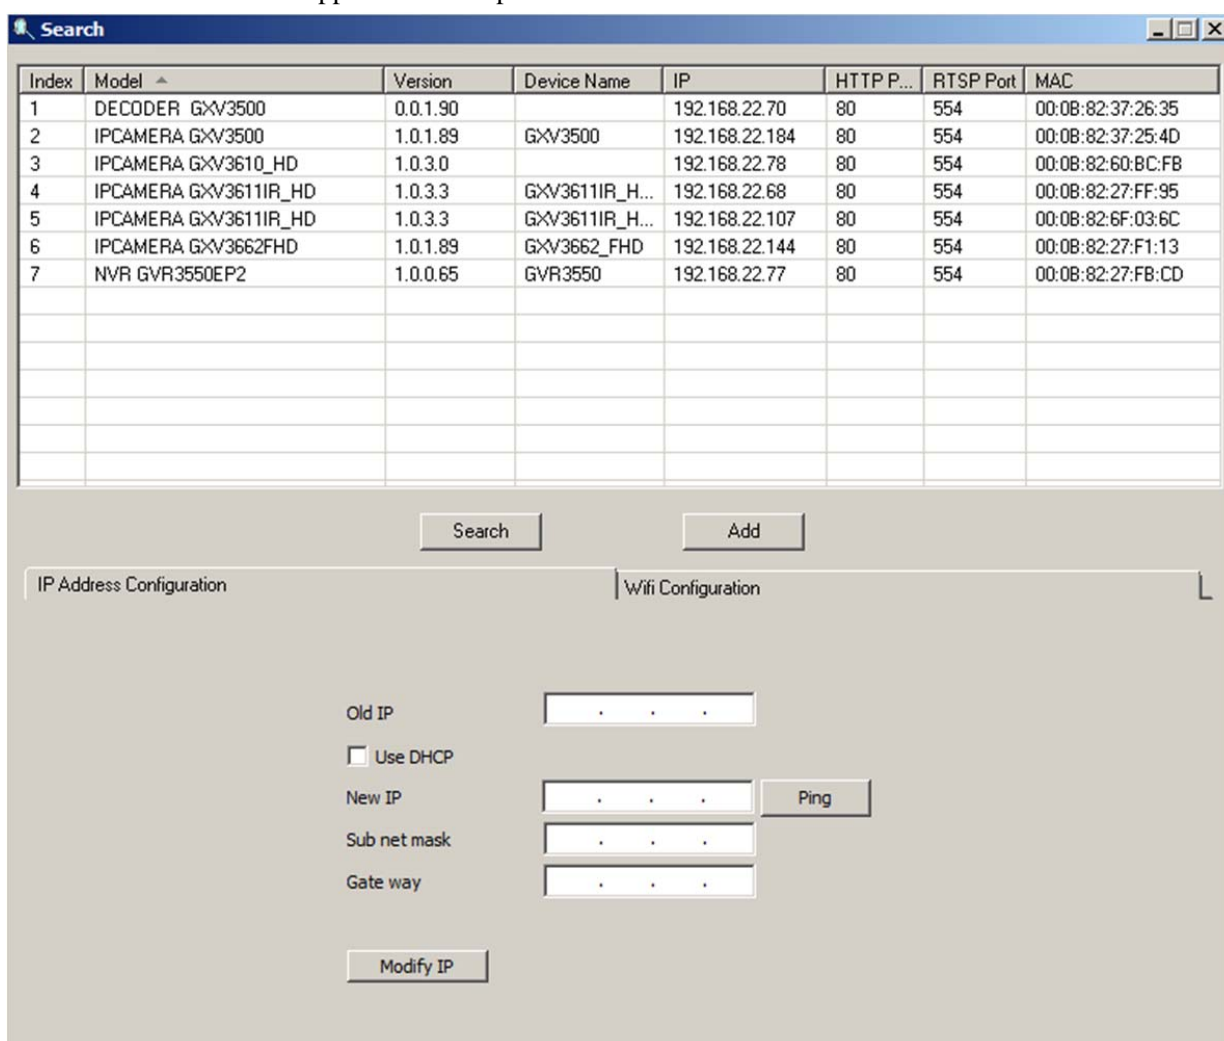

5. Double click the column of the detected camera, the browser will automatically open and link to the device IP and the web configuration page.
6. The browser will ask for plug-in or ActiveX if not installed, otherwise it will get to Home page and start to show the video captured by the camera (by default the camera enabled anonymous access)
7. Click “Configuration”, the browser will ask credentials to authorize configuration.

8. Enter the administrator user name and password to access the Web Configuration Interface, the default user name and password are both set to **admin**.
9. In step 6, browser will indicate that “This website wants to install the following add-on: GSViewerX.cab from Grandstream Networks Inc.” Please allow the installation.
10. The plug-in can be download here:
http://www.grandstream.com/products/tools/surveillance/webcontrl_plugin.zip

NOTE:


- *Please temporarily disable Antivirus or Internet Security Software and close all browsers when download and install the Grandstream Plug-in Software.*

Connect to the Camera using Static IP

If no DHCP server in the network, or the camera does not get IP from DHCP server, user can connect the camera to a computer directly, using static IP to configure the camera.

The default IP, if no DHCP server; or DHCP offer time out (3 minutes), is **192.168.1.168**

1. Connect the computer RJ-45 via an Ethernet cable directly to the IP camera GXV3611IR_HD.
2. Configure the computer using Static IP: 192.168.1.XXX (1<XXX<255, but NOT 168) and configure the “Subnet mask” to “255.255.255.0”. Leave the “Default Gateway” to “Blank” like below:

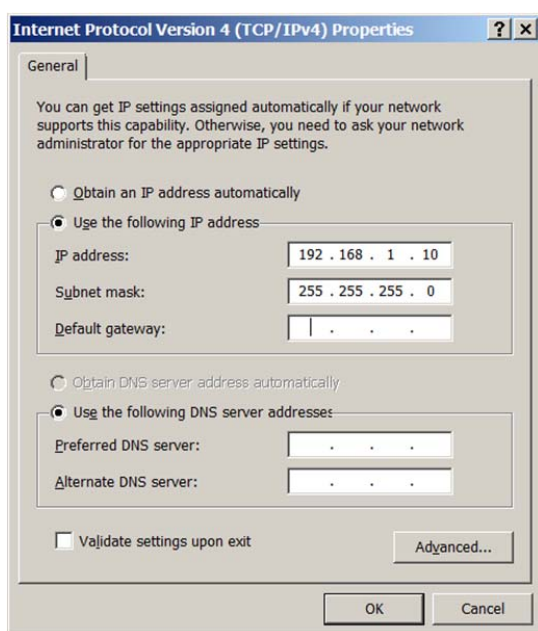

3. Power on the GXV3611IR_HD.
4. Start the browser when the network connection is up.
5. Enter 192.168.1.168 in the address bar of the browser.
6. The browser will ask for plug-in or ActiveX if not installed, otherwise it will get to Home page and start to show the video captured by the camera (by default the camera enabled anonymous access)
7. Click “Configuration”, the browser will ask credentials to authorize configuration.



8. Enter the administrator user name and password to access the Web Configuration Interface, the default user name and password are both set to ***admin***.
9. In step 6, IE will indicate that “This website wants to install the following add-on: GSViewerX.cab from Grandstream Networks Inc.”, allow the installation.
10. Firefox, Chrome user need to download and install the plug-in to see the video, the plug-in is here:
http://www.grandstream.com/products/tools/surveillance/webctrl_plugin.zip

NOTE:

- *Please temporarily disable Antivirus or Internet Security Software and close all browsers when download and install the Grandstream Plug-in Software.*

GXV3611IR_HD HOME WEB PAGE

The Home Page of GXV3611IR_HD shown as Figure 1:

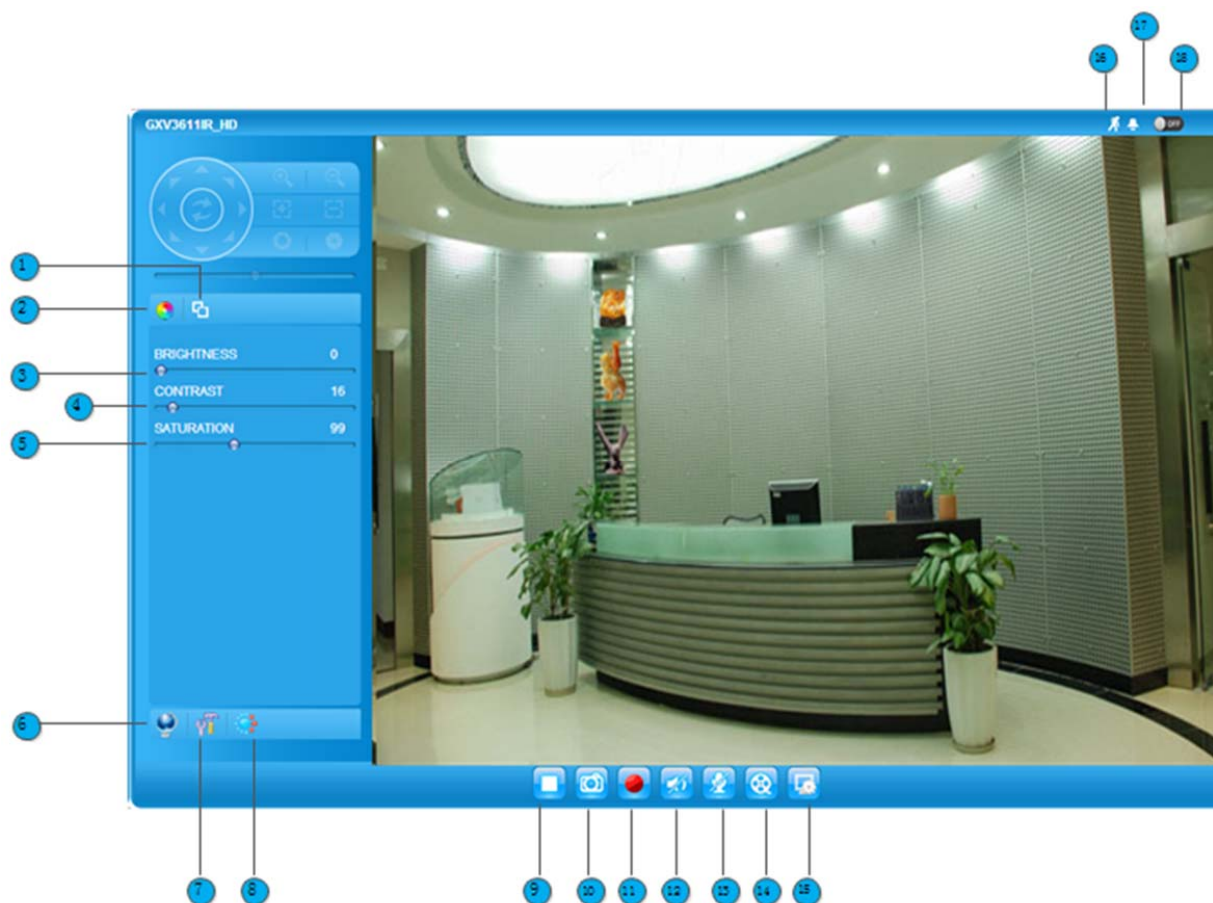


Figure 1: Home Page of GXV3611IR_HD

- | | |
|--|--|
| 1. Control Console: | PTZ Console controller for ePTZ function. |
| 2. ZOOM: | Zoom in or Zoom out during ePTZ operation (Not Applicable). |
| 3. FOCUS: | Adjust the focus of image (Not Applicable). |
| 4. PTZ SPEED/Default Button:
“D” | Adjust the rotate speed of the control console (Not Applicable).
“Default Button” to reset the video brightness, contrast and saturation value from (auto or manual) adjusted value to factory default value. |
| 5. BRIGHTNESS: | Adjust the image or video brightness. |
| 6. CONTRAST: | Adjust the image or video contrast. |
| 7. SATURATION: | Adjust the image or video saturation. |
| 8. View Size: | Adjust the size of embedded video. |
| 9. Configuration: | Click to enter “Configuration Page” to configure the parameters of GXV3611IR_HD (Administration privilege required). |
| 10. Language: | Click to switch webpage language.
(Current support: Chinese, English and Russian) |
| 11. Play/Stop: | Start/Stop playing the video stream at embedded webpage. |
| 12. Capture (Snapshot): | Click to capture and save a snapshot of current video frame displayed.
Default directory: C:\Capture |
| 13. Record: | Click to Start/Stop record of current video stream into a file.
Default directory: C:\Record |
| 14. Sound On/Off: | Toggle to listen/stop the sound from camera microphone |
| 15. Talk: | Toggle to talk to camera speaker if provided. (PC microphone and related speaker hardware required) |

- 16. **Playback:** Click to playback the recorded video file.
- 17. **Local Configuration:** Click to configure the file path of snapshot and recorded video files. Also adjust the video delay or smoothness.
- 18. **Motion Detection Alarm Indicator:** If motion detection alarm triggered, the indicator will flash in *red* (if configured). Click the indicator icon to turn off the alarm indication.

GXV3611IR_HD Configuration & Language Page

- When click the “Configuration” tab, web page will link to page to configure the related parameters of the GXV3611IR_HD.
- There are two big categories of settings: Basic Settings and Advanced Settings. Details will be illustrated in the later Chapter.
- When click the “Language” tab, supported languages will be displayed in Figure 2. Click to select the related webpage display language.



Figure 2: Web Language Switch

- Currently firmware only support: English (default), Simplified Chinese and Russian.

BASIC SETTINGS EXPLANATION

System Settings Page

This page allow user to configure the system settings of GXV3611IR_HD.

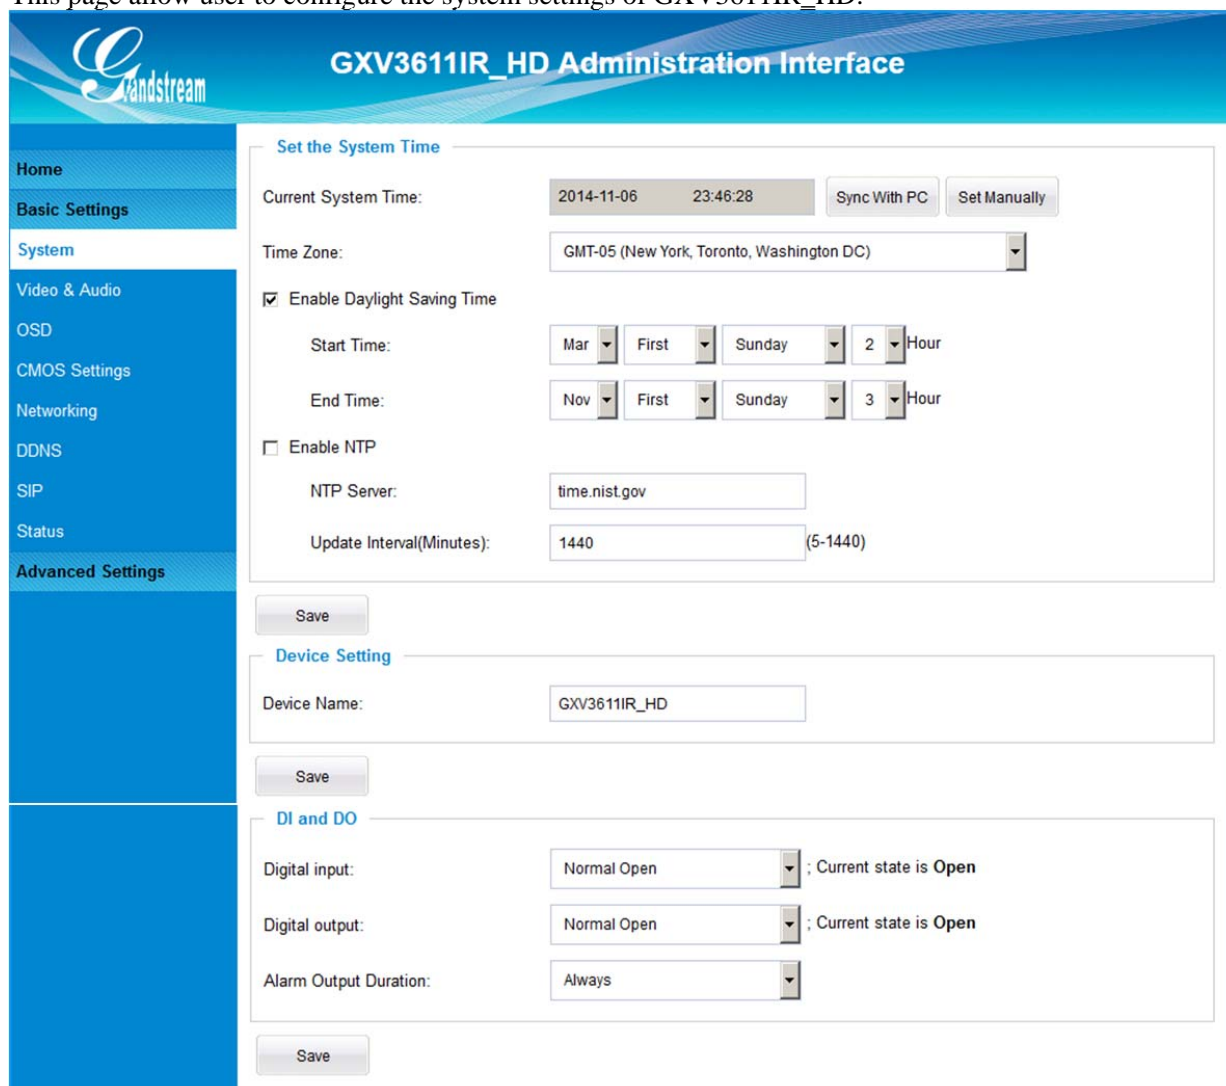



Figure 3: System Settings Page

- **Current System Time:** Display time current system is running at
- **Set the System Time:** Configure the time system is running.
 - Time Zone: Select from pull down menu the time zone unit located
 - Self-Defined Time Zone: Use the self-defined time zone for automatic daylight saving time adjustment. Format please refer to the “help over mouse”
 - Update via NTP Server: Synchronize time using NTP protocol with a Time Server over the Internet cloud (*)
 - Synchronize with Local Computer: Synchronize time with local computer
 - Set the Time Manually: Manually input the time
 - Keep Current D/T: Select to use camera current displayed time




- **OSD Date Format:** Pull down to select date format displayed on video screen
- **Device Name:** The name of device which will be shown in the result of “Search Tool” of GSurf_Pro VMS program.

NOTE:

- (*) If select this option, a valid DNS server must be preconfigured under **Basic Settings** → **Networking**
-  *button has to be clicked to save all the changes made to the device.*

Video & Audio Setting Page

This page allows user to configure the video and audio related settings.

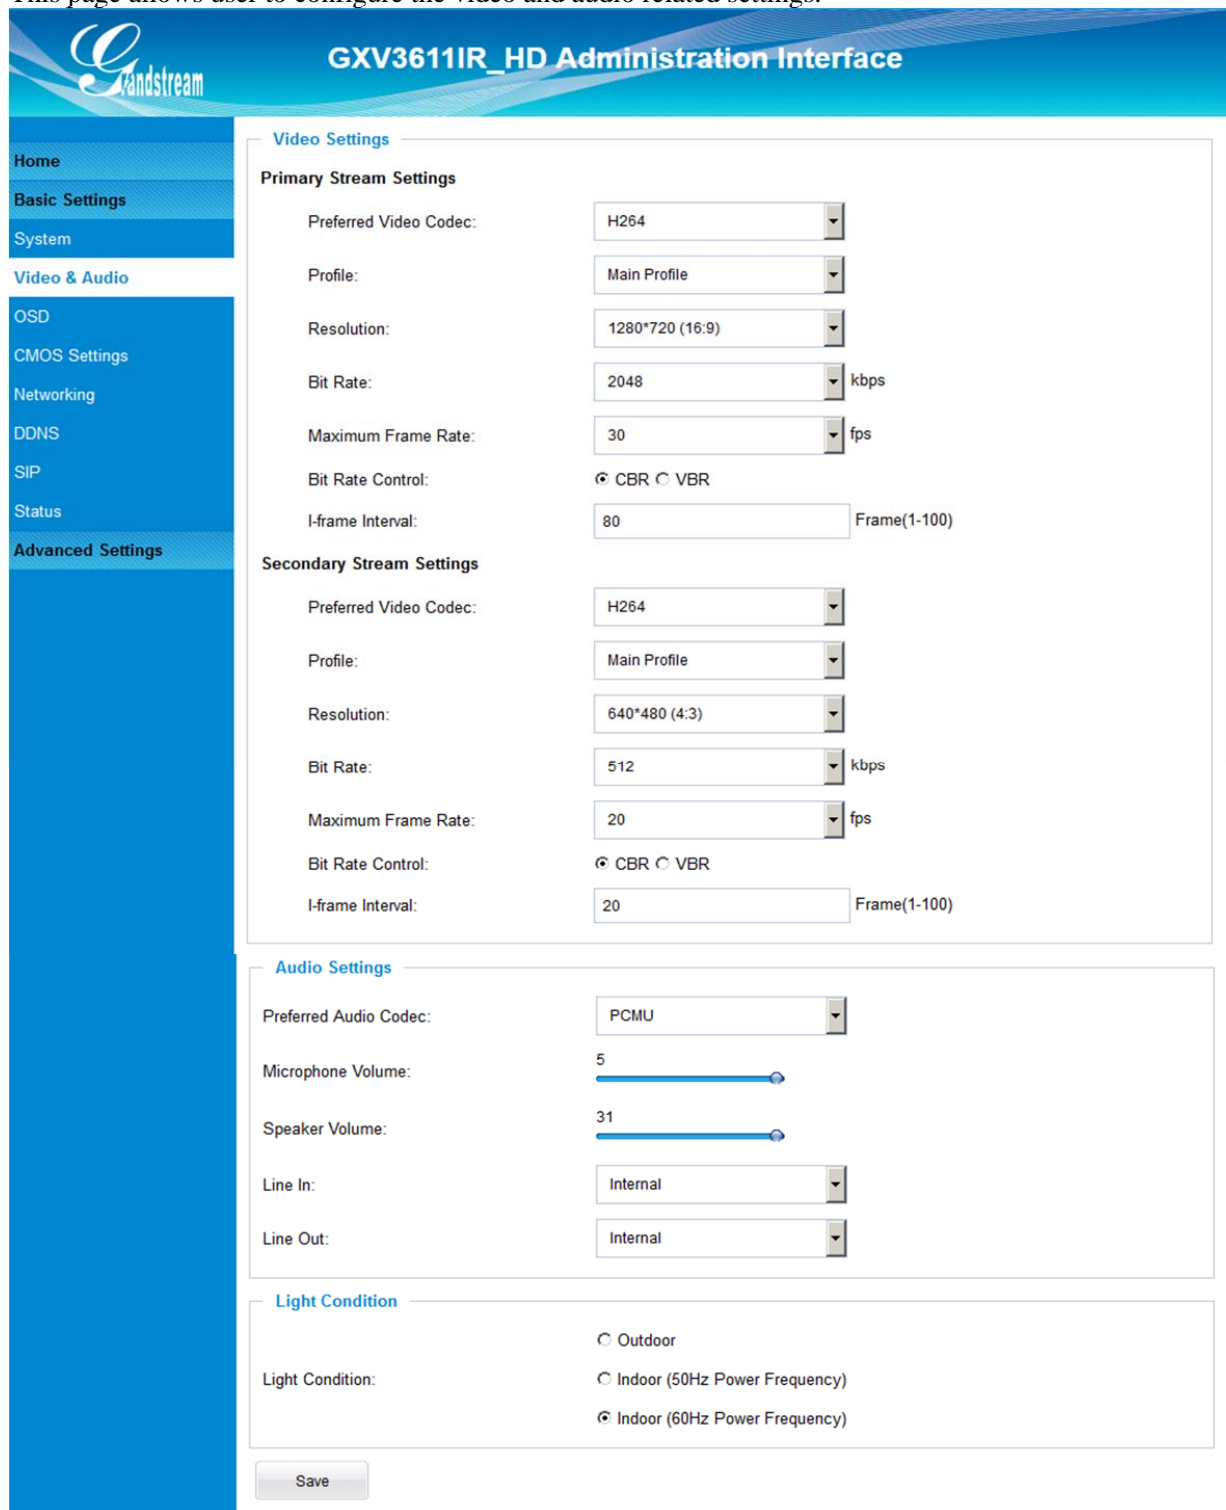

The screenshot displays the 'GXV3611IR_HD Administration Interface' with a sidebar on the left containing navigation options: Home, Basic Settings, System, Video & Audio (selected), OSD, CMOS Settings, Networking, DDNS, SIP, Status, and Advanced Settings. The main content area is divided into three sections: Video Settings, Audio Settings, and Light Condition.

Video Settings

Primary Stream Settings

- Preferred Video Codec: H264
- Profile: Main Profile
- Resolution: 1280*720 (16:9)
- Bit Rate: 2048 kbps
- Maximum Frame Rate: 30 fps
- Bit Rate Control: CBR VBR
- I-frame Interval: 80 Frame(1-100)

Secondary Stream Settings

- Preferred Video Codec: H264
- Profile: Main Profile
- Resolution: 640*480 (4:3)
- Bit Rate: 512 kbps
- Maximum Frame Rate: 20 fps
- Bit Rate Control: CBR VBR
- I-frame Interval: 20 Frame(1-100)

Audio Settings

- Preferred Audio Codec: PCMU
- Microphone Volume: 5
- Speaker Volume: 31
- Line In: Internal
- Line Out: Internal

Light Condition

- Outdoor
- Indoor (50Hz Power Frequency)
- Indoor (60Hz Power Frequency)

A 'Save' button is located at the bottom left of the settings area.

Figure 4-1: Video & Audio Settings Page

- **On Screen Display (OSD):** Display time stamp and text on the video screen.
 - OSD Text: Inputted text (to identify the camera) shown on the screen.
 - OSD Position: Show the OSD in either top or bottom position on screen.
 - Display Time: When checked, time stamp will display on video screen
 - Display Text: When checked, inputted text will display on video screen.

- **Audio Settings:**
 - Preferred Audio Codec: PCMU, PCMA, AAC supported.
 - Microphone Volume: Slide to adjust microphone gain.
 - Speaker Volume: Slide to adjust the speaker volume connected.

- **Power Frequency:** Select correct local power frequency to avoid video flicking effect under fluorescence light condition. Default is Outdoor.

- **Video Settings**

Video Settings

Primary Stream Settings

Preferred Video Codec:	H264	▼
Profile:	Main Profile	▼
Resolution:	1280*720 (16:9)	▼
Bit Rate:	2048	▼ kbps
Maximum Frame Rate:	30	▼ fps
Bit Rate Control:	<input checked="" type="radio"/> CBR <input type="radio"/> VBR	
I-frame Interval:	80	Frame(1-100)

Secondary Stream Settings

Preferred Video Codec:	H264	▼
Profile:	Main Profile	▼
Resolution:	640*480 (4:3)	▼
Bit Rate:	512	▼ kbps
Maximum Frame Rate:	20	▼ fps
Bit Rate Control:	<input checked="" type="radio"/> CBR <input type="radio"/> VBR	
I-frame Interval:	20	Frame(1-100)

Figure 4-2: Video & Audio Settings Page

- **Primary Stream Settings:**
 - Preferred Video Codec: MJPEG and H.264 supported, H.264 recommended.
 - Profile: H.264 profile selection. Default is “Baseline.”
 - Resolution: The video resolution in pixels used in video of camera
 - Bit Rate: video bit rate used
 - Maximum Frame Rate: Maximum frame rate used. More data if big frame used
 - Bit Rate Control: Constantly bit rate, or variable bit rate
 - Image Quality: Image quality used when Variable Bit Rate used
 - I-frame Interval: I-frame interval

- **Secondary Stream Settings:** Same as primary stream.

NOTE:

- *H.264 suggested if camera needs to be viewed via Internet.*
- *If MJPEG selected, reduce max. frame rate to min. value to save bandwidth and get better image*
- Grandstream IP Camera provides two video streams, user can use them with flexibility. For example, the high-resolution stream for local recording; another low or high resolution for remote monitoring; or vice versa depending application scenarios.
- *Use below link to calculate bandwidth and storage before installation*
<http://www.grandstream.com/support/tools/bandwidth-storage-calc>

CMOS Settings Page

This page allows user to adjust the CMOS parameters:

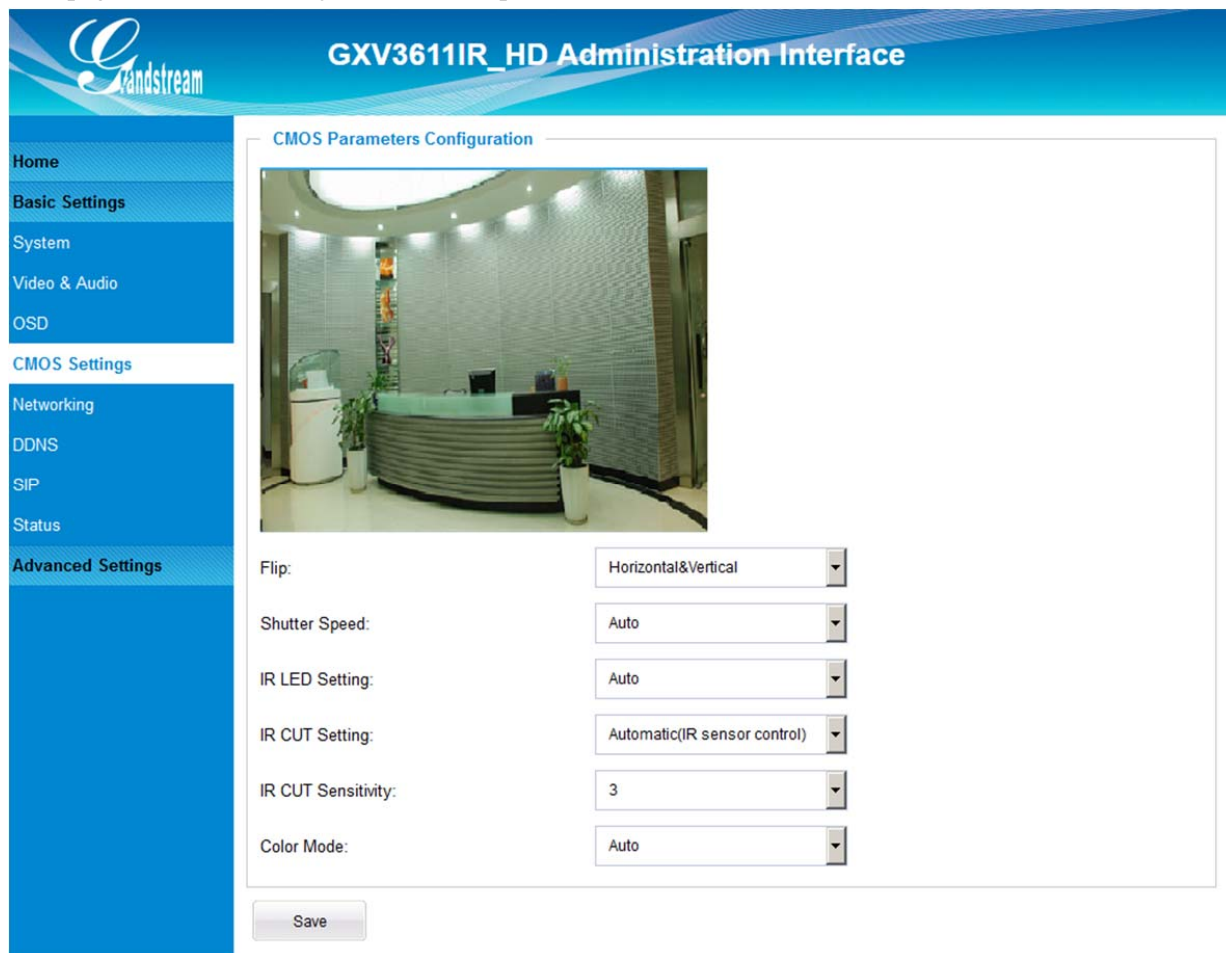


Figure 5: CMOS Settings Page

- **Flip:** Pull down to choose video flip, either vertically or horizontal or both.
- **Shutter Speed:** Camera Shutter Speed. There are 10 options, with Auto, 1/30, 1/60, 1/125, 1/250, 1/500, 1/1000, 1/2000, 1/5000 and 1/10000
- **IR CUT Setting:** Manual or Automatic (IR Sensor controlled mechanical IR CUT)
- **IR CUT Sensitivity:** Sensitivity of IR CUT to be triggered; 5 levels total.
- **Color Mode:** Camera Color Mode. There are three options: Color, Black/White, Auto (Default).

NOTE:

- *Auto option recommended for Shutter Speed, IR CUT Setting and Color Mode.*

Networking Setting Page

This page allows user to configure network related parameters:

IP Address Configuration

Dynamically Assigned via DHCP

Statically Configured as:

IP Address:

Subnet Mask:

Default Gateway:

DNS Configuration

Obtain DNS Server Address Automatically

Use the Following DNS Server Address:

Primary DNS Server:

Secondary DNS Server:

HTTP

HTTP Port:

Figure 6: Networking Setting Page

- **IP Address Configuration:**
 - Dynamically Associated via DHCP: Camera IP address configuration
Default setting, DHCP server assign IP to camera.
 - Statically Configured as: Static IP address configuration
- **DNS Configuration:** DNS server IP. Must be configured if using static IP.
- **HTTP:** Web access TCP port, default 80.

NOTE:

- If camera behind SOHO router with port forwarding configuration for remote access, static IP or static DHCP has to be used to avoid IP address change after router reboot.
- TCP port above 5000 suggested if port forwarding HTTP remote access, due to some ISP would block port 80 inbound traffic. For example, change the default HTTP port from 80 to 8088, to make sure the port forwarding not likely be blocked.
- In addition to HTTP port, RTSP port also required to be configured for port forwarding, in order for remote party viewing the H.264 video.
- If change the default port from TCP 80 to port "A", then RTSP port should be "2000+A". Both TCP port "A" and "2000+A" should be configured for port forwarding in the router. For example, the HTTP port changed to 8088, the RTSP port should be 10088, both 8088 and 10088 should be configured for port forwarding in order for remote camera video access.

DDNS Settings Page

This page allows user to configure dynamic DNS related parameters:




Figure 7: DDNS Setting Page


- **DDNS Active:** Enable DDNS by check this field.
- **DDNS ISP Type:** Select the DDNS service provider from the pull-down menu list
- **Self-Define DDNS Address:** Input the self-defined DDNS address
- **Site Name:** DDNS site name
- **DDNS Account:** DDNS account name
- **DDNS Password:** DDNS password
- **STUN Server:** Stun server FQDN or IP. If device behind a non-symmetric router, STUN server can help to penetrate & resolve NAT issue.



SIP Setting Page

This page allows user to configure SIP related parameters.

GXV3611IR_HD can be configured as SIP endpoint to call out when alarm triggered, or allow permitted number to call in to check the audio/video if Grandstream IP videophone used.



GXV3611IR_HD Administration Interface

- Home
- Basic Settings
- System
- Video & Audio
- OSD
- CMOS Settings
- Networking
- DDNS
- SIP
- Status
- Advanced Settings

General Phone Settings

Registered: Online

Unregister On Reboot:

SIP Settings

Account Name: ⓘ

SIP Server: ⓘ

Outbound Proxy: ⓘ

SIP User ID: ⓘ

Authenticate ID: ⓘ

TEL URI: Disabled User=phone Enabled ⓘ

Authenticate Password: ⓘ

STUN Server: ⓘ

Stream: ⓘ

Preferred Vocoder: ⓘ

Register Expiration(Second): ⓘ

Local SIP Port: ⓘ

Local RTP Port: ⓘ

Auto On-Hook Timer: ⓘ

Disable Audio in SIP Call: ⓘ

Enable Keep Alive:

Accept Direct IP Call:

Enable White List Number Filter: ⓘ

Enable two-way Audio Warning Mode: ⓘ

SIP Proxy Compatibility Mode: ⓘ

SIP Transport: UDP TCP TLS/TCP ⓘ

SIP TLS Certificate:

SIP TLS Private Key:

SIP TLS Private Key Password: ⓘ

Self-defined Warning Audio: ⓘ

SIP Open Door Settings

Enable SIP Open Door: ⓘ

SIP Open Door Settings

Enable SIP Open Door: ⓘ

Key to Open the Door: ⓘ

Delay Lock Time(Second): ▼

Phone List

Phone Number	Remark Name	Remove
<input type="text" value="6179114110"/>	<input type="text" value="Local Police"/>	<input type="button" value="Add..."/>


White List

Phone Number	Remove
<input type="text" value="6175669300"/>	<input type="button" value="Add..."/>

Figure 8-1: SIP Setting Page

- **Registered:** SIP registration status. Display “Online” in Green, “Offline” in Red.
- **Unregistered on Reboot:** If checked and server support, reboot camera will unbind all registration in same SIP account.

- **Account Name:** SIP account name
- **SIP Server:** FQDN or IP of SIP server from VoIP service provider
- **Outbound Proxy:** IP or FQDN of Outbound proxy server, helps penetrate NAT/Firewall
- **SIP User ID:** SIP username, or telephone number from ITSP
- **Authenticate ID:** Authenticate ID used by SIP proxy
- **Authenticate Password:** Authenticate password used by SIP proxy
- **STUN Server:** STUN server used to resolve NAT if have
- **Stream:** Which stream used for SIP call.
- **Preferred Vocoder:** Audio codec used for SIP call.
- **Registration Expiration:** Registration expiration time, default 3600 seconds
- **Local SIP Port:** Local SIP port, default 5060
- **Local RTP Port:** Local RTP port for media, default 5004

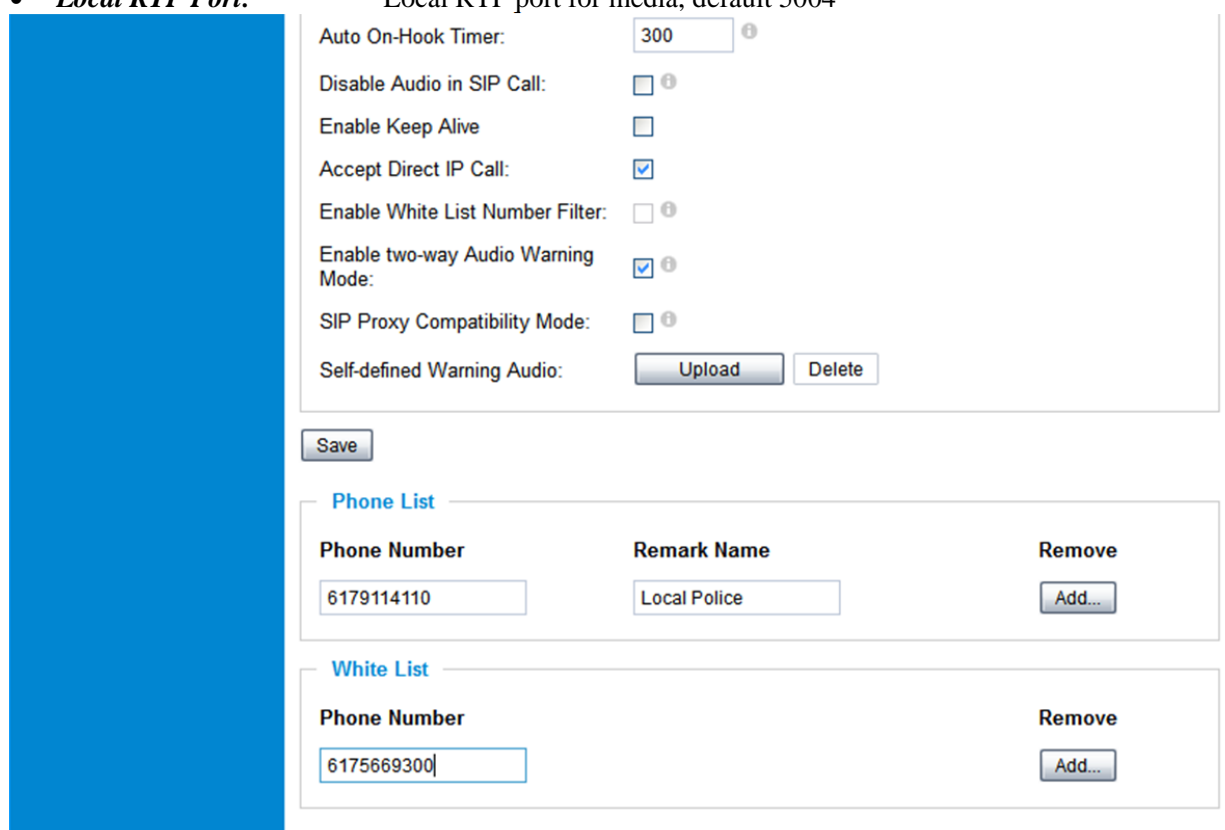

Auto On-Hook Timer:

Disable Audio in SIP Call:

Enable Keep Alive:

Accept Direct IP Call:

Enable White List Number Filter:

Enable two-way Audio Warning Mode:

SIP Proxy Compatibility Mode:

Self-defined Warning Audio:

Phone List

Phone Number	Remark Name	Remove
<input type="text" value="6179114110"/>	<input type="text" value="Local Police"/>	<input type="button" value="Add..."/>

White List

Phone Number	Remove
<input type="text" value="6175669300"/>	<input type="button" value="Add..."/>

Figure 8-2: SIP Setting Page

- **Auto on hook Timer:** Auto On Hook timer, default 300 seconds
- **Disable Audio in SIP Call:** Checked to disable audio for SIP call
- **Enable Keep Alive:** Checked to enable, help NAT resolution
- **Accept Direct IP Call:** Check to accept peer-to-peer IP call.
- **Enable White List Number Filter:** Check to allow only white list number to call in, for security
- **Enable Dual-way Audio Warning:** Check to enable two-way audio when call established (Default)
- **SIP Proxy Compatibility Mode:** Check to enable more proxy compatibility with cost of bandwidth
- **Self-define Warning Audio:** Upload self-defined warning message audio (follow the format)
- **Phone List (Phone Number):** Callee or call receiver's number when alarm call triggered.
- **White List (Phone Number):** Phone numbers allowed calling into the camera.

Status Page

This page shows the GXV3611IR_HD operation status:



The screenshot shows the 'GXV3611IR_HD Administration Interface' with a left-hand navigation menu and three main status sections:

- System Statistics:**
 - Product Model: GXV3611IR_HD
 - Hardware Version: V1.0A
 - Part Number: 9670007010A
 - Bootloader Version: 1.0.3.5
 - Core Version: 1.0.3.5
 - Base Version: 1.0.3.5
 - Firmware Version: 1.0.3.5
 - System Up Time Since: 5 minutes
- Network Status:**
 - MAC Address: 00:0B:82:6F:03:BF
 - LAN IP Address: 192.168.11.187
 - LAN Subnet Mask: 255.255.255.0
 - LAN Default Gateway: 192.168.11.254
 - DDNS Status: Disabled
 - SIP Registered: **Online**
- IR CUT Status:**
 - IR CUT Status: Night

Figure 9: Status Page

NOTE:


- *IR CUT Status will display “Daytime” or “Night” depending on current IR CUT position*
- *When SIP account registered, the status will display “Online” in Green.*
- *When SIP account unregistered, the status will display “Offline” in Red, as below.*

SIP Registered: **Offline**

ADVANCED SETTINGS EXPLANATION

User Management Page

This page allows user to do user management:

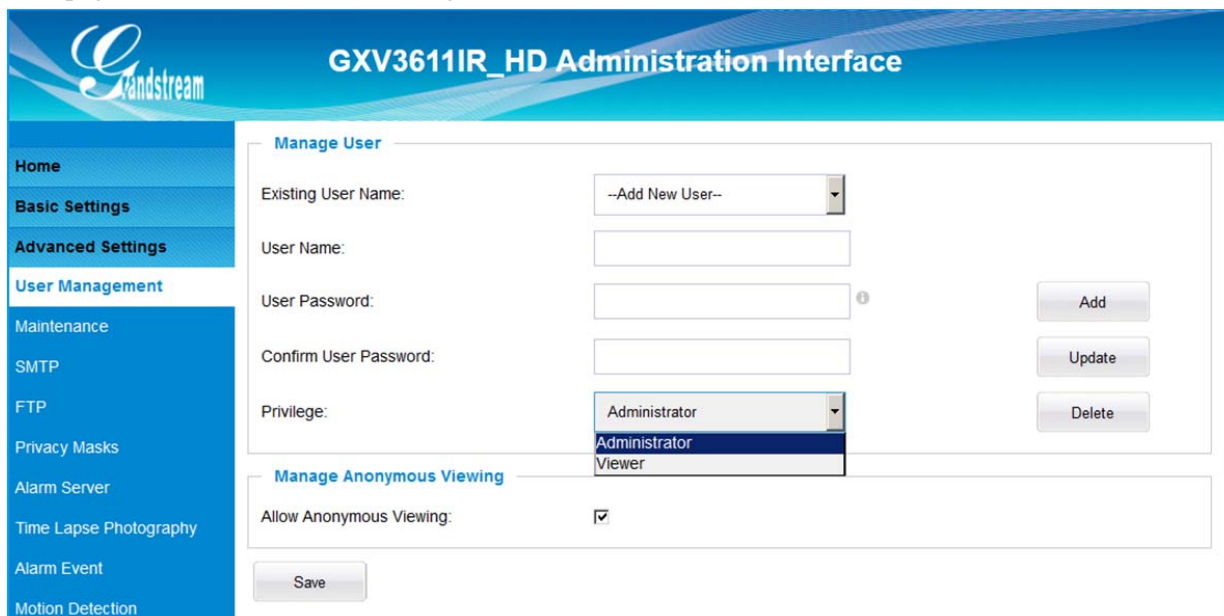

The screenshot shows the 'GXV3611IR_HD Administration Interface' with a sidebar on the left containing navigation options: Home, Basic Settings, Advanced Settings, User Management (highlighted), Maintenance, SMTP, FTP, Privacy Masks, Alarm Server, Time Lapse Photography, Alarm Event, and Motion Detection. The main content area is titled 'Manage User' and contains the following fields and controls:

- Existing User Name:** A dropdown menu with the option '--Add New User--'.
- User Name:** A text input field.
- User Password:** A text input field with an information icon.
- Confirm User Password:** A text input field.
- Privilege:** A dropdown menu with options: Administrator (selected), Administrator, and Viewer.
- Buttons:** 'Add', 'Update', and 'Delete' buttons are positioned to the right of the password and privilege fields.

Below the 'Manage User' section is the 'Manage Anonymous Viewing' section, which includes:


- Allow Anonymous Viewing:** A checkbox that is currently checked.
- Save:** A button at the bottom left of the form.

Figure 10: User Management Page

- **Existing User Name:** Allow revise existing user or add new user
- **User Name:** The name of user need to be revised
- **User Password:** New password if revise password
- **Confirm User Password:** Re-enter the new password for verification
- **Privilege:** Choose user privilege
- **Allow Anonymous Viewing:** When checked, no security enhanced. Any person can view the camera if knowing the IP or FQDN of the camera, but can NOT change anything, just view ONLY.

Maintenance Page

This page allows user to maintain the camera:

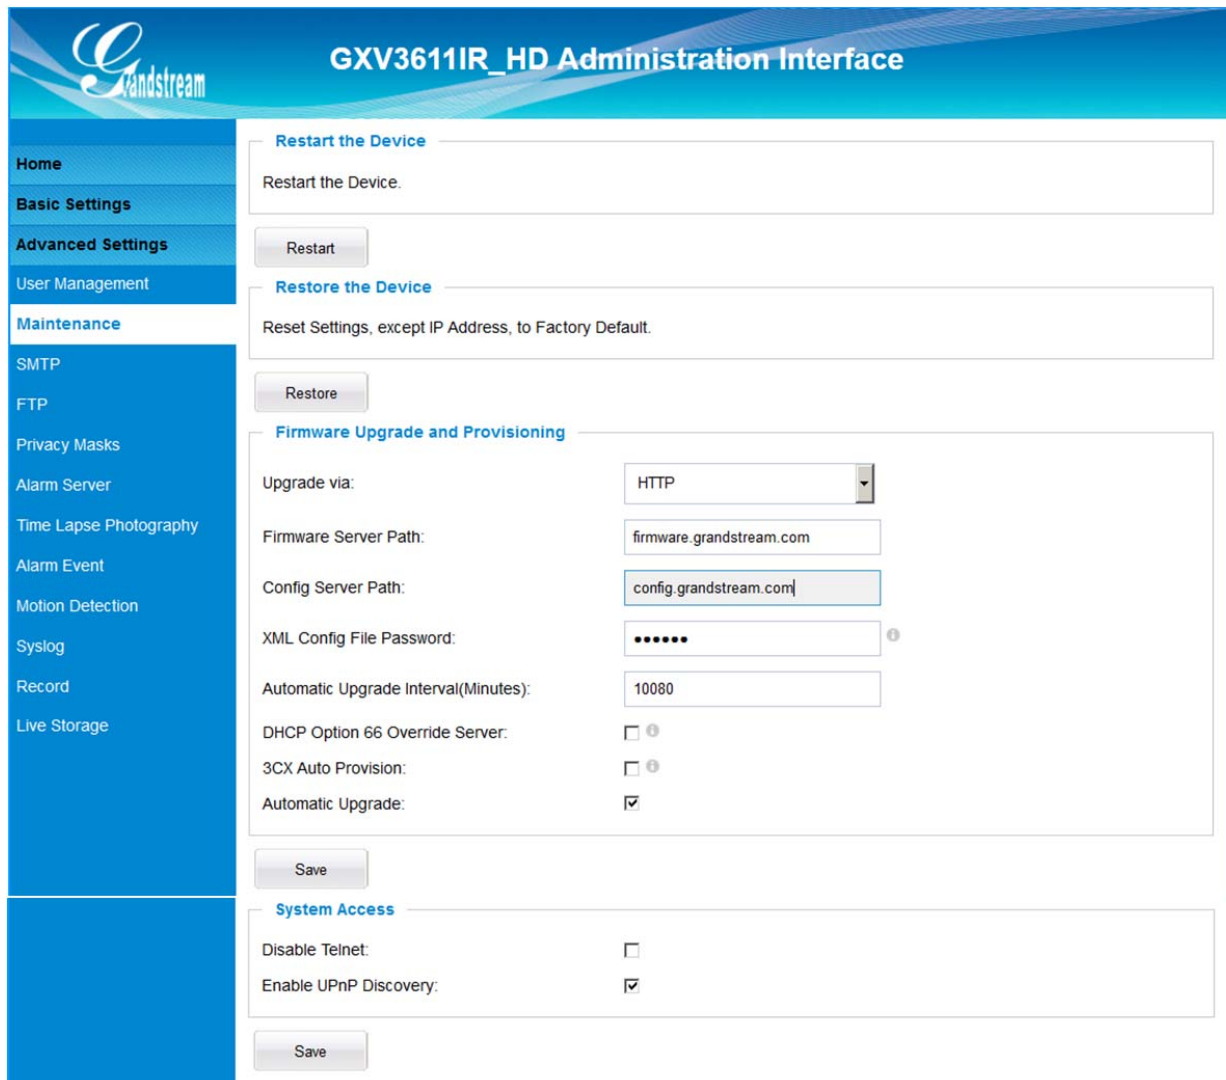

The screenshot shows the 'GXV3611IR_HD Administration Interface' with a left-hand navigation menu. The 'Maintenance' section is selected, showing three main areas: 'Restart the Device', 'Restore the Device', and 'Firmware Upgrade and Provisioning'. The 'Restart the Device' section has a 'Restart' button. The 'Restore the Device' section has a 'Restore' button. The 'Firmware Upgrade and Provisioning' section includes a dropdown for 'Upgrade via' (set to HTTP), text boxes for 'Firmware Server Path' (firmware.grandstream.com) and 'Config Server Path' (config.grandstream.com), a password field for 'XML Config File Password', a text box for 'Automatic Upgrade Interval (Minutes)' (10080), and checkboxes for 'DHCP Option 66 Override Server', '3CX Auto Provision', and 'Automatic Upgrade' (checked). A 'Save' button is at the bottom. Below this is the 'System Access' section with checkboxes for 'Disable Telnet' and 'Enable UPnP Discovery' (checked), with another 'Save' button.

Figure 11: Maintenance Page

- **Restart:** When clicked, the camera will reboot or restart
- **Restore:** When clicked, the camera will be reset to factory default, wiping out all the configurations (except IP address)
- **Upgrade via:** Upgrade firmware via TFTP, HTTP or HTTPS
- **Firmware Server Path:** Server path holding the firmware
- **Config Server Path:** Server path holding the configuration file (auto provisioning)
- **XML ConfigFile Password:** Password for encrypt the XML based configuration file
- **Automatic Upgrade Interval (Minutes):** Time interval for automatic upgrade, default 10080
- **Automatic Upgrade:** Checked to enable automatic firmware upgrade and provisioning.

NOTE:

- Only XML based automatic provisioning is supported by GXV3611IR_HD.

SMTP Setting Page (Email Alarm)

This page allows user to configure email client to send out email when alarm triggered:

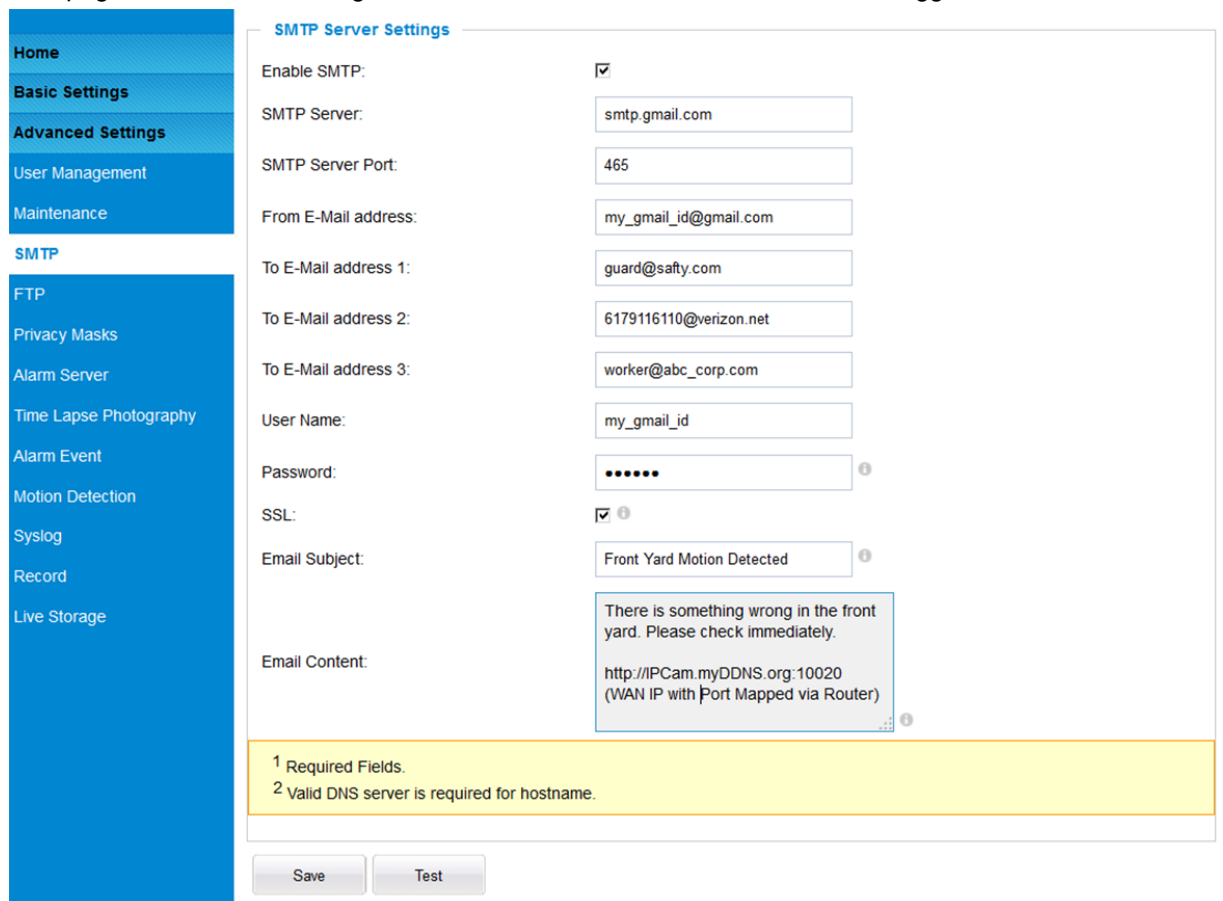


Figure 12: SMTP Setting Page

- **Enable SMTP:** When checked, email client is enabled.
- **SMTP Server:** SMTP Email Server IP or Domain Name
- **SMTP Server Port:** Port number used by server to send email
- **From Email address:** The email address of alarm email sending from, usually client email ID
- **To E-Mail address:** The email address to receive the alarmed email, total 3 included.
- **User Name:** Email client User ID
- **Password:** Email client password
- **SSL:** Check if the SMTP email server requires SSL
- **Email Subject:** Customizable email subject for user convenience
- **Email Content:** Customizable email body for user convenience

NOTE:

- Click “Save” to save the email configuration information.

- Click “Test” after configuration, if setting is correct, a test email will send out and “Test successful!” orange bar will display like below

Home	Test successful!	
Basic Settings	Enable SMTP:	<input checked="" type="checkbox"/>
Advanced Settings	SMTP Server:	<input type="text" value="smtp.gmail.com"/>
User Management	SMTP Server Port:	<input type="text" value="465"/>

FTP Settings Page (Upload Alarm)

This page allows user to configure FTP parameters to upload the alarm or video recording:

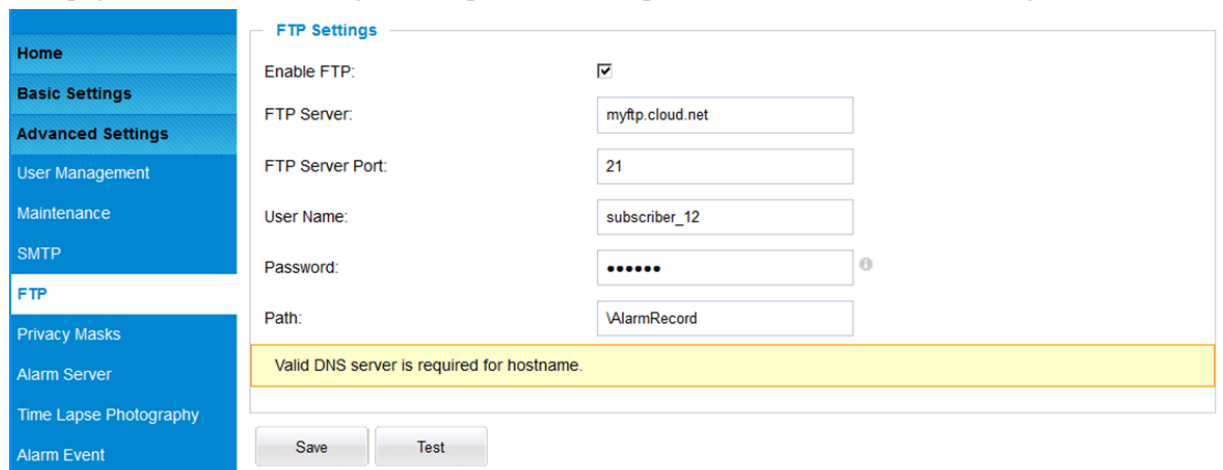


Figure 13: FTP Setting Page

- **Enable FTP:** When checked, built-in FTP client is enabled.
- **FTP Server:** IP or Domain name of FTP site or server
- **FTP Server Port:** TCP port for FTP server, default port number 21
- **User Name:** FTP server User ID
- **Password:** FTP server user password
- **Path:** Path in the server where upload files are stored.

NOTE:

- Click “Save” to save the FTP configuration information.
- Click “Test” after configuration, if setting is correct, a test FTP operation will be performed and “Test successful!” orange bar will display if the operation is successful.

Alarm Server Settings Page (Upload Alarm to supported VMS or HTTP Server)

This page allows user to configure alarm HTTP server to upload alarms:

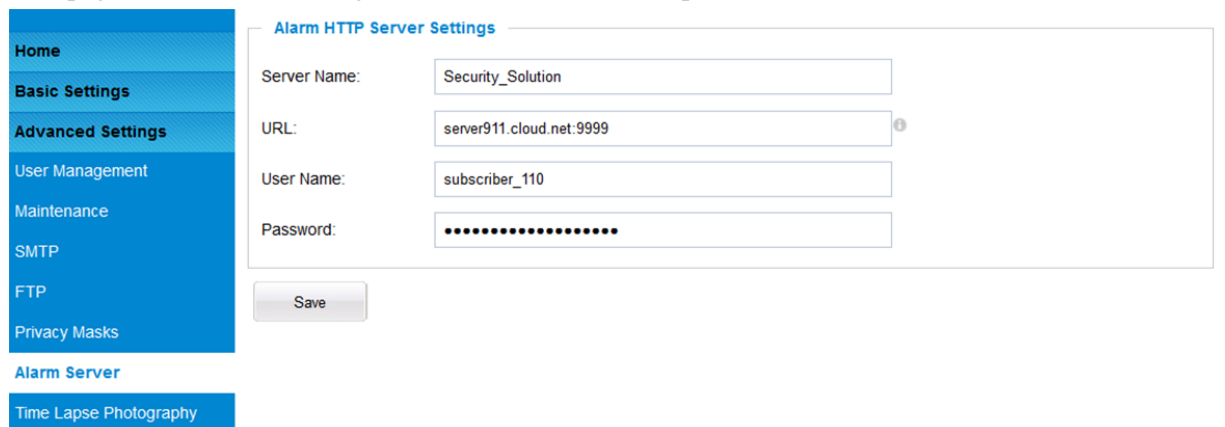


Figure 14: Alarm HTTP Server Setting Page


- **Server Name:** The name of HTTP server or VMS system
- **URL:** URL of the Server
- **User Name:** User ID from that Server
- **Password:** Password for that User ID

NOTE:

- Grandstream provide HTTP API to help third party companies by using HTTP server or VMS to develop further solutions for their customers.
http://www.grandstream.com/products/surveillance/general/documents/grandstream_http_api.pdf
- Grandstream IP Camera and Encoder (include GXV3611IR_HD) are ONVIF certified.

Motion Detection Configuration Page (Set Alarm)

This page allows user to configure motion detection to trigger alarms:

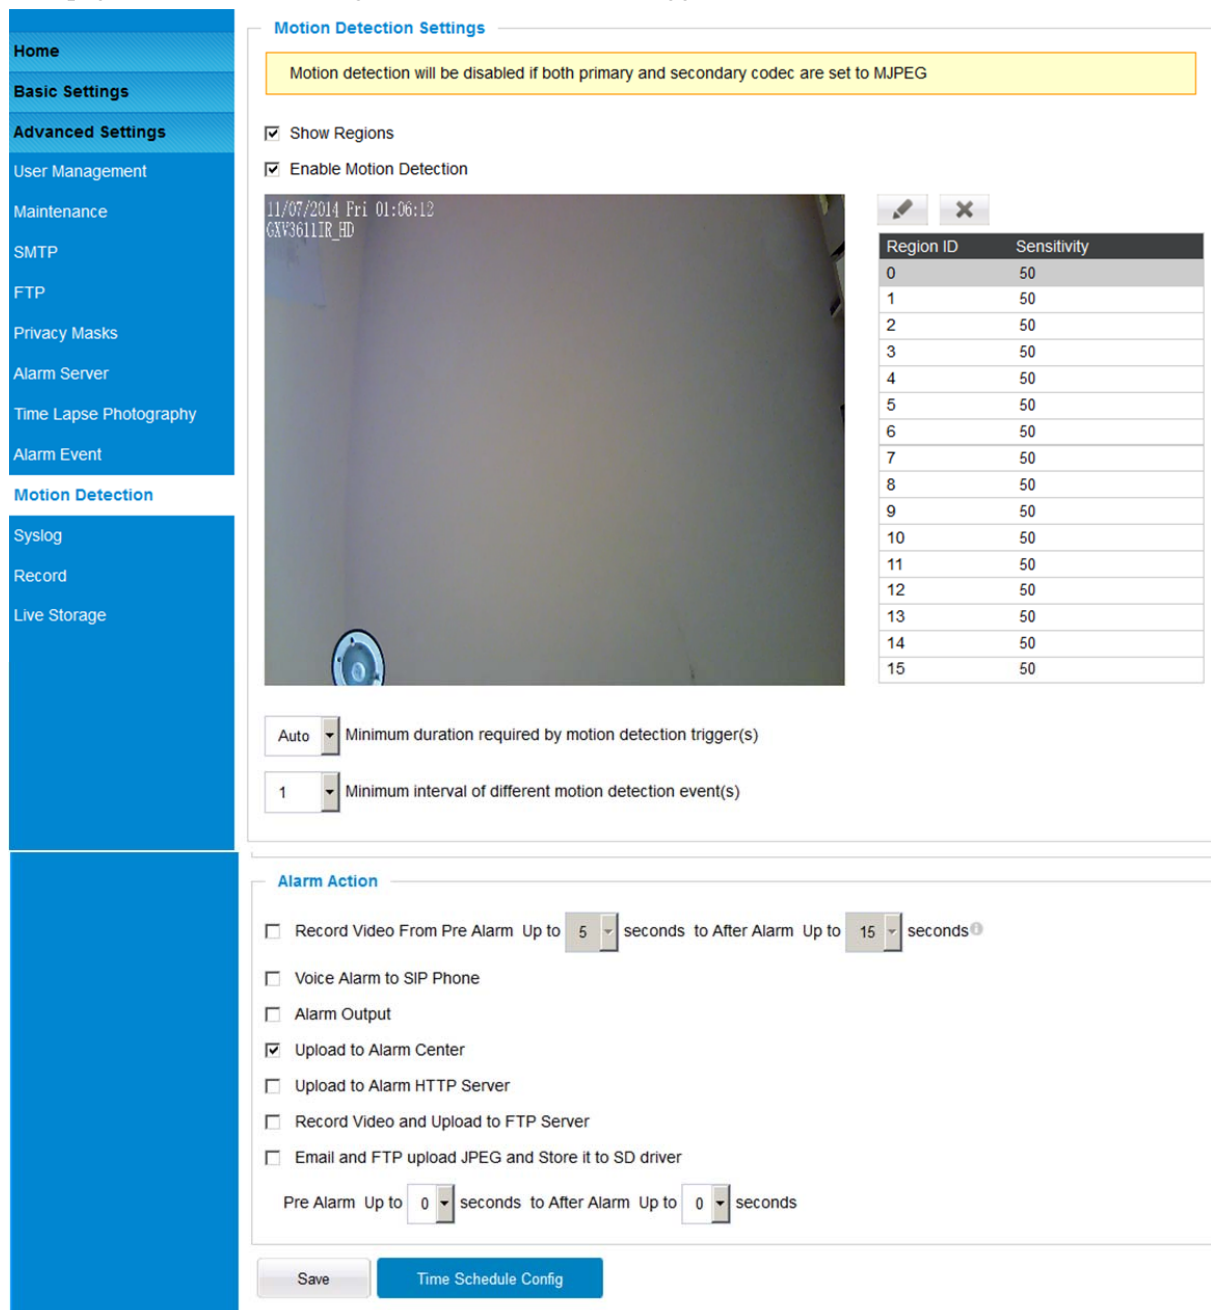

The screenshot shows the 'Motion Detection Settings' page. On the left is a navigation menu with options like Home, Basic Settings, Advanced Settings, User Management, Maintenance, SMTP, FTP, Privacy Masks, Alarm Server, Time Lapse Photography, Alarm Event, Motion Detection, Syslog, Record, and Live Storage. The main content area is titled 'Motion Detection Settings' and contains a yellow warning box: 'Motion detection will be disabled if both primary and secondary codec are set to MJPEG'. Below this are two checked checkboxes: 'Show Regions' and 'Enable Motion Detection'. A video preview window shows a timestamp '11/07/2014 Fri 01:06:12' and device ID 'GXV3611IR_HD'. To the right of the video is a table of motion detection regions:

Region ID	Sensitivity
0	50
1	50
2	50
3	50
4	50
5	50
6	50
7	50
8	50
9	50
10	50
11	50
12	50
13	50
14	50
15	50

Below the table are two dropdown menus: 'Auto' for 'Minimum duration required by motion detection trigger(s)' and '1' for 'Minimum interval of different motion detection event(s)'. The 'Alarm Action' section includes several checkboxes: 'Record Video From Pre Alarm Up to 5 seconds to After Alarm Up to 15 seconds', 'Voice Alarm to SIP Phone', 'Alarm Output', 'Upload to Alarm Center' (checked), 'Upload to Alarm HTTP Server', 'Record Video and Upload to FTP Server', and 'Email and FTP upload JPEG and Store it to SD driver'. At the bottom, there are 'Pre Alarm Up to 0 seconds to After Alarm Up to 0 seconds' and 'Save' and 'Time Schedule Config' buttons.

Figure 15-1: Motion Detection Configuration Page

- **Enable Motion Detection:** When checked, motion Detection enabled.
- **Show Motion Detection Regions:** When checked, motion Detection region with number will be displayed as a white rectangle in the screen. When “Edit” clicked, the Rectangle will become Red, as shown in Figure 16-1.



- **Select a Region:** Pull down to select and configure alarm region, altogether 16 alarm region available, from 0 to 15.
- **Sensitivity:** Select configured alarm region number, input number for sensitivity to trigger alarm, 100 is the maximum sensible value.

Alarm Action:

- **Record Video From.....:** Allow user to configure how long pre/post alarm trigger moment, the video to be captured by the camera.
- **Voice Alarm to SIP Phone:** When checked and SIP proxy configured and IPCam registered, SIP alarm call will be made to pre-configured number.
- **Upload to Alarm Center:** When checked, the alarm video will be transferred to Alarm Center, like Grandstream free GSurf_Pro VMS software.
- **Upload to Alarm HTTP Server:** When checked, the alarm will be sent to Alarm HTTP Server. Third Party Server also can be used via GS HTTP API
- **Record Video and Upload...:** When checked and FTP server configured, the recorded video will be FTPed to the configured FTP server.
- **Email and FTP upload JPEG:** When checked, snapshots of trigger moment will be emailed to pre-configured email account and also uploaded to FTP server if configured.

NOTE:

- *Grandstream free GSurf_Pro VMS software can be downloaded here:*
http://www.grandstream.com/products/tools/surveillance/gsurf_pro.zip

Motion Detection Time Schedule:

This page allows user to configure Motion Detection Operation Schedule:

Motion Detection Time Schedule
✕

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
	0	2	4	6	8	10	12	14	16	18	20	22	24				
Sun																	
Mon																	
Tue																	
Wed																	
Thu																	
Fri																	
Sat																	

Date	Start Time	End Time	<input type="checkbox"/> Check All
Everyday	00:00	23:59	<input type="checkbox"/>

Everyday

00:00

23:59

Add

Delete

Cancel

Figure 15-2: Motion Detection Schedule Configuration Page

- *As shown in Figure 15-2, user can configure the Motion Detection Region with related Start and Stop time to control the motion detection operation.*

Syslog Settings Page (Troubleshooting)

This page allows user to enable the Syslog to help troubleshooting problems:

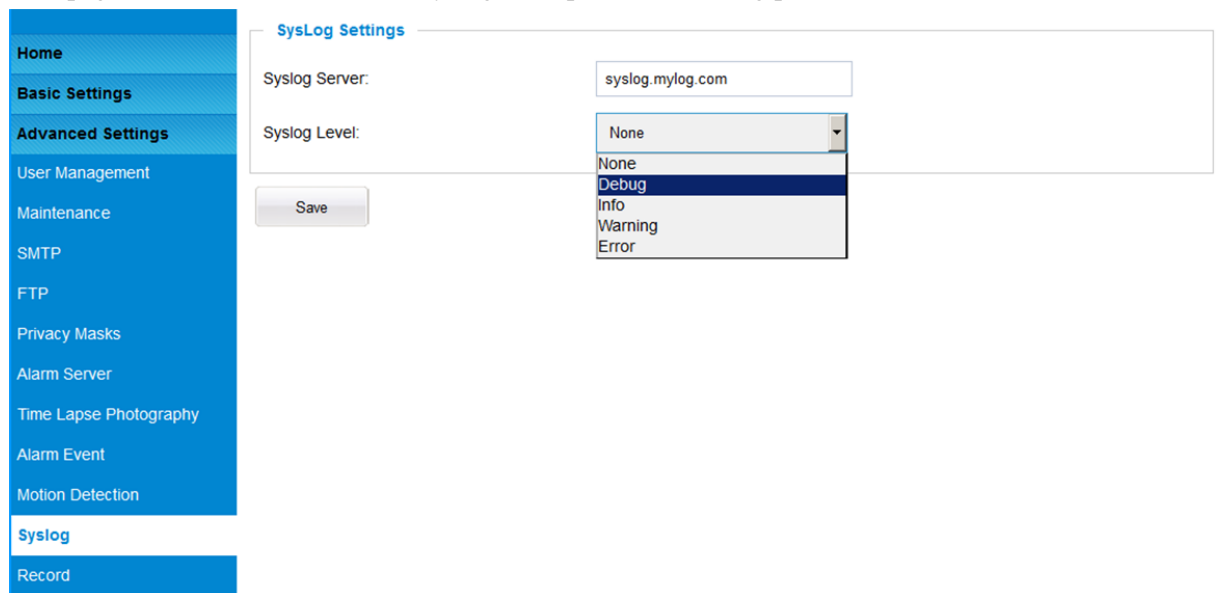



Figure 16: Alarm Server Setting Page

- **Syslog Server:** Syslog server IP or Domain Name
- **Syslog Level:** Lever of syslog message sent to the syslog server:
None, Debug, Info, Warning, Error.

Software Upgrade

This page allows user to configure firmware upgrade:

Software upgrade can be done via TFTP, HTTP or HTTPS. The corresponding configuration settings are in the ADVANCED SETTINGS configuration page.

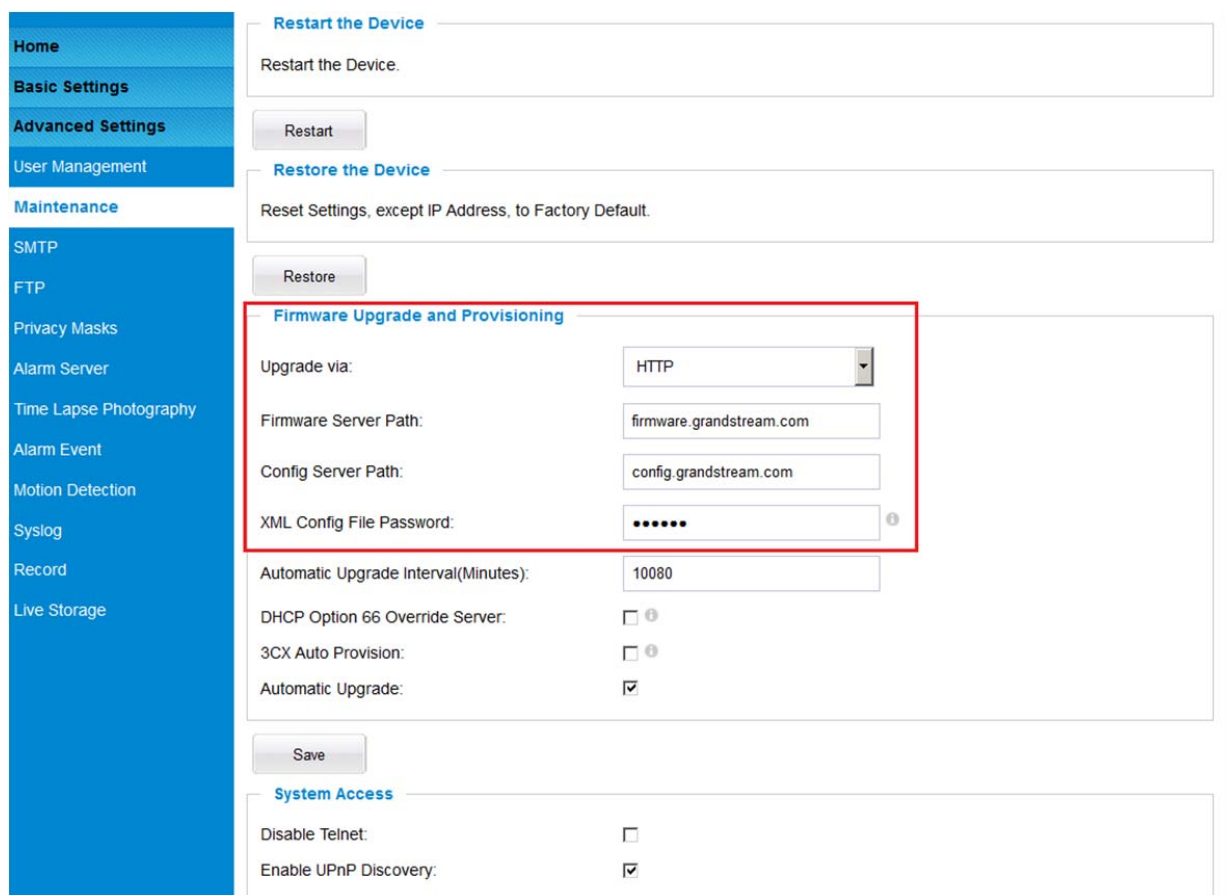

Restart the Device

Restart the Device.

Restart

Restore the Device

Reset Settings, except IP Address, to Factory Default.

Restore

Firmware Upgrade and Provisioning

Upgrade via: HTTP

Firmware Server Path: firmware.grandstream.com

Config Server Path: config.grandstream.com

XML Config File Password:

Automatic Upgrade Interval(Minutes): 10080

DHCP Option 66 Override Server:

3CX Auto Provision:

Automatic Upgrade:

Save

System Access

Disable Telnet:

Enable UPnP Discovery:

Figure 17: Firmware Upgrade and Provisioning

NOTE:

- *Grandstream recommends end-user use the Grandstream HTTP server: firmware.grandstream.com*
- *For large companies, we recommend to maintain their own TFTP/HTTP/HTTPS server for upgrade and provisioning procedures.*

Instructions for local firmware upgrade using TFTP server:

1. Unzip the file and put all of them under the root directory of the TFTP server.
2. Put the PC running the TFTP server and the device in the same LAN segment.
3. Please go to File -> Configure -> Security to change the TFTP server's default setting from "Receive Only" to "Transmit Only" for the firmware upgrade.
4. Start the TFTP server, in the phone's web configuration page
5. Configure the Firmware Server Path with the IP address of the PC
6. Update the change and reboot the unit

End users can also choose to download the free HTTP server from <http://httpd.apache.org/> or use Microsoft IIS web server.

Configuration File Download

Grandstream SIP Device can be configured via Web Interface as well as via Configuration File through TFTP or HTTP/HTTPS. "Config Server Path" is the TFTP or HTTP/HTTPS server path for configuration file. It needs to be set to a valid URL, either in FQDN or IP address format. The "Config Server Path" can be same or different from the "Firmware Server Path".

A configuration parameter is associated with each particular field in the web configuration page. A parameter consists of a Capital letter P and 1 to 3 (Could be extended to 4 in the future) digit numeric numbers. i.e., P2 is associated with "Admin Password" in the ADVANCED SETTINGS page. For a detailed parameter list, please refer to the corresponding firmware release configuration template.

When Grandstream Device boots up or reboots, it will issue request for configuration file named "cfgxxxxxxxxxx.xml", where "xxxxxxxxxx" is the MAC address of the device, i.e., "cfg000b820102ab.xml". The configuration file name should be in lower cases.

Currently GXV3611IR_HD only support XML configuration.


RESTORE FACTORY DEFAULT SETTING

WARNING!

Restoring the Factory Default Setting will DELETE all configuration information of the camera. Please BACKUP or PRINT out all the settings before approach to following steps. Grandstream will not take any responsibility if you lose all the parameters of setting or cannot connect to your VoIP service provider.

Reset from Web Interface

This page allows user to configure dynamic network related parameters:

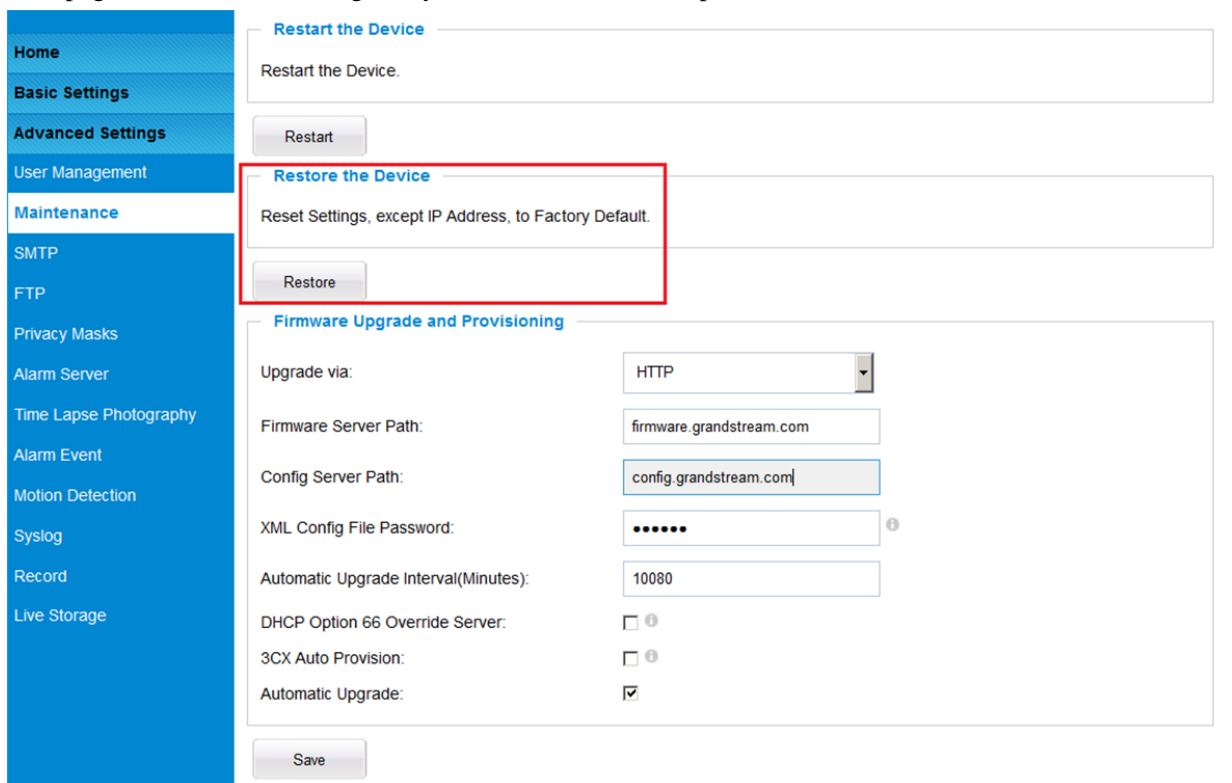

The screenshot shows the web interface with a left-hand navigation menu. The 'Maintenance' menu item is selected. The main content area is divided into three sections:

- Restart the Device:** Contains the text 'Restart the Device.' and a 'Restart' button.
- Restore the Device:** This section is highlighted with a red box. It contains the text 'Reset Settings, except IP Address, to Factory Default.' and a 'Restore' button.
- Firmware Upgrade and Provisioning:** Contains several configuration fields:
 - Upgrade via: HTTP (dropdown menu)
 - Firmware Server Path: firmware.grandstream.com
 - Config Server Path: config.grandstream.com
 - XML Config File Password: [masked]
 - Automatic Upgrade Interval(Minutes): 10080
 - DHCP Option 66 Override Server:
 - 3CX Auto Provision:
 - Automatic Upgrade:

A 'Save' button is located at the bottom of the 'Firmware Upgrade and Provisioning' section.

Figure 18: Factory Reset from Web Interface

IP SURVEILLANCE FAQ

1. What is the default IP address of the GXV3611IR_HD?

The default IP configuration is DHCP.

2. Why can I not view the live video stream in Microsoft Internet Explorer?

Please double check whether the Grandstream Plug-in/Active-X is installed correctly. Once you log into the GXV3611IR_HD web interface, Internet Explorer will indicate that this website wants to install to following add-on: GSViewer. cab' from Grandstream Networks, Inc. Please install this add-on when prompted by IE.

3. How do you manually uninstall the Grandstream video viewer add-on for IE?

Please follow these steps to uninstall the add-on:

1. Delete the GSViewerX Control from C:\WINDOWS\Downloaded Program Files directory
2. Delete GSNetClient.dll, GS_Replay.exe, GSViewerX.ocx, hi_h264dec_w.dll, lik_VoiceEngine_dll.dll and GSViewerX.inf from C:\WINDOWS\system32

4. Why can't I access the GXV3611IR_HD web configuration interface?

Q 1: Is your internet service down?

A 1: Connect a PC to the internet to test the connection.

Q 2: Are the PC and the device in different subnets?

A 2: Check the subnet mask and default gateway of the device and PC.

Q 3: Is there a conflict with another IP address?

A 3: Try to change the IP address of the device.

Q 4: Has the HTTP port been changed?

A 4: Contact the administrator of the device for more information.

5. The GXV3611IR_HD web configuration page is not displayed correctly in IE8 ?

In IE8, Compatibility View might need to be enabled for the GXV3611IR_HD web configuration page to load properly. To enable compatibility view, open IE8, click *Tools*, *Compatibility View Setting*, and add the GXV3611IR_HD web configuration pages to the Compatibility View.

6. Why does IE indicate to install Grandstream Video Viewer add-on after a firmware upgrade? The add-on was properly installed before the firmware upgrade process.

New firmware will often upgrade the add-on as well. To watch the live video stream, you must install the newest version of the add-on.

7. How do you watch secondary video stream?

Login to the home page of the GXV3611IR_HD web GUI, click Play to watch the video stream. To watch a secondary video stream, right click on the video, and select *Secondary Stream* on the pop-up menu. Try reinstalling the Grandstream Viewer add-on for IE if you cannot see the video stream.

8. What is DDNS? Is it important for IP surveillance product to have DDNS support?

DDNS is an acronym for Dynamic Domain Name Service. It is important to choose an IP network camera that has DDNS support for dynamic IP addresses. Chances are that the network has a dynamic IP address (which changes with every log on). A DDNS service makes sure that the camera's IP address always matches up to the current server address. DDNS also allows a website to be linked to the IP camera that is constantly updated with the correct information and has a reliable feed.

9. Why is Windows Media Player unable to play the recorded video files?

The GXV3611IR_HD uses the H.264 video codec. Windows Media Player may lack the proper H.264 decoder to play the recorded video. Please download the Microsoft FFDSHOW H.264 decoder from <http://sourceforge.net/projects/ffdshow-tryout/> and install it.

10. Alarm Triggered Events do not work with GSurf_Pro?

Please double check the Alarm Action on your GXV3611IR_HD. Login to the web GUI of the GXV3611IR_HD, go to the Motion Detection or Alarm Events page, and make sure option Upload to Alarm Center is checked.

11. Recommended to save the video files in different directories when using GSurf_Pro?

It is better to save video files in different directory to prevent accidental deletion of the recorded files you need.

12. How to use a cell phone to watch the GXV3611IR_HD video stream?

You must set the video resolution to QCIF to watch the GXV3611IR_HD video stream from a cell phone. Make sure to set the bit rate to 64kbps to ensure the best video quality.

13. What Smartphone application should I use to view the video?

There are free application and paid version application for this, like: IP Cam Viewer

<http://hit-mob.com/>

14. Why the IP address of the device NOT reset when clicking the “Restore” button?

The GXV3611IR_HD could be installed in areas that are not easy to access. For example, it could be installed on the roof of a building or the ceiling of an office. This makes it difficult to reinstall the device, therefore the “Restore” function will not clear the IP address.

15. Why can't the live video stream be viewed using a mobile phone or GSurf_Pro after changing the HTTP Port of the device?

Make sure that the RTSP port of the device is set to 2000 plus the HTTP Port number. For example, if the HTTP port is 88, then the RTSP port of the device that you configured on GSurf_Pro or mobile phone should be 2088.

16. Port forwarding

Two ports must be forwarded on your router to watch video from a GXV3611IR_HD that is located on a private network from a PC in a public network. The web port (HTTP) and the RTSP port. Please make note that the RTSP port number changes according to the web port. If the web port is 80, then the RTSP port is 554. If the web port is not 80, then the RTSP port equals the web port +2000. For example, if the web port is 88, then the RTSP port will be 2088.

17. Tested PC display adapters.

Display Adapter	Test Result
SiS 650/651/740/661 FX/741/760 Series	Works normally
Intel® 82945R Express Chipset Family	Works normally
VIA/S3G UniChrome Pro IGP	Works normally
NVIDIA Geforce 7300GS	Works normally
SiS 661FX	Works normally
SiS Mirage Graphics	Works normally
SiS 661 Series	Works normally
Intel® G33/G31 Express	Works normally
SiS Mirage3 Graphics	Works normally
SiS 661FX/GX Mirage Graphics	Works normally
S3 Graphics ProSavageDDR(Microsoft Corporation)	Works normally
XGI Velari Z7/Z9/Z9S V1.08.12	There is some delay when playing videos.
Intel® 965 Express Chipset Family	Works normally
ATI Mobility Radeon X1300	Works normally
Intel® G45/G43 Express Chipset	Works normally
Mobile Intel 965 Express Chipset Family	Works normally
Mobile Intel® 4 Series Express Chipset Family	Works normally
Mobile Intel® 945GM Express Chipset Family	Works normally
Mobile intel® 915GM/GMS, 910GML Express Chipset Family	Works normally
Intel® G45/G43 Express Chipset	Works normally
ATI Technologies, RAGE XL PCI	This display adapter cannot display videos.