

ENGLISH

(Diagram references)

- 1 PCB Overview
- 2 LED Indications
- 3 Microwave Adjustment: 0m to 15m
- 4 Dip Switches 1-4
- 5 Registration Procedure
- 6 Signal Strength Test
- 7 Inserting the Fixed Mask or Flexible Mask
- 8 Flexible Mask Adjustment (1)
- 9 Flexible Mask Adjustment (2)
- 10 10m Lens Diagram
- 11 Wall Mounting Bracket & Adapter
- 12 Wall Mounting Bracket
- 13 Ceiling Mounting Bracket
- 14 Guidelines

Technical Specification

Item	Specification
Detection Range	0-15m (flexible mask)
Detection Angle	90°
Detection Beam	25 x 2° Plasma
Detection Beam	0.25 x 2.5mm
Mounting Height	2.4m
Two-way wireless technology	Yes
Real-time Technology	Yes
Dual element Picoelectric sensor	Yes
Tamper protection	Yes and Real-time protection
Integrated siren buzzer	Yes
Separate LED indication	Yes
Registration Method (RFID)	Yes
5 Microwave Submodules to avoid interference	Yes
Anti-interference Plasma through RF1 technology	Yes
Anti-Block Analysis	Yes
Anti-Block Analysis	Yes
Plastic housing	Polycarbonate
Alarm mode	200s
Optics	Zeiss
Adjustable sensitivity	120m to low range
Visible light filter	0.4mm HSPR in lens area
Lens	1/4" compressed
Detection method	1: Digital detection Logic
Sensor	2: low noise dual element passive infrared sensors and a microwave doppler unit
Weatherproof	IP54 rated
Certified operation temperatures	-10°C to 55°C
Physical dimensions (H x W x D)	580mm x 80mm x 100mm
Weight	1.5kg
Power source & battery	1 x 3V CR2032
Maximum frequency	433MHz
Transmission frequency	433MHz
Range in open space	1000m
Battery type	3V Lithium battery (included)
Battery life	12 months (normal)
Warranty	2 years
Reusable wall mount	Yes - additional wall and fixed brackets available separately
Fixed wall mount	Yes - additional wall and fixed brackets available separately
ceiling mount	Yes - additional wall and fixed brackets available separately

Battery Information



The batteries supplied have been chosen to provide long service life whilst, for safety reasons, having limited output current.

The battery leads must be connected for operation. When disposing of the product, the battery must be removed and disposed of separately in accordance with the local regulations.




Product Information

COPYRIGHT © 2018 Hangzhou Hikvision Digital Technology Co., Ltd. ALL RIGHTS RESERVED.
Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou Hikvision Digital Technology Co., Ltd. or its subsidiaries (hereinafter referred to as "Hikvision"). This user manual (hereinafter referred to as "the Manual") cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of Hikvision. Unless otherwise stipulated, Hikvision does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.


About this Manual
This manual is applicable to detector.
The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the company website (<http://overseas.hikvision.com/en/>). Please use this user manual under the guidance of professionals.
Trademarks Acknowledgement
HIKVISION and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

CE This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the EMC Directive 2014/30/EU, the LVD Directive 2014/35/EU, the RoHS Directive 2011/65/EU.

START

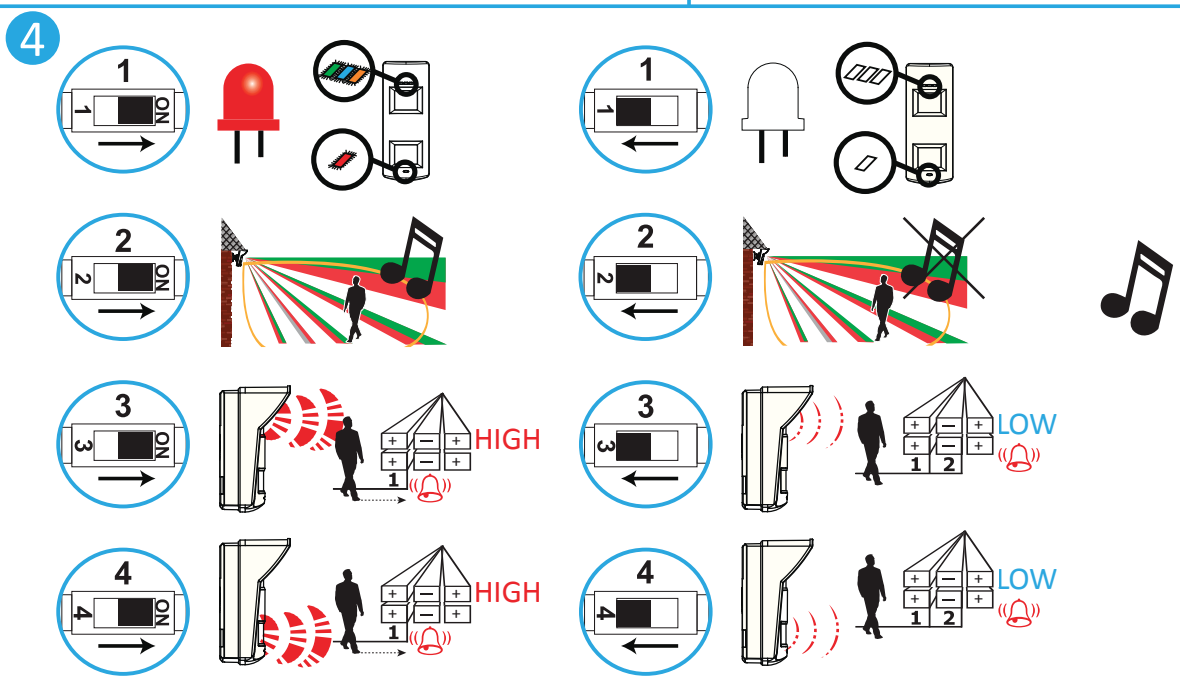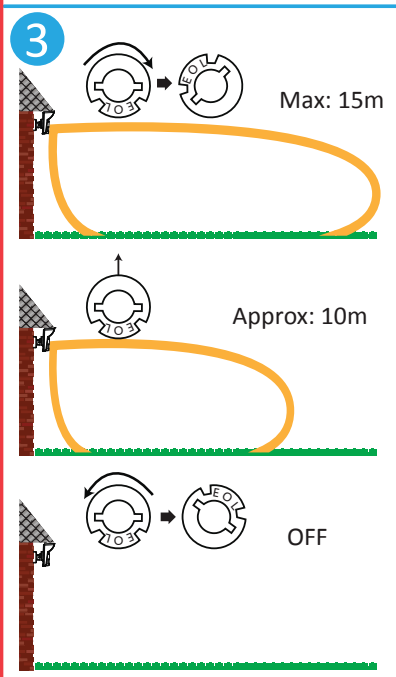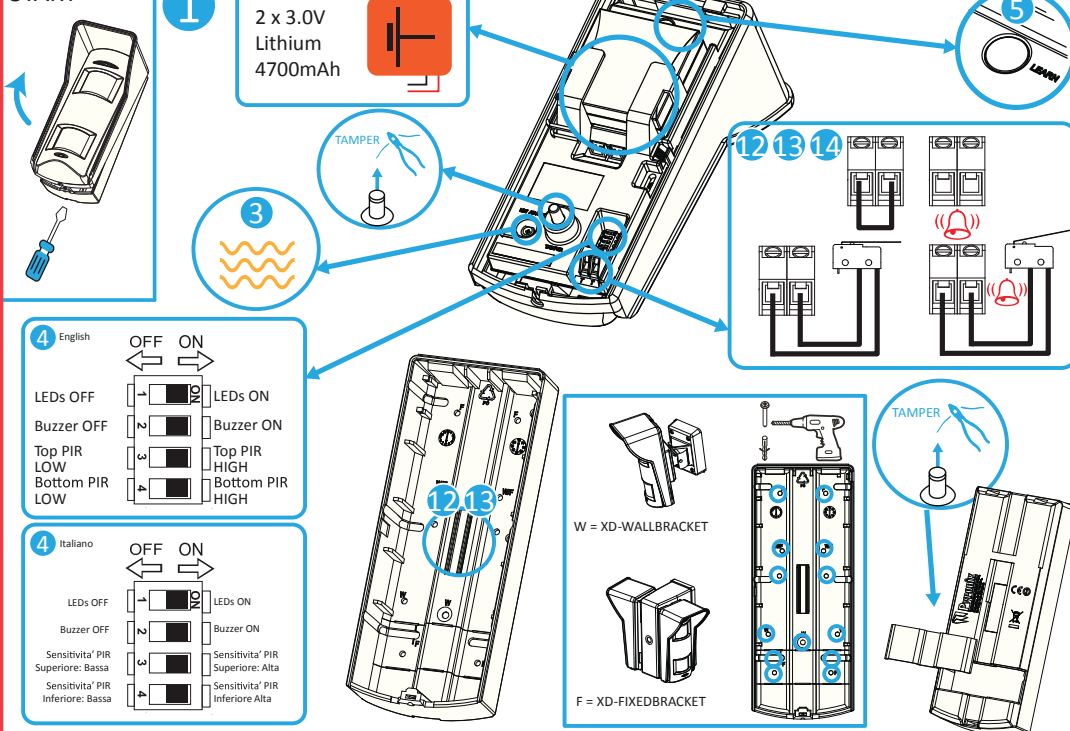

Color	Model
Pink	XDH10TT1-WE
Blue	XDH10TT1-WE
Red	XDH10TT1-WE
White	XDH10TT3-WE (UK ONLY)
Green	XDH10TT3-WE (UK ONLY)
Red	XDH10TT3-WE (UK ONLY)

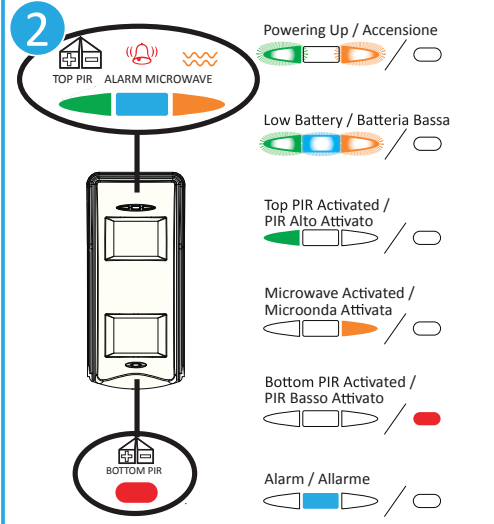

5

Please register the detector within 90 seconds after it being powered on.
Register Detector Locally



1. Make the security control panel enter the registration mode.
 2. Register the detector: Hold the learnt key until the three LEDs flash alternately. The green LED will flash 7 times if the registration is finished.
 3. Communication Test: Release the TAMPER spring to trigger the alarm.
- Note:** The distance between the security control panel and the detector should be less than 50 cm.

Unregister Detector

- Delete the Detector from the Control Panel
1. Make the security control panel enter the unregistration mode.
 2. Unregister the detector: Hold the registration key until the three LEDs flash alternately.


Initialize the Detector

1. Remove the battery to power the detector off.
2. 5s later, hold the registration key and reinstall the battery to power the detector on at the same time to make the three LEDs start flashing alternately. Release the registration key while the three LEDs flash once together.


Register Detector via APP

1. Log in to the **APP Store** and input "Hik-Connect" to search the mobile client.
2. Download and install Hik-Connect to your phone.
3. After installing, tap to run the client.
4. Power on the security control panel.
5. Log in in the Hik-Connect and tap the icon "+" at the upper-right corner of the Hik-Connect page to add the security control panel. You can scan the QR code on the device rear panel or on the package box, or input the device serial No. manually to add the device when the device is in the registration mode.
6. After adding the security control panel, tap the arming status icon on the right of the security control panel's name to enter the Partition page.
6. Tap the "+" icon on the Partition page to add the peripherals.


6




Control panel enter the signal strength checking mode




7

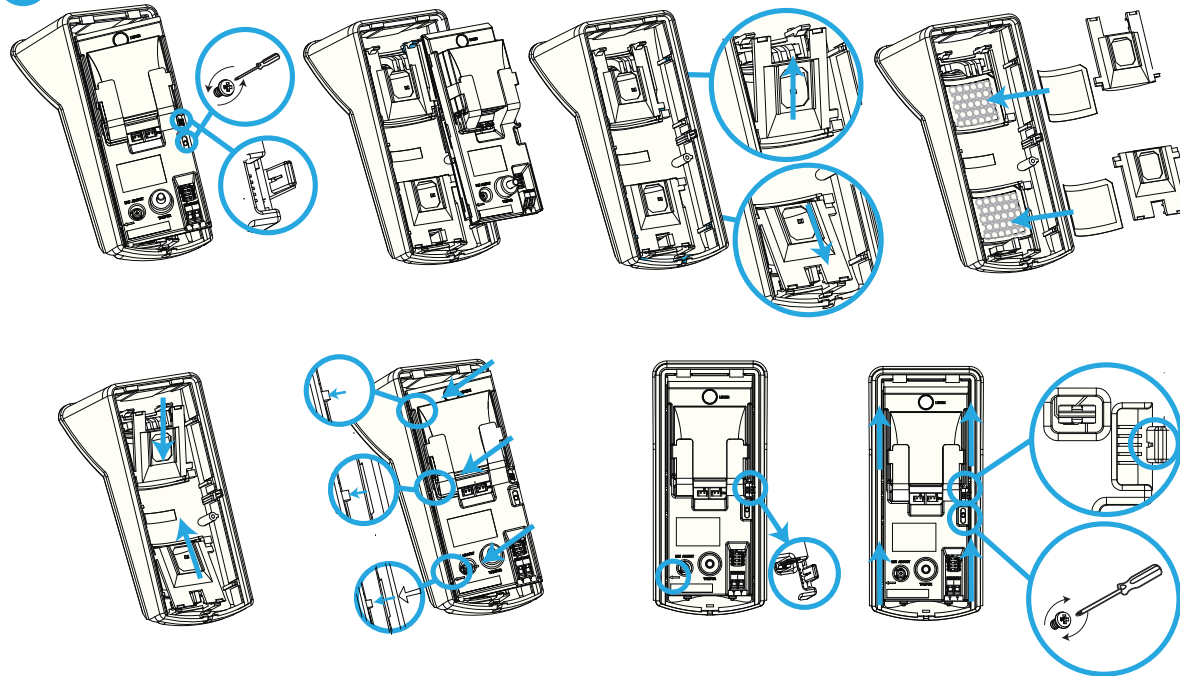



8

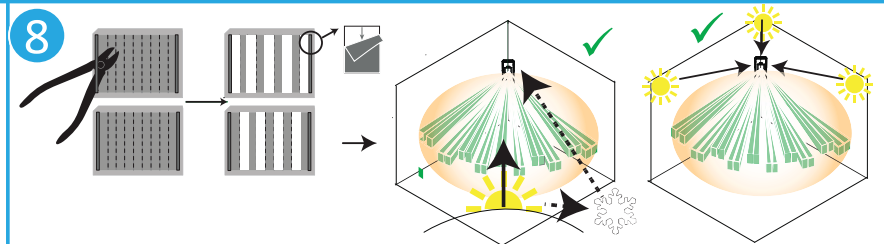

9

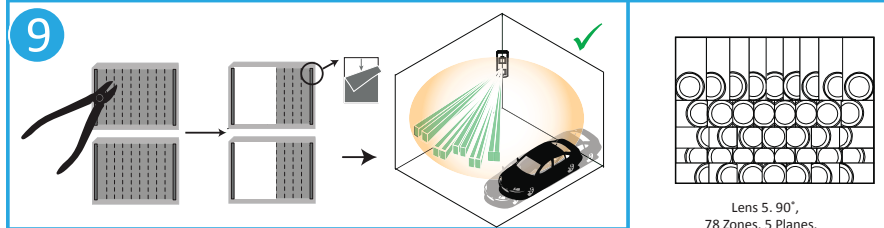


10

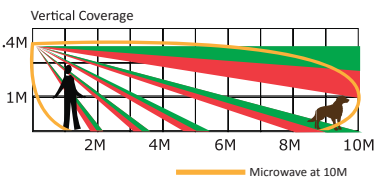


Do not partially or completely obscure the detector's field of view with large objects


11 WALLBRACKET + ADAPTER

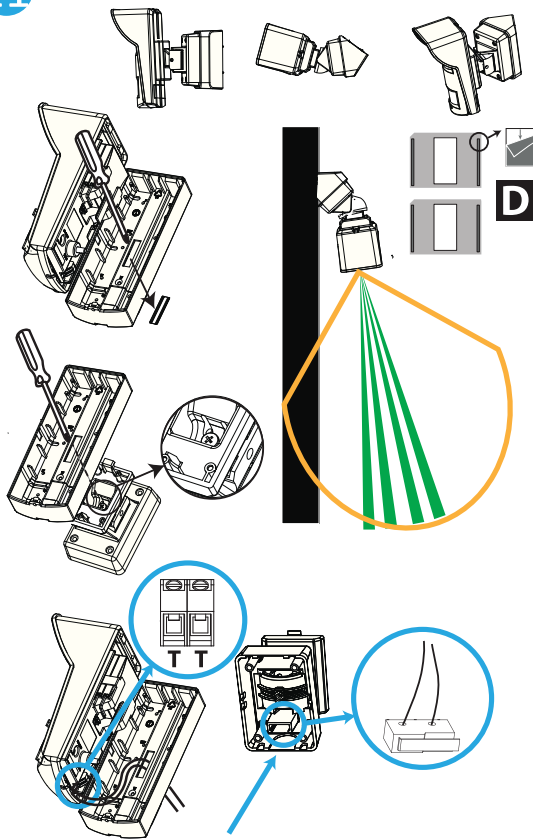


12 WALLBRACKET

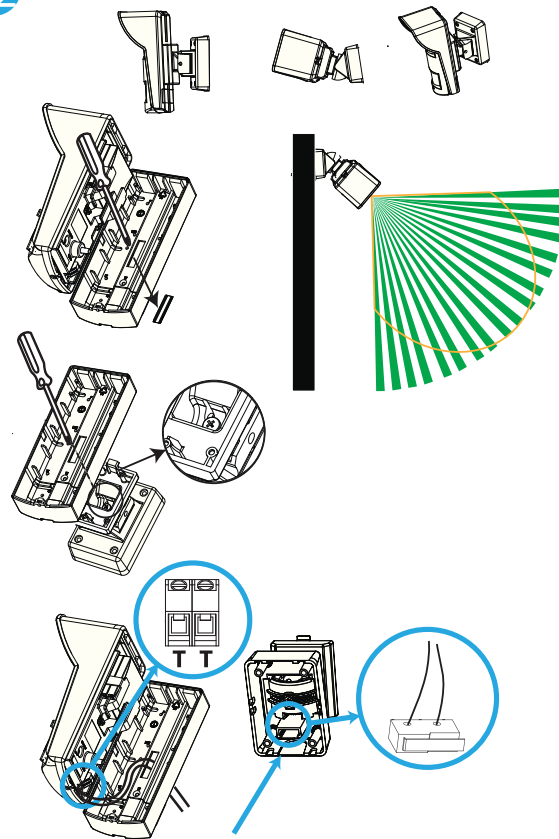

13 FIXEDBRACKET

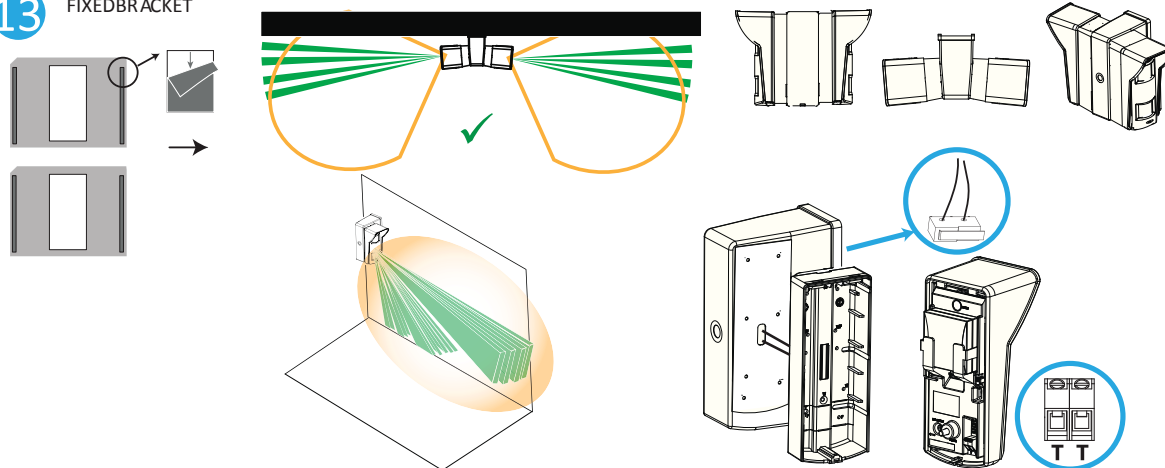

14

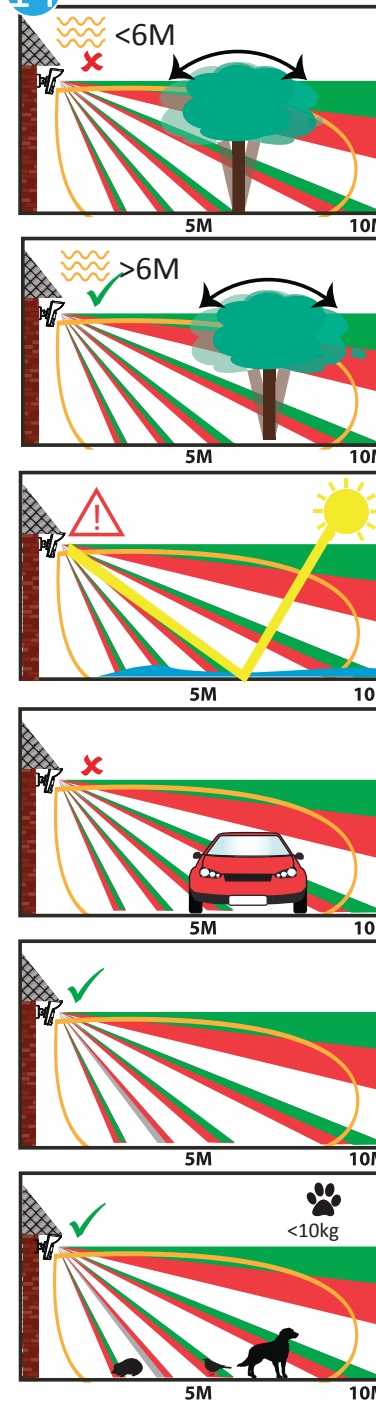

FCC Information

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. FCC compliance: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.