


Mini 8C

ORIGINALITY DESIGN SMART – AND BEAUTIFUL



QUICK GUIDE

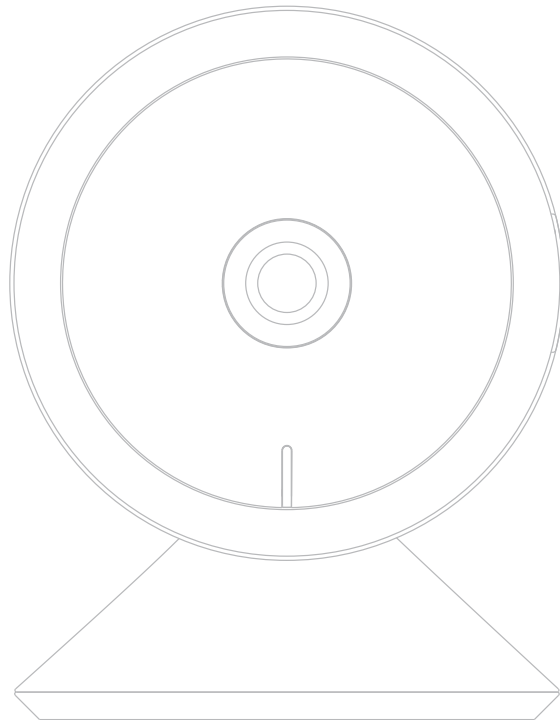

What's in the box

Please consult this checklist for all parts.




Mini 8C



Power adapter



USB cable




Adhesive tape



I/M



Pin

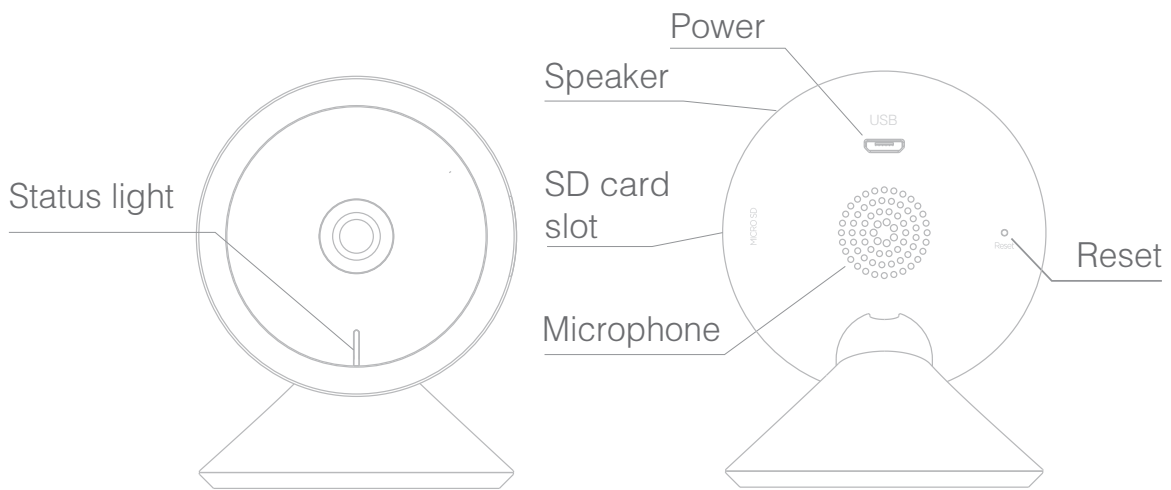

Description

Power DC5V \pm 10%

Status light

- Red light solid on: the camera network is abnormal
- Blinking red light: awaiting WiFi connecting, or currently connecting (faster blinking)
- Blue light solid on: camera running correctly
- Blinking blue light: awaiting manual WiFi configuration, or currently connecting (faster blinking)


Microphone Captures sounds for your video

SD card slot Supports local SD Card storage (Max.128G)


Reset Press and hold the 'RESET' for 5 seconds to reset the device(if you have modified settings, they will return to factory defaults)
Pressing for 1 second will activate manual WiFi setup mode

Install

- 1 Stick the adhesive tape in the middle of camera bottom

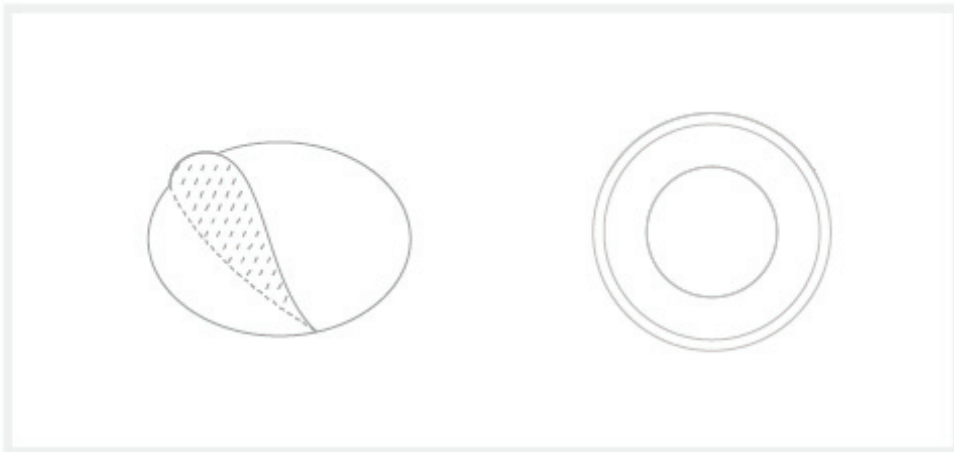

- 2 Put the camera on the clean plane

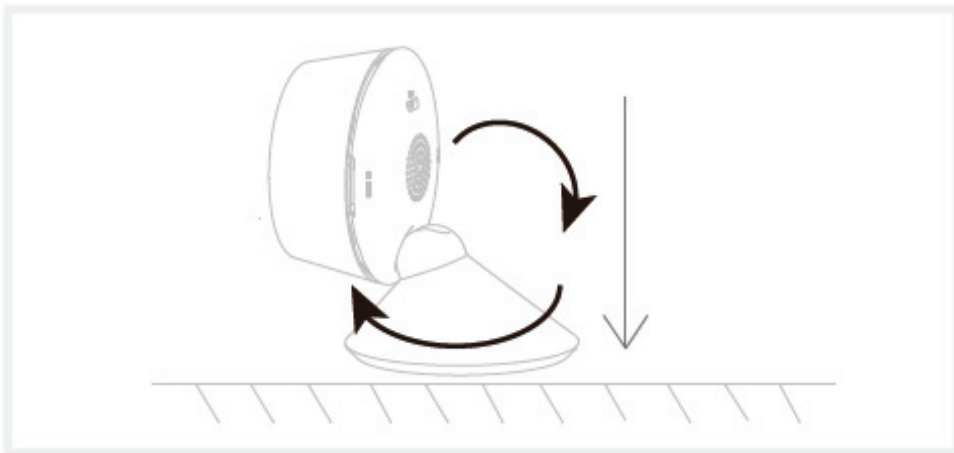


Connect

Download


Download the CloudEdge App and install it on your smartphone (App download consumes a certain amount of traffic, it is best to use WiFi.)

• Support

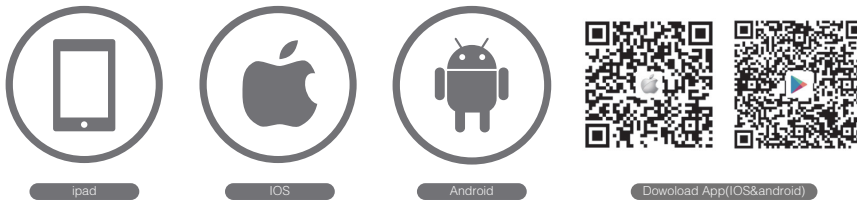



Set up router

This device requires an 802.11b/g/n 2.4GHz WiFi connection with WPA/WPA2 encryption to set up once it has been setup on your 2.4GHz network. Your phone can switch to other WiFi networks and still control the device.


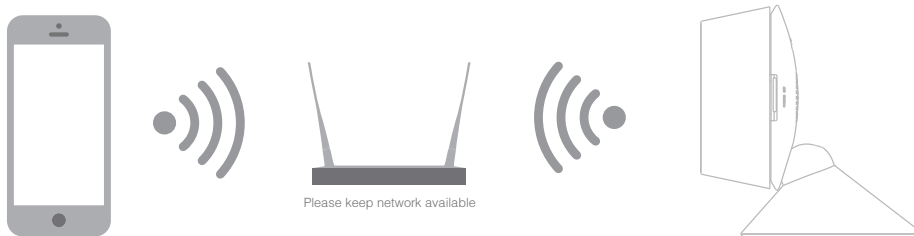


Registration process

Step 1 Open the CloudEdge App, click 'SIGN UP', input a valid email address and select 'registration means agreement with user agreement privacy agreement' then click 'NEXT'.

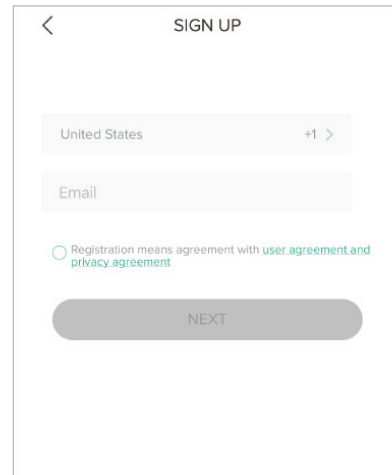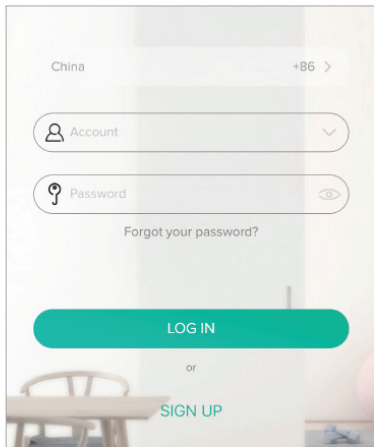

Step 2 Enter the email address and click 'OK', create a nickname and login password.

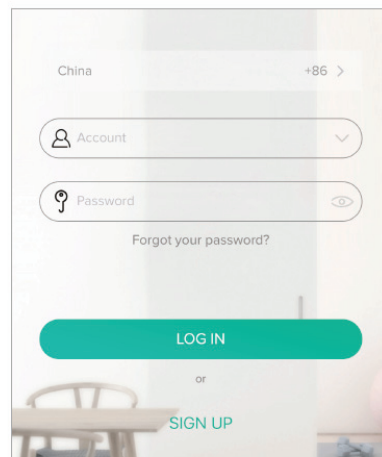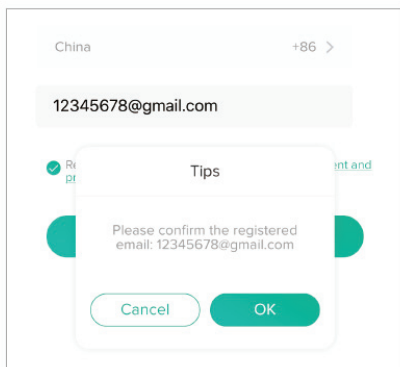

Note: Make sure your router, camera, and mobile phone are nearby.


QR Code Configuration

Important reminders before adding the device



1. This device only supports 2.4GHz WiFi router, please make sure you are using a 2.4 GHz WiFi router.
2. Please follow the instructions and make sure the password is inputed correctly.
3. One device can only be added with one App account, if the camera has been added with another account already, then it can't be added to any another account again.

Process

Step 1 Open the Cloudedge App, click '+', and select the type of device to add.

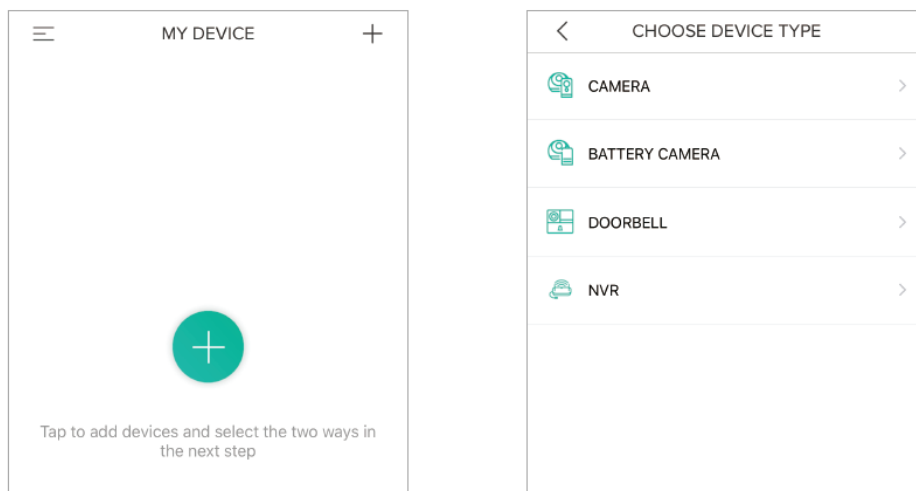



Step 2 Please confirm the red LED light blinks, select 'The device has flashed red slowly or you hear a tone', click 'Next'. Then input the wireless password, click 'Next'.

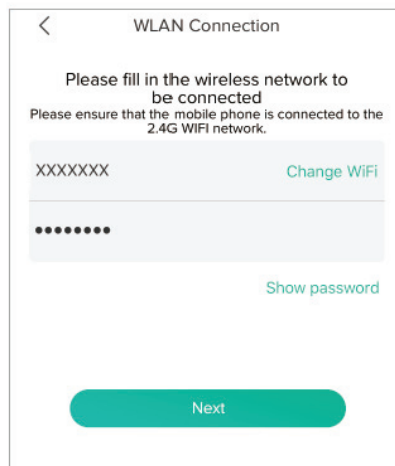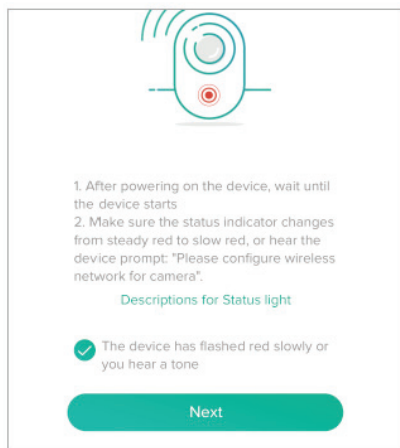

Step 3 The device is scanning the QR code at a distance of 15~25cm (you can click the 'operation' to view the scanning mode). After the device scans successfully, click 'Hear tone'.



Step 4 The device is successfully connected to the network. After the configuration is completed, the App automatically adds the successfully scanned device, and clicks 'Finish' to return to the device list. The configuration is completed.

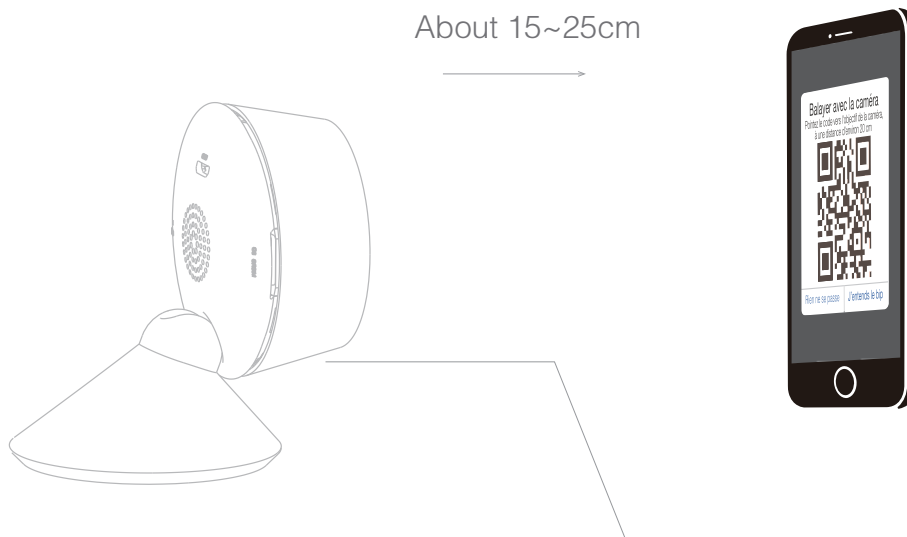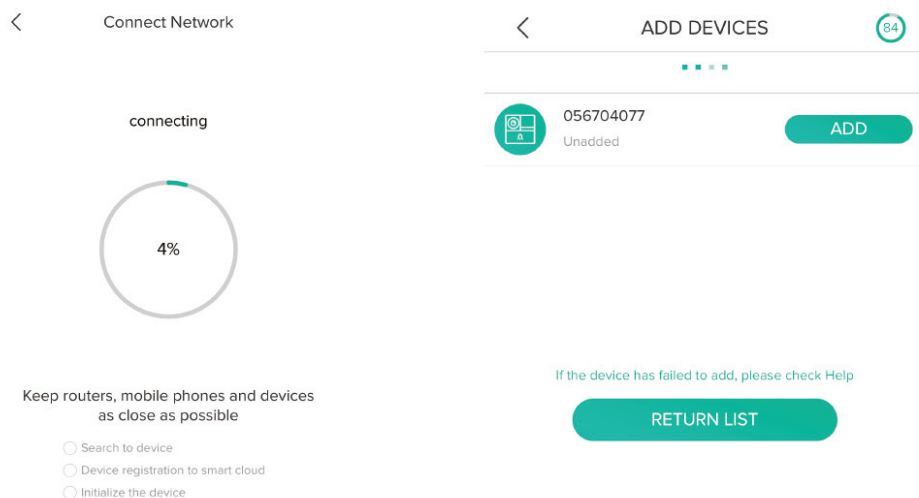

FAQ

Q: The device cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, and if not, it is recommended to reset the device and add it again.

Q: Why is it still in the list of devices after resetting?

A: The reset device only resets the network configuration of the camera, but cannot change the configuration on the App, remove the device, and must be deleted by the App.

Q: How to cut the device network to another router?

A: First remove and reset the device on the App and then configure the device again by the App.

Q: Why doesn't the device identify the SD card?

A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can't be identified when the internet environment is not good.

Q: Why I can't get the notifications with my cell phone App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; Message notification and authority confirmation in the mobile phone system have been opened.

Functions

Video flip

Flip your video stream vertically anytime for maximum flexibility.

Sleep mode

Turn on sleep mode when monitoring is not needed, and resume monitoring when you are away.

Motion detection


Motion sensors will notify you when movement is detected.

Record

Record every moment using high capacity SD card storage.

Day & Night

Powerful night vision means no interruptions, even in complete darkness.

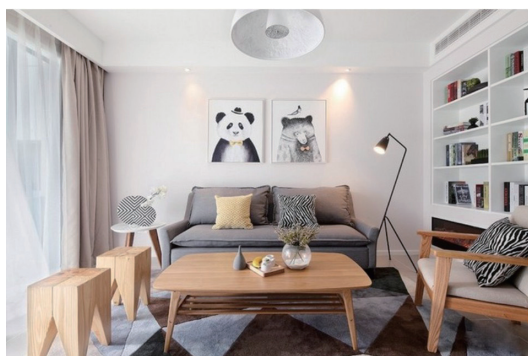

Daytime



Night

FCC Statement

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.