

DCM-500B_H

SANITARY CUBELET ICE MACHINE/DISPENSER

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

DCM-500B_H

11/09

Item # 13226

DIMENSIONS

W x D x H

DCM-500B_H


26 x 22 1/2 x 40

SD-450

26 1/4 x 22 x 32 1/2

SD-500


25 9/10 x 22 x 32 3/4




DCM-500
Countertop




DCM-500
Countertop
with optional
6" legs



DCM-500
Floor Model
with optional
stand



SD-450
optional
stand



SD-500
optional
stand

DCM-500BAH

Air-Cooled

Shown on an optional

SD-500 Stand

DCM-500BWH

Water-Cooled



DCM-500B_H

- CleanCycle12®. Every 12 hours, unit performs 15 minute purge to rid itself of impurities
- Corrosion resistant stainless steel exterior
- Up to 567 lbs. of ice production per 24 hours, with 40 lbs. built-in storage
- Easy to chew, cubelet ice
- Self contained design reducing opportunities for cross contamination
- Dispenses ice and water
- Protected by HoshiGuard Antimicrobial Agent **HOSHIGUARD**



SD-450 Stand / SD-500 Stand

- Heavy duty stand for floor model icemaker/dispenser
- Corrosion resistant stainless steel exterior
- Easy cleaning with attractive appearance
- Locking doors standard on SD-500



Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Two Year - Parts & Labor on entire machine.

Five Year - Parts on: Compressor, air-cooled condenser.



DIMENSIONS

W x D x H

DCM-500B_H
26 x 22^{1/2} x 40

SD-450
26^{1/4} x 22 x 32^{1/2}

SD-500
25^{9/10} x 22 x 32^{3/4}

- Hands-free ice machine/dispenser
- Optional stand
- Optional stand with locking doors


Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	535	510	485
	80°	461	438	416
	90°	396	385	358

Water Temp ° F.		50°	70°	90°
Air Temp ° F.	70°	567	549	539
	80°	529	519	509
	90°	500	495	481


Model Number	KWH per 100 LBS.		Gal. Per 100 LBS.	
	90/70	70/50	90/70	70/50
DCM-500BAH	6.6	4.4	12.0	12.0
DCM-500BWH	4.7	4.1	12.0	12.0

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
DCM-500BAH	Air-Cooled	12	20	276 lbs.
DCM-500BWH	Water-Cooled	11.5	20	269 lbs.
SD-450	N/A	N/A	N/A	110 lbs.
SD-500	N/A	N/A	N/A	98 lbs.


A diagram of a square pyramid. The base is a square with side length $\frac{3}{8}$ inch. The height of the pyramid is $\frac{3}{4}$ inch. The slant height of the pyramid is $\frac{5}{8}$ inch.

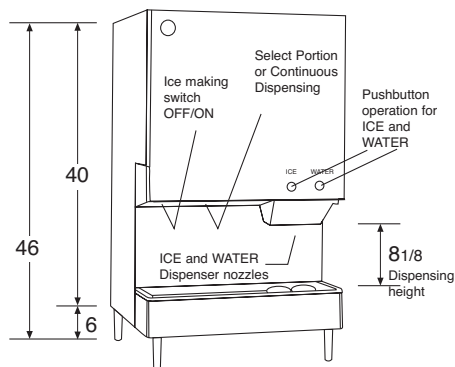



40 lb. Capacity Built-in Bin




Counter Top




Counter Top

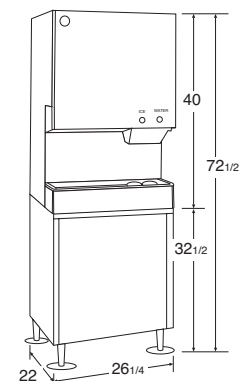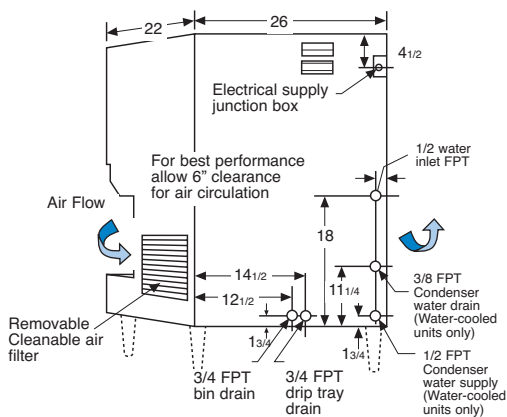

**Floor Model
with Optional Stand**



SD-450



SD-500

- 115V/60/1
- 20 amp Max Fuse Size
- 1/2" FPT Water Inlet
- 3/4" FPT x2 Drain



© HOSHIZAKI AMERICA, INC.

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter.
(Air-cooled model only)

