


Hoshizaki

Series


KM1300SAH-E 04/04
Item # 13055

KM-1300SAH-E SERIES


STACKABLE CRESCENT CUBER




B-800



B-900



B-800



B-900



KM-1300SAH-E Cuber
Shown on Optional
B-900 Bin

KM-1300SAH-E
Air-Cooled

- Durable stainless steel exterior
- CycleSaver® design 
- EverCheck® alert system 
- Up to 649 kgs. of ice production per 24 hours
- Individual crescent cube
- Stainless steel evaporator
- Stackable for 1298 kgs. per 24 hour Ice Production in the same floor space.
- Removable air filters

ICEMAKER DIMENSION

Width x Depth x Height
KM-1300S_H-E
122 x 69.5 x 69.5cm

DIMENSION BY BIN SIZE

Width x Depth x Height

B-800

122 x 80 x 186.7cm

B-900

132 x 80 x 186.7cm

B-800

(2 stacked)

122 x 80 x 256.5cm

B-900

(2 stacked)

132 x 80 x 256.5cm



Reliability is a
beautiful thing™

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269


TEL 770-487-2331

FAX 770-487-1325

www.hoshizaki.com

STACKABLE CRESCENT CUBER

KM-1300SAH-E (AIR-COOLED)



■ Up to 649 kgs. of ice production per 24 hours

■ Stackable for 1298 kgs. per 24 hours

**WARRANTY**
ONE YEAR - Parts**STAINLESS STEEL**
INTERNAL EVAPORATOR

R-404A REFRIGERANT

SERVICE

Panels easily removed and all components accessible for service.

Removable/cleanable air filters.

STORAGE BINS

B-800 - 363 kg. Application Capacity (272 kg. ARI-Rated Capacity Bin)

B-900 - 408 kg. Application Capacity (299 kg. ARI-Rated Capacity Bin)

B-1200 - 544 kg. Application Capacity

B-1500 - 680 kg. Application Capacity

OPERATING LIMITS

Ambient Temp Range 7 - 38 °C

Water Temp Range 7 - 32 °C

Voltage Range 198-254V

Water Pressure 10 - 113 psig

ELECTRICAL & PLUMBING

220-240/50/1 (3 wire with neutral for 115V)

20 Amp Max Fuse/HACR breaker size

1.27cm OD copper or equivalent

independent potable water supply

1.52cm independent drain connection

AIR - COOLED


Water Temp ° C.		10°	21°	32°
Air Temp ° C	21°	544	502	448
	27°	512	446	395
	32°	502	400	346

UTILITY CONSUMPTION


Model Number	Ice Production Per Cycle		KWH per 45 kgs.	Potable Water Gal. per 45 kgs.	Condenser Water Gal per 45 kgs.
	Kgs.	Cubes			
KM-1300SAH-E	13.7	1440	5.5	33.4	NA

SPECIFICATIONS


Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-1300SAH-E	Air-Cooled	11.5	20	143 kgs.

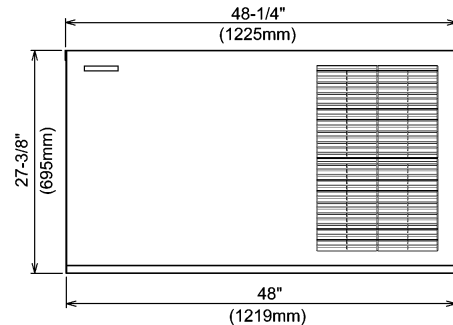


FRONT VIEW

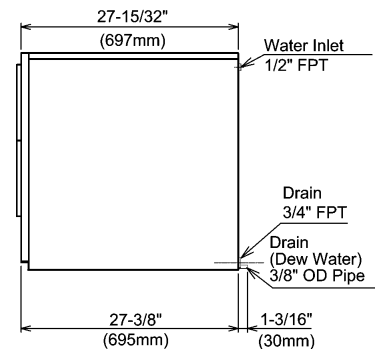

SIDE VIEW

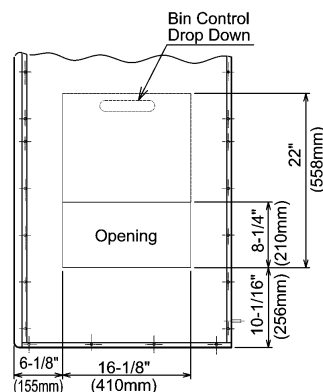

ICE DROP ZONE

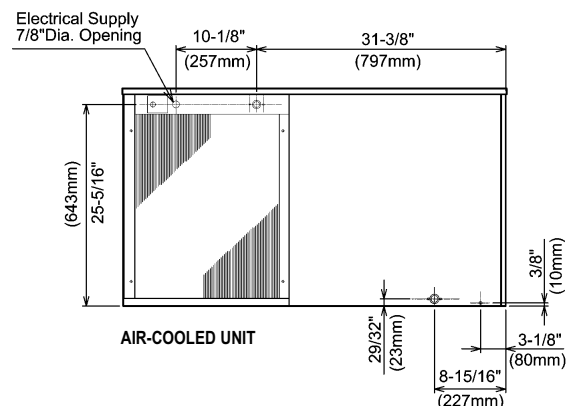

AIR-COOLED UNIT

We reserve the right to change specifications without notice.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 770-487-2331

FAX 770-487-1325

www.hoshizaki.com

Printed in U.S.A.