

ATTACHMENT E. USERS MANUAL



A526 Monitor/Moniteur

user's manual
colour monitor

manuel d'utilisation
moniteur couleur

Benutzerhandbuch
Farbmonitor


manual de uso
monitor en color

guida utente
monitor a colori

Table of Contents

Introduction	1
Conventions Used in This Guide	1
Features	1
General safety precautions	1
Video monitor precautions	2
Power source precautions	2
Cleaning and Maintenance	2
Assembly and Removal of the Tilt-and-Swivel Support	3
Fixing	3
Removing	3
Monitor Installation	4
Micro-controller features	5
Display modes memory	5
User-setting area	5
Factory-presetting area	5
DDC 1/2B (Display Data Channel 1/2B)	5
External controls	6
Preset timing chart	10
Timing charts	10
Input timing limits	10
Input level limits	10
Timing table	11
Power management	12
Operation	12
Video input terminal	13
Pin Description	13
D-Sub miniature connector	13
Specifications	14

ENGLISH



Introduction

This manual describes the most suitable procedures for installing and setting up the monitor. It also indicates the main technical specifications and operating features.

Read this guide carefully before installing and using the monitor, in order to avoid problems.

Conventions Used in This Guide

Associated with particularly important information, or information that is useful under some circumstances.

Marks the start of a series of instructions to carry out in order to complete an operation.

- !** In order to prevent fire or electric shock, do not expose this display to rain or moisture.

Features

- High resolution CRT for sharp and crisp images.
- 15"(13.7" viewable) Diagonal screen with non-glare direct etched surface.
- Unlimited Color Display.
- DPMS(Display Power Management Signaling).
- Digital Control
- DDC 1/2B (Display Data Channel 1/2B)

General safety precautions

This monitor has been engineered and manufactured to assure your safety, and you can prevent your safety from serious electrical shock and other hazards by keeping in mind the following attentions.

- Do not place anything heavy, wet or magnetic on the monitor or the power cord.
- Be sure to turn the monitor off before plugging the power cord into the power source.
- Make sure the power cord and the other cords are securely and correctly connected.
- Avoid operating the monitor in extreme heat, humidity or an area affected by dust.

ENGLISH

User's Guide

- Never cover the ventilation openings with any material and never touch them with metallic or inflammable materials.
- Do not overload AC outlets. Extension cords, frayed power cords and broken plugs are dangerous and may result in electric shock or fire. Call your service technician for replacement.
- Do not open the monitor. There are no user-serviceable components inside, and there is dangerously high voltages inside, even when the power is turned off. Contact your dealer if the monitor is not operating properly.
- Do not use aerosol directly on the picture tube because overspray may cause electrical shock.

Video monitor precautions

As with any electrical equipment, careless use and unprofessional maintenance are able to cause serious electrical shock and other hazards.
In the interests of safety, the following suggestions should be followed at all time.
Your monitor includes an appropriated plug for your area.

Power source precautions


Never remove the backcover of the monitor.
This will expose you to very high voltages and other hazards. If the display monitor does not operate properly, remove the power cord from the wall outlet, and contact your dealer. As a safety feature, this monitor is equipped with a polarized, alternating current line plug.(Grounded, 3 prong plug)
This plug will fit into the outlet only one way. If you are unable to insert the plug fully into the outlet, or if the plug simply does not fit, contact an electrician to replace the obsolete outlet.
Do not defeat the safety purpose of this polarized plug.

- !** When positioning this equipment, please ensure that the main plug and the socket are easily accessible.

Cleaning and Maintenance

The monitor must be switched off and the power supply cable disconnected during all cleaning operations.


- Use a damp cloth for cleaning the monitor.
- Do not touch the screen with your fingers, as the natural oils from your body leave smears on the screen and tend to attract dust.
- Do not use petrol, alcohol, solvents or abrasives for cleaning the monitor. These substances could corrode the external parts.



Assembly and Removal of the Tilt-and-Swivel Support

Fixing

This product consists of the display monitor and the tilt and swivel. When fixing the tilt and swivel to the display monitor, please follow the steps below.

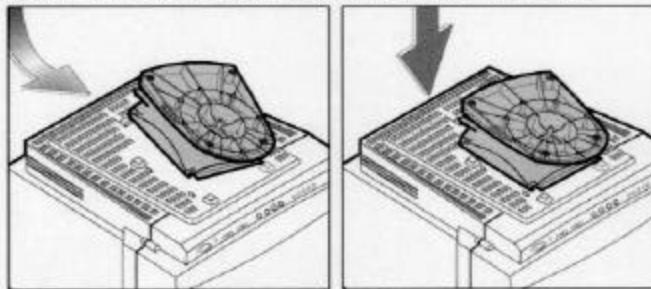


1. Push the four hooks of the tilt and swivel into the four holes at the bottom of the display monitor.
2. Then slide the tilt and swivel forward.
3. Then the latch is going to come above the tilt and swivel base, and it is fixed firmly.

ENGLISH

Removing


Please remove the tilt and swivel when transporting for repairing.

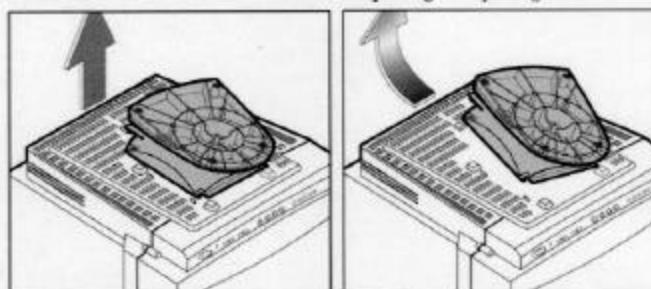

1. Push down the latch of the display monitor and pull out the tilt and swivel.
2. Slide backward the tilt and swivel from the front of the display monitor.
3. Pull out the tilt and swivel from the holes of the display monitor.

User's Guide**Monitor Installation**


Check that the computer is switched off before installing the monitor. The monitor is equipped with a cable for connection to the computer. The cable for connection to the power supply is provided with the computer. Follow the procedure described below to make the monitor operational :

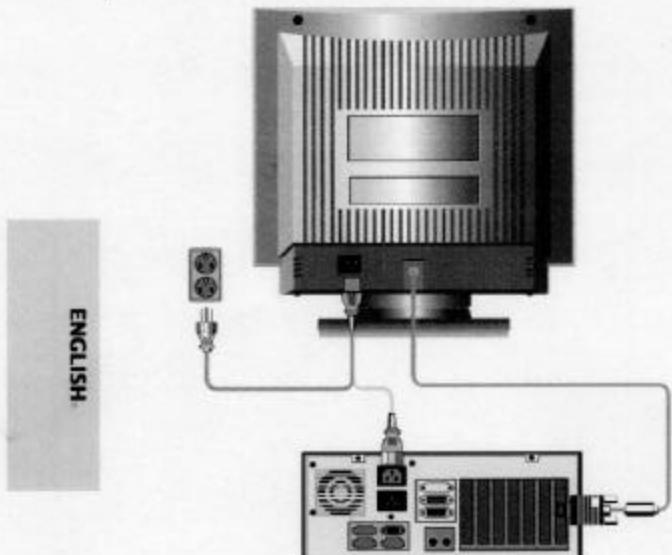

 Connect the video signal cable (15-pin connector) to the connector on the video board inside the computer, usually located on the rear panel of the computer.

 Connect the power supply cable to the monitor and then to the power supply.

After powering on the computer, wait for 30 seconds, then adjust the display using the various controls provided (see later). For further information on the installation procedure, refer to the operating guide of the computer being used.



Micro-controller features

The micro-controller automatically detects the video board installed in your system. When you turn on the monitor, the micro-controller first checks the display-mode memory stored in the user setting area and then the factory-presetting area.

Display modes memory

The micro-controller has the memory capacity to store 17 different display modes including timing formats and display settings. This memory capacity is divided into two parts. One is the user-setting area, and the other is the factory-presetting area.

User-setting area

The user can add nonstandard modes. If you adjust display image, the image is saved automatically. Then the microcontroller always detects and displays the last mode stored in the user setting area when the monitor is turned on. The user setting area maintains the last 8 display modes set by the user in its memory. When the user setting area is full (8 modes are registered), if new nonstandard timing is registered, the oldest timing settings will be deleted. (8 modes)

Factory-presetting area

There are 9 display modes stored in this area. These display modes are preset at the factory and include most of the display modes currently available (see TIMING CHART of this manual). You can also retrieve the factory preset mode by selecting the RECALL menu. (9 modes)

ENGLISH


DDC 1/2B (Display Data Channel 1/2B)

This monitor includes a DDC 1/2B feature. DDC 1/2B (Display Data Channel 1/2B) is a communication channel by which the monitor automatically informs the host system of its capabilities(e.g.each supported resolution with its corresponding timing). DDC 1/2B uses a formerly unconnected signal pins in the 15-pin VGA connector. The system will perform "Plug & Play" feature if both monitor and host systems support DDC 1/2B protocol.

! Some computer systems are not compatible with the DDC standard. If our monitor displays the incorrect resolution, please check your computer system including a DDC compatible video card.


User's Guide

External controls






CONTROL PANEL FUNCTION.

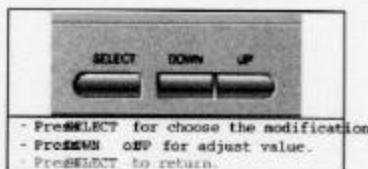

LED FUNCTION

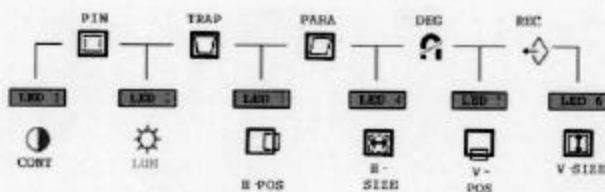

ENGLISH

	CONTRAST	LED 1
	LUMINESC	LED 2
	H-POSITION	LED 3
	H-SIZE	LED 4
	V-POSITION	LED 5
	V-SIZE	LED 6
	PINCUSHION	LED 1 + LED 2
	TRAPEZOID	LED 2 + LED 3
	PARALLELOGRAM	LED 3 + LED 4
	DEGAUSS	LED 4 + LED 5
	RECALL	LED 5 + LED 6

User's Guide**Contrast**

Press (**▲**) button to heighten the contrast level of the displayed image.
B) Press (**▼**) button to lower the contrast level of the displayed image.

Brightness

Press (**▲**) button to heighten the brightness level of the picture.
B) Press (**▼**) button to lower the brightness level of the picture.

H-Position LED

A) Press (**▲**) button to adjust the screen to the right.
B) Press (**▼**) button to adjust the screen to the left.

H-Size LED

A) Press (**▲**) button to increase the horizontal size.
B) Press (**▼**) button to decrease the horizontal size.

V-Position LED


A) Press (**▲**) button to adjust the screen to the top.
B) Press (**▼**) button to adjust the screen to the bottom.

V-Size LED

A) Press (**▲**) button to increase the vertical size.
B) Press (**▼**) button to decrease the vertical size.

Pincushion LED



A) Press (**▲**) button to bow out the vertical side line.
B) Press (**▼**) button to bow in the vertical side line.

Trapezoid LED

A) Press (**▲**) button to make the image wider at the top.
B) Press (**▼**) button to make the image wider at the bottom.

Parallelogram LED

Press the SELECT button until the Parallelogram LED is on.
A) Press (**▲**) button to tilt the image rightward.
B) Press (**▼**) button to tilt the image leftward.

 Packard Bell**Degauss**Press(**▼**)button or (**▲**)button to carryout degauss**Recall**

In a factory preset mode the RECALL will reset the image size, position and geometry settings to the factory presetting. In a user setting mode, this control has no effect for the image size, position and geometry settings. But the contrast will be reset to maximum luminance and brightness to cut-off level by selecting this control in any modes.

Function LED

Blinks when maximum or minimum control setting is reached.

Power/DPMS LED

- A) Normal mode : Green
- B) DPMS mode : Amber


Power Switch

Turns on or off Monitor power

ENGLISH

User's Guide**Preset timing chart****TIMING CHARTS****Supported video timings**

This monitor shall be capable of displaying following video timing charts.

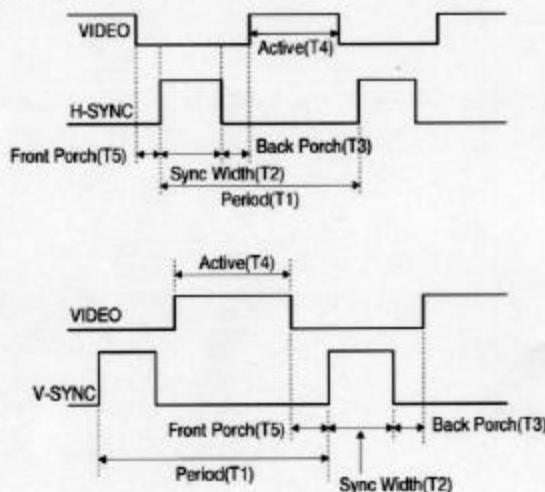Timing charts**Input timing limits**

H-sync pulse width: $1.0\mu s \leq$ Sync Pulse Width $\leq 8.0\mu s$

V-sync pulse width: $0.05ms \leq$ Sync Pulse Width $\leq 0.5ms$

! If the sync pulse width of input timing is out of range of input timing limits, monitor may be able to operate abnormal.

Input level limits

Low level : 0.4V max

High level : 2.4V min


Timing table

Horizontal	Dot	720	640	640	800	800	1024
Frequency	kHz	31.469	31.469	43.269	46.875	53.674	48.363
Period(T1)	μs	31.778	31.778	23.111	21.333	18.631	20.677
Sync Width(T2)	μs	3.813	3.813	1.556	1.616	1.138	2.092
Back Porch(T3)	μs	1.907	1.907	2.222	3.232	2.702	2.462
Active(T4)	μs	25.422	25.422	17.778	16.162	14.222	15.754
Front Porch(T5)	μs	0.636	0.636	1.556	0.323	0.569	0.369
Vertical	Line	400	480	480	600	600	768
Frequency	Hz	70.080	59.940	85.008	75.000	85.061	60.004
Period(T1)	ms	14.269	16.683	11.764	13.333	11.756	16.666
Sync Width(T2)	ms	0.064	0.064	0.069	0.064	0.056	0.124
Back Porch(T3)	ms	1.080	1.048	0.578	0.448	0.503	0.600
Active(T4)	ms	12.711	15.253	11.093	12.800	11.179	15.880
Front Porch(T5)	ms	0.413	0.318	0.023	0.021	0.019	0.062
Interlaced	Y/N	N	N	N	N	N	N
Sync Polar	H	-	-	-	+	+	-
	V	+	-	-	+	+	-

The monitor is compatible with additional modes within the specified frequency ranges provided that they are different at least for one of the following :

Horizontal Freq.: $\pm 1\text{kHz}$
 Vertical Freq.: $\pm 1\text{Hz}$

! Even if the monitor detects the input timing as a factory preset mode, the size and position may not be able to be set as desired. Check the input timings are under the specifications and adjust the image as you want.

For better quality of display image, use the timing and polarity shown in the table above. Please see your video card user's guide to ensure compatibility.

ENGLISH

User's Guide**Power management**

This monitor is equipped with DPMS(Display Power Management Signaling) function which automatically leads the monitor to the state of power saving that consumes just a little power less than 5W, when the computer is left unattended. Although the monitor can be left in power-saving mode for longer periods, we recommend that you turn it off after your daily work, because degaussing helps maintain faultless color purity, every time you turn the power on.

Operation

The DPMS function requires support from the computer system or any software DPMS function applied, currently being used. If the keyboard(or mouse) is left unattended for a certain period, the program or system will set the sync signals to DPMS modes. The DPMS function has three states. The recommended signals, power consumption and recovery times are shown in the table below.

STATES	SIGNAL			POWER CONSUMPTION	RECOVERY TIME	LED INDICATOR
	H.S	V.S	VIDEO			
ON	PULSES	PULSES	ACTIVE	Typical Consumption	-	GREEN
STAND-BY	NO PULSES	PULSES	BLANK	LESS THAN 15W	WITHIN 3 SEC	ORANGE / GREEN
SUSPEND	PULSES	NO PULSES	BLANK	LESS THAN 15W	WITHIN 3 SEC	ORANGE / GREEN
OFF	NO PULSES	NO PULSES	BLANK	LESS THAN 5W	WITHIN 15 SEC	AMBER

! When the monitor's signal cable is disconnected, the raster becomes visible.
This is not a malfunction. The screen will normalize when the signal cable is connected again.

Power consumption condition (Typical)

Input Voltage : 220VAC
Input Frequency : 50Hz/60Hz
Display Pattern : cross hatch
Display Size : 260 mm(H) x 195 mm(V)

 Packard Bell

Video input terminal

A 15 pin D-sub connector is used as the input signal connector.
Pin and input signals are shown in the table below.

Pin Description

PIN NO.	SIGNAL SEPARATE SYNC/ DDC 1/2B
1	RED
2	GREEN
3	BLUE
4	N.C
5	SELF TEST
6	RED GROUND
7	GREEN GROUND
8	BLUE GROUND
9	+5V(not used)
10	LOGIC GROUND
11	N.C
12	SDA
13	H-SYNC (TTL)
14	V-SYNC (VCLK)
15	SCL

D-Sub miniature connector



ENGLISH

User's Guide**Specifications**

CRT	SIZE	15"(13.7" viewable)
	Dot Pitch	0.28 mm
	Type	Non-glare, Anti-Static
Input	Signal	R.G.B Analog
	Connector	15 pin D-Type
SYNC	H-F	30~54kHz(Automatic)
	V-F	50~130 Hz(Automatic)
Display	Area(H×V)	260 × 195mm (Max. OVERSCAN)
	Color	Infinite
Resolution		Max. 800 × 600(54kHz/85Hz)
User Controls		H/V Size, H/V Position, Pincushion, Trapezoid, Parallelogram, Degauss, Recall, Brightness, Contrast, Power Switch
Power Management		As per VESA Standard, Lower than EPA's recommendation
VESA DDC 1/2B		Basic
Compatibility		VESA, 8514/A, XGA, EVGA
Power Source		100~240 VAC(Universal Power) 2.0A 70W(Typical)
Safety & Regulation	MPR II	Basic
	EMC	CE
	Safety	TÜV-GS, ISO-9241-3
Temperature	Operating	5 to 35 degree celsius
	Storage	-30 to 60 degree celsius
Humidity	Operating	35% to 80% (Non-condensing)
	Storage	30% to 85%
Weight		• Unit : 11.7Kg • Carton : 15.5Kg
Dimension(W × H × Dmm)		440 × 395 × 486 mm

► Specification is subject to change without notice for performance improvement.