



## INSTRUCTION MANUAL

VHF/UHF DUAL BAND FM TRANSCEIVER

# IC-T70A IC-T70E

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**WARNING:** MODIFICATION OF THIS DEVICE TO RECEIVE CELLULAR RADIOTELEPHONE SERVICE SIGNALS IS PROHIBITED UNDER FCC RULES AND FEDERAL LAW.

Icom Inc.



---

## FOREWORD

---

Thank you for purchasing this fine Icom product. The IC-T70A/T70E VHF/UHF DUAL BAND FM TRANSCEIVER is designed and built with Icom's superior technology and craftsmanship. With proper care, this product should provide you with years of trouble-free operation.

We want to take a moment of your time to thank you for making your IC-T70A/T70E your radio of choice, and hope you agree with Icom's philosophy of "technology first." Many hours of research and development went into the design of your IC-T70A/T70E.

---

## EXPLICIT DEFINITIONS

---

WORD	DEFINITION
⚠ <b>DANGER!</b>	Personal death, serious injury or an explosion may occur.
⚠ <b>WARNING!</b>	Personal injury, fire hazard or electric shock may occur.
<b>CAUTION</b>	Equipment damage may occur.
<b>NOTE</b>	Recommended for optimum use. No risk of personal injury, fire or electric shock.

---

## FEATURES

---

- *Dust-protection/Splash-resistant construction (IP54\*)*

\*Only when the battery pack/case, antenna and jack cover are attached.

- *Built in VOX circuit enabling the VOX operation\* (voice operated transmission)*

\*To use the VOX operation, an optional headset and a plug adapter cable are additionally required.

- *700 mW\* AF power with BTL (bridge-tied load) amplifier*

\*At 10% distortion with a 16 Ω load

---

## IMPORTANT

---

**READ ALL INSTRUCTIONS** carefully and completely before using the transceiver.

**SAVE THIS INSTRUCTION MANUAL—** This instruction manual contains important operating instructions for the IC-T70A/T70E.

---

## PRECAUTIONS

---

**⚠ WARNING RF EXPOSURE!** This device emits Radio Frequency (RF) energy. Caution should be observed when operating this device. If you have any questions regarding RF exposure and safety standards please refer to the Federal Communications Commission Office of Engineering and Technology's report on Evaluating Compliance with FCC Guidelines for Human Radio Frequency Electromagnetic Fields (OET Bulletin 65)

**⚠ WARNING! NEVER** hold the transceiver so that the antenna is very close to, or touching exposed parts of the body, especially the face or eyes, while transmitting. The transceiver will perform best if the microphone is 5 to 10 cm (2 to 4 inches) away from the lips and the transceiver is vertical.

**⚠ WARNING! NEVER** operate the transceiver with an earphone, headphones or other audio accessories at high volume levels. Hearing experts advise against continuous high volume operation. If you experience a ringing in your ears, reduce the volume level or discontinue use.

**⚠ WARNING! NEVER** operate the transceiver while driving a vehicle. Safe driving requires your full attention—anything less may result in an accident.

**NEVER** connect the transceiver to a power source of more than 16 V DC. This will ruin the transceiver.

**NEVER** connect the transceiver to a power source using reverse polarity. This will ruin the transceiver.

**DO NOT** operate the transceiver near unshielded electrical blasting caps or in an explosive atmosphere.

**DO NOT** push the PTT unless you actually intend to transmit.

**BE CAREFUL!** The transceiver will become hot when operating it continuously for long periods.

**DO NOT** use or place the transceiver in direct sunlight or in areas with temperatures below  $-20^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$ ) or above  $+60^{\circ}\text{C}$  ( $+140^{\circ}\text{F}$ ).

Place the unit in a secure place to avoid inadvertent use by children.

**DO NOT** use harsh solvents such as benzine or alcohol to clean the transceiver, because they can damage the transceiver's surfaces.

---

## PRECAUTIONS

---

**KEEP** the transceiver away from heavy rain, and never immerse it in the water. The transceiver meets IP54\* requirements for dust-protection and splash resistance. However, once the transceiver has been dropped, dust-protection and splash resistance cannot be guaranteed because of possible damage to the transceiver's case or the waterproof seal.

\*Only when the supplied battery pack (or optional battery pack/case), antenna and jack cover are attached.

**NEVER** operate or touch the transceiver with wet hands. This may result in an electric shock or may damage the transceiver.

Even when the transceiver power is OFF, a slight current still flows in the circuits. Remove the battery pack or batteries from the transceiver when not using it for a long time. Otherwise, the installed battery pack or batteries will become exhausted, and will need to be recharged or replaced.

---

## FCC INFORMATION

---

• **FOR CLASS B UNINTENTIONAL RADIATORS:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**CAUTION:** Changes or modifications to this device, not expressly approved by Icom Inc., could void your authority to operate this device under FCC regulations.

---


## SUPPLIED ACCESSORIES

---

The following accessories are supplied with the transceiver.

- ① Hand strap ..... 1
- ② Antenna ..... 1
- ③ Battery pack (BP-264)\* ..... 1
- ④ Belt clip\* ..... 1
- ⑤ Battery charger (BC-167SA/SD/SV)\* ..... 1

\* Not supplied, or the shape is different, depending on the transceiver version.

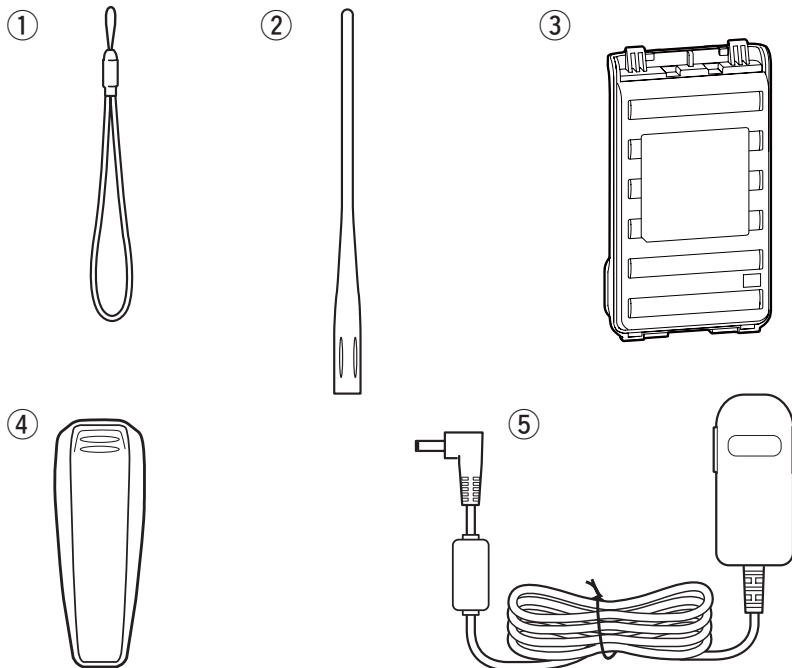

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia and/or other countries.

Microsoft, Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.

---

# TABLE OF CONTENTS

---

FOREWORD .....	i
EXPLICIT DEFINITIONS .....	i
FEATURES .....	i
IMPORTANT .....	i
PRECAUTIONS .....	ii, iii
FCC INFORMATION .....	iii
SUPPLIED ACCESSORIES .....	iv
TABLE OF CONTENTS .....	v, vi
<b>1 ACCESSORY ATTACHMENT .....</b>	<b>1–2</b>
■ Hand strap .....	1
■ Belt clip .....	1
■ Battery pack .....	2
■ Antenna .....	2
<b>2 PANEL DESCRIPTION .....</b>	<b>3–8</b>
■ Front, top and side panels .....	3
■ Function display .....	6
<b>3 BATTERY CHARGING .....</b>	<b>8–15</b>
■ Caution (for the supplied BP-264 Ni-MH battery pack) .....	8
■ Caution (for the optional BP-265 Li-Ion battery pack) .....	9
■ Optional battery case .....	11
■ Battery information .....	11
■ Regular charging .....	12
■ Rapid charging with the BC-191 .....	13
■ Rapid charging with the BC-193 .....	14
■ External DC power operation .....	15

<b>4 BASIC OPERATION .....</b>	<b>16–23</b>
■ Power ON .....	16
■ Setting audio volume .....	16
■ Setting squelch level .....	17
■ Monitor function .....	17
■ Setting the mode .....	18
■ Setting a tuning step .....	19
■ Setting a frequency .....	19
■ Operating mode selection .....	21
■ Key lock function .....	21
■ Receiving .....	22
■ Transmit power selection .....	22
■ Transmitting .....	23
<b>5 REPEATER AND DUPLEX OPERATIONS .....</b>	<b>24–28</b>
■ Repeater operation .....	24
■ Duplex operation .....	26
■ Reverse duplex function .....	26
■ Auto repeater function .....	27
■ 1750 Hz tone .....	28
<b>6 MEMORY/CALL CHANNELS .....</b>	<b>29–39</b>
■ General description .....	29
■ Selecting a call channel .....	29
■ Selecting a memory channel .....	30
■ Memory channel programming .....	31
■ Memory bank setting .....	32
■ Memory bank selection .....	33
■ Programming memory/bank/scan name .....	34

# TABLE OF CONTENTS

■ Selecting memory/bank name indication.....	35	■ Tone frequency and DTCS code.....	68
■ Display type .....	36	■ Tone/DTCS squelch .....	70
■ Copying memory/call contents.....	37	■ Tone scan.....	71
■ Memory clearing .....	38	■ Weather channel operation.....	72
■ Erasing/transferring bank contents .....	39	■ Cloning function .....	74
<b>7 SCAN OPERATION .....</b>	<b>40–47</b>	■ Resetting.....	75
■ Scan types .....	40	<b>11 TROUBLESHOOTING.....</b>	<b>76</b>
■ Full/band/programmed scan .....	42	<b>12 SPECIFICATIONS.....</b>	<b>77</b>
■ Scan edges programming.....	43	<b>13 OPTIONS .....</b>	<b>78–82</b>
■ Memory scan .....	44	■ VOX function .....	80
■ Memory bank scan .....	45	■ Remote control function.....	82
■ Skip channel/frequency setting.....	46	<b>14 CE .....</b>	<b>83, 84</b>
■ Scan resume condition .....	47	<b>INDEX .....</b>	<b>85–88</b>
<b>8 PRIORITY WATCH .....</b>	<b>48–50</b>		
■ Priority watch types .....	48		
■ Priority watch operation .....	49		
<b>9 SET MODES .....</b>	<b>51–64</b>		
■ General .....	51		
■ Set mode item list .....	52		
■ Initial set mode item list .....	52		
■ Set mode items.....	53		
■ Initial set mode items.....	59		
<b>10 OTHER FUNCTIONS .....</b>	<b>65–75</b>		
■ Programming a DTMF code sequence.....	65		
■ Transmitting a DTMF code sequence .....	66		
■ Setting DTMF transfer speed.....	67		


1
2
3
4
5
6
7
8
9
10
11
12
13
14

# 1

## ACCESSORY ATTACHMENT


### ■ Hand strap

To facilitate carrying the transceiver, slide the hand strap through the loop on the top of the rear panel as illustrated at right.

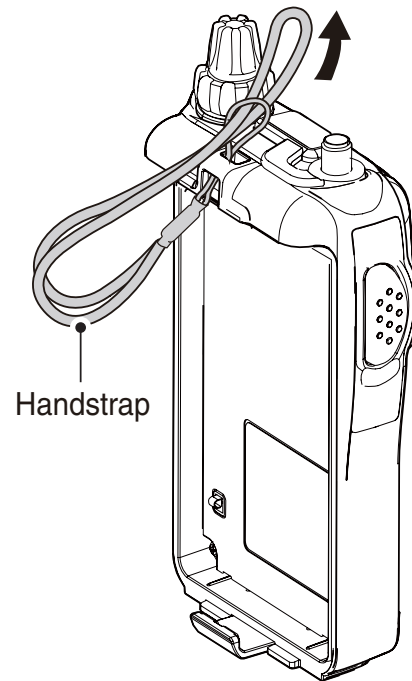


### ■ Belt clip

**To attach the belt clip:**  
Slide the belt clip in the direction of the arrow until the belt clip locks in place, and makes a 'click' sound.

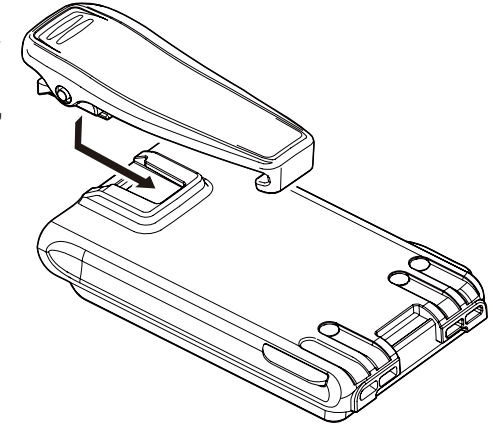

**To detach the belt clip:**

- ① Remove the battery pack from the transceiver, if it is attached. (p. 2)
- ② Lift the tab up (①), and slide the belt clip in the direction of the arrow (②).

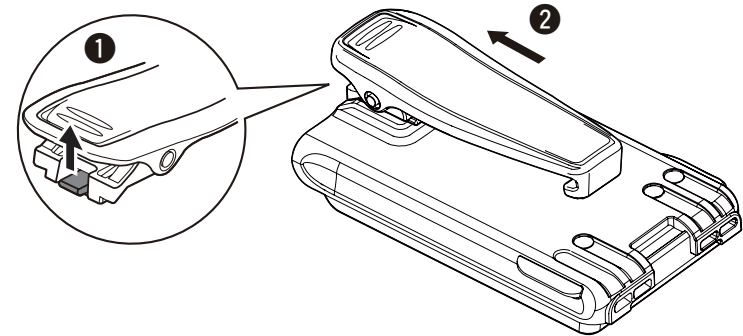




## ■ Battery pack

### To attach the battery pack:


- ① Fit the battery pack in the direction of the arrow (①), then close.
- ② Hook the latch until it makes a 'click' sound (②).
  - Charge the battery pack before use. (pp. 12–14)

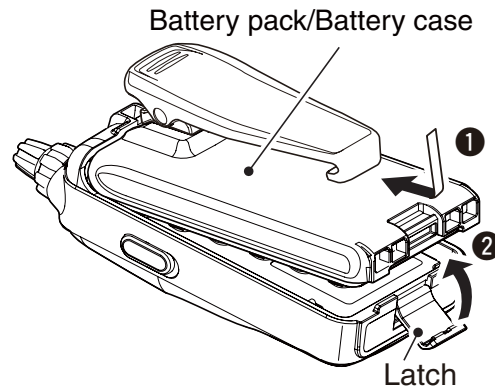

### To detach the battery pack:


/// **Be careful!** The latch is tightly locked, so use caution when releasing it. **DO NOT** use your finger nail. Use the edge of a coin or screwdriver tip to carefully release it.

Unhook the latch (③), and lift up the battery pack in the direction of the arrow (④).

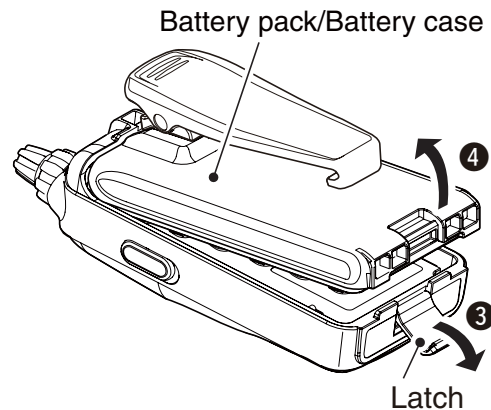

## ■ Antenna

Insert the antenna connector into the antenna and tighten the antenna screw.

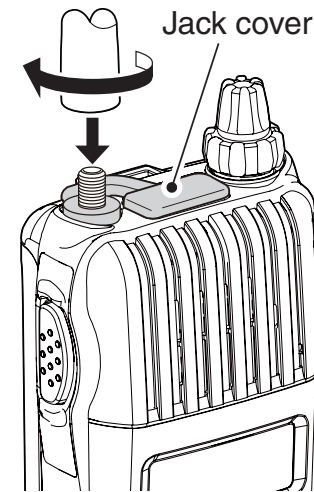


- /// • **NEVER** carry the transceiver by holding only the antenna.
- /// • When the jack is not in use, **keep** the jack cover attached to protect the connector from dust and moisture.

### /// ✓ For your information

Third-party antennas may increase transceiver performance. An optional AD-92SMA ANTENNA CONNECTOR ADAPTER is available to connect an antenna that has a BNC connector.

## ■ Front, top and side panels

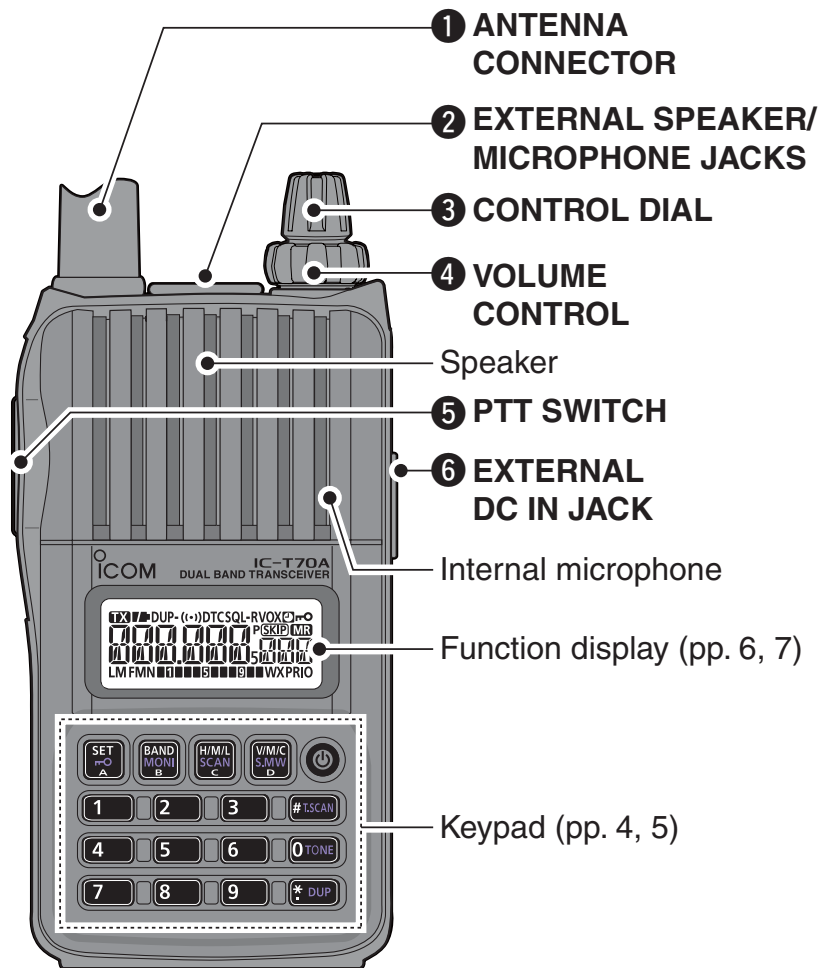

### ① ANTENNA CONNECTOR (p. 3)

Connects the supplied antenna.

- An optional AD-92SMA adapter (p. 79) is available for connecting an antenna with a BNC connector.

### ② EXTERNAL SPEAKER/MICROPHONE JACKS [SP/MIC]

Connect an optional speaker microphone, cloning cable, or headset, if desired.

See page 79 for a list of available options.

- ▨ Be sure to turn power OFF before connecting or disconnecting optional equipment to/from the [SP/MIC] jack.

### ③ CONTROL DIAL [DIAL]

- ➔ Rotate to tune the operating frequency. (p. 19)
- ➔ During memory mode, rotate to select the memory channel. (pp. 18, 30)
- ➔ While scanning, changes the scanning direction. (pp. 42, 44, 45)
- ➔ While continuing to push [MONI](BAND), sets the squelch level. (p. 17)
- ➔ After pushing [BAND] during memory mode operation, selects the programmed bank. (p. 33)
- ➔ During set mode operation, rotate to select the set items. (p. 51)

**4 VOLUME CONTROL [VOL]**

- ➔ Adjust audio volume level. (p. 16)
- ➔ During set mode operation, rotate to select the options. (p. 51)

**5 PTT SWITCH [PTT]**

- ➔ Push and hold to transmit, release to receive. (p. 23)

**For IC-T70E only**

- ➔ Push briefly, then push and hold to transmit a 1750 Hz tone burst. (p. 28)

**6 EXTERNAL DC IN JACK [DC IN]**

- ➔ Connects the supplied wall charger, BC-167S, to charge the attached battery pack, BP-264. (p. 12)
  - The transceiver can charge only the Ni-MH battery pack, BP-264. Charging the Li-Ion battery pack, BP-265 requires the rapid charger, BC-193.
- ➔ Connect an external DC power supply through the optional CP-12L, CP-19R or OPC-254L for external DC operation. (p. 15)

◇ Keypad



- ➔ Push to input numeral for frequency input, memory channel selection.
- ➔ Push to send the DTMF code. (pp. 66, 67)
  - [0]–[9] send “0”–“9,” [A](SET) sends “A,” [B](BAND) sends “B,” [C](H/M/L) sends “C,” [D](V/M/C) sends “D,” [\*](DUP) sends “\* (E)” and [#](T.SCAN) sends “# (F).”

**POWER KEY [⏻]**



- ➔ Push and hold for 1 sec. to turn the transceiver power ON or OFF. (p. 16)

**VFO/MEMORY/CALL • SELECT MEMORY WRITE KEY [V/M/C] • [S.MW](V/M/C)**



- ➔ Push to select the VFO mode, memory mode, call channel mode or weather channel mode\*. (pp. 18, 29, 30, 72)
  - \*Only for the U.S.A. version transceiver.
- ➔ Push and hold for 1 sec. to enter select memory write mode. (p. 31)

---

## 2 PANEL DESCRIPTION

◇ Keypad (continued)

### **BAND • MONITOR KEY [BAND] • [MONI](BAND)**



- ➔ During VFO mode operation, push to select an operating frequency band. (p. 19)
- ➔ Push and hold to open the squelch temporarily and monitor the operating frequency. (p. 17)
- ➔ While continuing to push this key, rotate [DIAL] to adjust the squelch level. (p. 17)
- ➔ During memory mode operation, push to enter the memory bank group selection. (p. 33)

### **OUTPUT POWER • SCAN KEY [H/M/L] • [SCAN](H/M/L)**



- ➔ Push to select the output power. (p. 22)
  - Selects the transmit output power from high, mid or low.
- ➔ Push and hold for 1 sec. to enter the scan type selection mode. (pp. 42, 44, 45)
  - Push again to start the scan.

### **SET • LOCK KEY [SET] • [r-O](SET)**



- ➔ Push to enter the Set mode. (p. 51)
- ➔ Push and hold for 1 sec. to toggle the lock function ON or OFF. (p. 21)
- ➔ During select memory write mode, push to select the items. (pp. 32, 34, 38, 39)

### **TONE SCAN [T.SCAN](#)**



- ➔ Push and hold for 1 sec. to start tone scan function. (p. 71)

### **TONE/TONE SQUELCH KEY [TONE](0)**




- ➔ Push and hold for 1 sec. to select repeater tone, tone squelch, tone squelch reverse, DTCS squelch, DTCS squelch reverse and no tone operation in sequence. (p. 70)
  - Pocket beep function is available for tone squelch and DTCS squelch. (p. 70)

### **DUPLEX KEY [DUP](\*)**



- ➔ Push and hold for 1 sec. to select minus duplex, plus duplex or simplex operation. (p. 26)
  - “DUP–” (minus duplex), “DUP” (plus duplex) and no indication (simplex) appear in order.

## ■ Function display

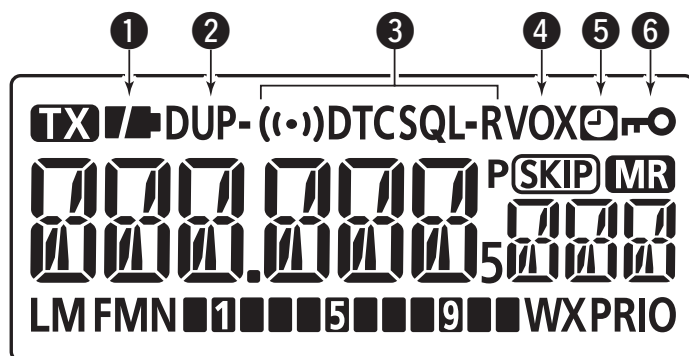

### ① BATTERY ICON (pp. 11, 12)

#### ○ When BP-264 or BP-265 is attached

- ➔ “” (battery icons) appear when the battery pack has ample capacity.
- ➔ “” appears when the battery pack has less than half capacity.
- ➔ “” blinks before the battery pack is exhausted. The battery pack must be charged.
- ➔ The icons show “,” “” and “ (disappears)” in sequence while charging the attached Ni-MH battery pack (BP-264).

#### ○ When BP-263 is attached

- ➔ “” (battery icons) appear when the installed batteries have ample capacity.
- ➔ “” blinks before the installed batteries are exhausted. The batteries must be replaced.

### ② DUPLEX ICON (p. 26)

“DUP” appears when plus duplex, “DUP-” appears when minus duplex is selected.

### ③ TONE ICON

- ➔ “T” appears while the subaudible tone encoder is in use. (p. 24)
- ➔ “T SQL” appears while the tone squelch function is in use. (p. 70)
- ➔ “T SQL-R” appears while the reverse tone squelch function is in use. (p. 70)
- ➔ “DTCS” appears while the DTCS squelch function is in use. (p. 70)
- ➔ “DTCS -R” appears while the reverse DTCS squelch function is in use. (p. 70)
- ➔ “((·))” appears with the “T SQL” or “DTCS” indicator while the pocket beep function (with CTCSS or DTCS) is in use. (p. 70)

### ④ VOX ICON (p. 80)

Appears when the VOX function is in use.

### ⑤ AUTO POWER OFF ICON (p. 59)


Appears when the Auto Power OFF function is ON.

### ⑥ KEY LOCK ICON (p. 21)

Appears when the key lock function is activated.

## 2 PANEL DESCRIPTION

### ■ Function display (continued)

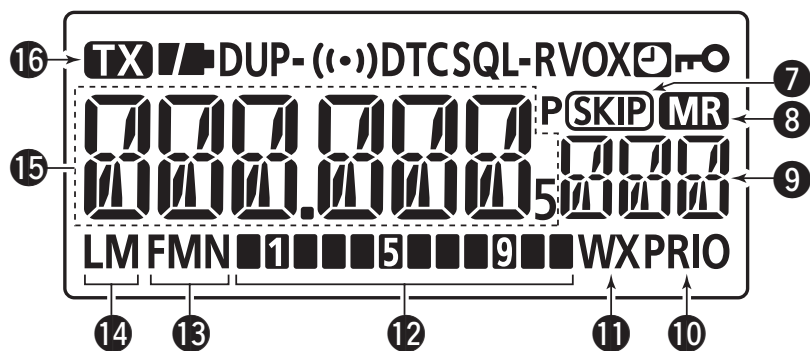

#### 7 SKIP ICONS

- “SKIP” appears when the selected memory channel is set as a skip channel. (p. 46)
- “P SKIP” appears when the displayed frequency is set as a skip frequency in memory mode. (p. 46)

#### 8 MEMORY ICON (pp. 18, 30)

Appears when memory mode is selected.

#### 9 MEMORY CHANNEL NUMBER

- Shows the selected memory channel number. (pp. 18, 30)
- “C0” or “C1” appears when the call channel is selected. (pp. 18, 29)

#### 10 PRIORITY WATCH ICON (pp. 49, 50)

Appears when priority watch is in use.

#### 11 WEATHER CHANNEL ICON (pp. 72–73)

Appears when the weather alert function is in use.

#### 12 S/RF METER

- Shows the relative signal strength while receiving signals. (p. 22)
- Shows the output power level while transmitting. (pp. 22, 23)

#### 13 OPERATING MODE ICONS (p. 21)

Shows the selected operating mode.

- FM and FMN are selectable.

#### 14 POWER ICONS (p. 22)

- “L” appears when low power is selected.
- “M” appears when middle power is selected.
- No indicator appears when high power is selected.

#### 15 FREQUENCY READOUT

- Displays a variety of information, such as operating frequency, set mode contents.
  - The decimal point blinks during scan.
- During memory mode operation, the programmed memory or memory bank name is displayed.

#### 16 TRANSMIT ICON (p. 23)

Appears during transmit.

## ■ Caution (for the supplied BP-264 Ni-MH battery pack)

- ⚠ **DANGER! NEVER** short terminals (or charging terminals) of the battery pack. Also, current may flow into nearby metal objects such as a necklace, so be careful when placing battery packs (or the transceiver) in handbags, etc. Simply carrying with or placing near metal objects such as a necklace, etc. may cause shorting. This may damage not only the battery pack, but also the transceiver.
  - ⚠ **DANGER! NEVER** incinerate used battery packs. Internal battery gas may cause an explosion.
  - ⚠ **DANGER! NEVER** immerse the battery pack in water. If the battery pack becomes wet, be sure to wipe it dry **BEFORE** attaching it to the transceiver.
  - **CAUTION:** Always use the battery within the specified temperature range,  $-5^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  ( $+23^{\circ}\text{F}$  to  $+140^{\circ}\text{F}$ ). Using the battery out of its specified temperature range will reduce the battery's performance and battery life.
  - **CAUTION:** Shorter battery life could occur if the battery is left completely discharged, or in an excessive temperature environment (above  $+55^{\circ}\text{C}$ ;  $+131^{\circ}\text{F}$ ) for an extended period of time. If the battery must be left unused for a long time, it must be detached from the radio after charging. Keep it safely in a cool dry place at the following temperature range:
    - $-20^{\circ}\text{C}$  to  $+45^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  to  $+113^{\circ}\text{F}$ ) (up to a month)
    - $-20^{\circ}\text{C}$  to  $+35^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  to  $+95^{\circ}\text{F}$ ) (up to six months)
    - $-20^{\circ}\text{C}$  to  $+25^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  to  $+77^{\circ}\text{F}$ ) (up to a year\*)
- **Clean** the battery terminals to avoid rust or misscontact.
  - **Keep** battery terminals clean. It's a good idea to clean battery terminals once a week.
  - If your Ni-MH battery pack seems to have no capacity, even after being charged, completely discharge it by leaving the power ON overnight. Then, fully charge the battery pack again. If the battery pack still does not retain a charge (or only very little charge), a new battery pack must be purchased. Prior to using the transceiver for the first time, the battery pack must be fully charged for optimum life and operation.
  - Recommended temperature range for charging:
    - between  $0^{\circ}\text{C}$  and  $+45^{\circ}\text{C}$  for the regular charge by the transceiver.
    - or between  $+10^{\circ}\text{C}$  and  $+40^{\circ}\text{C}$  for the rapid charge with the BP-191.
  - Use the supplied charger (BC-167S) or optional charger (BC-191) only. **NEVER** use other manufacturers' chargers.
  - The battery pack contains a rechargeable battery. Charge the battery pack before first operating the transceiver, or when the battery pack becomes exhausted. If you want to prolong the battery life, the following points should be observed:
    - Avoid over charging.
    - Use the battery pack until it becomes almost completely exhausted, under normal conditions. We recommend battery charging after transmitting becomes impossible.



---

## 3 BATTERY CHARGING

### ■ **Caution** (for the optional BP-265 Li-Ion battery pack)

Misuse of Lithium-Ion batteries may result in the following hazards: smoke, fire, or the battery may rupture. Misuse can also cause damage to the battery or degradation of battery performance.

- ⚠ **DANGER!** Use and charge only specified Icom battery packs with Icom radios and Icom chargers. Only Icom battery packs are tested and approved for use with Icom radios or charged with Icom chargers. Using third-party or counterfeit battery packs may cause smoke, fire, or cause the battery to burst.

#### ◇ **Battery caution**

- ⚠ **DANGER! DO NOT** hammer or otherwise impact the battery. Do not use the battery if it has been severely impacted or dropped, or if the battery has been subjected to heavy pressure. Battery damage may not be visible on the outside of the case. Even if the surface of the battery does not show cracks or any other damage, the cells inside the battery may rupture or catch fire.
- ⚠ **DANGER! NEVER** use or leave battery pack in areas with temperatures above +60°C (+140°F). High temperature buildup in the battery, such as could occur near fires or stoves, inside a sun heated car, or in direct sunlight may cause the battery to rupture or catch fire. Excessive temperatures may also degrade battery performance or shorten battery life.

- ⚠ **DANGER! DO NOT** expose the battery to rain, snow, seawater, or any other liquids. Do not charge or use a wet battery. If the battery gets wet, be sure to wipe it dry before using.
- ⚠ **DANGER! NEVER** incinerate a used battery pack, since internal battery gas may cause it to rupture, or may cause an explosion.
- ⚠ **DANGER! NEVER** solder the battery terminals, or **NEVER** modify the battery pack. This may cause heat generation, and the battery may burst, emit smoke or catch fire.
- ⚠ **DANGER!** Use the battery only with the transceiver for which it is specified. Never use a battery with any other equipment, or for any purpose that is not specified in this instruction manual.
- ⚠ **DANGER!** If fluid from inside the battery gets in your eyes, blindness can result. Rinse your eyes with clean water, without rubbing them, and see a doctor immediately.
- ⚠ **WARNING!** Immediately stop using the battery if it emits an abnormal odor, heats up, or is discolored or deformed. If any of these conditions occur, contact your Icom dealer or distributor.
- ⚠ **WARNING!** Immediately wash, using clean water, any part of the body that comes into contact with fluid from inside the battery.



- **⚠ WARNING! NEVER** put the battery in a microwave oven, high-pressure container, or in an induction heating cooker. This could cause a fire, overheating, or cause the battery to rupture.
- **CAUTION:** Always use the battery within the specified temperature range,  $-20^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  to  $+140^{\circ}\text{F}$ ). Using the battery out of its specified temperature range will reduce the battery's performance and battery life.
- **CAUTION:** Shorter battery life could occur if the battery is left fully charged, completely discharged, or in an excessive temperature environment (above  $+50^{\circ}\text{C}$ ;  $+122^{\circ}\text{F}$ ) for an extended period of time. If the battery must be left unused for a long time, it must be detached from the radio after discharging. You may use the battery until the remaining capacity is about half, and then keep it safely in a cool dry place at the following temperature range:
  - $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  to  $+122^{\circ}\text{F}$ ) (up to a month)
  - $-20^{\circ}\text{C}$  to  $+35^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  to  $+95^{\circ}\text{F}$ ) (up to three months)
  - $-20^{\circ}\text{C}$  to  $+20^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  to  $+68^{\circ}\text{F}$ ) (up to a year)

### ◇ Charging caution


- **⚠ DANGER! NEVER** charge the battery pack in areas with extremely high temperatures, such as near fires or stoves, inside a sun-heated vehicle, or in direct sunlight. In such environments, the safety/protection circuit in the battery will activate, causing the battery to stop charging.
- **⚠ WARNING! DO NOT** charge or leave the battery in the battery charger beyond the specified time for charging. If the battery is not completely charged by the specified time, stop charging and remove the battery from the battery charger. Continuing to charge the battery beyond the specified time limit may cause a fire, overheating, or the battery may rupture.
- **⚠ WARNING! NEVER** insert the transceiver (battery attached to the transceiver) into the charger if it is wet or soiled. This could corrode the battery charger terminals or damage the charger. The charger is not waterproof.
- **CAUTION: DO NOT** charge the battery outside of the specified temperature range: BC-193 ( $+10^{\circ}\text{C}$  to  $+40^{\circ}\text{C}$ ;  $+50^{\circ}\text{F}$  to  $+104^{\circ}\text{F}$ ). Icom recommends charging the battery at  $+20^{\circ}\text{C}$  ( $+68^{\circ}\text{F}$ ). The battery may heat up or rupture if charged out of the specified temperature range. Additionally, battery performance or battery life may be reduced.

### 3 BATTERY CHARGING

#### ■ Optional battery case (BP-263)

When you would like to use the optional battery case (BP-263), install 6 × AA (LR6) size alkaline batteries, as shown below.

- ① Remove the battery case if it is attached. (p. 2)
- ② Install 6 × AA (LR6) size alkaline batteries.
  - Install only alkaline batteries.
  - Be sure to observe the correct polarity.

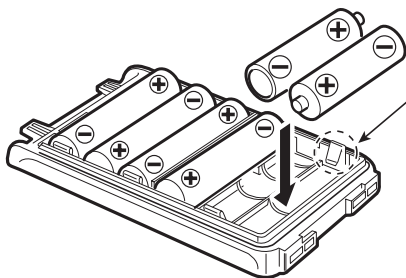

**Be careful!** The negative terminals of the battery case protrude from the body, so pay attention not to injure your fingers when inserting the batteries.

- ③ Attach the battery case. (p. 2)

- When installing batteries, make sure they are all the same brand, type and capacity. Also, do not mix new and old batteries together.
- Never use batteries whose insulated covering is damaged.
- Never incinerate used battery cells since internal battery gas may cause them to rupture.
- Never expose a detached battery case to water. If the battery case gets wet, be sure to wipe it dry before using it.
- Keep battery contacts clean. It's a good idea to clean battery terminals once a week.
- We recommend to select the middle power transmission during the battery case operation for protecting batteries heat up.

#### ■ Battery information

##### ◇ Battery life

Battery pack	Voltage	Capacity	Battery life*1	
BP-263	Battery case for AA (LR6) × 6 alkaline		___*2	
BP-264	7.2 V	1400 mAh (typ.)	VHF	11.5 hrs.
			UHF	10 hrs.
BP-265	7.4 V	1900 mAh (min.) 2000 mAh (typ.)	VHF	16 hrs.
			UHF	13.5 hrs.

\*1 When the power save function is set to "Auto," and the operating time is calculated under the following conditions;

TX : RX : standby = 5 : 5 : 90

\*2 The average operating time depends on the alkaline cells used.

Even when the transceiver power is OFF, a small current still flows in the radio. Remove the battery pack or case from the transceiver when not using it for a long time. Otherwise, the battery pack or installed batteries will become exhausted.

Indication	Battery condition
	The battery pack (BP-264/BP-265) or battery case (BP-263) has ample capacity.
	The battery pack (BP-264/BP-265) is nearing exhaustion.
 (blinks)	The battery pack or battery case is exhausted. Charging (BP-264/BP-265) or replacing batteries (BP-263) is necessary.

## Regular charging


Prior to using the transceiver for the first time, the battery pack must be fully charged for optimum life and operation.

### ◇ Battery icons

The icons show “,” “” and “ (disappears)” in sequence and “CHARGE” appears while charging (when the transceiver’s power is OFF). The icons and “CHARGE” disappear when the battery pack is completely charged.

### ◇ Charging note

- Be sure to turn the transceiver power OFF. Otherwise the battery pack will not be charged completely or will take much longer to charge.
- The transceiver can charge only the BP-264 battery pack. Other types of rechargeable battery, Ni-Cd or Li-Ion batteries cannot be charged.
- External DC power operation becomes possible when using an optional CP-12L, CP-19R or OPC-254L. The attached battery pack is also charged simultaneously, except during transmit (see p. 15 for more details).
- The external DC power supply voltage must be between 10–16 V to charge the battery pack and for operation when using an optional OPC-254L. (We recommend 11 V DC for operation.)
- If the battery icons (“” and “”) disappears only after 1 min. from connecting to the DC power supply, the battery pack may have problem. In this case, contact your Icom dealer/distributor, or purchase a new battery pack.

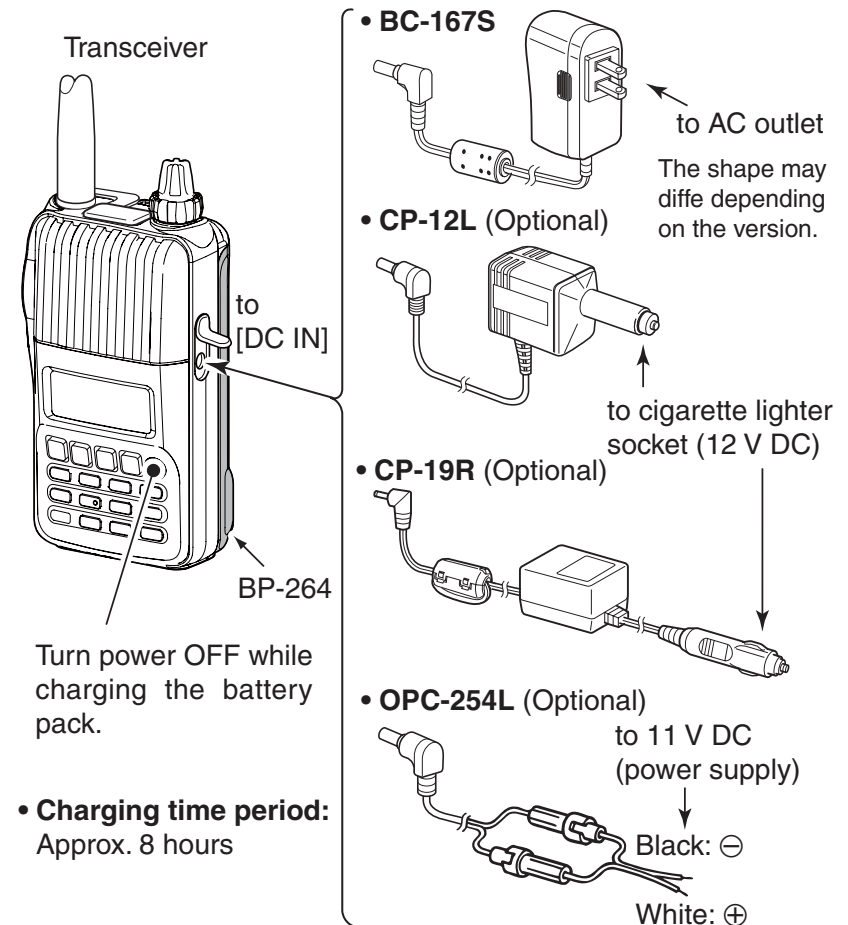

Be sure to disconnect the AC adapter from the AC outlet after the battery charging is completed, otherwise the transceiver may receive switching noise from the AC adapter depending on the operating frequencies and/or antenna used.

## 3 BATTERY CHARGING


### ■ Rapid charging with the BC-191

The optional BC-191 provides rapid charging of the Ni-MH battery pack BP-264.

#### ◇ Charging note

- Be sure to turn the transceiver power OFF.
- The desktop charger, BC-191, can charge only the BP-264 battery pack. Other types of rechargeable battery, Ni-Cd or Li-Ion batteries cannot be charged.
- **NEVER** install the transceiver with battery pack to the BC-191 when the transceiver is connected to the DC power supply. This may cause the BC-191's malfunction and the charging indicator of the BC-191 lights red. In this case, disconnect the AC adapter from the BC-191, and then reconnect the AC adapter to the BC-191.
- The optional CP-23L and OPC-515L can be used instead of the supplied AC adapter. Connect one of these to the [DC 12-16V] jack in this case.

- **Charging period:** approx. 2 hours (with BP-264)

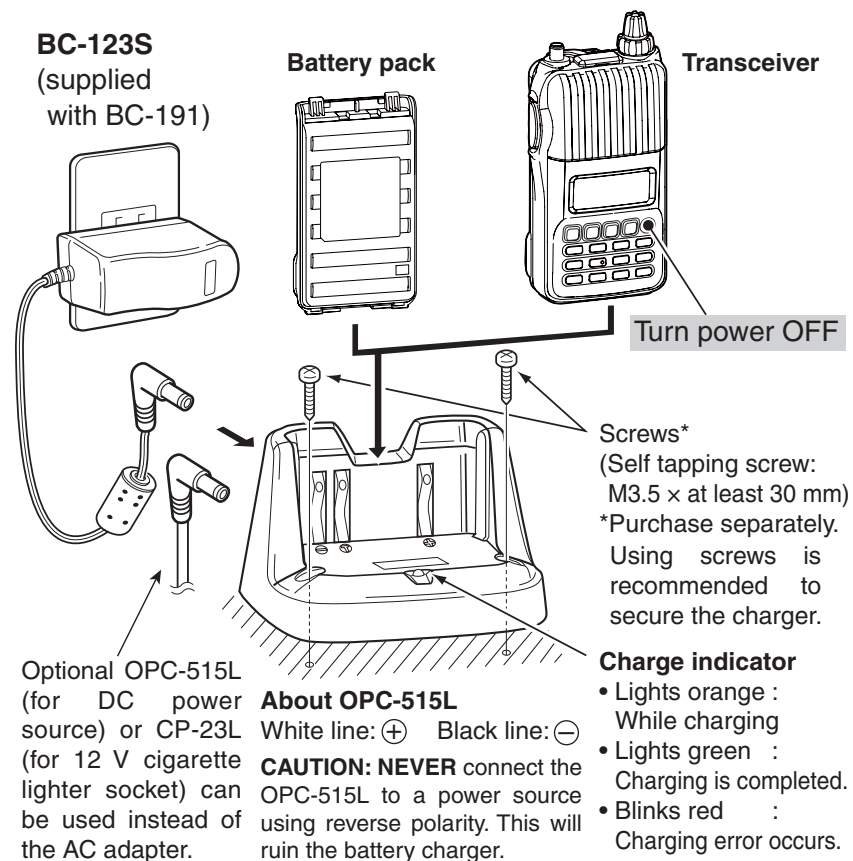


## ■ Rapid charging with the BC-193

The optional BC-193 provides rapid charging of the Li-Ion-battery pack BP-265.

### ◇ Charging note

- Be sure to turn the transceiver power OFF.
- The desktop charger, BC-193, can charge only the BP-265 battery pack. Other types of rechargeable battery, Ni-Cd or Ni-MH batteries cannot be charged.
- **NEVER** install the transceiver with battery pack to the BC-193 when the transceiver is connected to the DC power supply. This may cause the BC-193's malfunction and the charging indicator of the BC-193 lights red. In this case, disconnect the AC adapter from the BC-193, and then reconnect the AC adapter to the BC-193.
- The optional CP-23L and OPC-515L can be used instead of the supplied AC adapter. Connect one of these to the [DC 12-16V] jack in this case.

- **Charging period:** approx. 2.5 hours (with BP-265)

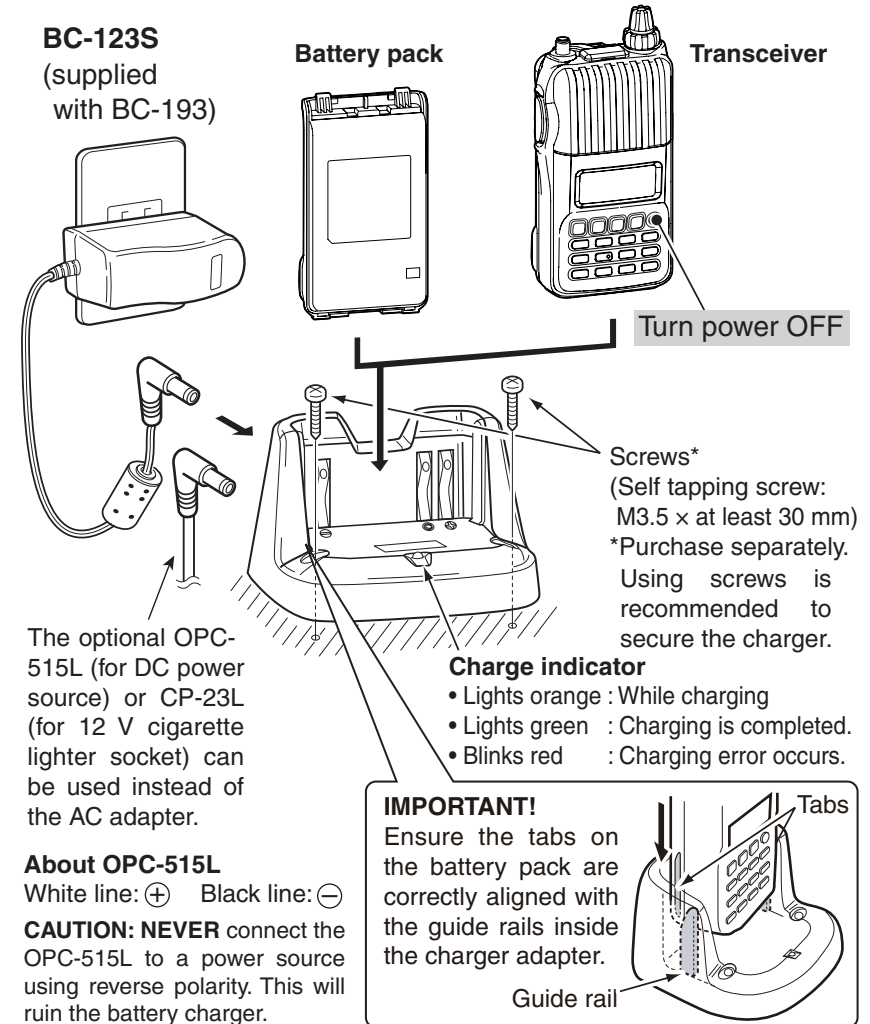


## 3 BATTERY CHARGING

### External DC power operation

An optional cigarette lighter cable (CP-12L or CP-19R; for 12 V cigarette lighter socket) or external DC power cable (OPC-254L) can be used for external power operation. (We recommend the CP-19R when you want to connect a 12 V cigarette lighter socket.)

#### ◇ Operating note

- Power supply voltage must be between **10.0–16.0 V DC**. (We recommend 11.0 V DC.) **NEVER CONNECT OVER 16 V DC** directly into the [DC IN] jack of the transceiver.
- **BE SURE** to use **CP-12L**, **CP-19R** or **OPC-254L** when connecting a regulated 12 V DC power supply. Use an external DC-DC converter to connect the transceiver through optional CP-12L, CP-19R or OPC-254L to a 24 V DC power source.
- The voltage of the external power supply must be within 10–16 V DC when using either CP-12L, CP-19R or OPC-254L, otherwise, use the battery pack/battery case.
- Disconnect the power cable from the transceiver when not using it. Otherwise, the vehicle battery will become exhausted.
- The power save function is deactivated automatically during external DC power operation.

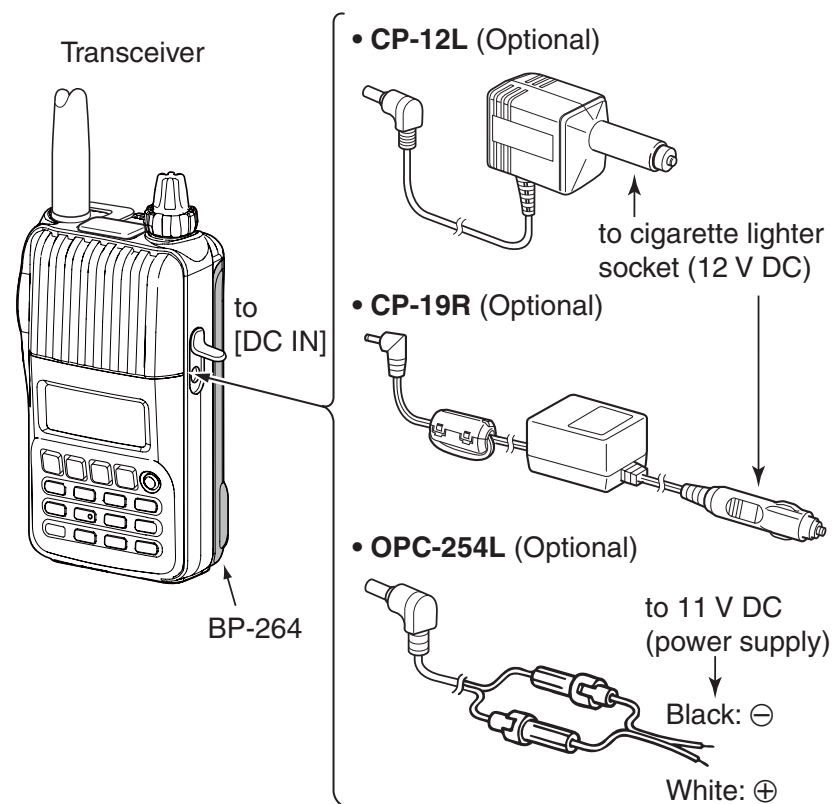


**NOTE:** Up to 5 W (approx.) of maximum output power is available when using external DC power. However, when the supplied voltage exceeds 14 V, the built-in protection circuit activates to reduce the transmit output power to 2.5 W (approx.).



## ■ Power ON


- ➔ Push and hold [POWER] for 1 sec. to turn power ON.
  - Push and hold [POWER] for 1 sec. to turn power OFF.

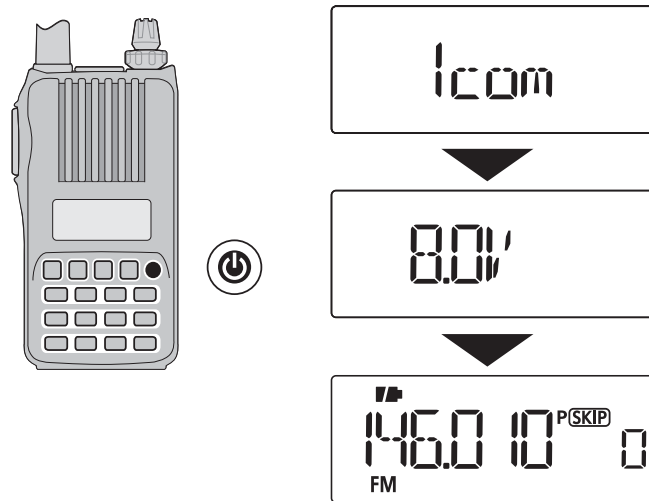

The voltage indication is skipped in the Initial set mode (p. 61).

## ■ Setting audio volume

- ➔ Rotate [VOL] to adjust the audio level.
- If squelch is closed, push and hold [MONI](BAND) while setting the audio level.
- The display shows the volume level while setting.

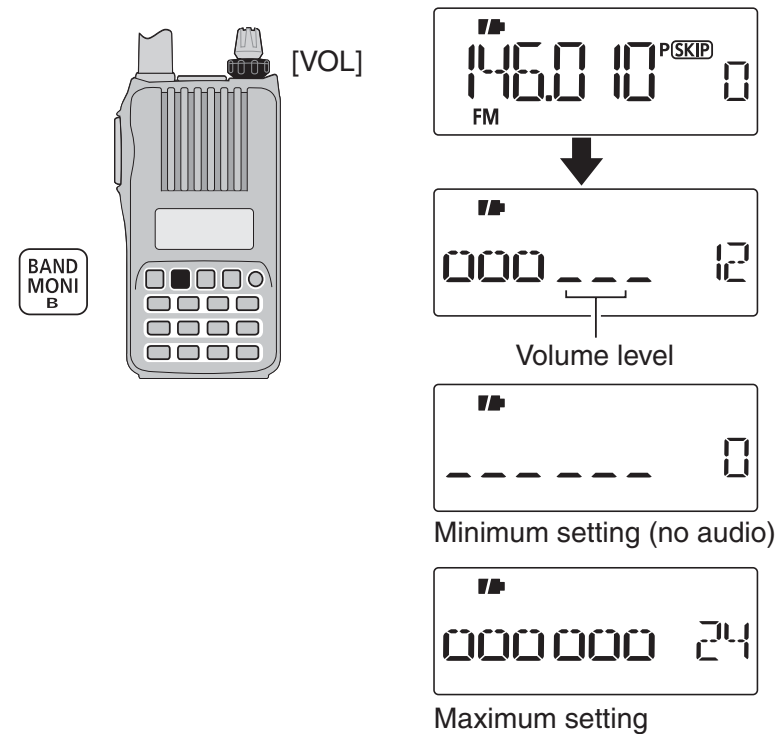


The beep level is adjustable in the Initial set mode (p. 60).

## 4 BASIC OPERATION

### ■ Setting squelch level

The squelch circuit mutes the received audio signal depending on the signal strength. The transceiver has 9 squelch levels, a continuously open setting and an automatic squelch setting.


- ➔ While continuing to push **[MONI]**(BAND), rotate **[DIAL]** to select the squelch level.
  - “LEVEL1” is loose squelch (for weak signals) and “LEVEL9” is tight squelch (for strong signals).
  - “Auto” indicates automatic level adjustment by a noise pulse counting system.
  - “OPEn” indicates continuously open setting.

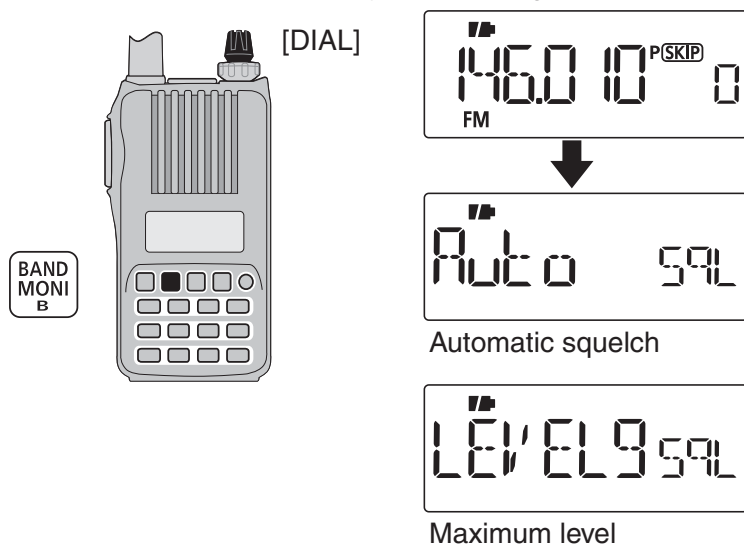

### ■ Monitor function

This function is used to listen to weak signals without disturbing the squelch setting or to open the squelch manually even when mute functions such as the tone squelch are in use.

- ➔ Push and hold **[MONI]**(BAND) to monitor the operating frequency.
  - The 1st and 2nd segments of the S-meter blink.

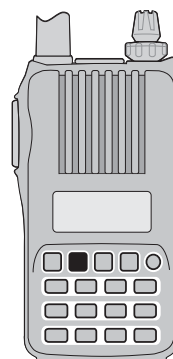

Two segments blink

▨ The **[MONI]** key can be set to ‘sticky’ operation in the Initial set mode. See page 63 for details.




## ■ Setting the mode

- ① Push [V/M/C] repeatedly to select the VFO mode, memory mode, call channel mode or weather channel mode\*, in sequence

\*Only for the U.S.A. version transceiver.

- ② Rotate [DIAL] to change the frequency or select a desired channel.

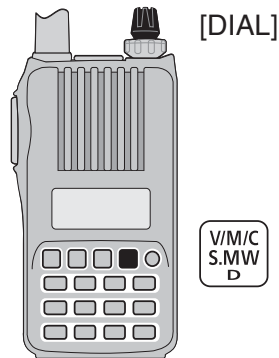

### ◇ VFO mode

The VFO mode is used to set the desired frequency.

#### • VFO mode display



#### What is VFO?

VFO is an abbreviation of Variable Frequency Oscillator. Frequencies for both transmitting and receiving are generated and controlled by the VFO.

### ◇ Memory mode

Memory mode is used for operation on memory channels which store programmed frequencies.

- “MR” appears when memory mode is selected.
- Only programmed memory channels can be selected.
- Enter the memory channel directly to select the desired memory channel. (p. 30)

#### • Memory mode display



Appears

### ◇ Call channel mode

The Call channel is used for quick recall of most often-used frequency.

- “C0” or “C1” appears instead of the memory channel number when the Call channel mode is selected.

#### • Call channel display



### ◇ Weather channel mode\*

There are 10 weather channels for monitoring weather broadcasts from NOAA (National Oceanic and Atmospheric Administration).

#### • Weather channel display



\*Only for the U.S.A. version transceiver.

## 4 BASIC OPERATION


### ■ Setting a tuning step

The tuning step can be selected for both band. The following tuning steps are available for the IC-T70A/T70E.

- 5.0 kHz
- 10.0 kHz
- 12.5 kHz
- 15.0 kHz
- 20.0 kHz
- 25.0 kHz
- 30.0 kHz
- 50.0 kHz
- 100.0 kHz
- 125.0 kHz
- 200.0 kHz

#### ◇ Tuning step selection


- ① In the VFO mode, push **[BAND]** to select the desired frequency band.
  - If the VFO mode is not selected, such as a memory channel/call channel mode or the weather channel mode, push **[V/M/C]** to select the VFO mode first, then push **[BAND]** to select the desired band.
- ② Push **[SET]** to enter the Set mode.
- ③ Rotate **[DIAL]** to select the tuning step set item, then rotate **[VOL]** to select the desired tuning step.
- ④ Push **[V/M/C]** to return to the VFO mode.

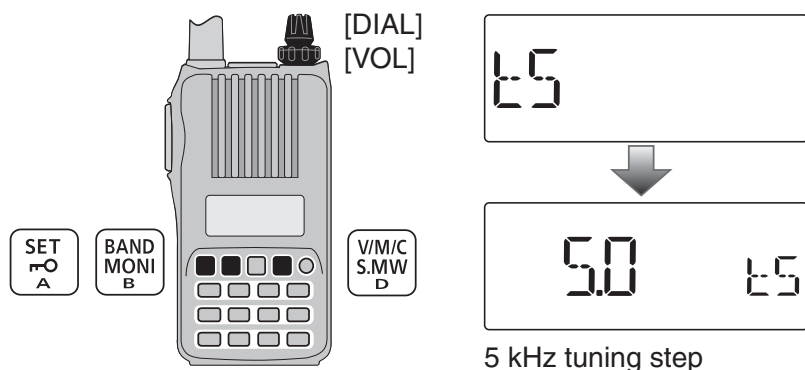

### ■ Setting a frequency

#### ◇ Using the dial

- ① Push **[V/M/C]** to select the VFO mode, if any other mode is selected.
- ② Push **[BAND]** to select the desired frequency band.
- ③ Rotate **[DIAL]** to select the desired frequency.
  - The frequency changes according to the preset tuning steps. See the previous content to set the tuning step.

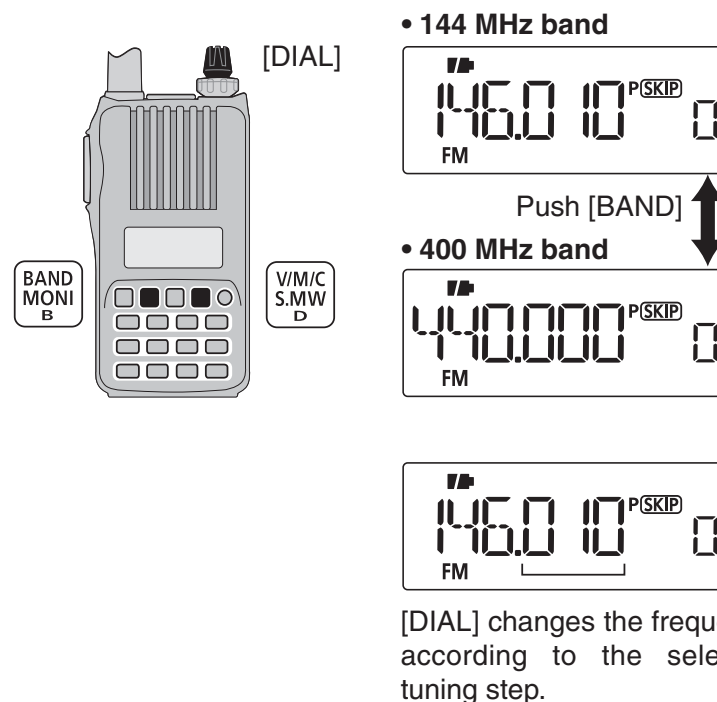


[DIAL] changes the frequency according to the selected tuning step.

◇ Using the keypad

The frequency can be directly set via numeric keys.


- If a frequency outside the frequency range is entered, the previously displayed frequency is automatically recalled after entering last digit.

- ① Push [V/M/C] to select the VFO mode, if any other mode is selected.
- ② Enter the desired frequency via the keypad.

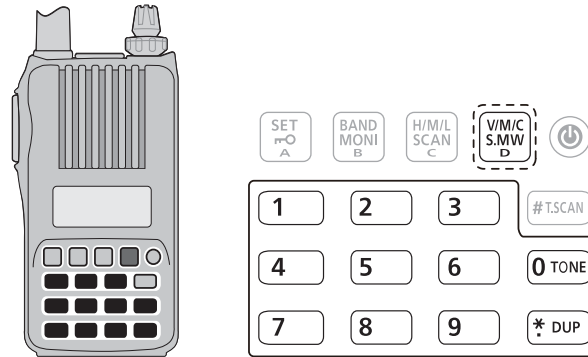


Depending on the tuning step setting, it may not be possible to input a 1 kHz digit. In this case, enter "0" as 1 kHz digit, then rotate [DIAL] to set the desired frequency.

• Entering 145.580 MHz

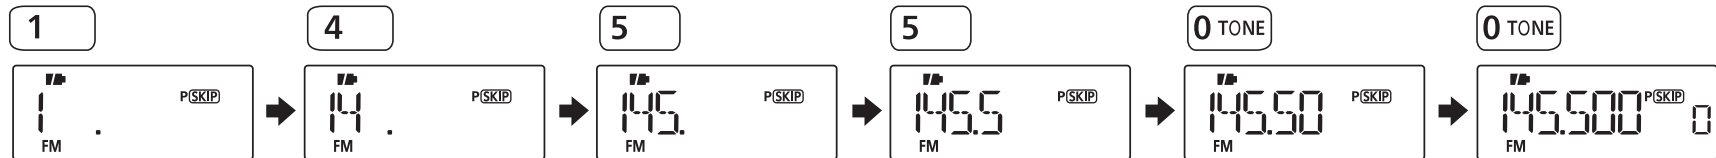

• Changing 100 kHz and below

Editing 145.550 MHz to 145.640 MHz

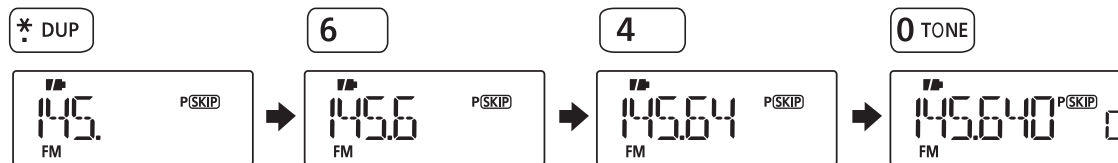


Push to cancel numeral key input.

## 4 BASIC OPERATION

### ■ Operating mode selection

Operating modes are determined by the modulation of the radio signals. The transceiver has two operating modes, FM and FM-N (narrow). The mode selection is stored independently for each band and memory channel.

- ① Push **[V/M/C]** to select the VFO mode, if any other mode is selected.
- ② Push **[BAND]** to select the desired frequency band.
- ③ Push **[SET]** to enter the Set mode.
- ④ Rotate **[DIAL]** to select the operating mode set item, then rotate **[VOL]** to select “WIDE” (FM) or “nARROW” (FM-narrow).
- ⑤ Push **[V/M/C]** to return to the VFO mode.

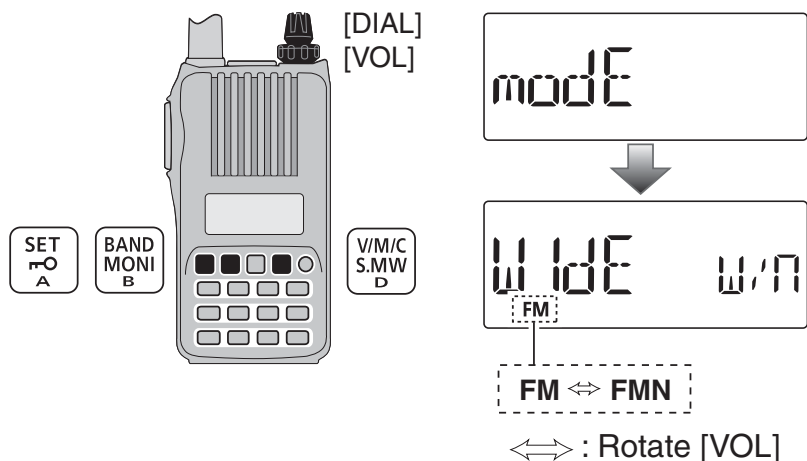

### ■ Key lock function

To prevent accidental frequency changes and unnecessary function access, use the lock function.

- ➔ Push and hold **[FO]**(SET) for 1 sec. to turn the lock function ON or OFF.
  - “FO” appears while the lock function is activated.
  - **[FO]**, **[FO]**(SET), **[MONI]**(BAND), **[PTT]**, **[VOL]** and squelch adjustment (**[MONI]**(BAND) + **[DIAL]**) are operable while the lock function is activated.




▨ To prevent accidental transmission, etc., the transceiver has a PTT lock function. Turns the PTT lock function ON or OFF in the Initial set mode. (p. 62)

## ■ Receiving

Make sure a charged battery pack (BP-264, BP-265) or brand new alkaline batteries (BP-263) are installed (pp. 2, 12–14).


- ① Push and hold [POWER] for 1 sec. to turn power ON.
- ② Rotate [VOL] to set the desired audio level. (p. 16)
  - The frequency display shows the volume level while setting.
- ③ Set the receiving frequency. (p. 20)
- ④ Set the squelch level. (p. 17)
  - While continuing to push [MONI](BAND), rotate [DIAL].
  - The first click of [DIAL] indicates the current squelch level.
  - “LEVEL1” is loose squelch (for weak signals) and “LEVEL9” is tight squelch (for strong signals).
  - “Auto” indicates automatic level adjustment by a noise pulse counting system.
  - Push and hold [MONI](BAND) to open the squelch manually.
- ⑤ When a signal is received:
  - Squelch opens and audio is output.
  - The S/RF meter shows the relative signal strength level.

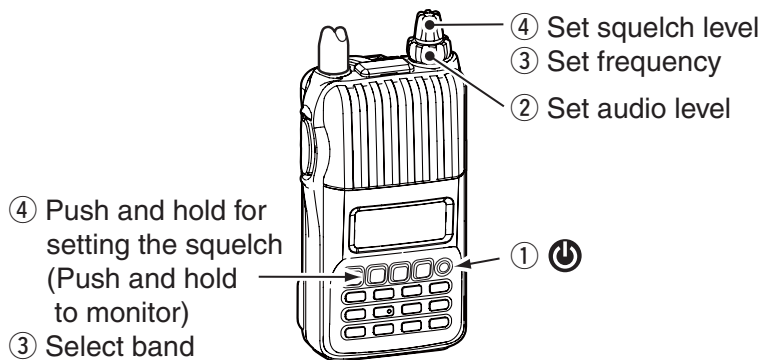

## ■ Transmit power selection

The transceiver has three output power levels to suit your operating requirements. Low output power during short-range communications may reduce the possibility of interference to other stations and will conserve battery power.

- ➔ Push [H/M/L] to toggle the transmit output power between High (5W\*), Mid (2.5 W\*) and Low (0.5 W\*). \*approx.

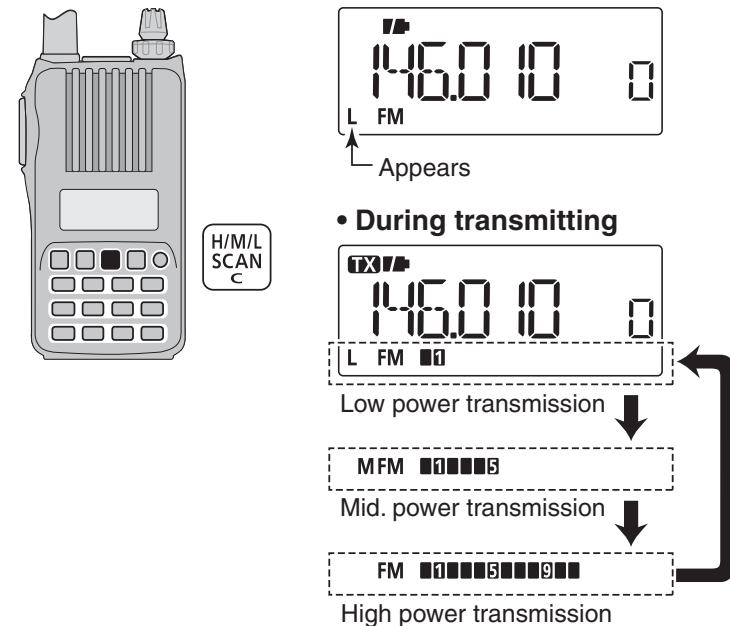


## 4 BASIC OPERATION

### ■ Transmitting

**CAUTION:** Transmitting without an antenna will damage the transceiver.

**NOTE:** To prevent interference, push and hold [MONI] (BAND) to listen on the frequency before transmitting.

- ① Set the operating frequency. (p. 20)
  - Transmission is available on the 144 MHz/400 MHz amateur bands only.
  - Select output power if desired. See previous page for details.
- ② Push and hold [PTT] to transmit.
  - “TX” appears.
  - S/RF meter shows the output power level.
- ③ Speak into the microphone using your normal voice level.
  - DO NOT hold the transceiver too close to your mouth or speak too loudly. This may distort your speech.
- ④ Release [PTT] to return to receive.

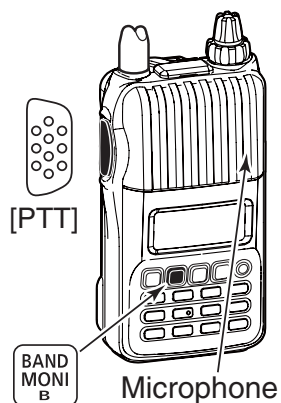

#### ⚠ WARNING!

**NEVER** continuously transmit for long periods of time. When the transceiver is used for continuous prolonged transmission at high power, the transceiver radiates heat to protect itself from overheating and transceiver's chassis will become hot. This may cause a burn.

**DO NOT** operate the transceiver in a situation that will obstruct heat dissipation, especially if the transceiver is operated with an external power supply. Heat dissipation may be affected, and it may cause a burn, warp the casing or damage the transceiver.


**NOTE:** When the transceiver becomes hot from continuous transmission, etc., the transceiver's heat protection gradually reduces the output power to 2.5 W (Mid), then it stops transmission after that, to protect the transceiver itself until it has cooled down.

- “M” (Power icon) blinks during the heat protection reduces the output power.
- “Hot” is displayed during the heat protection inhibits the transmission.


# REPEATER AND DUPLEX OPERATIONS

## Repeater operation

When using a repeater, the transmit frequency is shifted from the receive frequency by the frequency offset (p. 54). This is called duplex operation. It is convenient to program repeater information into memory channels (p. 29).

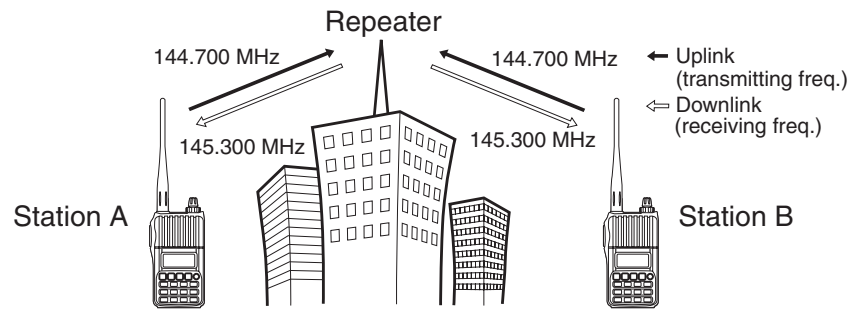

- ① Set the receive frequency (repeater output frequency).
- ② Set the shift direction of the transmit frequency. (DUP- or DUP; see p. 26 for details.)
  - When the auto repeater function is in use (U.S.A. and Korean versions only), this selection and step ③ are not necessary. (p. 27)


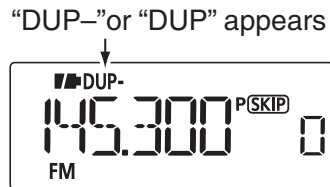


- ③ Push and hold **[TONE]**(0) for 1 sec. to activate the subaudible tone encoder, according to repeater requirements.


- "T" appears.

Refer to p. 53 for tone frequency settings.


- ④ Push and hold **[PTT]** to transmit.
  - The displayed frequency automatically changes to the transmit frequency (repeater input frequency).
  - If "OFF" appears, check the frequency offset or shift direction. (p. 26)

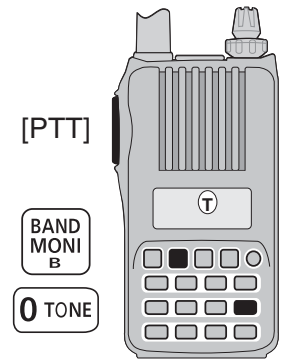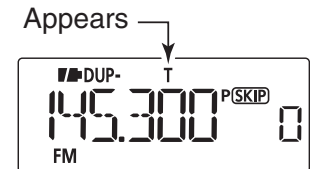

While receiving

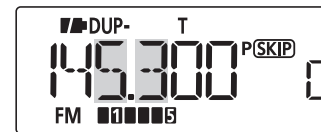

While transmitting

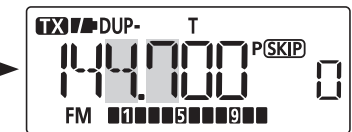

- ⑤ Release **[PTT]** to receive.
- ⑥ Push and hold **[MONI]**(BAND) to check whether the other station's transmit signal can be directly received or not.

### U.S.A. and Korean versions:


Auto repeater function uses standard values of the repeater tone frequency and frequency offset.

## 5 REPEATER AND DUPLEX OPERATIONS

### ◇ Checking the repeater input signal


The transceiver can check whether the other station's transmit signal can be received directly or not, by listening on the repeater input frequency.

- ➔ Push and hold **[MONI]**(BAND) to check whether the other station's transmit signal can be received directly or not.
  - When the other station's signal can be directly received, move to a non-repeater frequency to use simplex. (duplex OFF)

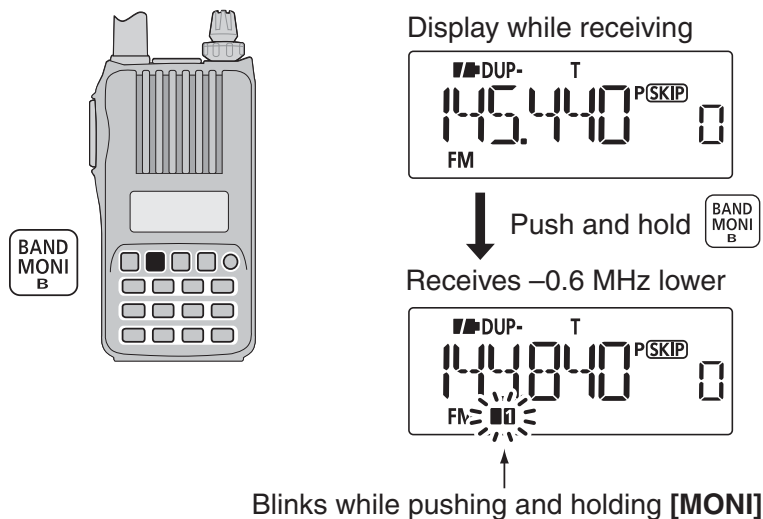

### ◇ Off band indication

If the transmit frequency is out of the amateur band when **[PTT]** is pushed, the off band indication, "OFF," appears on the display. Check the frequency offset or duplex direction in this case. (p. 26)

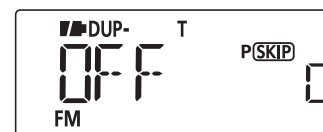

### U.S.A. and Korean versions:

The auto repeater function uses standard values of the frequency offset.

### ✓ CONVENIENT!

**Tone scan function:** When you don't know the subaudible tone used for a repeater, the tone scan is convenient for detecting the tone frequency.



- ➔ Push and hold **[T.SCAN]**(#) for 1 sec. to start the tone scan. See p. 71 for more information.



## Duplex operation



### ◇ Setting frequency offset

- ① Push **[SET]** to enter the Set mode.
- ② Rotate **[DIAL]** to select the frequency offset set item, then rotate **[VOL]** to set the frequency offset.
- ③ Push **[V/M/C]** to return to the frequency display.

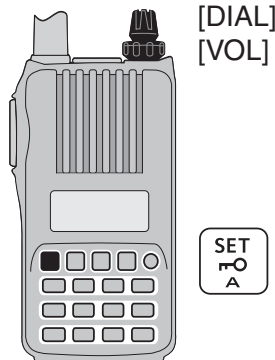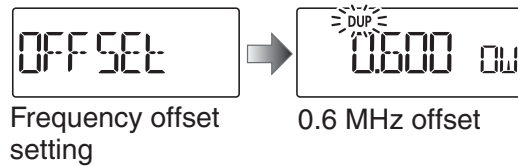

### ◇ Setting duplex direction

- ➔ Push and hold **[DUP](\*)** for 1 sec. to select “DUP-” (negative offset) or “DUP” (positive offset).
  - “DUP-” or “DUP” indicates the transmit frequency for minus shift or plus shift, respectively.

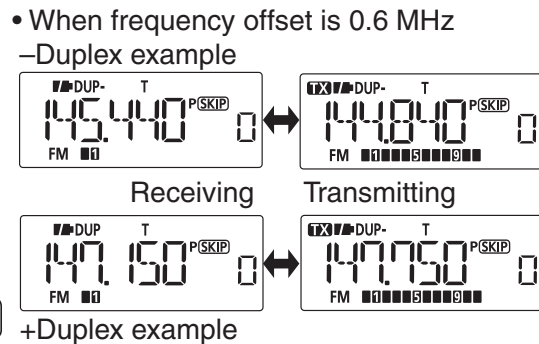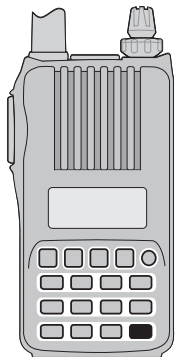


### U.S.A. and Korean versions:

The auto repeater function has priority over the manual duplex setting. If the transmit frequency changes after setting, the auto repeater function may have changed the duplex setting. Turn the auto repeater function OFF to prevent this (p. 26).

## Reverse duplex function

When the reverse duplex function is ON, the receive and transmit frequencies are reversed. The function can be set in the Set mode.

- ① Push **[SET]** to enter the Set mode.
- ② Rotate **[DIAL]** to select the reverse duplex set item, then rotate **[VOL]** to turn the function ON or OFF.

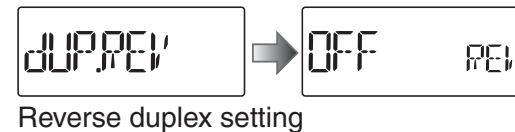

- ③ Push **[V/M/C]** to return to the frequency display.

Each receive and transmit frequency is shown in the table below, with the following configurations;

Input freq.: 145.300 MHz, Direction: – (down), Offset: 0.6 MHz

Reversed	RX freq.	TX freq.
OFF	145.300 MHz	144.700 MHz
ON	144.700 MHz	145.300 MHz

- “DUP-” or “DUP” blinks when the reverse duplex function is ON.

## 5 REPEATER AND DUPLEX OPERATIONS

### ■ Auto repeater function

The U.S.A. and Korean versions automatically use standard repeater settings (duplex ON/OFF, duplex direction, tone encoder ON/OFF) when the operating frequency falls within or outside of the general repeater output frequency range. The offset and repeater tone frequencies are not changed by the auto repeater function. Reset these frequencies, if necessary.

#### ◇ Frequency range and offset direction

##### • U.S.A. version

FREQUENCY RANGE	SHIFT DIRECTION
145.200–145.495 MHz 146.610–146.995 MHz	“DUP–” appears
147.000–147.395 MHz	“DUP” appears
442.000–444.995 MHz	“DUP” appears
447.000–449.995 MHz	“DUP–” appears

##### • Korean version

FREQUENCY RANGE	SHIFT DIRECTION
439.000–440.000 MHz	“DUP–” appears


- ① While continuing to push **[SET]**, turn the power ON to enter the Initial set mode.
- ② Rotate **[DIAL]** to select the auto repeater set item, then rotate **[VOL]** to set the auto repeater setting.

##### U.S.A. version:

- “R1” : Activates duplex only. (default)
- “R2” : Activates duplex and tone.
- “OFF” : Auto repeater function is turned OFF.

##### Korean version:

- “On” : Activates duplex and tone. (default)
- “OFF” : Auto repeater function is turned OFF.

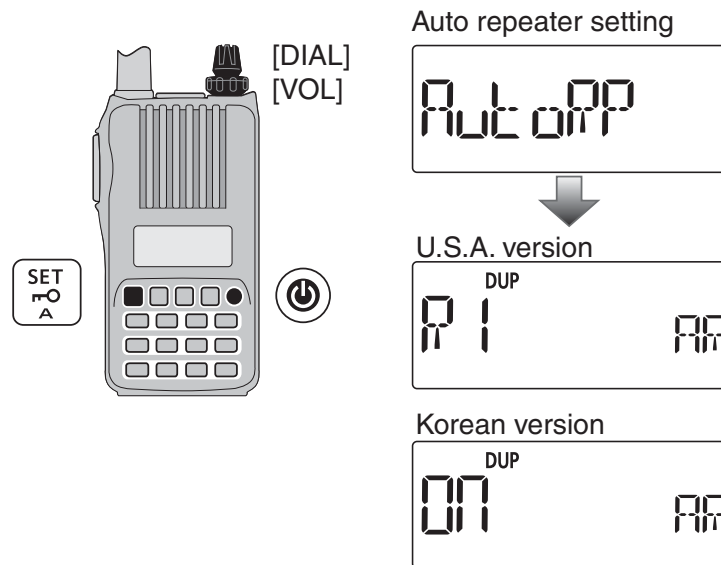


- ③ Push **[⏻]** to return to the frequency display.

## ■ 1750 Hz tone

To access some European repeaters, the transceiver must transmit a 1750 Hz tone burst. For such European repeaters, perform the following.

- This tone can be used as a 'Call signal' in countries out of Europe.

- ① Push **[SET]** to enter the Set mode.
- ② Rotate **[DIAL]** to select the DTMF key item, then rotate **[VOL]** to set to "t-CALL."

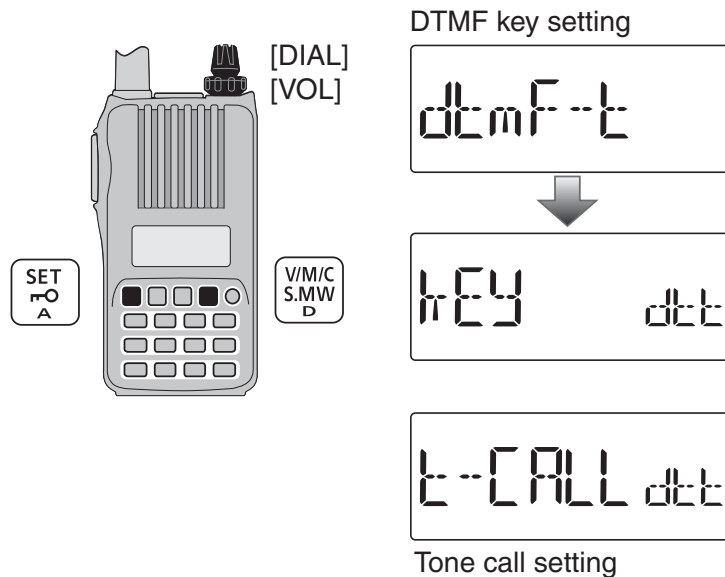

- ③ Push **[V/M/C]** to return to the frequency display.

- ④ Set the receive frequency (repeater output frequency).
- ⑤ Set the shift direction of the transmit frequency. (-DUP or +DUP; see p. 26 for details.)
- ⑥ While continuing to push **[PTT]**, push **[MONI](BAND)** to transmit a 1750 Hz tone burst signal.
  - If "OFF" appears, check the frequency offset or shift direction. (p. 26)
  - The displayed frequency automatically changes to the transmit frequency (repeater input frequency).
- ⑦ Push and hold **[PTT]** to transmit.
- ⑧ Release **[PTT]** to receive.
- ⑨ Push and hold **[MONI](BAND)** to check whether the other station's transmit signal can be received directly or not, by listening on the repeater input frequency.

### ✓ CONVENIENT! (For the IC-T70E only)

- ① Set the receive frequency (repeater output frequency).
- ② Set the shift direction of the transmit frequency. (-DUP or +DUP; see p. 26 for details.)
- ③ Push **[PTT]** briefly, then push and hold **[PTT]** again for 1 to 2 sec. to transmit a 1750 Hz tone burst signal.
  - If "OFF" appears, check the frequency offset or shift direction. (p. 26)
  - The displayed frequency automatically changes to the transmit frequency (repeater input frequency).
- ④ Push and hold **[PTT]** to transmit; release to receive.

# 6

## MEMORY/CALL CHANNELS

### ■ General description

The IC-T70A/T70E has 300 memory channels, and 2 call channels. Memory channels include 50 scan edge memory channels (25 pairs) for storage of often-used frequencies. Also, 26 memory banks, A to Z, are available in each band for storing groups of frequencies, etc. Up to 100 channels can be assigned to a bank.

### ◇ Memory channel contents

The following information can be programmed into memory channels:


- Operating frequency (p. 20)
- Operating mode (p. 21)
- Duplex direction (+DUP or -DUP) with a frequency offset (p. 26)
- Reverse duplex function ON/OFF (p. 26)
- Subaudible tone encoder (p. 24), tone squelch or DTCS squelch ON/OFF (p. 70)
- Subaudible tone frequency (p. 53), tone squelch frequency or DTCS code with polarity (p. 53)
- Scan skip setting (p. 46)
- Memory bank (p. 32)
- Memory name (p. 34)
- Tuning step (p. 19)
- Output power (p. 22)

**NOTE:** Memory data can be erased by static electricity, electric transients, etc.

In addition, they can be erased by malfunction and during repairs. Therefore, we recommend that memory data be written down or be saved to a PC using the CS-T70 CLONING SOFTWARE.

### ■ Selecting a call channel


- ① Push **[V/M/C]** to select call channel mode.
  - Pushing **[V/M/C]** toggles between the VFO mode, the memory channel mode, call channel mode and weather channel mode\*.  
\*Only the U.S.A. version transceiver.
- ② Rotate **[DIAL]** to select a desired call channel.
  - “C0” and “C1” are selectable.

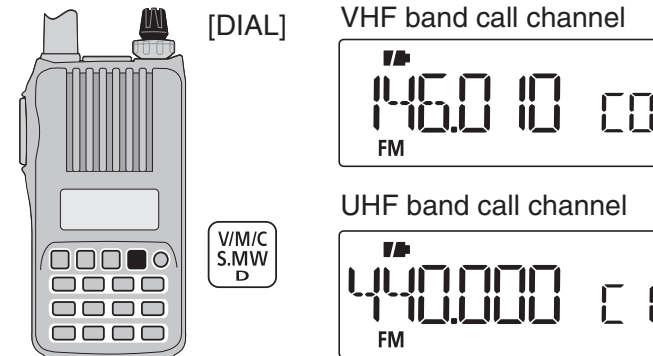

## ■ Selecting a memory channel

### ◇ Using [DIAL]

- ① Push **[V/M/C]** to select the memory mode.
  - Pushing **[V/M/C]** toggles between the VFO mode, the memory channel mode, call channel mode and weather channel mode\*.
    - \*Only the U.S.A. version transceiver.
- ② Rotate **[DIAL]** to select a desired memory channel.
  - Only programmed channels are displayed.

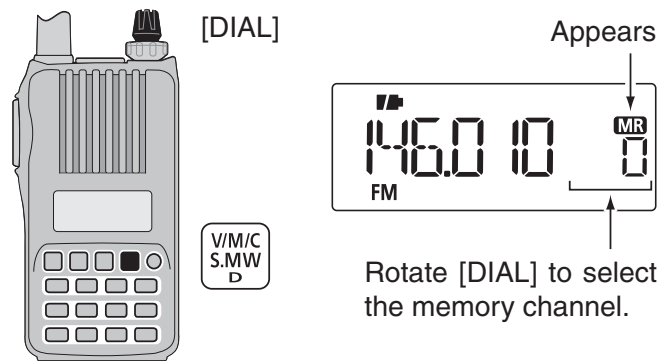


### ◇ Using the Numeral keys

- ① Push **[V/M/C]** to select the memory mode.
  - Pushing **[V/M/C]** toggles between the VFO mode, the memory channel mode, call channel mode and weather channel mode\*.
    - \*Only the U.S.A. version transceiver.
- ② Use the numeral keys to enter 3 digits to select a desired memory channel.
  - The blank channels are also selectable.

#### • Example— selecting memory channel “25”

Push **[V/M/C]**, then push **[0]**, **[2]**, **[5]**.

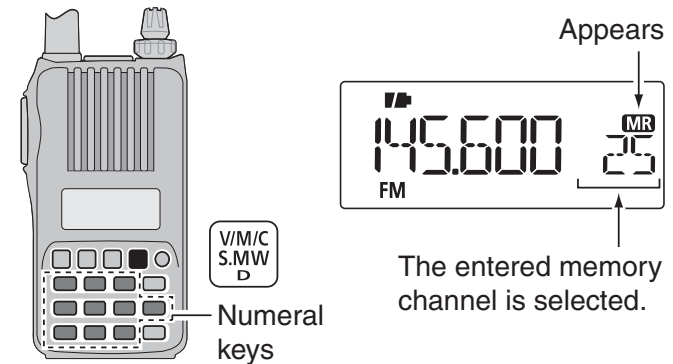


## 6 MEMORY/CALL CHANNELS

### Memory channel programming

- ① Push **[V/M/C]** to select the VFO mode.
- ② Set a desired frequency:
  - Select a desired band with **[BAND]**.
  - Set a desired frequency with **[DIAL]**.
  - Or set a desired frequency with keypad directly.  
In this case, the band and frequency settings with **[BAND]** and **[DIAL]** as above are not required.
  - Set other data (e.g. frequency offset, duplex direction, tone squelch, etc.), if desired.
- ③ Push and hold **[S.MW]**(V/M/C) for 1 sec. to enter the select memory write mode.
  - 1 short and 1 long beep sound.
  - “**MR**” icon and memory channel number blink.
- ④ Rotate **[DIAL]** to select a desired channel.
  - Call channels (C0, C1), VFO and scan edge channels (0A/0b to 24A/24b), as well as regular memory channels, can be programmed in this way.
- ⑤ Push and hold **[S.MW]**(V/M/C) for 1 sec. to program.
  - 3 beeps sound.
  - Memory channel number automatically increases when continuing to push **[S.MW]**(V/M/C) for 1 sec. after programming.


**NOTE:** Push **[H/M/L]** to cancel to program and exit the select memory write mode before memory programming is finished.

**[EXAMPLE]:** Programming 145.440 MHz into memory channel 11 (a blank channel).

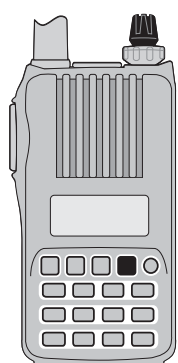

[DIAL]


V/M/C  
S.MW  
D

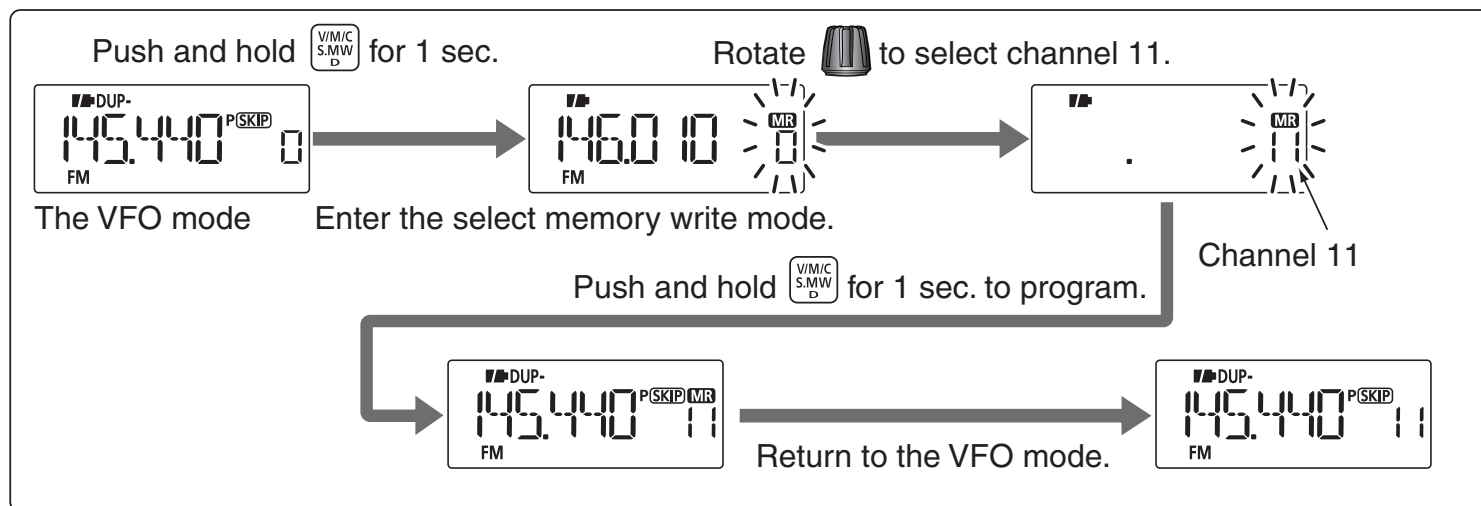


## Memory bank setting

The IC-T70A/T70E has a total of 26 banks (A to Z). Memory channels 0 to 249 are assigned to any desired bank for easy memory management.


- ① Push and hold **[S.MW]**(V/M/C) for 1 sec. to enter the select memory write mode.
  - 1 short and 1 long beep sound.
  - “**MR**” icon and memory channel number blink.
- ② Rotate **[DIAL]** to select a desired memory channel.
- ③ Push **[SET]** to select “bAnk” item.
  - Bank group and channel number are displayed if the selected memory channel has already been assigned to a bank.

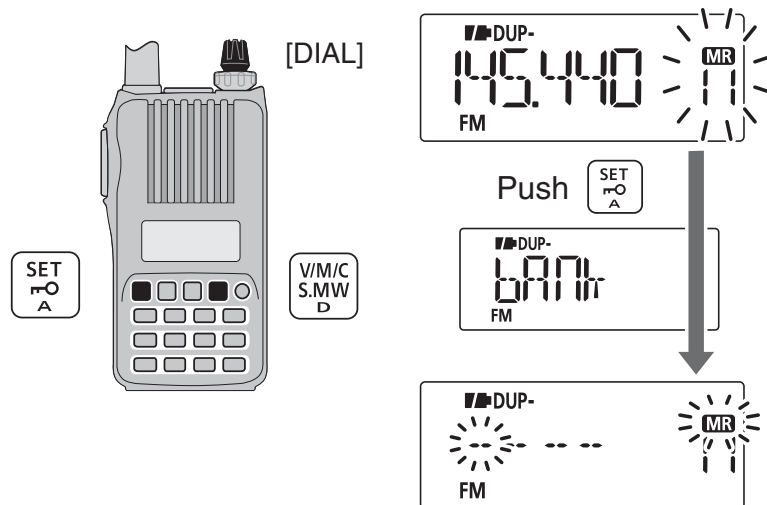

- ④ Rotate **[DIAL]** to select a desired bank group from “A” to “Z.”

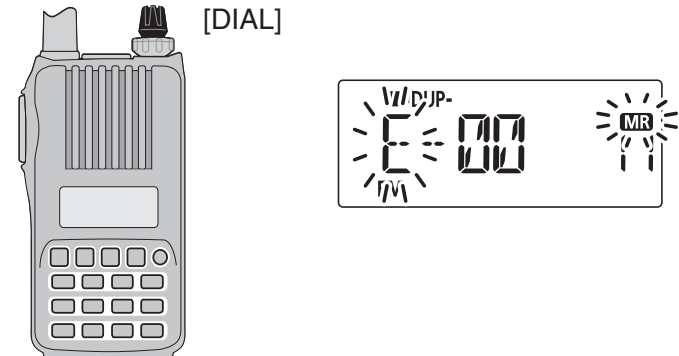

- ⑤ Push **[BAND]** to select the bank channel digit, then rotate **[DIAL]** to select the bank channel number from “00” to “99.”
  - Push **[BAND]** to toggle the bank group selection and bank channel selection.

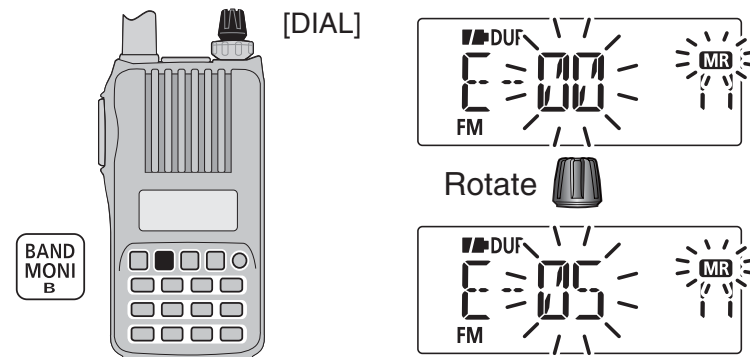


- ⑥ Push and hold **[S.MW]**(V/M/C) for 1 sec. to assign the channel to the bank.
  - Return to the previous indication before entering the select memory write mode.

## 6 MEMORY/CALL CHANNELS

### Memory bank selection

- ① Push **[V/M/C]** to select the memory mode.
- ② Push **[BAND]** to enter the bank selection mode.
- ③ Rotate **[DIAL]** to select a desired bank (A to Z), then push **[BAND]**.
  - Only programmed banks are displayed.
  - Also regular memory channel can be selected.

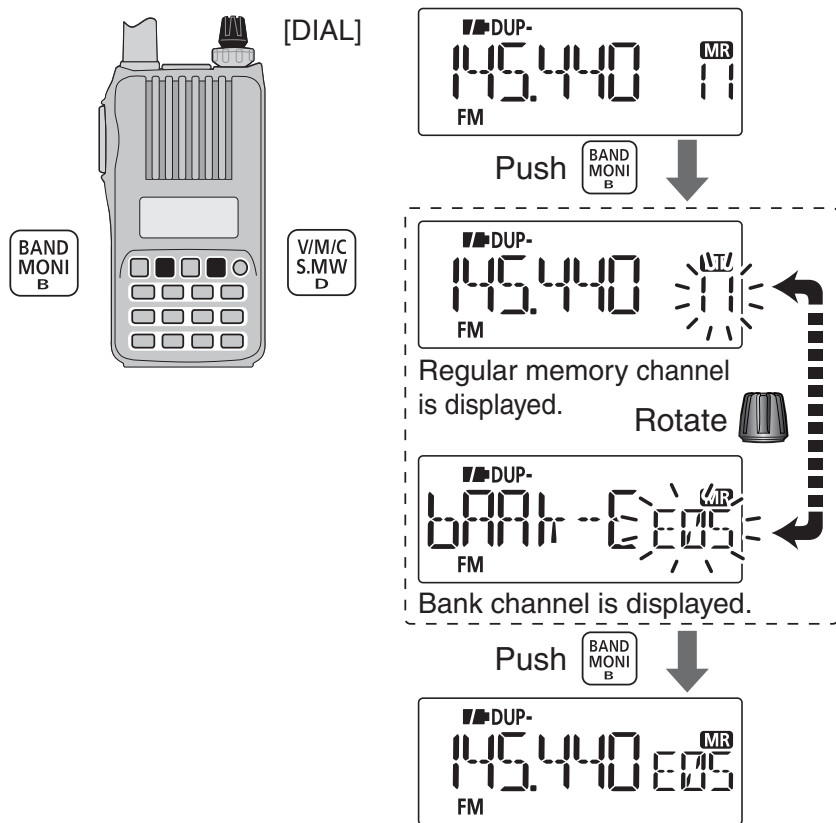

- ④ Rotate **[DIAL]** to select the bank channel.
  - Only programmed channels are displayed.





## ■ Programming memory/bank/scan name

Each memory channel can be programmed with an alphanumeric channel name for easy recognition and can be indicated independently by channel. Names can be a maximum of 6 characters.

/// **NOTE:** Scan name indication can be turned ON or OFF in the Initial set mode. (p. 34)

- ① Push **[V/M/C]** to select the memory mode.
- ② Push and hold **[S.MW](V/M/C)** for 1 sec. to enter the select memory write mode.
  - 1 short and 1 long beep sound.
  - “**MR**” icon and memory channel number blink.
- ③ Rotate **[DIAL]** to select a desired memory channel.
  - Select Call channels (C0 or C1) or scan edge channels (0A/0b to 24A/24b) to program a call channel name or scan name, respectively.
- ④ Push **[SET]** repeatedly to select “b nAmE,” “m nAmE” or “S nAmE” when programming the bank name, the memory name or the scan name, respectively.
- ⑤ Push and hold **[SET]** for 1 sec. to enter the name programming mode.
  - After selecting the name to be programmed, a cursor blinks for the first character.
- ⑥ Rotate **[DIAL]** to select a desired character.
  - The selected character blinks.
  - Push **[BAND]** to move the cursor right; push **[SET]** to move the cursor left.

- ⑦ Repeat step ⑥ until a desired channel name is programmed.
- ⑧ Push and hold **[S.MW](V/M/C)** for 1 sec. to set the name and exit channel name programming state.
  - 3 beeps sound.

/// **NOTE:** Only one bank name can be programmed into each bank. Therefore, the previously programmed bank name will be displayed when bank name indication is selected. Also, the programmed bank name is assigned for the other bank channels automatically.


### ◇ Usable characters

A	b	C	d	E	F	G	H	I	J	k	L	m
(A)	(b)	(C)	(d)	(E)	(F)	(G)	(H)	(I)	(J)	(k)	(L)	(m)
n	O	P	q	R	S	t	U	V	W	X	y	Z
(n)	(O)	(P)	(q)	(R)	(S)	(t)	(U)	(V)	(W)	(X)	(y)	(Z)
0	1	2	3	4	5	6	7	8	9			
(0)	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)			
+	-	=	*	/	( )	( )	( )	( )	( )	( )	( )	( )
(+)	(-)	(=)	(*)	(/)	(( ))	(( ))	(( ))	(( ))	(( ))	(( ))	(( ))	(Space)

## 6 MEMORY/CALL CHANNELS

### ■ Programming memory/bank/scan name (continued)

**[EXAMPLE]:** Programming the bank name “VHF” into the scan edge channel 1A

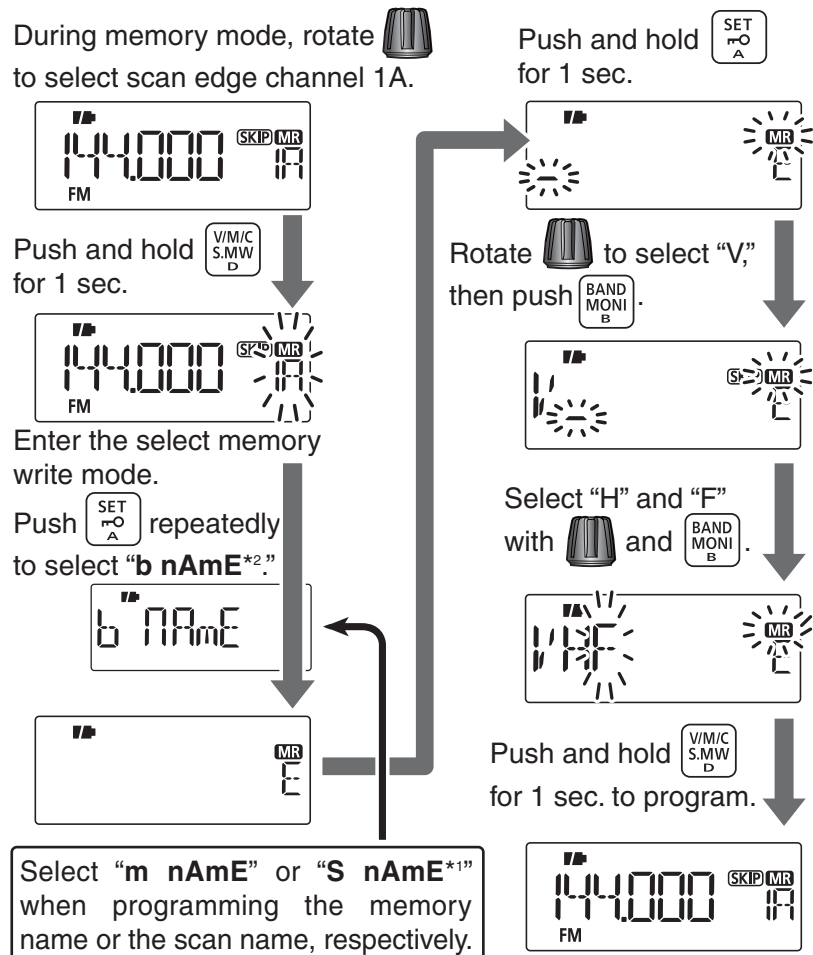


\*1 S nAmE can be set for scan edge channels only.

\*2 b nAmE can be set for bank assigned channels only.

### ■ Selecting memory/bank name indication

During memory mode operation, either the programmed memory name or bank name can be displayed.

- ① While continuing to push [SET], turn the power ON to enter the Initial set mode.
- ② Rotate [DIAL] to select the memory name item, then rotate [VOL] to set the memory name indication setting.
  - “OFF” : Memory name indication is turned OFF.
  - “On” : Activates the memory name indication. (default)

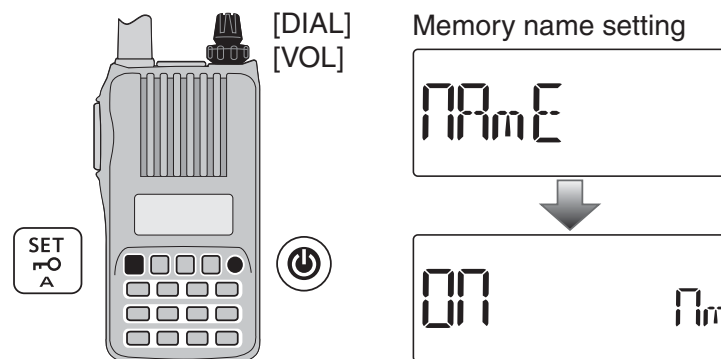


- ③ Push  to return to the frequency display.

## ■ Display type


During memory mode operation, the transceiver has 3 display types to suit your operating style. Set the display type in the Initial set mode.

- ① While continuing to push [SET], turn the power ON to enter the Initial set mode.
- ② Rotate [DIAL] to select the display mode item, then rotate [VOL] to set the display type from “FREQ,” “CH” or “PRIV.”

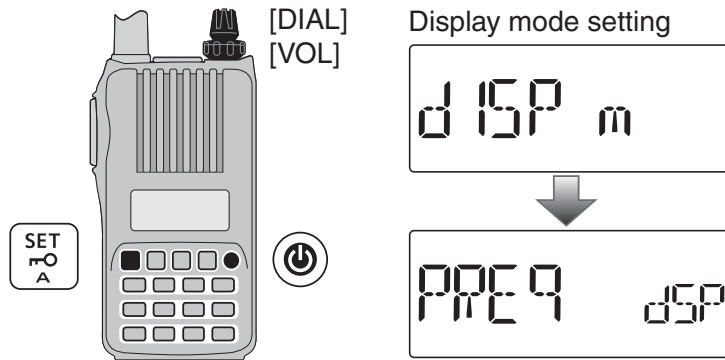


- ③ Push [⏻] to return to the frequency display.

### “Frequency display”

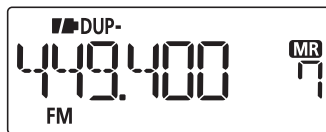

Displays the programmed frequency. (default)


### “Channel number display”

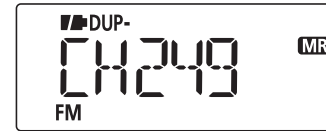

Displays the memory channel number. Only programmed memory channels are displayed, and modes other than the memory mode cannot be selected.

- When the channel number display type is selected, only the following functions can be performed.
  - Scan function (p. 44)
  - Monitor function (p. 17)
  - DTMF transmit function (p. 66)
  - The scan pause timer setting, the scan resume timer setting, the DTMF memory selection, the mic gain setting and the VOX gain setting in the Set mode.
  - Output power setting (p. 22)
  - Key lock function (p. 21)

### “Private channel display”

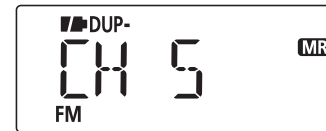

Displays the memory channel number. Only programmed memory channels 0 to 5 are displayed, and modes other than the memory mode cannot be selected.

- When the private channel display type is selected, only the following functions can be performed.
  - Output power setting (p. 22)
  - Key lock function (p. 21)
  - Monitor function (p. 17)
  - DTMF transmit function (p. 66)

## 6 MEMORY/CALL CHANNELS

### ■ Copying memory/call contents

This function transfers a memory channel's contents to VFO (or another memory/call channel). This is useful when searching for signals around a memory channel frequency and for recalling the frequency offset, subaudible tone frequency etc.


#### ◇ Memory/call ⇄ VFO

- ① Select the memory (call) channel to be copied.
  - ➔ Push **[V/M/C]** repeatedly to select the memory mode or the call channel mode, then rotate **[DIAL]** to select a desired channel.
- ② Push and hold **[S.MW]**(V/M/C) for 1 sec. to enter the select memory write mode.
  - 1 short and 1 long beep sound.
  - “**MR**” icon and memory channel number blink.
- ③ Rotate **[DIAL]** to select “VFO.”
- ④ Push and hold **[S.MW]**(V/M/C) for 1 sec. to write the selected channel contents to the VFO mode.
  - Returns to the VFO mode automatically.


Pushing and holding **[S.MW]**(V/M/C) for 2 seconds at step ②, will also copy the memory contents to VFO. In this case, steps ③ and ④ are not necessary.

#### ◇ Memory/call ⇄ memory/call

- ① Select the memory (call) channel to be copied.
  - ➔ Push **[V/M/C]** repeatedly to select the memory mode or the call channel mode, then rotate **[DIAL]** to select a desired channel.
- ② Push and hold **[S.MW]**(V/M/C) for 1 sec. to enter the select memory write mode.
  - 1 short and 1 long beep sound.
  - “**MR**” icon and memory channel number blink.
  - Do not hold **[S.MW]**(V/M/C) for more than 2 seconds otherwise the memory contents will be copied to the VFO mode.
- ③ Rotate **[DIAL]** to select the target memory (call) channel.
- ④ Push and hold **[S.MW]**(V/M/C) for 1 sec. again to copy.

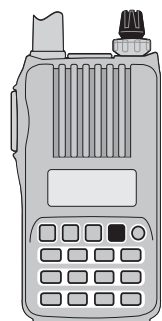

[DIAL] **[EXAMPLE]:** Copying memory channel 11 to the VFO mode.

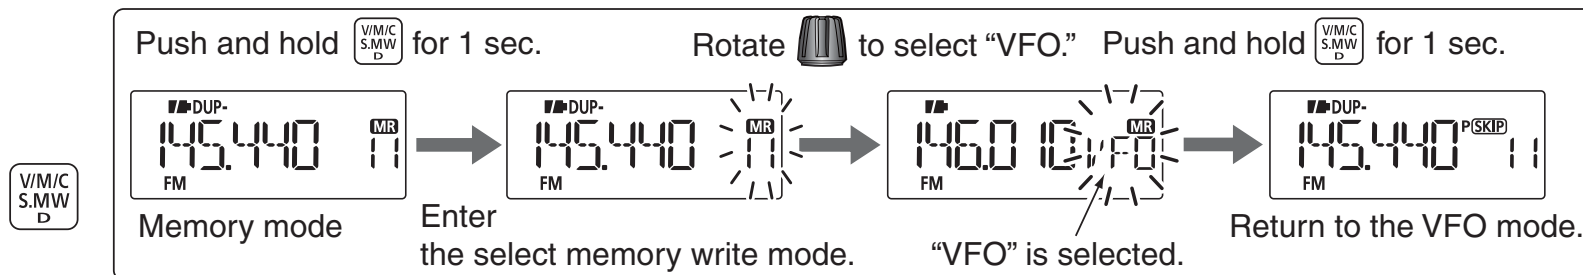


## Memory clearing

Contents of programmed memories can be cleared (erased), if desired.


- ① Push and hold **[S.MW]**(V/M/C) for 1 sec. to enter the select memory write mode.
  - 1 short and 1 long beep sound.
  - “**MR**” icon and memory channel number blink.
  - Do not hold **[S.MW]**(V/M/C) for more than 2 seconds otherwise the memory contents will be copied to the VFO mode.
- ② Rotate **[DIAL]** to select a desired memory channel to be cleared.

- ③ Push **[SET]** repeatedly to select “CLEAR.”
- ④ Push and hold **[S.MW]**(V/M/C) for 1 sec. to clear the contents.
  - 3 beeps sound.
  - The cleared channel changes to blank channel
  - Return to the select memory write mode.— Memory channel number blinks. Push **[H/M/L]** to exit the select memory write mode.

**NOTE:** Be careful!— the contents of cleared memories **CANNOT** be recalled.

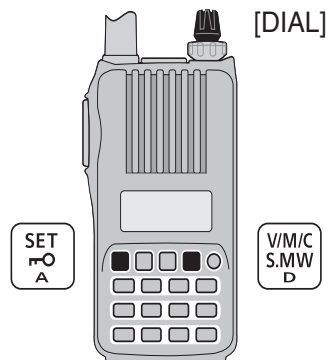

**[EXAMPLE]:** Clearing memory channel 14.

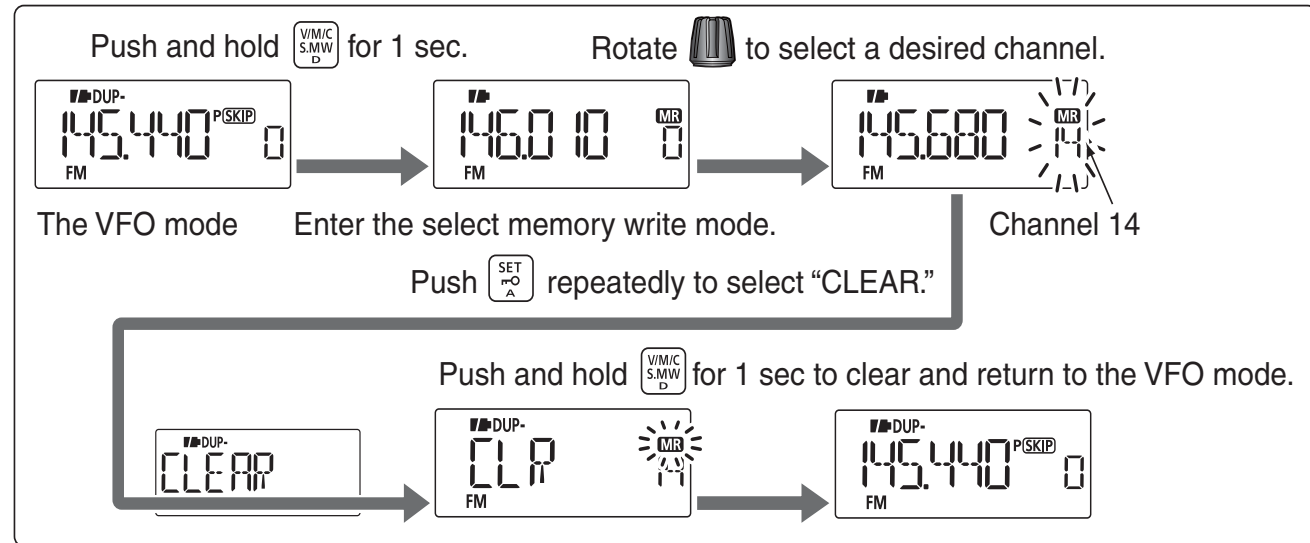


## 6 MEMORY/CALL CHANNELS

### Erasing/transferring bank contents

The bank contents of programmed memory channels can be cleared or reassigned to another memory bank.

**INFORMATION:** Even if the memory bank contents are cleared, the memory channel contents still remain programmed.


- ① Select a desired bank contents to be transferred or erased from the bank. (p. 33)
  - ➔ Push **[BAND]** to enter the memory bank selection mode.
  - ➔ Rotate **[DIAL]** to select a desired memory bank group, then push **[BAND]**.
  - ➔ Rotate **[DIAL]** to select the bank channel.

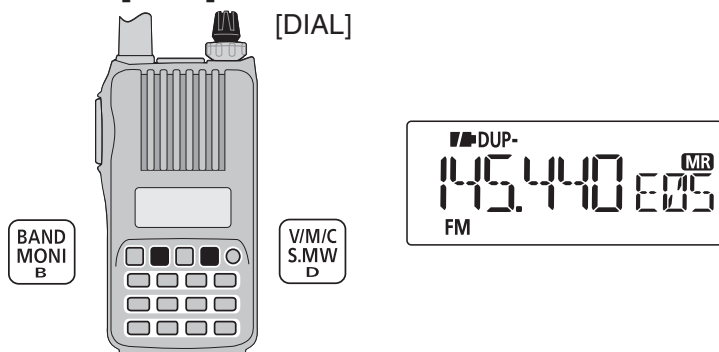


- ② Push **[S.MW]**(V/M/C) for 1 sec. to enter the select memory write mode.
  - 1 short and 1 long beeps sound.
  - Displays the original memory channel number automatically, and then “**MR**” icon and memory channel number blink.

- Do not hold **[S.MW]**(V/M/C) for more than 2 seconds, otherwise the memory contents will be copied to VFO.

- ③ Push **[SET]** repeatedly to select “bAnk.”

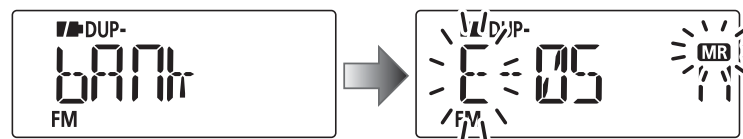

- ④ Push **[BAND]** to toggle the bank channels selection or the bank group selection.
- ⑤ Rotate **[DIAL]** to select a desired bank group or channel to be transferred.
  - Select “- - - -” display when erasing the contents from the bank.

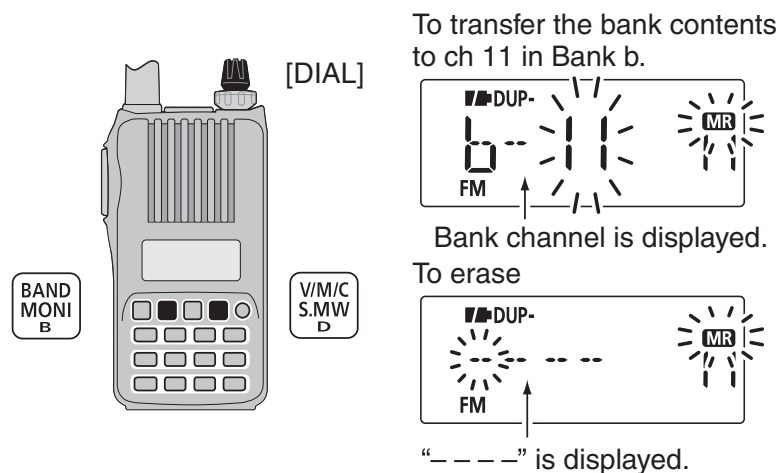


- ⑥ Push **[S.MW]**(V/M/C) for 1 sec. to erase/transfer the bank contents.

## ■ Scan types


Scanning searches for signals automatically and makes it easier to locate new stations for contact or listening purposes.

### FULL SCAN (p. 42)

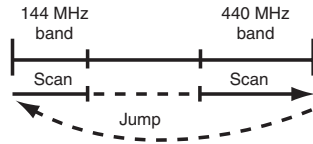


Repeatedly scans all frequencies over the entire band. Some frequency ranges are not scanned according to the frequency coverage of the transceiver's version.

### SELECTED BAND SCAN (p. 42)

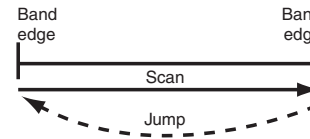


Repeatedly scans all frequencies over the entire selected band.

### PROGRAMMED SCAN (p. 42)

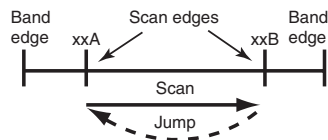

Repeatedly scans between two user-programmed frequencies. Used for checking for frequencies within a specified range such as repeater output frequencies, etc.

### FREQUENCY/MEMORY SKIP FUNCTION

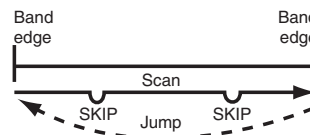

Skips unwanted frequencies or channels that inconveniently stop scanning. This setting can be turned ON or OFF in the select memory write mode. (p. 46)

### PROGRAMMED LINK SCAN (pp. 42, 57)

Repeatedly programmed scans user-programmed frequencies selected at "P Link" item in the Set mode.


The frequency skip scan function can be turned ON or OFF in the Set mode. When this function is set to ON, the specified frequencies are skipped during VFO scan. (p. 55)

- "P(SKIP)" icon appears in the VFO mode.

# 7 SCAN OPERATION


## ■ Scan types (continued)

### MEMORY (SKIP) SCAN (p. 44)

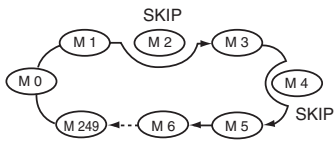

Repeatedly scans memory channels except those set as skip channel. Skip channels can be turned ON or OFF in the select memory write mode. (p. 46)


### BAND MEMORY (SKIP) SCAN (p. 44)

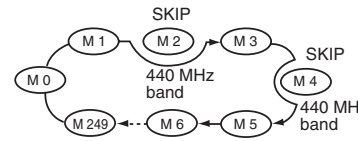

Repeatedly scans memory channels in the same band as displayed band.

Example: While scanning the 144 MHz band

### ALL/SELECTED BANK SCAN (p. 45)

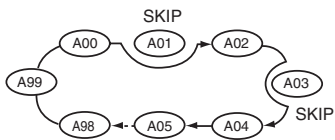

Repeatedly scans all bank channels or selected bank channels. The skip scan is also available.

### BANK-LINK SCAN (pp. 45, 46)

Repeatedly scans bank channels selected at “b Link” item in the Set mode.

### DUPLEX SCAN (pp. 42, 44)



Repeatedly scans two (transmission/reception) frequencies during duplex scan operation.




## Full/band/programmed scan

- ① Push **[V/M/C]** to select the VFO mode.
  - Select a desired frequency band with **[BAND]**, if desired.
- ② Set the squelch level.
- ③ Push and hold **[SCAN](H/M/L)** for 1 sec. to enter the scanning type selection.
- ④ Rotate **[DIAL]** to select a desired scanning type.
  - “ALL” for full scan; “bAnd” for band scan, “P-LInk x” for programmed link scan (x= 0 to 9), “PROGxx (or scan name if programmed)” for programmed scan (xx= 0 to 24; only programmed scan edge numbers are displayed), “dUP” (appears only when duplex operation is set) for duplex scan.

- ⑤ Push **[SCAN](H/M/L)** to start the scan.
  - Scan pauses when a signal is received.
  - Rotate **[DIAL]** to change the scanning direction. This also causes the transceiver to resume scanning.
  - Push **[V/M/C]** to stop the scan.
  - Push **[BAND]** to change the band during band scan, or change the scan edge during programmed scan/program link scan.

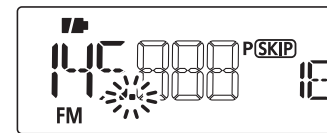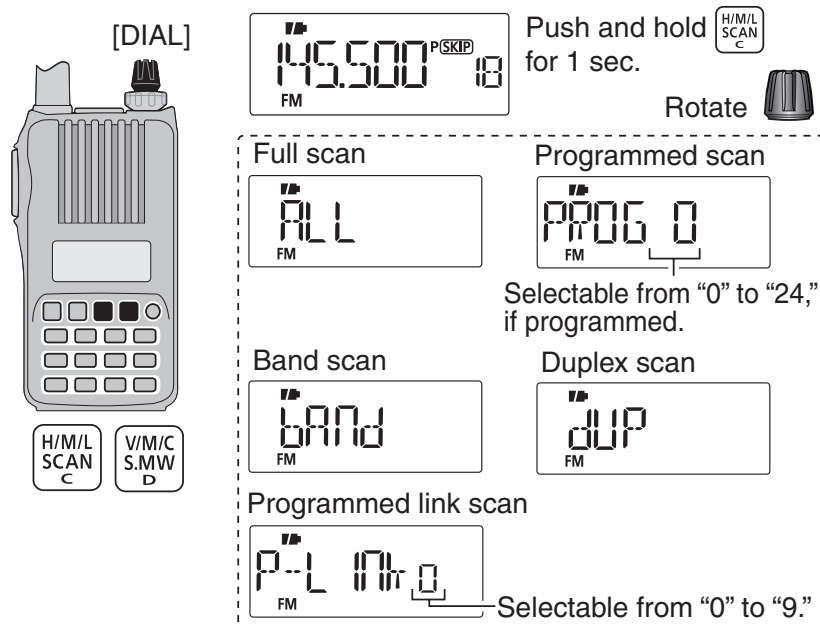

During full/band scan

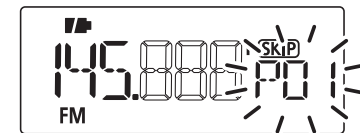

During programmed scan

Scan name can be displayed instead of “P-LInk x” for program link scan (x= 0 to 9), “PROGxx” for programmed scan (xx= 0 to 24) when scan name is programmed and set to ON in the Initial set mode.

Scan name is not displayed during scan.


## 7 SCAN OPERATION

### ■ Scan edges programming

Scan edges can be programmed in the same manner as memory channels. Scan edges are programmed into scan edges, 0A/0b to 24A/24b, in memory channels.

- ① Push **[V/M/C]** to select the VFO mode.
- ② Set a desired frequency:
  - Select a desired band with **[BAND]**.
  - Set a desired frequency with **[DIAL]**.
  - Program different frequencies in “\*A” and “\*b” respectively.
  - Set other data (e.g. frequency offset, duplex direction, tone squelch, etc.), if desired.
- ③ Push and hold **[S.MW]**(V/M/C) for 1 sec. to enter the select memory write mode.
  - 1 short and 1 long beep sound.
  - “**MR**” icon and memory channel number blink.


- ④ Rotate **[DIAL]** to select a desired programmed scan edge channel from 0A to 24A.
- ⑤ Push and hold **[S.MW]**(V/M/C) for 1 sec.
  - 3 beeps sound.
  - The other scan edge channel “b,” 0b to 24b, is automatically selected when continuing to push **[S.MW]**(V/M/C) after programming.
- ⑥ To program a frequency for the other pair of scan edges, 0b to 24b, repeat steps ② and ④.
  - If the same frequency is programmed into a pair of scan edges, programmed scan will not function.

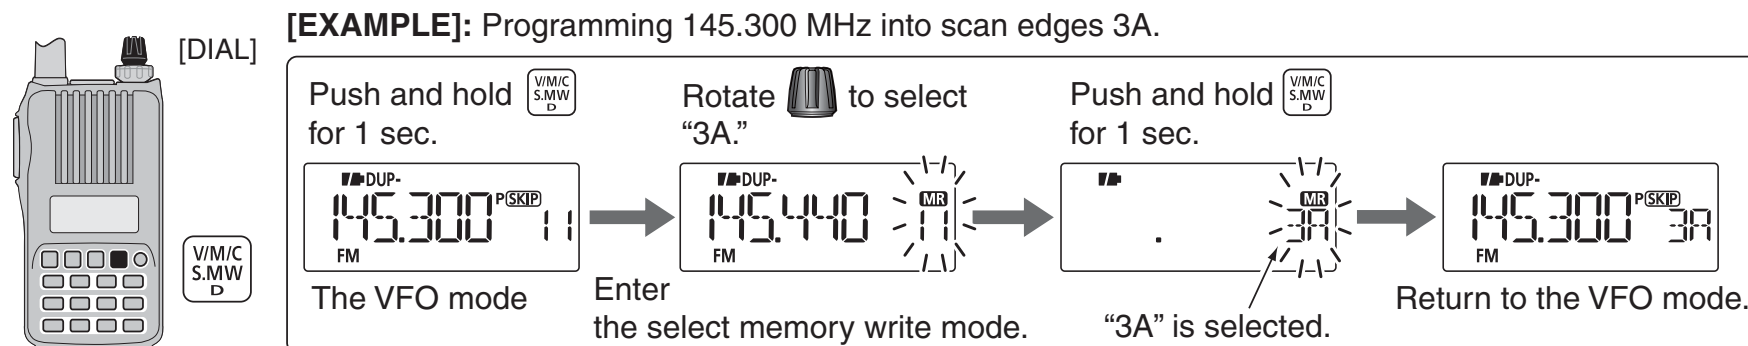


## Memory scan

**IMPORTANT!:** To perform memory scan, 2 or more memory channels MUST be programmed, otherwise the scan will not start.

- ① Push **[V/M/C]** repeatedly to select the memory mode.
- ② Set the squelch level.
- ③ Push and hold **[SCAN](H/M/L)** for 1 sec. to enter the scanning type selection.
- ④ Rotate **[DIAL]** to select a desired scanning type.
  - “ALL” for all memory scan; “bAnd” for band memory scan, “dUP” (appears only when duplex operation is set) for duplex scan.

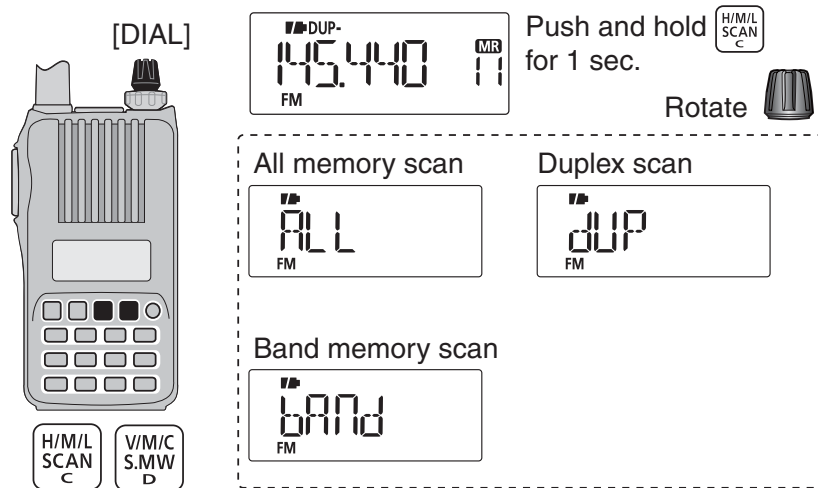

- ⑤ Push **[SCAN](H/M/L)** to start the scan.
  - Scan pauses when a signal is received.
  - Rotate **[DIAL]** to change the scanning direction. This also causes the transceiver to resume scanning.
  - Push **[V/M/C]** to stop the scan.

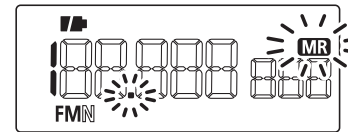


During memory scan

# 7 SCAN OPERATION


## Memory bank scan

**IMPORTANT!** To perform memory bank scan, 2 or more bank channels MUST be programmed, otherwise the scan will not start.

- ① Select memory bank mode.
  - Select the memory mode with [V/M/C].
  - Enter the memory bank selection mode with [BAND].
  - Set a desired bank (A to Z) with [DIAL], then push [BAND].
- ② Set the squelch level.
- ③ Push and hold [SCAN](H/M/L) for 1 sec. to enter the scanning type selection.

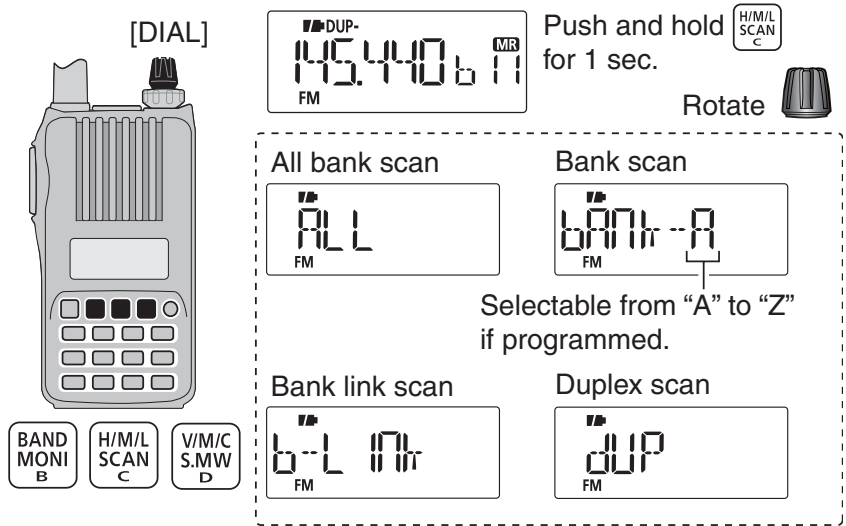

- ④ Rotate [DIAL] to select a desired scanning type.
  - “ALL” for all bank scan; “b-LInk” for bank link scan or “bAnk-x” for bank scan (x= A to Z; programmed bank groups are only displayed.), “dUP” (appears only when duplex operation is set) for duplex scan.
- ⑤ Push [SCAN](H/M/L) to start the scan.
  - Scan pauses when a signal is received.
  - Rotate [DIAL] to change the scanning direction. This also causes the transceiver to resume scanning.
  - Push [V/M/C] to stop the scan.
  - Push [BAND] to change the bank during bank scan.

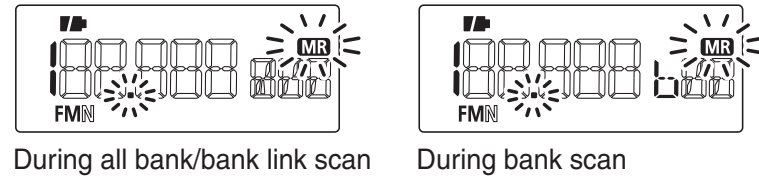

The bank-link setting can be changed in the Set mode. See page 56 for details.

Memory bank scan skips any memory channels in the selected bank that are set to “SKIP” or “PSKIP.” Memory bank scan stops at the first channel when all channels in a bank are set to “SKIP” or “PSKIP.”

## ■ Skip channel/frequency setting

Memory channels can be set to be skipped during memory skip scan. In addition, memory channels can be set to be skipped during both memory skip scan and frequency skip scan. This is useful to speed up the scan rate.

① Select a memory channel:


- ➔ Push **[V/M/C]** to select the memory mode.
- ➔ Rotate **[DIAL]** to select a desired channel to be a skip channel/frequency.



② Push and hold **[S.MW]**(V/M/C) for 1 sec. to enter the select memory write mode.



③ Push **[SET]** repeatedly to select “SKIP” item.

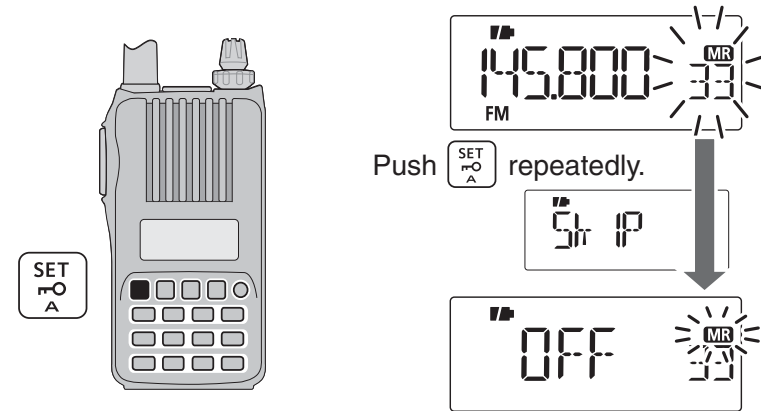

④ Rotate **[DIAL]** to select the skip condition from “SKIP,” “PSKIP” or “OFF” for the selected channel.

- **PSKIP** : The channel is skipped during memory/bank scan and the programmed frequency is skipped during VFO scan, such as programmed scan.
- **SKIP** : The channel is skipped during memory or bank scan.
- **OFF** : The channel is scanned during any scan.

⑤ Push and hold **[S.MW]**(V/M/C) for 1 sec. to store the skip condition into the memory.

- “**SKIP**” or “**P SKIP**” icon appears, according to the skip selection in step ④.



Skip channel setting



Program skip setting


## 7 SCAN OPERATION

### ■ Scan resume condition

#### ◇ Scan pause timer

The scan pauses when receiving signals according to the scan pause time. It can be set from 2 to 20 seconds or unlimited.

- ① Push **[SET]** to enter the Set mode.
- ② Rotate **[DIAL]** to select the scan pause timer item.
- ③ Rotate **[VOL]** to select a desired scan pausing time from 2–20 seconds (2 seconds steps) or “HOLD.”
  - “2”–“20” : Scan pauses for 2–20 seconds while receiving a signal.
  - “HOLD” : Scan pauses on a received a signal until it disappears.

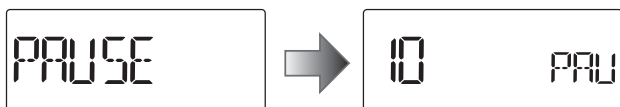


- ④ Push **[V/M/C]** to return to the frequency display.

#### ◇ Scan resume timer

The scan restarts after the signal disappears according to the resume time. It can be set from 0–5 seconds or unlimited.

- ① Push **[SET]** to enter the Set mode.
- ② Rotate **[DIAL]** to select the scan pause timer item.
- ③ Rotate **[VOL]** to select a desired scan resume time from 0–5 seconds (1 second steps) or “HOLD.”
  - “0” : Scan restarts immediately after the signal disappears.
  - “1”–“5” : Scan restarts 1–5 seconds after the signal disappears.
  - “HOLD” : Scan remains paused on the received signal according to the scan pause timer even if it disappears. Rotate **[DIAL]** to resume manually.

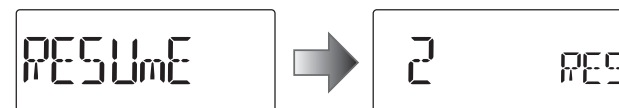

- ④ Push **[V/M/C]** to return to the frequency display.

/// Scan resume timer must be set shorter than the scan pause timer, otherwise this timer does not activate.

## Priority watch types

Priority watch checks for signals on the frequency every 5 seconds while operating on a VFO frequency or scanning. The transceiver has three priority watch types to suit your needs.

The watch resumes according to the selected scan resume condition. See page 47 for details.

**NOTE:** If the pocket beep function is activated, the transceiver automatically selects the tone squelch function when priority watch starts.


### About priority beep function

When receiving a signal on the priority frequency, you can be alerted with beeps and a blink “(•)” icon. This function can be activated when setting the priority watch function ON.

### MEMORY/CALL CHANNEL WATCH

While operating on a VFO frequency, priority watch checks for a signal on the selected channel every 5 seconds.


- A memory channel with skip information can be watched.

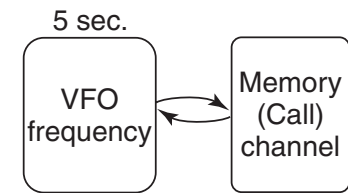

### MEMORY SCAN WATCH

While operating on a VFO frequency, priority watch checks for signals on each memory channel in sequence.

- The memory skip function and/or memory bank scan is useful to speed up the scan.

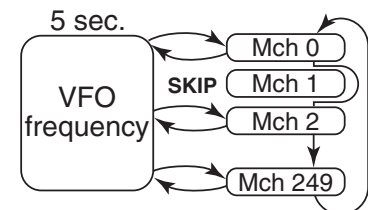

### VFO SCAN WATCH

While scanning in the VFO mode, priority watch checks for signals on the selected channel every 5 seconds.




## 8 PRIORITY WATCH

### ■ Priority watch operation


#### ◇ Memory/call channel and memory scan watch

- ① Select the VFO mode; then, set an operating frequency.
- ② Select the channel(s) to be watched.
  - For memory channel watch:**  
Select a desired memory channel.
  - For call channel watch:**  
Select a desired call channel.
  - For memory scan watch:**
    - Select the memory mode, or a desired bank group.
    - Push and hold **[SCAN]**(H/M/L) for 1 sec. to enter the scan type selection mode.
    - Rotate **[DIAL]** to select a desired scan type, then push **[SCAN]**(H/M/L) again to start the memory/bank scan.
- ③ Push **[SET]** to enter the Set mode.
- ④ Rotate **[DIAL]** to select the priority watch set item.
- ⑤ Rotate **[VOL]** to select “On.”
  - Select “bELL” if the priority beep function is desired.
- ⑥ Push **[V/M/C]** to exit the Set mode and start the watch.
  - “PRIO” icon appears.
  - The transceiver checks the memory/bank channel(s) or call channel every 5 seconds.
  - The watch resumes according to the selected scan resume condition. (p. 47)
- ⑦ Push **[V/M/C]** to cancel the watch.

#### • During priority watch

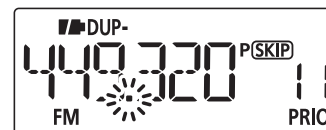

Monitors VFO frequency for 5 sec.

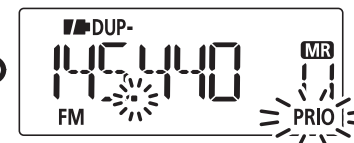

Pauses on a memory or call channel when a signal is received.

#### • During priority watch with priority beep



Sounds beep tone and blinks “(!)” icon when a signal is received on a memory or call channel.




◇ VFO scan watch

- ① Select the channel(s) to be watched.
  - For memory channel watch:**  
Select a desired memory channel.
  - For call channel watch:**  
Select a desired call channel.
  - For memory scan watch:**
    - ➔ Select the memory mode, or a desired bank group.
    - ➔ Push and hold **[SCAN]**(H/M/L) for 1 sec. to enter the scan type selection.
    - ➔ Rotate **[DIAL]** to select a desired scan type, then push **[SCAN]**(H/M/L) again to start memory/bank scan.
- ② Push **[SET]** to enter the Set mode.
- ③ Rotate **[DIAL]** to select the priority watch set item.
- ④ Rotate **[VOL]** to select “On.”
  - Select “bELL” if the priority beep function is desired.
- ⑤ Push **[V/M/C]** to exit the Set mode and start the watch.
  - “PRIO” icon appears.
- ⑥ Push and hold **[SCAN]**(H/M/L) for 1 sec. to enter scan type selection mode.
- ⑦ Rotate **[DIAL]** to select a desired scan type from “ALL,” “bAnd,” “P-LInk x (x= 0–9),” “PROGxx (xx= 0–24)” and “dUP.”

- ⑧ Push **[SCAN]**(H/M/L) to start the VFO scan watch.
  - The transceiver checks the memory/bank channel(s) or call channel every 5 seconds.
  - The watch resumes according to the selected scan resume condition. (p. 47)
- ⑧ Push **[V/M/C]** to cancel the watch.


• During priority watch

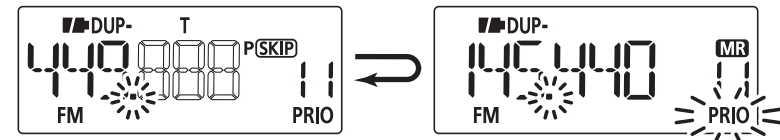

Searches VFO frequencies for 5 sec.

Pauses on a memory or call channel when a signal is received.

• During priority watch with priority beep

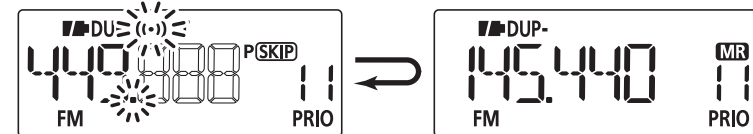


Sounds beep tone and blinks “((·))” icon when a signal is received on a memory or call channel.

## ■ General

### ◇ Entering Set mode and operation

The Set mode is used to change the settings of the transceiver's functions.


- ① Push **[SET]** to enter the Set mode.
- ② Rotate **[DIAL]** to select the desired set item.
- ③ Rotate **[VOL]** to set the desired value or setting.
- ④ Push **[V/M/C]** to return to frequency display, or repeat steps ② and ③ to set another items.

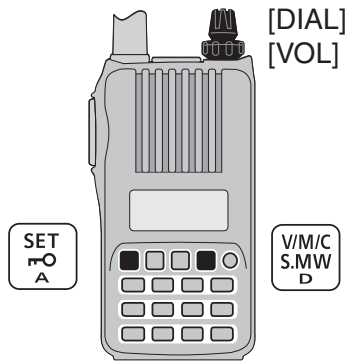

### ◇ Entering Initial set mode and operation

The Initial set mode can be accessed at power ON and allows you to set seldom-changed settings, to suit your preference and operating style.

- ① While continuing to push **[SET]**, turn the power ON to enter the Initial set mode.
- ② Rotate **[DIAL]** to select the desired set item.
- ③ Rotate **[VOL]** to set the desired value or setting.
- ④ Push **[⏻]** to return to the frequency display, or repeat steps ② and ③ to set another items.

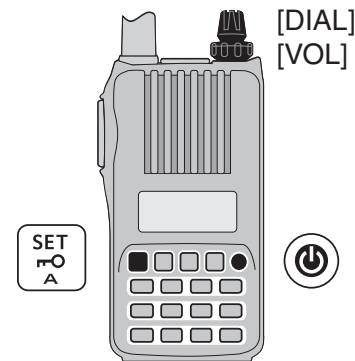

## ■ Set mode item list

Guidance	Item	Page
R TONE	Repeater tone frequency	p. 53
C TONE	TSQL frequency	p. 53
code	DTCS code	p. 53
dtcs P	DTCS polarity	p. 53
TS	Tuning step	p. 54
OFFSET	Frequency offset	p. 54
DUPREV	Reverse duplex function	p. 54
mode	Operating mode	p. 54
WXALT	Weather alert	p. 54
PRIO	Priority watch	p. 55
PAUSE	Scan pause timer	p. 55
RESUME	Scan resume timer	p. 55
PSKIP	Program skip function	p. 55
BLINK	Bank link	p. 56
PLINK	Programmed scan link	p. 56
dtmf-t	DTMF TX key	p. 58
dtmf	DTMF memory setting	p. 58
mic G	MIC gain	p. 58
VOX	VOX function	p. 58
VOX LV	VOX gain	p. 58
VOX dLY	VOX delay	p. 59
VOX tot	VOX time-out timer	p. 59

## ■ Initial set mode item list

Guidance	Item	Page
mic S	Microphone simple mode	p. 59
AP OFF	Auto power OFF	p. 59
LIGHT	Display backlight	p. 60
BEEP LV	Beep output level	p. 60
AUTO PP	Auto repeater	p. 60
P SAVE	Power save	p. 61
VOLT	Voltage indication	p. 61
dtmf--S	DTMF speed	p. 61
Cont	LCD contrast	p. 62
PTT Lk	PTT lock	p. 62
Lk Out	Busy lockout	p. 62
tot	Time-out timer	p. 62
SQ L dL	Squelch delay	p. 62
mon i	Monitor key action	p. 63
dIAL S	Dial speed acceleration	p. 63
NAME	Memory name	p. 63
S NAME	Scan name	p. 63
DISP m	Display type	p. 64
HS SEL	HS-95 selection	p. 64
AUTO LP	Auto low power	p. 64


## 9 SET MODES

### ■ Set mode items

#### ◇ Repeater tone frequency (R TONE)

Selects one of 50 subaudible tone frequencies used to access the repeaters.


- 67.0–254.1 Hz (default: 88.5 Hz)

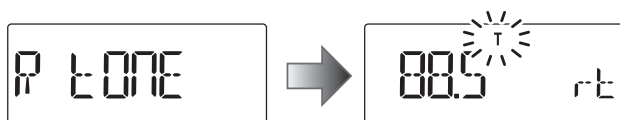

#### ◇ TSQL frequency (C TONE)

Selects one of tone frequencies for tone squelch or pocket beep operation.

- 67.0–254.1 Hz (default: 88.5 Hz)

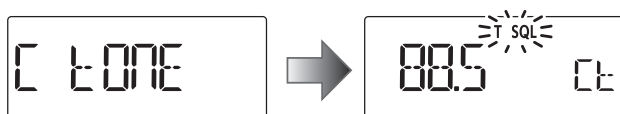

#### • Available subaudible tone frequencies


67.0	79.7	94.8	110.9	131.8	156.7	171.3	186.2	203.5	229.1
69.3	82.5	97.4	114.8	136.5	159.8	173.8	189.9	206.5	233.6
71.9	85.4	100.0	118.8	141.3	162.2	177.3	192.8	210.7	241.8
74.4	88.5	103.5	123.0	146.2	165.5	179.9	196.6	218.1	250.3
77.0	91.5	107.2	127.3	151.4	167.9	183.5	199.5	225.7	254.1

/// The transceiver has 50 tone frequencies and consequently their spacing is narrow compared with units having 38 tones. Therefore, some tone frequencies may receive interference from adjacent tone frequencies.

#### ◇ DTCS code (CODE)

Selects one of 104 DTCS (both encoder/decoder) codes.

- 023–754 (default: 023)

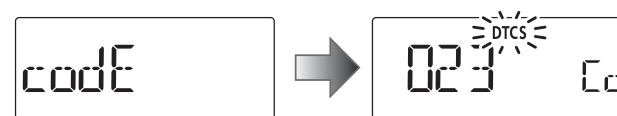


#### • Available DTCS codes

023	054	125	165	245	274	356	445	506	627	732
025	065	131	172	246	306	364	446	516	631	734
026	071	132	174	251	311	365	452	523	632	743
031	072	134	205	252	315	371	454	526	654	754
032	073	143	212	255	325	411	455	532	662	
036	074	145	223	261	331	412	462	546	664	
043	114	152	225	263	332	413	464	565	703	
047	115	155	226	265	343	423	465	606	712	
051	116	156	243	266	346	431	466	612	723	
053	122	162	244	271	351	432	503	624	731	

#### ◇ DTCS polarity (DTCS P)

Selects the DTCS polarity between “both n” (TX/RX: normal), “tn-RR” (TX: normal, RX: reverse), “tR-Rn” (TX: reverse, RX: normal) and “both R” (TX/RX: reverse). (default: both n)

The DTCS code’s polarity for transmitting or receiving can be independently set by this item.

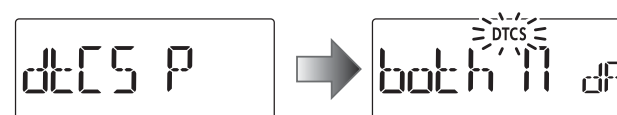

◇ **Tuning step (TS)**


Sets the tuning step between 5, 10, 12.5, 15, 20, 25, 30 and 50 kHz for the dial operation.



The default value may differ according to the selected frequency band (before accessing the Set mode) and transceiver version.

◇ **Frequency offset (OFFSET)**

Sets the offset frequency for duplex (repeater) operation within the range of 0 to 59.995 MHz.

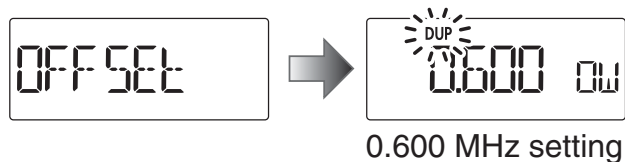


The default value may differ according to the selected frequency band (before accessing the Set mode) and transceiver version.

/// The selected tuning step in VFO mode is used when setting the frequency offset.


◇ **Reverse duplex function (DUP.REV)**

Turns the reverse duplex function ON or OFF. (default: OFF)

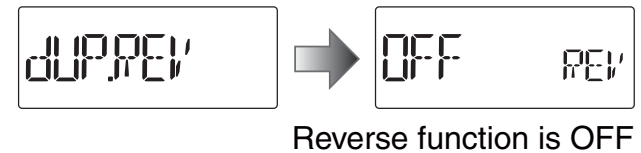


◇ **Operating mode (MODE)**

Sets the operating mode between “WIdE” (FM mode) and “nARROW” (FM-N mode). (default: WIdE)

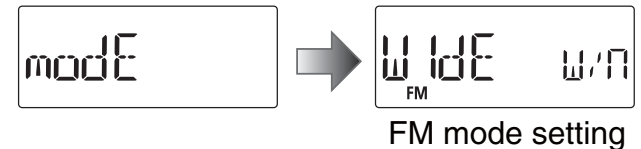

◇ **Weather alert (WX.ALT)** U.S.A. version only

Turns weather alert function ON or OFF. (p. 72) (default: OFF)

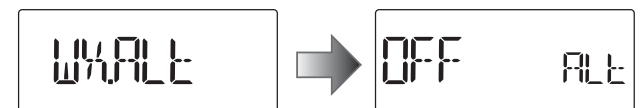


## 9 SET MODES

### ◇ Priority watch (PRIO)

Activates priority watch or priority watch with alert (Bell).  
(default: OFF)


- OFF : The priority watch is turned OFF.
- On : The transceiver checks the memory channel frequency every 5 seconds.
- bELL : The transceiver checks the memory channel frequency every 5 seconds. You can be alerted with beeps and blinking “(•).”

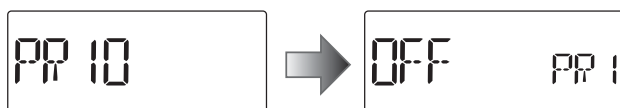

### ◇ Scan pause timer (PAUSE)

Selects the scan pause time. When receiving signals, the scan pauses according to the scan pause timer. (default: 10)


- 2–20 : Scan pauses for 2–20 seconds while receiving a signal in 2 seconds steps.
- HOLd : Scan pauses on a received signal until it disappears.

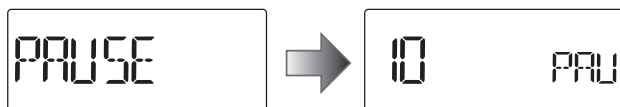

### ◇ Scan resume timer (RESUME)

Selects the scan resume time from a pause after the received signal disappears.  
(default: 2)


- 0 : Scan resumes immediately after the received signal disappears.
- 1–5 : Scan pauses 1–5 seconds after the received signal disappears.
- HOLd : Scan remains paused on the received signal according to the scan pause timer even if it disappears. Rotate [DIAL] to resume manually.

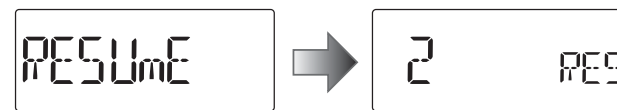

Scan resume timer must be set shorter than scan pause timer (previous item), otherwise this timer cannot be activated.

### ◇ Program skip scan (P SKIP)

Sets programmed skip scan function ON (default) or OFF for VFO scan (full scan, programmed scan, etc.) operation.

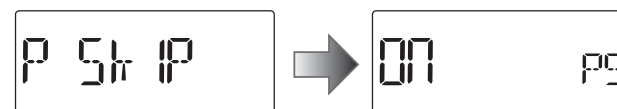


◇ **Memory bank link function (B LINK)**

Sets the memory bank link function ON (default) or OFF. The link function provides continuous bank scan, scanning all channels in the selected banks during bank scan.




• **Bank link setting**

- ① Push and hold [SET] for 1 sec. to enter the bank link setting.

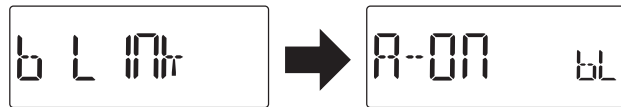

- ② Rotate [DIAL] to select the bank that you want to change the link setting.
- ③ Rotate [VOL] to select the option.

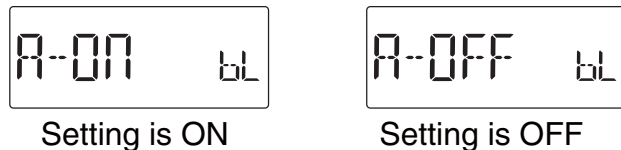


- ④ Rotate [DIAL] to select next bank and repeat steps ② and ③, or push [BAND] to exit the BANK link setting.

◇ **Program scan link function (P LINK)**

Sets the program scan link function. The link function provides continuous program scan in the selected program scan number during program scan.

Default settings for Lnk0 to Lnk9; PROG 1 to PROG 24 are linked, but PROG 0 is no-linked.

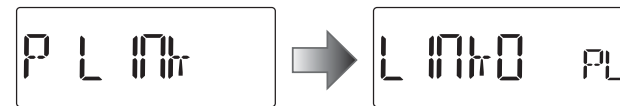

• **Confirming program scan link**

- ① Rotate [VOL] to select the program scan link number that you want to confirm.



- ② Push and hold [SET] for 1 sec. to enter the program scan link setting.
  - “Lnk” appears.



- ③ Push and hold [SET] for 1 sec., then rotate [DIAL] to confirm the linked program scans.



- ④ Push [BAND] to exit the program scan link setting.

## 9 SET MODES

### • Program scan link setting

- ① Rotate **[VOL]** to select the program scan link number that you want to change.



- ② Push and hold **[SET]** for 1 sec. to enter the program scan link setting.
  - "Link" appears.
- ③ Rotate **[DIAL]** to select the option, "Add" or "CLEAR."



- ④ Push and hold **[SET]** for 1 sec., then rotate **[DIAL]** to select the desired program scan.
  - When "Add" is selected in step ③, only non-linked program scans are displayed. When "CLEAR" is selected in step ③, only linked program scans are displayed.




- ⑤ Push and hold **[SET]** for 1 sec. to set the program scan link setting.
- ⑥ Repeat steps ④ and ⑤ to add or clear the program scan to/from the link, or push **[BAND]** to exit the program link scan setting.

### • Program scan link name programming


- ① Rotate **[VOL]** to select the program scan link number for which you want to program a name.



- ② Push and hold **[SET]** for 1 sec. to enter the program scan link setting.
  - "Link" appears.
- ③ Rotate **[DIAL]** to select "nAmE."
- ④ Push and hold **[SET]** for 1 sec. to enter the name programming.

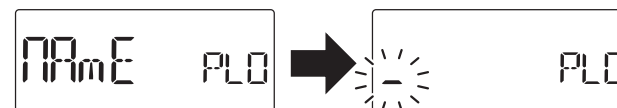

- ⑤ Rotate **[DIAL]** to select the desired character, number, symbol or space; push **[BAND]** or **[SET]** to move the cursor right or left, respectively.
- ⑥ When the cursor is on the 6th digit, push **[BAND]** to program the scan link name and exit the setting.

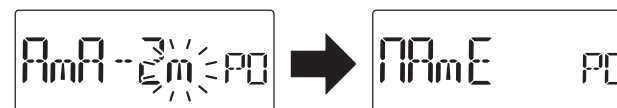


- ⑦ Push **[BAND]** to exit the program link setting.
- ⑧ Repeat steps from ① to ⑦ to program the program link scan name, or push **[V/M/C]** to exit the Set mode.



◇ **DTMF TX key (DTMF-T)**


Selects the method to transmit a DTMF code sequence. While continuing to push [PTT], push one of the keys, [0] to [9], [A](SET), [B](BAND), [C](H/M/L), [D](V/M/C), [\*] (indication: E) and [#] (indication: F).

- KEy : Transmits the appropriate DTMF code assigned to the key. (default)
- mEm : Transmits the programmed DTMF code sequence in the DTMF memory channel assigned to the key.
- t-CALL : No DTMF code can be transmitted. However, while continuing to push [PTT], push [MONI](BAND) to transmit a 1750 Hz tone burst signal.

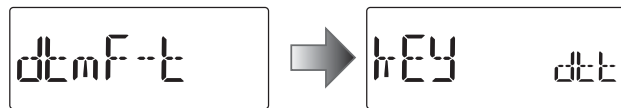


◇ **DTMF memory (DTMF)**

Program the DTMF memory channels. (p. 65)

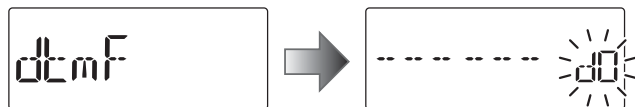

◇ **Microphone gain (MIC G)**


Sets the microphone gain to between 1 and 4 to suit your preference. Higher values make the microphone more sensitive to your voice. (default: 2)

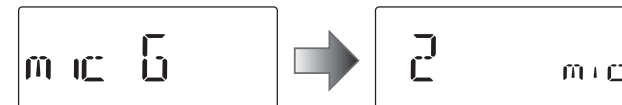

NOTE: When using the VOX function, we recommend setting the microphone gain to 3. However, you can adjust it to suit your operating environment (including the headset performance you are using).

◇ **VOX function (VOX)**


Turns the vox function ON or OFF. (p. 80) (default: On)

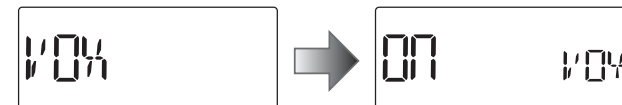

◇ **VOX gain (VOX LV)**

Sets the VOX gain to between 1 and 10. Higher values make the VOX function more sensitive to your voice.

To turn the VOX function OFF, select "OFF." (default: 5)

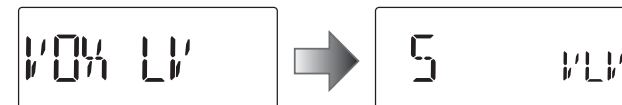


NOTE: Set the microphone gain before setting the VOX gain. See page 80 for details of the VOX function.

## 9 SET MODES

### ◇ VOX delay (VOX.DLY)

Sets the VOX delay to between “0.5,” “1.0,” “1.5,” “2.0,” “2.5” and “3.0” (seconds).


The VOX delay is the amount of time the transmitter stays ON after you stop speaking. (default: 0.5)

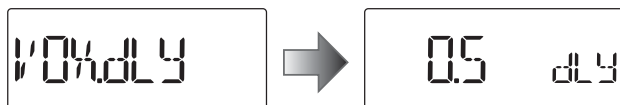

### ◇ VOX time-out timer (VOXTOT)

Sets the VOX time-out timer to between 1, 2, 3, 4, 5, 10 and 15 (minutes) to prevent accidental prolonged transmission for the VOX function.

To turn the function OFF, select “OFF.” (default: 3)

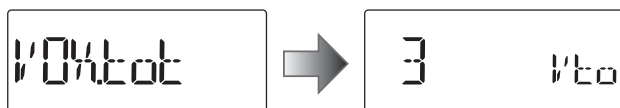


## ■ Initial set mode items

### ◇ Microphone simple mode (MIC S)

Microphone simple mode is used to assign the essential operations to the four switches (S1 to S4) on the remote control unit. (p. 82)


- SImPLE
- nORm-1 (default)
- nORm-2

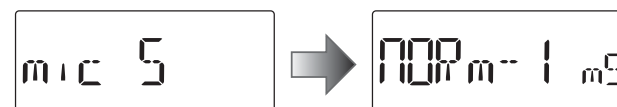

### ◇ Auto power OFF (AP OFF)

The transceiver can turn itself OFF automatically after a specified time. Activating a control restarts the time-out. The transceiver beeps before turning OFF.


30, 60, 90, 120 (minutes) and OFF (default) can be specified. The specified period is retained even when the transceiver is turned OFF by the auto power-off function. To cancel the function, select “OFF.”

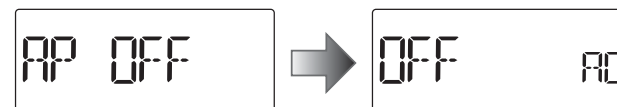

◇ **Display backlighting (LIGHT)**


The transceiver has display backlighting with a 5 seconds timer for night time operation. The display backlighting can be turned ON continuously or turned OFF. (default: Auto1)

- OFF : The backlight is turned OFF.
- On : The backlight continuously lights ON.
- Auto1 : Lights when an operation is performed, goes out after 5 seconds.
- Auto2 : Lights when an operation is performed, goes out after 5 sec with a battery pack or battery case operation, or stays ON when using the external power supply (more than 10 V DC).

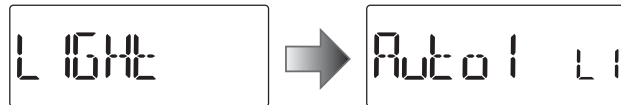

◇ **Beep output level (BEEPLV)**

Turns the key-touch beep ON (the beep level 1 to 9) or OFF. When changing the beep level, beeps sound at the level. (default: 4)

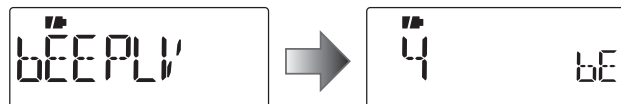


◇ **Auto repeater (AUTORP)**

**U.S.A. and Korean versions only**

The auto repeater function automatically turns ON or OFF the duplex operation and tone encoder. The offset and repeater tone settings are not changed by the auto repeater function. Reset these frequencies, if necessary.


**U.S.A. version:**

- OFF : The auto repeater function is turned OFF.
- R1 : Activates for duplex only. (default)
- R2 : Activates for duplex and tone.

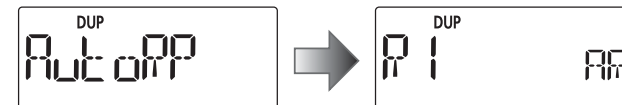

**Korean version:**

- OFF : The auto repeater function is turned OFF.
- On : Activates duplex and tone. (default)


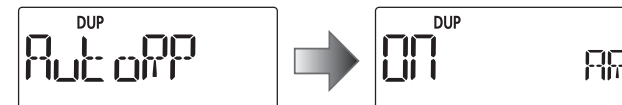


## 9 SET MODES

### ◇ Power save (P SAVE)

The power save function allows you conserve battery life by selecting the duty cycle of the receiver. Select the ratio of the power save time to the standby time. (default: Auto)

- OFF : Turns the function OFF.
- 2 : Sets the duty cycle to 1:2.
- 8 : Sets the duty cycle to 1:8.
- 16 : Sets the duty cycle to 1:16.
- 32 : Sets the duty cycle to 1:32.
- Auto : Transceiver sets "1:2" duty ratio when receiving no signal for 5 seconds, then it sets "1:16" after 60 seconds has past.

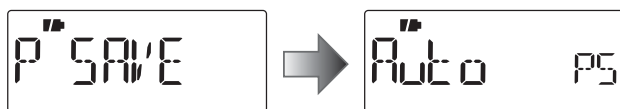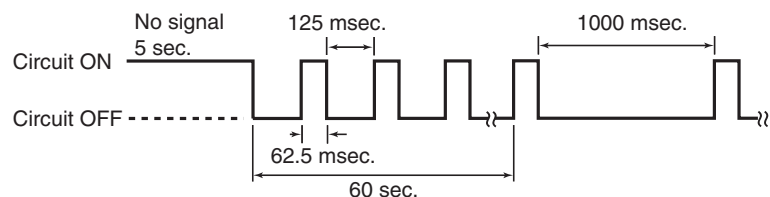


/// **NOTE:** Power save function is disabled when connecting the external power supply (more than 10 V DC).

### ◇ Voltage indication (VOLT)

The power voltage, battery voltage or external power supply voltage, is displayed at power ON. This setting is selectable from ON or OFF. (default: On)


- OFF : The power voltage indication is skipped.
- On : The power voltage is displayed at power ON.

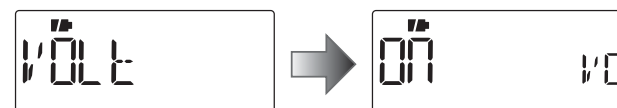

### ◇ DTMF speed (DTMF-S)

Select the desired DTMF transmission speed from 100 msec, 200 msec, 300 msec, 500 msec. (default: 100)


- 100 : 100 msec. interval; 5.0 characters per second
- 200 : 200 msec. interval; 2.5 characters per second
- 300 : 300 msec. interval; 1.6 characters per second
- 500 : 500 msec. interval; 1.0 character per second

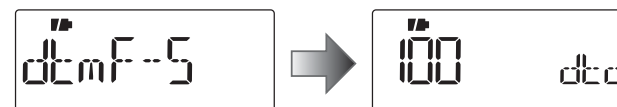

◇ **LCD contrast (CONT)**


Selects the LCD contrast. (default: Auto)

- Auto : Sets the contrast to high. However, if the transceiver is exposed to high temperatures, it automatically sets the contrast to low.
- HI : Sets the contrast to high.
- LO : Sets the contrast to low.

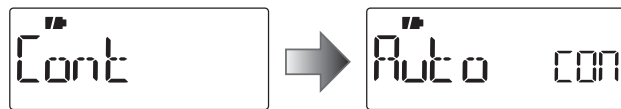


◇ **PTT lock (PTT LK)**

Turns the PTT lock function ON or OFF. To prevent accidental transmission, etc., the transceiver has a PTT lock function. (default: OFF)

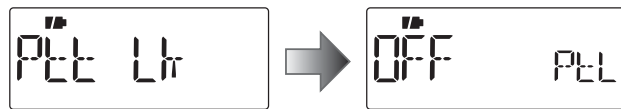

◇ **Busy lockout (LK OUT)**


Turns the busy lockout function ON and OFF. This function inhibits transmission while receiving a signal or when the squelch is open. (default: OFF)

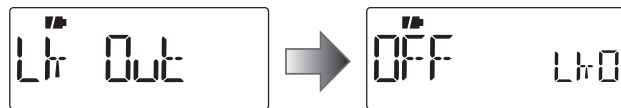

◇ **Time-out timer (TOT)**

To prevent accidental prolonged transmission, etc., the transceiver has a time-out timer. This function cuts transmission OFF after 1–30 min. of continuous transmission. This timer can be cancelled. (default: 5)

- OFF : The time-out timer is turned OFF.
- 1 to 30 : The transmission is cut OFF after the set period elapses.

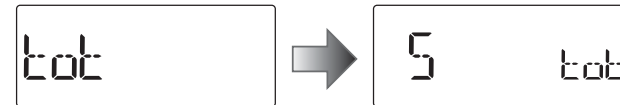


/// Approx. 10 seconds before the time-out timer is activated, the transceiver emits a beep tone as a warning.

/// **BE CAREFUL!** The transceiver will become hot when this time-out timer function is turned OFF or set to the long periods, and transmission is made for long periods.

◇ **Squelch delay (SQL DL)**

Sets the squelch delay between short and long. The delay prevents the squelch from repeatedly opening and closing while receiving the same signal. (default: SHORT)

- SHORt : Sets the squelch delay to short.
- LOnG : Sets the squelch delay to long.

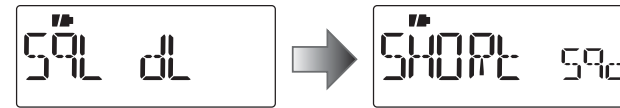


## 9 SET MODES

### ◇ Monitor key action (MONI)

The monitor key, **[MONI](BAND)**, can be set as a 'sticky' key. When set to the sticky condition, each push of **[MONI](BAND)** toggles the monitor function ON and OFF. (default: PUSH)


- PUSH : Push and hold **[MONI](BAND)** to monitor the frequency.
- HOLD : Push and hold **[MONI](BAND)** for 1 sec. to monitor the frequency and push again to cancel it.

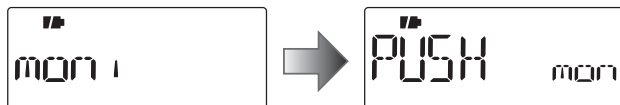

### ◇ Dial speed acceleration (DIAL S)

The dial speed acceleration automatically speeds up the tuning dial speed when rotating **[DIAL]** rapidly. (default: On)

- OFF : The dial speed acceleration is turned OFF.
- On : The dial speed acceleration is tuned ON.

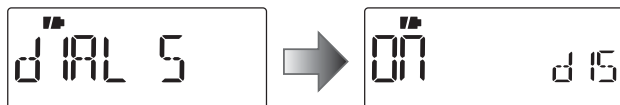


### ◇ Memory name (NAME)

The memory name is displayed during memory mode.

(default: OFF)


- OFF : The frequency of the selected memory channel is displayed.
- On : The pre-programmed memory name is displayed when the memory mode is selected.

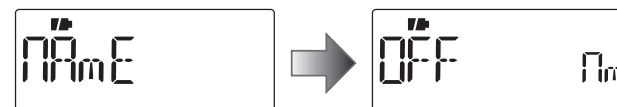

### ◇ Scan name (S NAME)

The programmed scan, programmed link scan or bank name is displayed during the scan type selection. (default: On)


- OFF : The programmed scan, programmed link scan or bank name is not displayed.
- On : The programmed scan, programmed link scan or bank name is displayed.

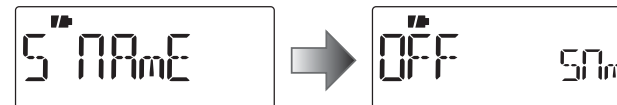

◇ **Display type (DISP M)**

Selects the display type for memory mode operation.  
(default: FREq)


- FREq : Displays the programmed frequency.
- CH : Displays the memory channel number. Operable functions, configurable items in the Set mode, and selectable modes will be restricted.
- PRIV : Displays the memory channel number. Operable channel, functions and selectable mode are restricted.

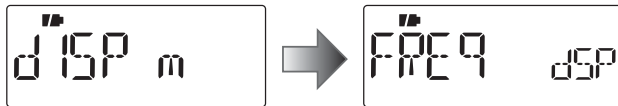

◇ **Head set selection (HS SEL)**


Selects the connected head set type between the HS-95 and other.

When using optional head set HS-95, this setting must be set "HS-95."  
(default: OtHER)

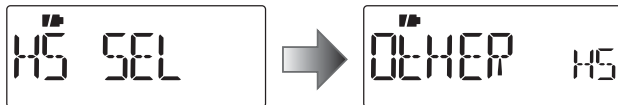

◇ **Auto low power (AUTOLP)**

Turns the auto low power function ON or OFF.  
When the temperature goes below 0°C (+32°F), the function automatically sets the output power to low.  
In that case, the transmit power selections (Hi/Mid) are also disabled.  
(default: OFF)

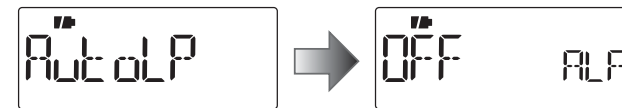


# 10 OTHER FUNCTIONS


## ■ Programming a DTMF code sequence

DTMF codes are used for autopatching, accessing repeaters, controlling other equipment, etc. The transceiver has 16 DTMF memory channels (d0–d9, dA, dB, dC, dd, dE, dF) for storage of often-used DTMF codes of up to 24 digits.

- ① Push **[SET]** to enter the Set mode.
- ② Rotate **[DIAL]** to select the DTMF programming item.
- ③ Rotate **[VOL]** to select a desired DTMF memory channel.
  - If programmed, previously programmed DTMF code is displayed.

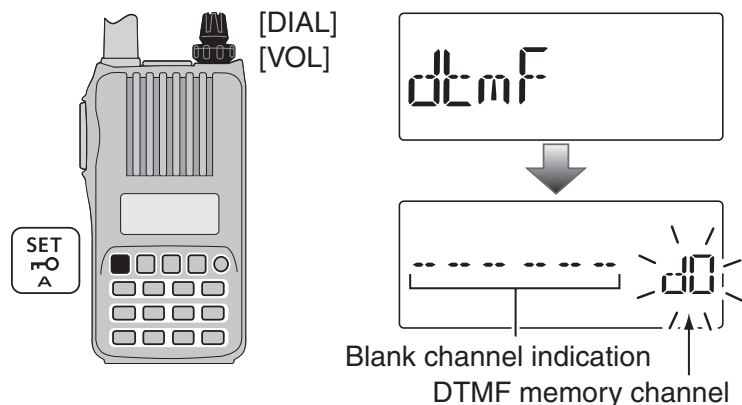


- ④ Push and hold **[SET]** for 1 sec. to enter the programming mode.

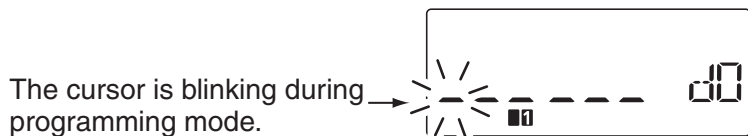


- ⑤ Rotate **[VOL]** to select the characters.


- “0”–“9,” “A,” “b,” “C,” “d,” “E” and “F” are selectable.
- Up to 24 digits can be programmed.
- Push **[BAND]** to move the cursor right; push **[SET]** to move the cursor left.

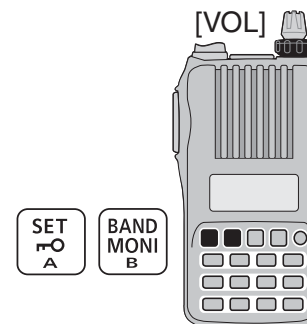

- ⑥ Repeat step ⑤ until the desired code is input.

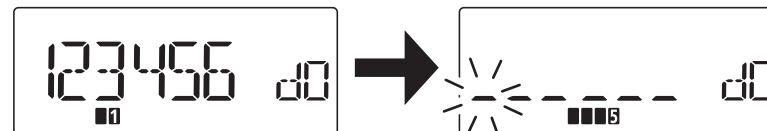

Next display appears after 6th digit has been input.




- If a digit is mistakenly programmed, push **[SET]** (or **[BAND]**) repeatedly to select the digit, then rotate **[VOL]** to correct it. Or rotate **[VOL]** to select “\_” to erase on and after the digits. Programmed memories will be cleared by this operation on the 1st digit.
- ⑥ Push **[BAND]** twice to program the DTMF code and exit the programming mode.
    - After the 24th digit is input, the transceiver automatically stores the code sequence and returns to step ③.
  - ⑦ Push **[V/M/C]** to return to the frequency display.



## ■ Transmitting a DTMF code sequence

The transceiver has 3 methods of transmitting a DTMF code sequence. Select a desired option in the Set mode.

- ① Push **[SET]** to enter the Set mode.
- ② Rotate **[DIAL]** to select the DTMF TX key item.

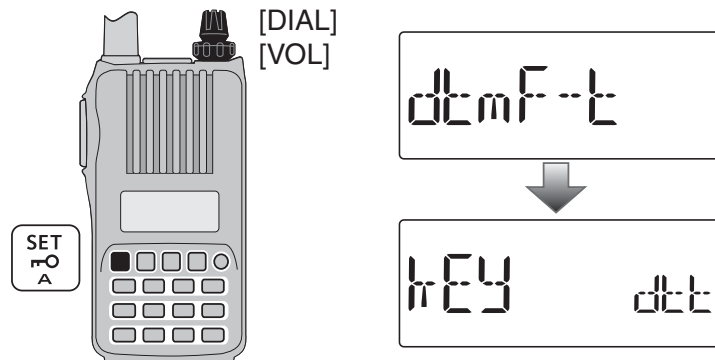


- ③ Rotate **[VOL]** to select a desired DTMF key setting.
  - kEy : Transmits the appropriate DTMF code assigned to the pushed key. (default)
  - mEm : Transmits the programmed DTMF code sequence in the DTMF memory channel assigned to the pushed key.
  - t-CALL : No DTMF code can be transmitted. However, while continuing to push **[PTT]**, pushing **[MONI]**(BAND) transmits a 1750 Hz tone burst signal.
- ④ Push **[V/M/C]** to return to the frequency display.

### ◇ Manual DTMF code transmission

First, set the DTMF TX key to “kEy” in the Set mode.

- ➔ While continuing to push **[PTT]**, push the desired keys to transmit a DTMF code sequence manually.
  - **[0]–[9]**, **[A]**(SET), **[B]**(BAND), **[C]**(H/M/L), **[D]**(V/M/C), **[\*]**(.) or **[#]** sends “0”–“9,” “A,” “B,” “C,” “D,” “\*,” or “#.”

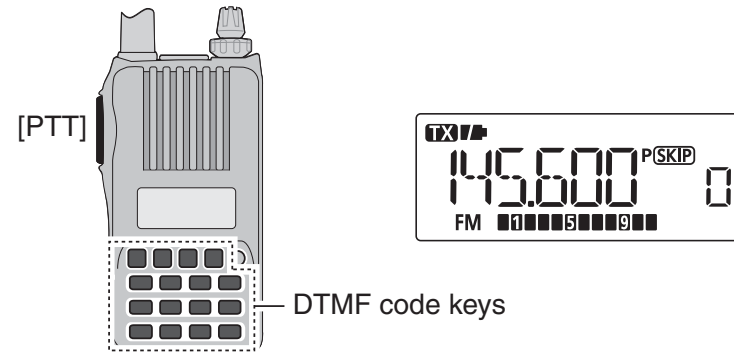

## 10 OTHER FUNCTIONS

### ■ Transmitting a DTMF code sequence (continued)

#### ◇ Using a DTMF memory channel

First, set the DTMF TX key to “mEm” in the Set mode.

➔ While continuing to push **[PTT]**, push one of the keys to transmit the programmed DTMF code sequence in the DTMF memory.

- Pushing **[0]** to **[9]**, **[A]**(SET), **[B]**(BAND), **[C]**(H/M/L), **[D]**(V/M/C), **[\*]**(.) or **[#]** transmits “d0”–“d9,” “dA,” “dB,” “dC,” “dD,” “dE” or “dF.”

#### ◇ 1750 Hz tone

To access some European repeaters, the transceiver must transmit a 1750 Hz tone burst signal.

- This tone can be used as a ‘Call signal’ in countries out of Europe.


First, set the DTMF TX key to “t-CALL” in the Set mode.

➔ While continuing to push **[PTT]**, push and hold **[MONI]** (BAND) for 1 or 2 sec. to transmit a 1750 Hz tone burst signal.

### ■ Setting DTMF transfer speed

The DTMF transfer speed can be selected.

- ① While continuing to push **[SET]**, turn the power ON to enter the Initial set mode.
- ② Rotate **[DIAL]** to select the DTMF transfer speed item, then rotate **[VOL]** to select the transfer speed.

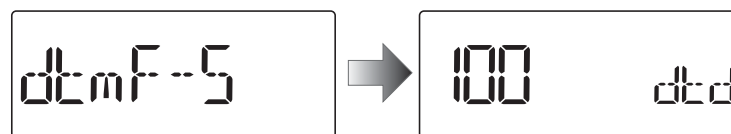

- 100 : Transfer the DTMF tones at about 100 msec. per tone.
- 200 : Transfer the DTMF tones at about 200 msec per tone.
- 300 : Transfer the DTMF tones at about 300 msec per tone.
- 500 : Transfer the DTMF tones at about 500 msec per tone.

- ③ Push **[⏪]** to return to the frequency display.

## ■ Tone frequency and DTCS code

### ◇ Tone and DTCS squelches

The tone squelch (CTCSS) or DTCS squelch opens only when receiving a signal containing a matching subaudible tone or DTCS code, respectively. You can silently wait for calls from group members using the same tone or code. Separate tone frequencies can be set for repeater and tone squelch/pocket beep operation.

### ◇ Reverse tone/DTCS squelch


The reverse tone/DTCS squelch is convenient if you want to ignore a specific signal. The transceiver mutes the squelch when a signal with the matched tone or code is received. "T SQL-R" / "DTCS-R" is displayed when the reverse tone/DTCS squelch is set.

### ◇ Pocket beep

These functions use subaudible tones or DTCS codes for calling and can be used as a "common pager" to inform you that someone has called while you were away from the transceiver.

### ◇ Setting subaudible tones for tone squelch

- ① Push **[SET]** to enter the Set mode.
- ② Rotate **[DIAL]** to select the CTCSS tone frequency item.

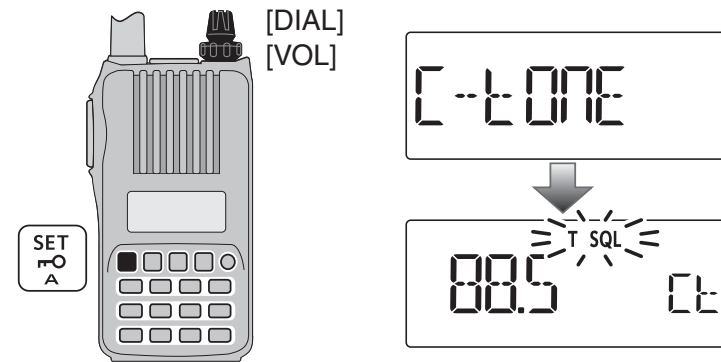


- ③ Rotate **[VOL]** to select a desired CTCSS tone frequency.
  - Each operating band and each memory channel have independent settings.
  - See page 53 for available tone frequencies for details.
- ④ Push **[V/M/C]** to return to the frequency display.

## 10 OTHER FUNCTIONS

### ■ Tone frequency and DTCS code (continued)

#### ◇ Setting DTCS code for DTCS squelch

- ① Push **[SET]** to enter the Set mode.
- ② Rotate **[DIAL]** to select the DTCS code item.

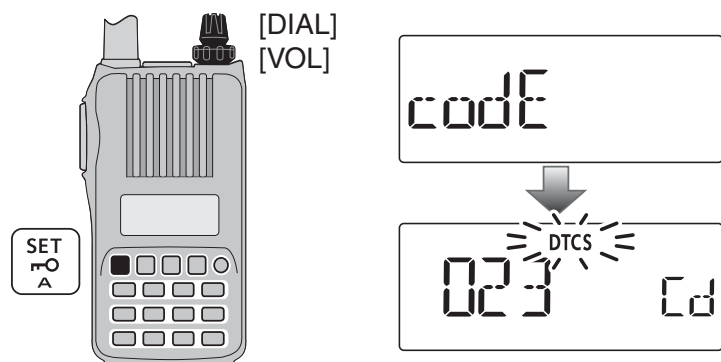


- ③ Rotate **[VOL]** to select a desired DTCS code.
  - Each operating band and each memory channel have independent settings.
  - See page 53 for available DTCS codes for details.
- ④ Push **[V/M/C]** to return to the frequency display.

DTCS phase can be selected in “dtCS-P” item. See next content for more details.

#### ◇ Setting DTCS polarity

- ① Push **[SET]** to enter the Set mode.
- ② Rotate **[DIAL]** to select the DTCS polarity item.

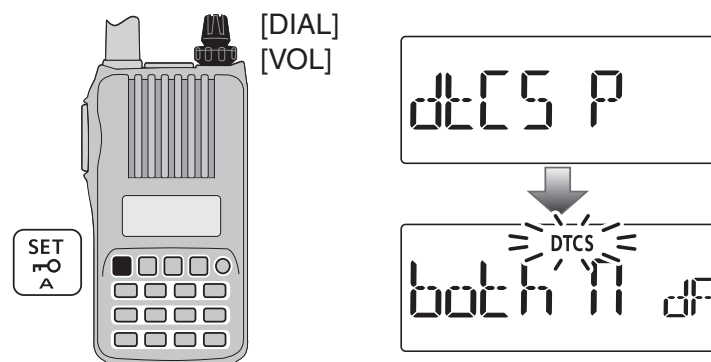

- ③ Rotate **[VOL]** to select a desired DTCS polarity mode.
  - bOtH n : Normal phase is used for both TX and RX. (Default)
  - tn-RR : Normal phase is used for TX; Reverse phase for RX.
  - tR-Rn : Reverse phase is used for TX; Normal phase for RX.
  - bOtH R : Reverse phase is used for both TX and RX.
- ④ Push **[V/M/C]** to return to the frequency display.


## ■ Tone/DTCS squelch

- ① Set a desired operating frequency, and then set a CTCSS tone or DTCS code.
- ② Push and hold **[TONE]**(0) for 1 sec. repeatedly to activate the tone or DTCS squelch. (T SQL or DTCS)
  - Subaudible tone encoder “T,” pocket beep (tone squelch) “((•)) T SQL,” tone squelch “T SQL,” DTCS beep “((•)) DTCS,” DTCS squelch “DTCS,” tone squelch reverse “T SQL-R,” DTCS squelch reverse “DTCS-R” and no tone operation are selectable in order.
- ③ Operate the transceiver in the normal way.
- ④ When the received signal includes a matching tone/code, the squelch opens and the signal can be heard. When the pocket beep function is activated, the transceiver also emits beep tones and blinks “((•)).”
  - When the received signal’s tone/code does not match, tone/DTCS squelch does not open, however, the S-indicator shows signal strength.
  - To open the squelch manually, push and hold **[MONI]**(BAND).
- ⑤ Push **[PTT]** to answer or push and hold **[MONI]**(BAND) for 1 sec. to stop the beeps and blinking.


No tone operation




Pocket beep

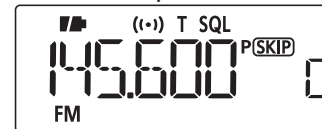

DTCS beep

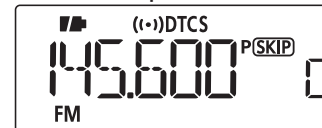


Tone squelch (reverse)

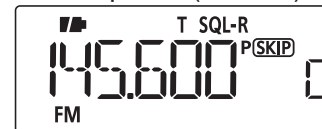


Subaudible tone encoder




Tone squelch

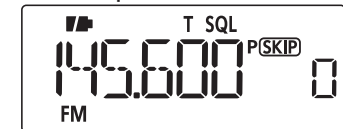

DTCS squelch

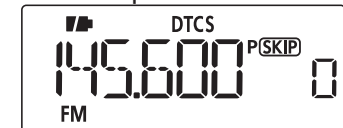

DTCS squelch (reverse)

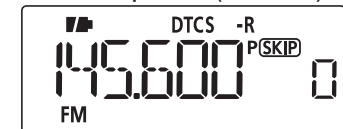


## 10 OTHER FUNCTIONS

### ■ Tone scan

The transceiver can detect the subaudible tone frequency and DTCS code in a received signal. By monitoring a signal that is being transmitted on a repeater input frequency, you can determine the tone frequency required to access the repeater.

- ① Set the desired frequency or memory channel to be checked for a tone frequency or DTCS code.
- ② Push and hold **[TONE](0)** for 1 sec. repeatedly to activate the repeater tone, tone squelch or DTCS squelch. (T, T SQL or DTCS)
- ③ Push and hold **[T.SCAN](#)** for 1 sec. to start the tone scan.
  - To change the scanning direction, rotate **[DIAL]**.
- ④ When the tone frequency or DTCS code is decoded, the set mode contents are programmed with the frequency or code.
  - The tone scan pauses for the set period in scan pause timer (p. 47) when a tone frequency or DTCS code is detected.
  - The decoded tone frequency is used for the repeater tone frequency when any tone setting, such as repeater tone or tone squelch is OFF.
  - The decoded tone frequency is used for the tone squelch frequency when the tone squelch is ON.
  - The decoded DTCS code is used for the DTCS squelch code when the DTCS squelch is ON.

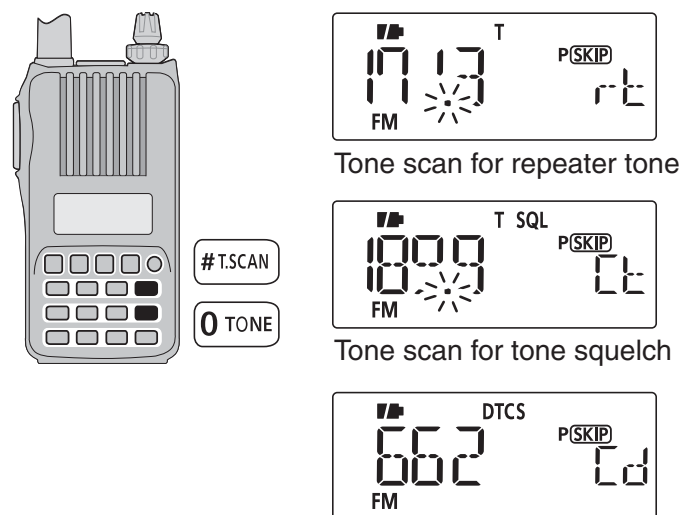

- ⑤ Push **[V/M/C]** to stop the scan.
  - If the scan is cancelled before the transceiver detects the tone or code, the set mode contents are not changed.
  - The detected tone is used for temporary operation only. The stored tone setting in memory or call channel won't be changed.

**NOTE:** Tone frequency is over-written automatically when it corresponds with the scanning tone frequency in tone squelch mode. However, it is not over-written in memory or call channel mode.


## Weather channel operation *U.S.A. version only*

There are 10 weather channels for monitoring weather broadcasts from the NOAA (National Oceanic and Atmospheric Administration).



### Weather channel selection

- ① Push **[V/M/C]** repeatedly to select weather channel mode.
  - “WX” and the weather channel number appear.
- ② Rotate **[DIAL]** to select a desired weather channel.
- ③ Push **[V/M/C]** to return to the previous frequency or memory channel.

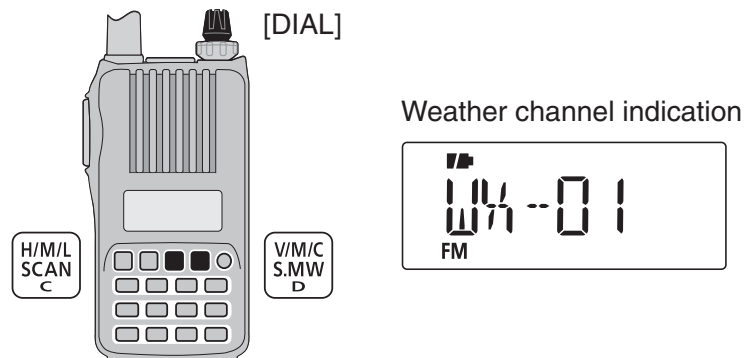


Push and hold **[SCAN]**(H/M/L) for 1 sec. activates the weather channel scan. Push **[SCAN]**(H/M/L) again to stop the scan.

### Weather alert function

NOAA broadcast stations transmit weather alert tones before important weather announcements. When the weather alert function is turned ON, the selected weather channel is monitored every 5 seconds for the announcement. When the alert signal is detected, the “ALT” and the WX channel indications are displayed alternately and a beep sounds until the transceiver is operated. The previously selected (used) weather channel is checked periodically during standby or while scanning.

- ① Select the desired weather channel.
- ② Push **[SET]** to enter the Set mode.
- ③ Rotate **[DIAL]** to select the weather alert setting item, then rotate **[VOL]** to select “On.”

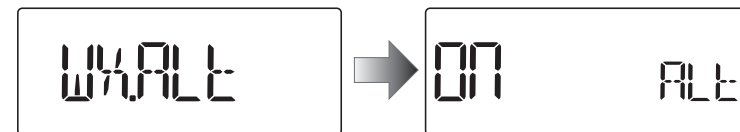


- ④ Push **[V/M/C]** to return to the weather channel display.
- ⑤ Set the desired stand-by condition.
  - Select VFO, memory or call channel.
  - Scan or priority watch operation can also be selected.

---

## 10 OTHER FUNCTIONS

### ◇ Weather alert function (continued)

- ⑥ When the alert is detected, a beep sounds and the following indication is displayed.

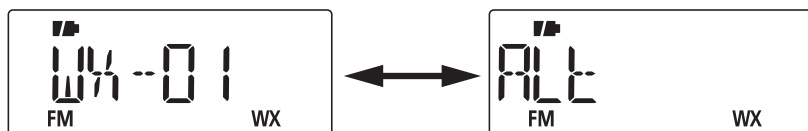

Shows above indications alternately.

- ⑦ Turn the weather alert function OFF in the Set mode.

**NOTE:** While receiving a signal on a frequency other than the Weather alert frequency, the receiving signal will be interrupted momentarily approximately every 5 seconds when the Weather alert function is ON. These interruptions cease when the Weather alert function is turned OFF.




## ■ Cloning function

The IC-T70A/T70E has transceiver-to-transceiver data cloning capability. This function is useful when you want to copy all of the programmed contents from one IC-T70A/T70E to another.


• An optional OPC-474 CLONING CABLE is required.

- ① Turn the transceiver's power OFF, then connect an optional OPC-474 between both [SP] jacks.

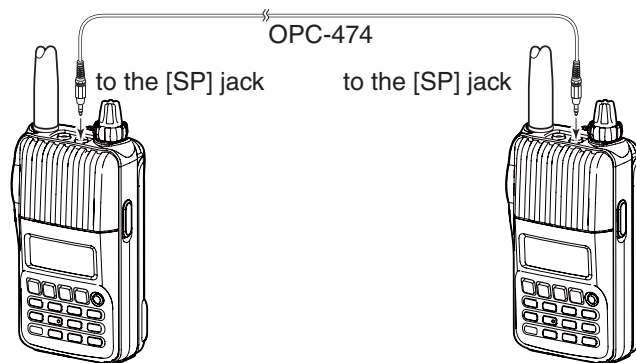


- ② While continuing to push [V/M/C], push and hold [⏻] for 1 sec. to enter the cloning mode.

• “CLOnE m” appears.

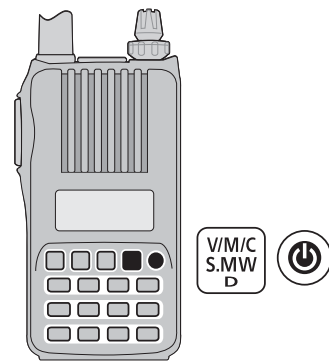

- ③ Push [PTT] on the “master” transceiver.
  - “CL OUT m” appears and the bar meter shows that cloning is taking place.
  - After the cloning is completed, the display returns to “CLOnE m.”
- ④ Push and hold [⏻] for 1 sec. to turn power OFF.

The optional CS-T70 CLONING SOFTWARE is also available to clone/edit contents with a PC (for Microsoft® Windows® 2000/XP, Windows Vista® or Windows® 7) using ICF format files.

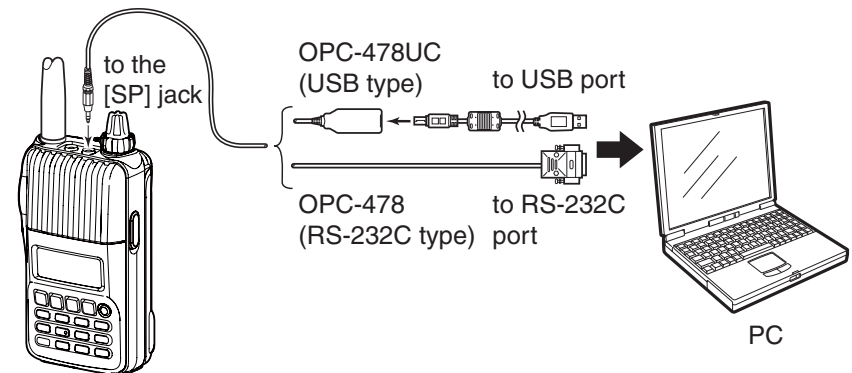

## 10 OTHER FUNCTIONS

### ■ Resetting

The display may occasionally display erroneous information (e.g. when first applying power). This may be caused externally by static electricity or by other factors.

If this problem occurs, turn power OFF. After waiting a few seconds, turn power ON again. If the problem persists, perform either or both procedures below.

#### • All reset


Reset the CPU before operating the transceiver for the first time, or if the internal CPU malfunctions due to static electricity, etc. All reset clears all programming and returns all settings to their factory defaults.

#### • Partial reset

Use Partial reset if you want to initialize the operating conditions (VFO frequency, VFO settings, set mode contents) without clearing the memory contents.

#### ◇ All reset

- ① Push and hold [⏻] for 1 sec. to turn power OFF.
- ② While continuing to push [SET], [BAND] and [H/M/L], then turn power ON to reset the CPU.
  - “CLEAR” appears when resetting the CPU (See the illustration below).

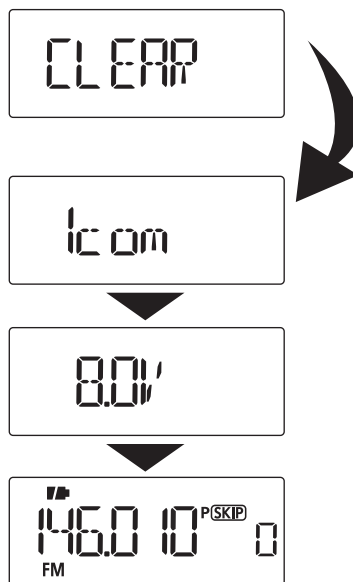


**CAUTION:** Resetting the CPU returns all programmed contents to their default settings.

#### ◇ Partial reset

- ① Push and hold [⏻] for 1 sec. to turn power OFF.
- ② While continuing to push [V/M/C], then turn power ON to partially reset the transceiver.

**NOTE:** No message appears on the display after the partial reset is done.

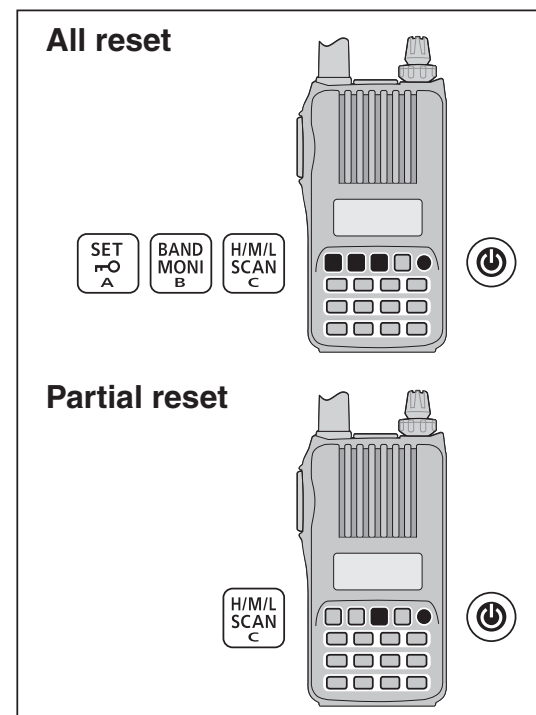

# TROUBLESHOOTING 11

If your transceiver seems to be malfunctioning, please check the following points before sending it to a service center.

PROBLEM	POSSIBLE CAUSE	SOLUTION	REF.
Transceiver does not turn ON.	<ul style="list-style-type: none"> <li>• The battery is exhausted.</li> <li>• The battery polarity is reversed.</li> <li>• Loose connection of a battery pack (case).</li> </ul>	<ul style="list-style-type: none"> <li>• Charge the battery pack, or replace the batteries.</li> <li>• Check the battery polarity.</li> <li>• Clean battery terminals.</li> </ul>	pp. 2, 11–14 p. 11 –
No sound comes from the speaker.	<ul style="list-style-type: none"> <li>• Volume level is too low.</li> <li>• An external speaker or a cloning cable is connected to the [SP] jack.</li> </ul>	<ul style="list-style-type: none"> <li>• Rotate [VOL] to adjust to a desired level.</li> <li>• Check the external speaker connection or remove the cloning cable.</li> </ul>	p. 16 –
Transmitting is impossible.	<ul style="list-style-type: none"> <li>• A frequency outside of the 144/400 MHz amateur bands is set.</li> <li>• The PTT lock function is activated.</li> <li>• The heat protection is activated, and “Hot” is displayed.</li> </ul>	<ul style="list-style-type: none"> <li>• Set the frequency within 144/400 MHz amateur bands.</li> <li>• Set the PTT lock function OFF in the Initial set mode.</li> <li>• Cool down the transceiver.</li> </ul>	p. 20 p. 62 p. 23
Transmitting using the VOX function is impossible.	<ul style="list-style-type: none"> <li>• The VOX gain is set to OFF or too low.</li> <li>• The microphone gain is too low.</li> </ul>	<ul style="list-style-type: none"> <li>• Set the VOX gain to a suitable level.</li> <li>• Set the microphone gain to a suitable level.</li> </ul>	p. 81 p. 58
Contacting with another station is impossible.	<ul style="list-style-type: none"> <li>• Different tone or code is used for the tone/DTCS squelch.</li> </ul>	<ul style="list-style-type: none"> <li>• Check the tone/DTCS by performing a tone scan.</li> </ul>	p. 71
Frequency cannot be set.	<ul style="list-style-type: none"> <li>• The lock function is activated.</li> <li>• The memory mode, Call channel mode, or weather channel mode is selected.</li> </ul>	<ul style="list-style-type: none"> <li>• Push and hold [r-O](SET) for 1 sec. to cancel the lock function.</li> <li>• Push [V/M/C] repeatedly to select the VFO mode.</li> </ul>	p. 21 p. 18
A program scan does not start.	<ul style="list-style-type: none"> <li>• The memory mode, Call channel mode, or weather channel mode is selected.</li> <li>• The same frequency has been programmed in the scan edge channels, “*A” and “*b.”</li> </ul>	<ul style="list-style-type: none"> <li>• Push [V/M/C] repeatedly to select the VFO mode.</li> <li>• Programming different frequencies in the scan edge channels.</li> </ul>	p. 18 p. 43
A memory scan does not start.	<ul style="list-style-type: none"> <li>• The VFO mode or Call channel mode is selected.</li> <li>• Only one or no memory channel has been programmed.</li> </ul>	<ul style="list-style-type: none"> <li>• Push [V/M/C] repeatedly to select the memory mode.</li> <li>• Program 2 or more memory channels.</li> </ul>	p. 18 p. 31
The displayed frequency is erroneous.	<ul style="list-style-type: none"> <li>• The CPU has malfunctioned.</li> <li>• External factors have caused a fault.</li> </ul>	<ul style="list-style-type: none"> <li>• Reset the transceiver.</li> <li>• Remove and re-attach the battery pack/case.</li> </ul>	p. 75 p. 2

# 12 SPECIFICATIONS

## ◇ General

- Frequency coverage : (unit: MHz)

Version	TX		RX	
<b>EUR, KOR</b>	144–146,	430–440	144–146,	430–440
<b>UK, RSP</b>	144–146,	430–440	136–174* <sup>1</sup> ,	400–479* <sup>2</sup>
<b>U.S.A.</b>	144–148,	420–450* <sup>4</sup>	136–174* <sup>3</sup> ,	400–479* <sup>4</sup>
<b>TPE</b>	144–146,	430–432	144–146,	430–432
<b>AUS</b>	144–148,	420–450* <sup>2</sup>	136–174* <sup>3</sup> ,	400–479* <sup>2</sup>
<b>CHN, EXP</b>	136–174* <sup>3</sup> ,	400–479* <sup>2</sup>	136–174* <sup>3</sup> ,	400–479* <sup>2</sup>

\*<sup>1</sup>Guaranteed 144–146 MHz only, \*<sup>2</sup>Guaranteed 430–440 MHz only,

\*<sup>3</sup>Guaranteed 144–148 MHz only, \*<sup>4</sup>Guaranteed 440–450 MHz only

- Mode : FM, FM-N
- No. of memory channels : 302  
(incl. 50 scan edges and 2 call channels)
- Usable temp. range : –20°C to +60°C; –4°F to +140°F
- Tuning steps : 5, 10, 12.5, 15, 20, 25, 30, 50, 100, 125 and 200 kHz
- Frequency stability : ±2.5 ppm (–20°C to +60°C; –4°F to +140°F)
- Power supply : 10.0–16.0 V DC for external DC power, or specified Icom battery pack
- Current drain (at 7.2 V DC) :
 

TX	High (typical)	VHF 1.7 A, UHF 2.1 A
	Mid. (typical)	VHF 1.2 A, UHF 1.5 A
	Low (typical)	VHF 0.6 A, UHF 0.8 A
Rx	Max. output	Less than 450 mA (Internal speaker) Less than 300 mA (External speaker)
	Power save	Less than 40 mA (Duty 1:8)
	standby	Less than 90 mA
- Antenna connector : SMA (50 Ω)
- Dimensions : 58(W)×111(H)×30(D) mm;  
(projections not included) 2<sup>9</sup>/<sub>32</sub>(W)×4<sup>3</sup>/<sub>8</sub>(H)×1<sup>3</sup>/<sub>16</sub>(D) in
- Weight (approx.) : 380 g; 13.4 oz (with antenna and BP-264)

## ◇ Transmitter

- Modulation system : Variable reactance freq. modulation
- Output power (at 7.2 V DC) : High 5.0 W, Mid. 2.5 W, Low 0.5 W (typical)
- Max. frequency deviation : ±5.0 kHz (FM wide: approx.)  
±2.5 kHz (FM narrow: approx.)
- Spurious emissions : Less than –60 dBc at High/Mid.  
Less than –13 dBm at Low
- Ext. mic. impedance : 2.2 kΩ

## ◇ Receiver

- Receive system : Double-conversion superheterodyne
- Intermediate frequencies : 1st 46.35 MHz, 2nd 450 kHz
- Sensitivity (except spurious points, 1 kHz/3.5 kHz Dev.; 12 dB SINAD) :
 

Guaranteed freq. range	Less than 0.18 μV
Other freq. range	Less than 0.32 μV
- Squelch Sensitivity (except spurious points, 1 kHz/3.5 kHz Dev.) :
 

Guaranteed range	Less than 0.18 μV
Other frequency range	Less than 0.32 μV
- Audio output power : (at 10% distortion/7.2 V DC)
 

Internal speaker	More than 700 mW with a 16 Ω load
External speaker	More than 400 mW with an 8 Ω load
- Selectivity : (at CH spacing 20 kHz/in the amateur bands)
 

FM (Wide)	More than 60 dB
FM (Narrow)	More than 60 dB
- Ext. speaker connector : 3-conductor 3.5(d) mm; (1/8")/8 Ω
- Spurious and image rejection ratio (in guaranteed freq. range) : More than 60 dB

All stated specifications are subject to change without notice or obligation.

- **BP-263 BATTERY CASE**  
Battery case for LR6 (AA) × 6 alkaline batteries.
- **BP-264 NI-MH BATTERY PACK**  
7.2 V/1400 mAh (Typ.) Ni-MH battery pack. Battery life: 11.5 hrs. (approx.; VHF, FM, high power, Tx : Rx : Standby = 5:5:90)
- **BP-265 LI-ION BATTERY PACK**  
7.4 V/1900 mAh (Min.)/2000 mAh (Typ.) Lithium Ion battery pack. Battery life: 16 hrs. (approx.; VHF, FM, high power, Tx : Rx : Standby = 5:5:90)
- **BC-167SA/SC/SV BATTERY CHARGER**  
For regular charging of the battery pack BP-264.
- **BC-191 DESKTOP CHARGER+BC-123S AC ADAPTER**  
For rapid charging of the Ni-MH battery pack. An AC adapter may be supplied with the charger, depending on the version.  
Charging time: approx. 2 hours for the BP-264.
- **BC-193 DESKTOP CHARGER+BC-123S AC ADAPTER**  
For rapid charging of the Li-Ion battery pack. An AC adapter may be supplied with the charger, depending on the version.  
Charging time: approx. 2.5 hours for the BP-265.

## BC-191/BC-193 common specifications

Power supply voltage	12 to 16 V DC or the specified Icom AC adapter (BC-123S)
Charging temp. range	+10°C to +40°C; +50°F to +104°F
Dimensions (projections not included)	87.5(W)×53.7(H)×72.8(D) mm; 3 <sup>7</sup> / <sub>16</sub> (W)×2 <sup>1</sup> / <sub>8</sub> (H)×2 <sup>7</sup> / <sub>8</sub> (D) in

- **CP-12L CIGARETTE LIGHTER CABLE WITH NOISE FILTER**
- **CP-19R CIGARETTE LIGHTER CABLE WITH DC-DC CONVERTER**  
Allows you to operate the transceiver through a 12 V cigarette lighter socket. You can also charge the attached battery pack (during stand-by only).  
CP-19R: A built-in DC-DC converter provides an 11 V DC output.
- **OPC-254L DC POWER CABLE**  
For operation and charging via an external power supply.
- **CP-23L CIGARETTE LIGHTER CABLE**  
Allows charging of the battery packs through a 12 V cigarette lighter socket. (For BC-191/BC-193)
- **OPC-515L DC POWER CABLE**  
Allows charging of the battery packs using a 12 V DC power source instead of the AC adapter. (For BC-191/BC-193)

---

## 13 OPTIONS

- **AD-92SMA** ANTENNA CONNECTOR ADAPTER  
Allows you to connect an external antenna with a BNC connector.
- **HM-131** SPEAKER-MICROPHONE  
Combination speaker-microphone that provides convenient operation while hanging the transceiver on your belt.
- **HM-153/HM-166** EARPHONE-MICROPHONE  
Ideal for hands-free operation: clip the HM-153/HM-166 (with integrated PTT switch) to your lapel or breast pocket.
- **HS-94/HS-95/HS-97** HEADSET  
+**OPC-2006** PLUG ADAPTER CABLE  
HS-94 : Ear hook type  
HS-95 : Neck & arm type  
HS-97 : Throat microphone  
OPC-2006 : Allows you to connect the HS-94/HS-95/HS-97 to the transceiver. After connecting, the VOX function can be used.
- **SP-13** EARPHONE  
Provides clear audio in noisy environments.
- **OPC-474** CLONING CABLE  
For transceiver-to-transceiver cloning.
- **OPC-478/478UC** CLONING CABLE  
Used for data cloning between transceiver and PC with CS-T70 (cloning software).
- **CS-T70** CLONING SOFTWARE  
Provides quick and easy programming of such settings as memory channels and Set modes contents via your PC's RS-232C terminal (using OPC-478), or USB port (OPC-478UC). Either OPC-478 or OPC-478UC is required.
- **LC-174** CARRYING CASE  
Helps protect the transceiver from scratches, etc.

Approved Icom optional equipment is designed for optimal performance when used with an Icom transceiver. Icom is not responsible for the destruction or damage to an Icom transceiver in the event the Icom transceiver is used with equipment that is not manufactured or approved by Icom.

## ■ VOX function


The transceiver has a VOX function, which allows hands-free operation.

An optional HS-94, HS-95 or HS-97 headset and the OPC-2006 plug adapter cable are also required for operation.

- The VOX (voice operated transmission) function starts transmission when you speak into the microphone, without needing to push [PTT]; then, automatically returns to reception when you stop speaking.


### ◇ Optional unit connection

- ① Push and hold [⏻] for 1 sec. to turn the power OFF.
- ② Remove the jack cover.
- ③ Connect the optional HS-94, HS-95 or HS-97 and OPC-2006, as illustrated below.

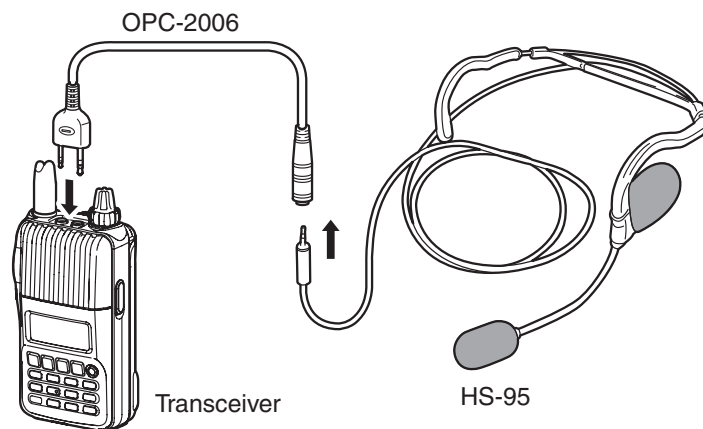

### ◇ Turning the VOX function ON or OFF

- ① Connect an optional headset and plug adapter cable to the transceiver, and then turn the power ON.
- ② Push [SET] to enter the Set mode.
- ③ Rotate [DIAL] to select the VOX setting item, then rotate [VOL] to select “On.”

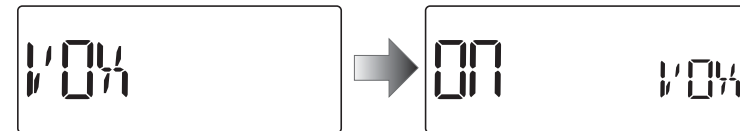

- ④ Push [V/M/C] to return to the frequency display.
  - “VOX” appears when the VOX function is ON.

#### NOTE:

- When using the VOX function, adjust the microphone gain and the VOX-related settings (p. 81) to suit your operating environment (including your headset performance).
- Set the microphone gain before setting the VOX gain in the Set mode (p. 58). We recommend setting the microphone gain to 3.
- When the PTT lock is set to “On” in the Set mode, you cannot transmit using the VOX function. (p. 62)



## 13 OPTIONS

### ◇ VOX-related settings


The VOX gain, the VOX delay, and the VOX time-out timer can be set in the Set mode.

- ① Connect an optional headset and plug adapter cable to the transceiver, and then turn the power ON.
- ② Push **[SET]** to enter the Set mode.
- ③ Rotate **[DIAL]** to select the VOX gain (VOX LV), the VOX delay (VOX.dLy), or the VOX time-out timer (VOX.tot) item.
- ④ Rotate **[VOL]** to select a desired option.
- ⑤ Push **[V/M/C]** to exit the Set mode.

▨ The VOX function does not activate transmission while in the Set mode.

#### • VOX gain

The VOX gain level can be adjusted between 1 (minimum) and 10 (maximum), or turned OFF. Higher values make the VOX function more sensitive to your voice. (default: 5)

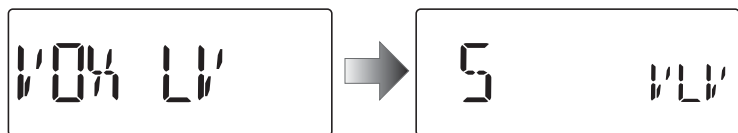

➔ While speaking into the headset microphone, adjust the VOX gain until “VOX” continuously appears on the LCD.


▨ If “VOX” is intermittent, be sure the VOX delay is set long enough to allow normal pauses in speech, but keep the VOX ON until you finish speaking.

#### ✓ CONVENIENT!

While transmitting using the VOX function, you can adjust the VOX gain simply by rotating **[DIAL]**.

#### • VOX delay


Sets the VOX delay to between 0.5 and 3.0 seconds (in 0.5 sec. steps). The VOX delay is the amount of time the transmitter stays ON after you stop speaking. (default: 0.5)

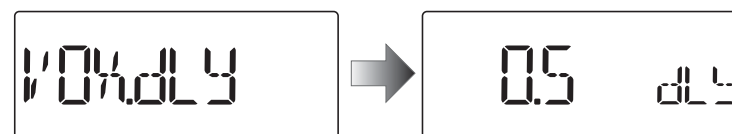

#### • VOX time-out timer

Sets the VOX time-out timer to between 1, 2, 3, 4, 5, 10 and 15 minutes to prevent accidental prolonged transmission for the VOX function.

To turn the function OFF, select “OFF.” (default: 3)

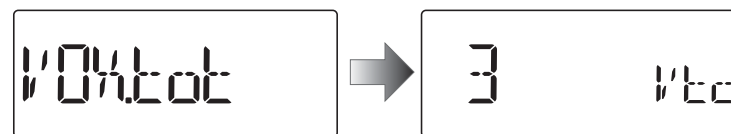




## Remote control function

The remote control unit allows you to remotely select operating frequencies, memory channels, etc.

### • User remote control unit


The below circuit is for reference only.

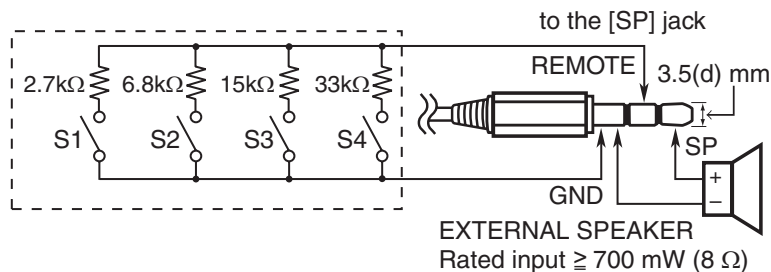

Be sure to turn power OFF when plugging/unplugging the remote control unit to/from the [SP/MIC] jack.

### ◇ Simple remote control mode

- ① While continuing to push [SET], turn the power ON to enter the Initial set mode.
- ② Rotate [DIAL] to select the microphone simple mode (mic S) item.
- ③ Rotate [DIAL] to select “SIMPLE,” “NORM-1” or “NORM-2” option.

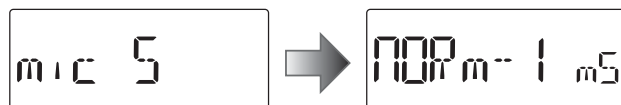

- ④ Push [F] to return to the frequency display.

### • SIMPLE

S1	Selects the Call channel.
S2	Turns the monitor function ON or OFF.
S3	Selects memory channel 0.
S4	Selects memory channel 1.

### • NORM-1

S1	Toggles the VFO mode and the memory mode.
S2	Selects the Call channel.
S3	Frequency or memory channel “UP.”
S4	Frequency or memory channel “DOWN.”

### • NORM-2

S1	Toggles the VFO mode and the memory mode.
S2	Turns the monitor function ON or OFF.
S3	Frequency or memory channel “UP.”
S4	Frequency or memory channel “DOWN.”

The VFO mode cannot be selected via the remote control unit when SIMPLE mode is selected.

### • COMMON (SIMPLE/NORM-1/NORM-2)

S2	Transmits T-CALL (1750 Hz tone) while pushing [PTT].
S3	Volume “UP” while operating the monitor function.
S4	Volume “DOWN” while operating the monitor function.

## IMPORTANT

- When transmitting with a portable radio, hold the radio in a vertical position with its microphone 2.5 to 5 centimetres from your head and body.
- If you wear a portable two-way radio on your body, ensure that the antenna is at least 2.5 centimetres from your body when transmitting.



CE Versions of the IC-T70E which display the 'CE' symbol on the serial number label, comply with the essential requirements of the European Radio and Telecommunication Terminal Directive 1999/5/EC.



This warning symbol indicates that this equipment operates in non-harmonised frequency bands and/or may be subject to licensing conditions in the country of use. Be sure to check that you have the correct version of this radio or the correct programming of this radio, to comply with national licensing requirements.

### • List of Country codes (ISO 3166-1)

	Country	Codes		Country	Codes
1	Austria	AT	18	Liechtenstein	LI
2	Belgium	BE	19	Lithuania	LT
3	Bulgaria	BG	20	Luxembourg	LU
4	Croatia	HR	21	Malta	MT
5	Czech Republic	CZ	22	Netherlands	NL
6	Cyprus	CY	23	Norway	NO
7	Denmark	DK	24	Poland	PL
8	Estonia	EE	25	Portugal	PT
9	Finland	FI	26	Romania	RO
10	France	FR	27	Slovakia	SK
11	Germany	DE	28	Slovenia	SI
12	Greece	GR	29	Spain	EP
13	Hungary	HU	30	Sweden	SE
14	Iceland	IS	31	Switzerland	CH
15	Ireland	IE	32	Turkey	TR
16	Italy	IT	33	United Kingdom	GB
17	Latvia	LV			



---

## INDEX

### – 1 –

1750 Hz tone ..... 28

### – A –

All reset ..... 75  
Antenna ..... 2  
Auto low power (AUTOLP) ..... 64  
Auto power OFF (AP OFF) ..... 59  
Auto repeater (AUTORP) ..... 60  
Auto repeater function ..... 27

### – B –

Band scan (VFO mode) ..... 42  
Battery caution ..... 10  
Battery icons ..... 12  
Battery information ..... 11  
Battery life ..... 11  
Battery pack ..... 2  
Beep output level (BEEPLV) ..... 60  
Belt clip ..... 1  
Busy lockout (LK OUT) ..... 62

### – C –

Call channel mode ..... 18  
Call channel watch ..... 49  
Caution (for the optional BP-265 Li-Ion battery pack) ..... 9  
Caution (for the supplied BP-264 Ni-MH battery pack) ..... 8  
CE ..... 83, 84  
Channel number display ..... 36

Charging caution ..... 10  
Charging note ..... 12–15  
Checking the repeater input signal ..... 25  
Cloning function ..... 74  
Copying call channel contents ..... 37  
Copying memory contents ..... 37

### – D –

DC operating note ..... 15  
Dial speed acceleration (DIAL S) ..... 63  
Display backlighting (LIGHT) ..... 60  
Display type ..... 36  
Display type (DISP M) ..... 64  
DOC ..... 84  
DTCS code (CODE) ..... 53  
DTCS polarity (DTCS P) ..... 53  
DTCS squelch ..... 70  
DTMF memory (DTMF) ..... 58  
DTMF speed (DTMF-S) ..... 61  
DTMF TX key (DTMF-T) ..... 58  
Duplex operation ..... 26

### – E –

Entering Initial set mode and operation ..... 51  
Entering Set mode and operation ..... 51  
Erasing bank contents ..... 39  
Explicit definitions ..... i  
External DC power operation ..... 15

- F -

FCC information ..... iii  
 Features ..... i  
 Foreword..... i  
 Frequency display.....36  
 Frequency offset (OFFSET) ..... 54  
 Frequency range and offset direction ..... 27  
 Front panel..... 3  
 Full scan ..... 42  
 Function display..... 6

- G -

General description ..... 29

- H -

Hand strap ..... 1  
 Head set selection (HS SEL)..... 64

- I -

Important ..... i  
 Index..... 85-88  
 Initial set mode item list ..... 52  
 Initial set mode items..... 59

- K -

Key lock function..... 21  
 Keypad..... 4

- L -

LCD contrast (CONT) ..... 62

- M -

Memory bank link function (B LINK)..... 56  
 Memory bank scan ..... 45  
 Memory bank selection ..... 33  
 Memory bank setting ..... 32  
 Memory channel contents ..... 29  
 Memory channel programming..... 31  
 Memory channel watch..... 49  
 Memory clearing..... 38  
 Memory mode ..... 18  
 Memory name (NAME)..... 63  
 Memory scan ..... 44  
 Memory scan watch..... 49  
 Microphone gain (MIC G) ..... 58  
 Microphone simple mode (MIC S) ..... 59  
 Monitor function ..... 17  
 Monitor key action (MONI)..... 63

- O -

Off band indication..... 25  
 Operating mode (MODE)..... 54  
 Operating mode selection..... 21  
 Optional battery case ..... 11  
 Optional unit connection ..... 80  
 Options ..... 78-82

---

## INDEX

### – P –

Partial reset .....	75
Pocket beep .....	68
Power OFF .....	16
Power ON .....	16
Power save (P SAVE) .....	61
Precautions .....	ii, iii
Priority watch (PRIO) .....	55
Priority watch operation .....	49
Priority watch types .....	48
Private channel display .....	36
Program scan link function (P LINK) .....	56
Program skip scan (P SKIP) .....	55
Programmed scan .....	42
Programming a DTMF code sequence .....	65
Programming bank name .....	34
Programming memory name .....	34
Programming scan name .....	34
PTT lock (PTT LK) .....	62

### – R –

Rapid charging with the BC-191 .....	13
Rapid charging with the BC-193 .....	14
Receiving .....	22
Regular charging .....	12
Remote control function .....	82
Repeater operation .....	24
Repeater tone frequency (R TONE) .....	53
Resetting .....	75

Reverse duplex function (DUP.REV) .....	54
Reverse tone/DTCS squelch .....	68
Reverse duplex function .....	26

### – S –

Scan edges programming .....	43
Scan name (S NAME) .....	63
Scan pause timer .....	47
Scan pause timer (PAUSE) .....	55
Scan resume condition .....	47
Scan resume timer .....	47
Scan resume timer (RESUME) .....	55
Scan types .....	40
Selecting a call channel .....	29
Selecting a memory channel .....	30
Selecting bank name indication .....	35
Selecting memory name indication .....	35
Set mode item list .....	52
Set mode items .....	53
Setting a frequency using the dial .....	19
Setting a frequency using the keypad .....	20
Setting a tuning step .....	19
Setting audio volume .....	16
Setting DTCS code for DTCS squelch .....	69
Setting DTCS polarity .....	69
Setting DTMF transfer speed .....	67
Setting duplex direction .....	26
Setting frequency offset .....	26
Setting squelch level .....	17

Setting subaudible tone for tone squelch..... 68  
 Setting the mode ..... 18  
 Side panel..... 3  
 Skip channel setting ..... 46  
 Skip frequency setting ..... 46  
 Specifications ..... 77  
 Squelch delay (SQL DL)..... 62  
 Supplied accessories..... iv

- T -

Table of contents ..... v, vi  
 Time-out timer (TOT) ..... 62  
 Tone and DTCS squelches..... 68  
 Tone frequency and DTCS code ..... 68  
 Tone scan ..... 71  
 Tone squelch ..... 70  
 Top panel..... 3  
 Transferring bank contents ..... 39  
 Transmit power selection ..... 22  
 Transmit warning ..... 23  
 Transmitting ..... 23  
 Transmitting a DTMF code sequence..... 66  
 Troubleshooting ..... 76  
 TSQL frequency (C TONE)..... 53  
 Tuning step (TS) ..... 54  
 Tuning step selection ..... 19  
 Turning the VOX function ON or OFF ..... 80

- U -

Usable characters..... 34

- V -

VFO mode ..... 18  
 VFO scan watch ..... 50  
 Voltage indication (VOLT) ..... 61  
 VOX delay (VOX.DLY)..... 59  
 VOX function..... 80  
 VOX function (VOX) ..... 58  
 VOX gain (VOX LV) ..... 58  
 VOX time-out timer (VOXTOT)..... 59  
 VOX-related settings..... 81


- W -

Weather alert (WX.ALT)..... 54  
 Weather alert function ..... 72  
 Weather channel mode ..... 18  
 Weather channel operation..... 72  
 Weather channel scan ..... 72  
 Weather channel selection ..... 72




**Count on us!**

A-6808H-1EX  
Printed in Japan  
© 2009 Icom Inc.

Printed on recycled paper with soy ink.



---



**Icom Inc.**  
1-1-32 Kamiminami, Hirano-ku, Osaka 547-0003, Japan

---