



RML-N1 LGA Module User Manual



Copyright

Copyright © 2023 COMPAL ELECTRONICS,INC. All rights reserved.

Without the prior written permission of the copyright holder, any company or individual is prohibited to excerpt, copy any part of or the entire document, or distribute the document in any form.

Notice

The document is subject to update from time to time owing to the product version upgrade or other reasons.

Unless otherwise specified, the document only serves as the user guide. All the statements, information and suggestions contained in the document do not constitute any explicit or implicit guarantee.



Contents

1	Forward.....	5
	1.1 Introduction.....	5
	1.2 Safety Information	5
2	Overview	7
	2.1 Trace Design.....	7
	2.2 Test procedures of Verification.....	7
	2.3 Antennas (Maximum allowable gain).....	9
3	FCC Notice.....	11



Table Index

Table 2-1: Maximum allowable gain.....	9
Table 2-2: Antenna port mapping table---For US band LGA module.....	10



1. Foreword

1.1 Introduction

The RML-N1 devices are WWAN LGA module in size 45x45mm. The LGA module and device software combination deliver multiband, multimode WWAN connectivity in a single hardware configuration. RML-N1 supports NR FR1(sub6) n2/ n5/ n12/ n25/ n30/ n41/ n48/ n66/ n71/ n77/ n78, LTE Band 2/ 4/ 5/ 12/ 13/ 17/ 25/ 26/ 30/ 41/ 48/ 66/ 71, LTE Band 29/46 is for downlink only. The RML-N1 devices also have an internal GPS receiver that can operate standalone or in simultaneous operation with its WWAN radios.

The RML-N1 device uses Mediatek chipset components. It implements the 5G NR standard for sub-6 GHz bands. The MT6190 device is a highly-integrated multimode, multiband RF CMOS transceiver IC that interfaces with the MT6890 device through IQ interface, it is the integrated single-chip RFIC that supports 5G NR sub-6 together with legacy 3G to 4G LTE.

RML-N1 and supported features for the NR FR1, Duplex mode: FDD(Frequency Division Duplex) and TDD((Time Division Duplex)). MIMO(Multi-input Multi-output) capability: up to 4x4 DL MIMO; CA(Carrier Aggregation) capability: DLCA: inter-band, intra-band contiguous and intra-band non-contiguous DLCA; ULCA: inter-band and intra-band contiguous ULCA. Modulation: UL: 256QAM; DL: 256QAM. Waveform: UL: CP-OFDM and DFT-S-OFDM; DL: CP-OFDM.

As for LTE, RML-N1 supports both FDD and TDD mode, MIMO capability: up to 4x4 DL MIMO, and 2x2 UL MIMO for n41. CA capability: DLCA: inter-band, intra-band contiguous and intra-band non-contiguous DLCA; ULCA: inter-band and intra-band contiguous ULCA. Modulation: UL: 256QAM; DL: 256QAM

1.2 Safety Information

The following safety precautions must be observed during all phases of operation, such as usage, service or repair of any cellular terminal or mobile incorporating with 5G RML-N1 LGA module. Manufacturers of the cellular terminal should send the following safety information to users and operating personnel, and incorporate these guidelines into all manuals supplied with the product. If not so, Compal assumes no liability for customers' failure to comply with these precautions.



Full attention must be given to driving at all times in order to reduce the risk of an accident. Using a mobile while driving (even with a hands free kit) causes distraction and can lead to an accident. Please comply with laws and regulations restricting the use of wireless devices while driving.



Switch off the cellular terminal or mobile before boarding an aircraft. The operation of wireless appliances in an aircraft is forbidden to prevent interference with communication systems. If the device offers an Airplane Mode, then it should be enabled prior to boarding an aircraft. Please consult the airline staff for more restrictions on the use of wireless devices on boarding the aircraft.



Wireless devices may cause interference on sensitive medical equipment, so please be aware of the restrictions on the use of wireless devices when in hospitals, clinics or other healthcare facilities.



Cellular terminals or mobiles operating over radio signals and cellular network cannot be guaranteed to connect in all possible conditions (for example, with unpaid bills or with an invalid (U) SIM card). When emergent help is needed in such conditions, please remember using emergency call. In order to make or receive a call, the cellular terminal or mobile must be switched on in a service area with adequate cellular signal strength.



The cellular terminal or mobile contains a transmitter and receiver. When it is ON, it receives and transmits radio frequency signals. RF interference can occur if it is used close to TV set, radio, computer or other electric equipment.



In locations with potentially explosive atmospheres, obey all posted signs to turn off wireless devices such as your phone or other cellular terminals. Areas with potentially explosive atmospheres include fueling areas, below decks on boats, fuel or chemical transfer or storage facilities, areas where the air contains chemicals or particles such as grain, dust or metal powders, etc.





2. Overview

2.1 Trace Design

The trace from module transmitter to antenna connector on the EVB must be maintained identical as the above specification with i-pex connector. Only trace designs approved by the module original grantee or through permissive change can be used by a host manufacturer. Any changes are deemed as antenna type change and should be reviewed to ensure compliance with the FCC regulation rules.

2.2 Test procedures of Verification

1. Set Transmission in the supported modulation mode, band and Channel.
2. Verify RF tuned-up power through conducted measurement with appropriate cable loss. The KDB guidance 971168 D01 can be followed to obtain the measurement results.
3. Verify the RF output power results obtained if it's accordance with the datasheet and test reports.

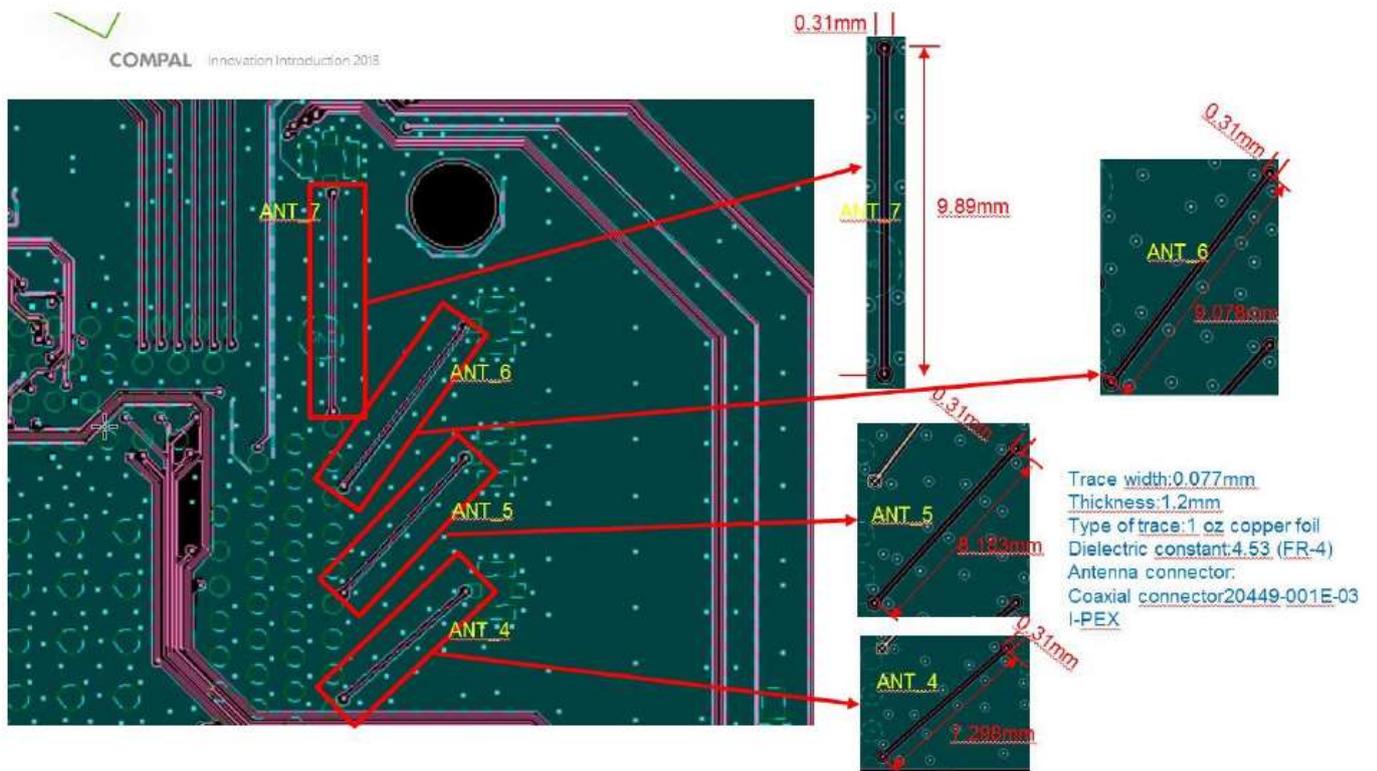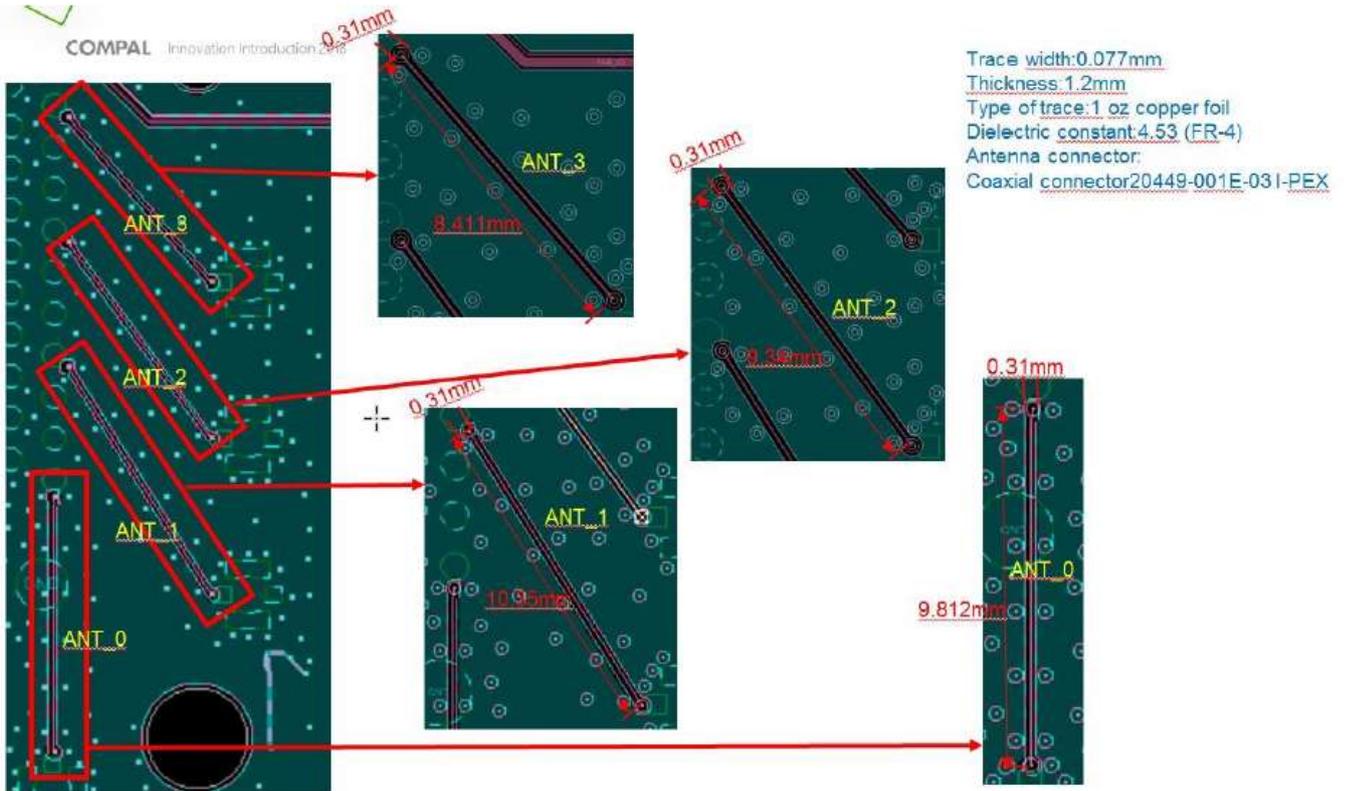



Antennas (Maximum allowable gain)

Table 2-1 Maximum allowable gain

Modulation	Frequency (MHz)	Max. Allowable Antenna Gain (dBi)	Max. Collocated Antenna Gain (dBi)
LTE Band 2/ NR n2	1850 ~ 1910	7.5	7.5
LTE Band 4	1710 ~ 1755	4.5	4.5
LTE Band 5/ NR n5	824 ~ 849	8.4	7.0
LTE Band 12/ NR n12	699 ~ 716	8.6	7.0
LTE Band 13	777 ~ 787	9.1	7.7
LTE Band 17	704 ~ 716	8.7	7.3
LTE Band 25/ NR n25	1850 ~ 1915	7.5	7.5
LTE Band 26	824 ~ 849	8.4	7.0
LTE Band 30/ NR n30	2305 ~ 2315	-1.1	-1.1
LTE Band 41/ NR n41	2496 ~ 2690	5.0	5.0
NR n41 MIMO Total gain	2496 ~ 2690	5.0	5.0
LTE Band 48	3550 ~ 3700	-2.0	-2.0
NR n48	3550 ~ 3700	-2.0	-2.0
LTE Band 66 / NR n66	1710 ~ 1780	4.5	4.5
LTE Band 71 / NR n71	663 ~ 698	8.4	7.0
NR n77/ NR n78	3300 ~ 4200	1.5	1.5



Table 2-2: Antenna port mapping table---For US band LGA module

Frequency		LTE	NR	Ant_0	Ant_1	Ant_2	Ant_3	Ant_4	Ant_5	Ant_6	Ant_7
LB	600-960MHz	5, 12, 13, 17, 26, 29(RX), 71	n5, n12, n71	Tx/PRx	DRx		Tx ³ /PRx	DRx ⁴			
MB	1710-2200MHz	2, 4, 25, 66	n2, n25, n66	Tx ¹ /DRx ²	DRx		PRx ²	Tx/PRx			
HB	2300-2700MHz	30, 41	n30, n41	Tx ¹ /DRx ²	DRx	Tx/PRx	PRx ²				
n41	2496-2690MHz	41	n41	Tx ² /PRx	Rx	Tx/PRx	Rx				
n77/n78	3300-4200MHz	48	n77, n78			DRx		PRx ²	Tx/PRx	DRx ²	
LAA	5150-5850MHz	46		PRx ²	DRx ²				PRx	DRx	
GPS L1	1575-1610MHz										Rx
GPS L5	1176MHz										Rx

Note.1 for B2/B4/B25/B66 CA

Note.2 n41 UL MIMO/LMHB+n41 EN-DC

Note.3 LB refarming EN-DC (for B13 TX/PRX)

Note.4 LB refarming EN-DC (for B13 DRx)



3. FCC Notice

Model: RML-N1

Important Notice to OEM integrators

1. This module is limited to OEM installation ONLY.
2. This module is limited to installation in mobile or fixed applications, according to Part 2.1091(b). 3. The separate approval is required for all other operating configurations, including portable configurations with respect to Part 2.1093 and different antenna configurations 4. For FCC Part 15.31 (h) and (k): The host manufacturer is responsible for additional testing to verify compliance as a composite system. When testing the host device for compliance with Part 15 Subpart B, the host manufacturer is required to show compliance with Part 15 Subpart B while the transmitter module(s) are installed and operating. The modules should be transmitting and the evaluation should confirm that the module's intentional emissions are compliant (i.e. fundamental and out of band emissions). The host manufacturer must verify that there are no additional unintentional emissions other than what is permitted in Part 15 Subpart B or emissions are complaint with the transmitter(s) rule(s).

Antenna Installation

- (1) The antenna must be installed such that 20 cm is maintained between the antenna and users.
- (2) The transmitter module may not be co-located with any other transmitter or antenna.
- (3) To comply with FCC regulations limiting both maximum RF output power and human exposure to RF radiation, the maximum antenna gain including cable loss in a mobile exposure condition must not exceed:

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.



Manual Information to the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

Module Warning statements

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure

This device has been tested and meets applicable limits for Radio Frequency (RF) exposure. The antenna(s) used for this transmitter should be installed and operated with minimum distance 20 cm between the radiator & your body.

Label requirements

Any device incorporating this module must include an external, visible, permanent marking or label which states:

“Contains FCC ID: GKRRMLN1”