

IEEE802.11a/b/g Wireless LAN MiniPCI Module

FX-DS540-MPCI4W

User's Manual (Installation Manual)

CONTEC CO., LTD.

Chapter 1: General Description

This document contains the specifications pertinent to the wireless LAN module (FX-DS540-MPCI4W), which comply with IEEE802.11a, IEEE802.11b and IEEE802.11g.

FX-DS540-MPCI4W is used attaching in the wireless LAN access point.

Features

2.4GHz Wireless LAN module

- IEEE802.11b and IEEE802.11g compatible
- BPSK, QPSK, CCK, and DSSS modulation schemes supported Data rates 1, 2, 5.5 and 11Mbps
- BPSK, QPSK, 16QAM, 64QAM and OFDM modulation shemes supported Data rate 6, 9, 12, 18, 24, 36, 48 and 54Mbps
- Coax. RF Connectors : JST AYU3 equivalent

5GHz Wireless LAN module

- IEEE802.11a compatible
- BPSK, QPSK, 16QAM, 64QAM and OFDM modulation shemes supported Data rate 6, 9, 12, 18, 24, 36, 48 and 54Mbps
- Coax. RF Connectors : JST AYU3 equivalent

System Functions

- Low power sleep mode control
- MiniPCI Interfase
- Radio circuit ON/OFF (RF Disable)

Chapter 2: Characteristics

Table1 : Mechanical Characteristics

Dimensions	39.65 x 59.6 x 2.4 (mm)
Weight	12g max.

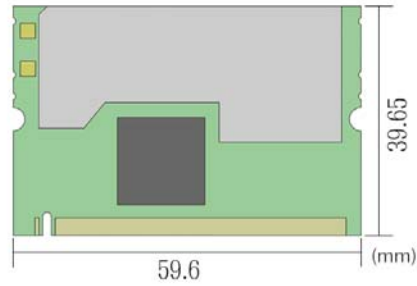


Figure1 : FX-DS540-MPCI4W

Table2 : Electrical Characteristics

Supply voltage Vcc	Nomial : 3.3V Extreme : 3.3V +/- 0.3V
Storage temperature	-25 to 70 deg.C
Humidity	20 to 95%
Operating Temperature	0 to 60 deg.C
Humidity	20 to 95% (no-condensing)

Chapter 3: Setup

FX-DS540-MPCI4W is used attaching in the wireless LAN access point. The wireless LAN access point is restricted only to CONTEC products.

As an example, the case where it attaches in FX-DS540-APDL-U is introduced.

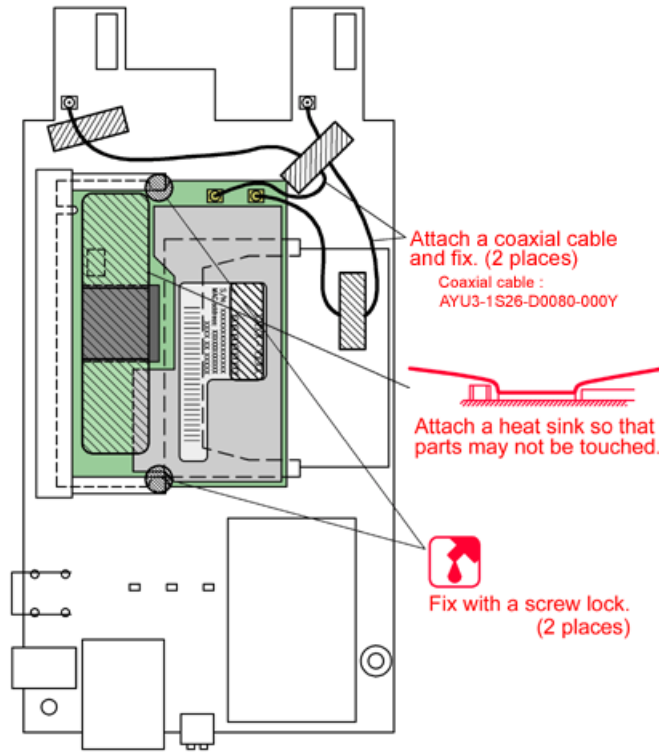


Figure2 : How to attach in FX-DS540-APDL-U

Chapter 4: Notes

When FX-DS540-MPCI4W is installed in the wireless LAN access point, the following remarks are to be considered:

1. FX-DS540-MPCI4W is designated its own FCC ID Number: PQRDS540-MPCI4W; therefore, the FCC ID Number should be appeared on the label on the exterior of the wireless LAN access point unless it is visible from outside. Such label on the exterior should include a statement, either “Contains Wireless LAN Module FCC ID: PQRDS540-MPCI4W” or “Contains FCC ID: PQRDS540-MPCI4W”.
2. FX-DS540-MPCI4W is in compliance with the requirements of sub-sections 15.203, 15.205, 15.207, 15.209, 15.247 and 15.407 of FCC Rules Part 15. FX-DS540-MPCI4W is to be installed in accordance with their requirements.
3. User Manual of the wireless LAN access point, in which is FX-DS540-MPCI4W installed, will include the following statements required by FCC.
 - FCC WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment
 - This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
 - In according with 47 CFR Part15.407 (e) U-NII devices operating in 5.15-5.25GHz frequency bands are restricted to indoor operations only.
 - This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.
 - This equipment complies with FCC radiation exposure limits set forth for uncontrolled equipment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65. This equipment should be installed and operated with at least 20cm and more between the radiator and person’s body (excluding extremities: hands, wrists, feet and legs).
4. The installers must ensure that the public is not exposed to radio frequency energy levels in excess of FCC guidelines in accordance with FCC Rules: Part 15 and FCC OET Bulletin 65, Supplement C.