

User's Guide



GSM Desktop Phone

_	г

INDEX1	Mute	
GETTING STARTED - FIRST USING1	Headset Mode	7
Check the contents of the package 1	PHONEBOOK	7
Insert the SIM card1	SETTINGS	
Install the backup battery 2	Phone settings	
Connect the receiver cord2	Call settings	
Connect the power adaptor – switch the phone ON 2	Message settings	
Charge the battery2	Sound settings	
Your Phone3	Security	
	Service	
BASIC CALL FUNCTIONS AND PHONE BOOK4	DC	40
Making a call4	PC INTERFACE	
Adding a new contact into the phonebook 4	JabloTool call management software	
Dialing a number from the phonebook 4	Connection with PC via USB	
TEXT MESSAGES (SMS)4	Connecting PC	
Sending a text message	Firmware update	
Opening an incoming message	PC-fax(CDD 044)	
	Connecting an analog phone (GDP-04Ai only)	12
OTHER FUNCTIONS5	TROUBLESHOOTING	12
Speed dial buttons5	CDD 04: DE	4.2
Options 6	GDP-04i RF – WIRELESS CONTROL GUIDE	
ADVANCED CALL FUNCTIONS6	Social security alarm – PANIC button	
Call Waiting 6	Remote control	13
Conference Call	TECHNICAL SPECIFICATIONS	14
Call Transfer		
Call Register	CERTIFICATION AND WARRANTY	14
	CALETY INCTRICTIONS	15

GETTING STARTED - FIRST USING


CHECK THE CONTENTS OF THE PACKAGE



INSERT THE SIM CARD


Open the battery cover at the bottom of the phone, open the SIM holder by sliding it out along the arrow marked "OPEN". Insert the SIM card into the SIM holder with the golden contact area facing upwards and the cut corner up on the left. Close the SIM holder and secure it by sliding it back until you feel a click.


If you want to remove the SIM card, open the SIM holder in the same way and take out your SIM card.

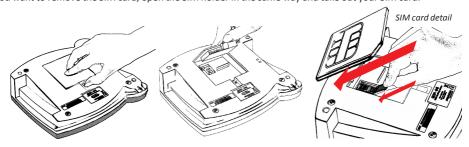



INSTALL THE BACKUP BATTERY





CONNECT THE RECEIVER CORD






CONNECT THE POWER ADAPTOR – SWITCH THE PHONE ON

The message "Phone is starting..." appears on the LCD after connecting the power adaptor.

If your SIM card is protected by a PIN code, the phone will require it.

Enter the PIN code and confirm it by pressing the green key or the **O K** selection key.

If you enter an incorrect PIN code three times in a row, the PIN code will be blocked. To unblock it, you need to enter your PUK (Personal Unblocking Key) – check your SIM card documentation for details.



Language

The phone will set the language automatically according to the country code of your SIM card. Language can be changed manually in the Settings menu.


CHARGE THE BATTERY

The battery is empty on delivery and needs to be charged before the first using. The battery should be charged for about 5 hours to reach its full capacity. The battery is being charged whenever the phone is connected to the power adaptor – even when the phone is switched off.





Use the battery and power adaptor only for its intended purpose. Never use any adaptor or battery that is damaged. Your phone may become warm during charging and during normal use. The phone is designed to be powered from the power adaptor. The limited capacity of the backup battery should only cover emergency calls in case of electricity failure. The standard talking time for a fully charged battery is about 3 hours. The standard standby time is about 48 hours. The battery gradually decreases its capacity during its lifetime. To reach the optimal parameters the battery should be kept in an environment between 5°C and 35°C. Never expose the battery to temperature out of the operating temperature range -10°C to +55°C. A device with a hot or cold battery may temporarily not work, even when the battery is fully charged. A battery's performance is particularly limited in temperatures well below freezing.



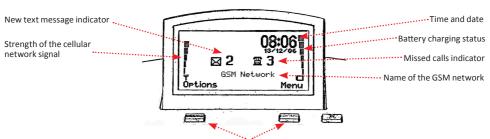

Selection keys – the current function is shown on the LCD

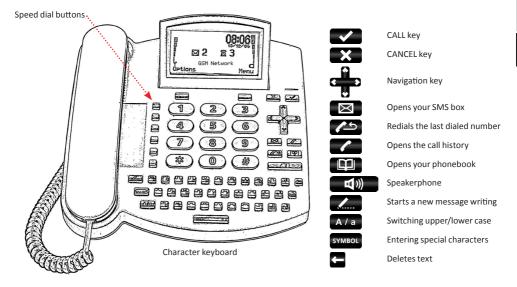





EN

BASIC CALL FUNCTIONS AND PHONE BOOK

MAKING A CALL

Pick up the receiver, enter the phone number as on a regular fixed line phone and press the selection key below **Dial** on the LCD. If you wait, without pushing any button, the number will then be dialed automatically. You may also press for hands free calling.



To input the "+" character for international calls, press * twice in rapid succession. We recommend using the international format of the phone number to avoid problems with local area codes.

To end an active call, hang-up the receiver or press . Press to cancel a call in the handsfree mode



The CANCEL key automatically interrupts calls or other activities.

To redial the last dialed number, press



You can enter the main menu during a call by pressing the Options context button and choosing Menu from the list. You can also press button to start writing an SMS during a call.

ADDING A NEW CONTACT INTO THE PHONEBOOK

Open the phonebook by pressing . Choose < new contact... > by pressing the Select selection key or

. Enter the contact name and confirm by . Choose the appropriate number type by pressing and enter the phone number. Each contact may contain up to 3 different phone numbers: Mobile , Business and Home . Store the record using the **Save** selection key.



Find more details about the phonebook in the <u>Phonebook</u> chapter.

DIALING A NUMBER FROM THE PHONEBOOK

To enter the phonebook press the key and scroll the contact list by using . You can also use the "fast contact searching" by typing the contact name directly on the character keypad. Confirm the selected contact and number by

Picking up the handset or pressing will also start the dialing

TEXT MESSAGES (SMS)

The Short Message Service (SMS) allows you to send and receive text messages consisting of up to 1000 characters.

SENDING A TEXT MESSAGE

Press the key, located on the upper left hand side of your phone's keyboard to start writing a new message. Enter your message text and press the **Send** selection key.

abc 113 SMS1
The contract has
been signed. Let me
know what
Options Send

Enter the recipient's phone number or recall it from the phone book by pressing Confirm the recipient's number and then send message by pressing the **OK** selection key.

For deleting the previous character, use . For changing the latest character press the button.

For switching between upper case and lower case characters press A / a . You can activate / deactivate CAPS LOCK by pressing A / a for about 2 seconds. It will be confirmed by the LCD icon switching between Abc, abc and ABC.

can also be used like a standard Shift key on a PC – you can press Shift and a character key together.

For entering special symbols shown above the top line of the QWERTY keys (#, \$, %, &, etc.), press together with a key from the top line of the QWERTY character keys. To enter a phone number from the phonebook

into the text message, press button, find the desired contact and select the number to enter.

For entering other specific symbols or characters like Ü, Ö, Å, §, etc., open the entire symbol character table by

pressing SYMBOL key for about 2 seconds. Select the desired symbol and press the Insert selection key to place it into the text. You can move fast through the table by pressing the corresponding base character (U, O, A).



If your phone firmware supports specific languages like Russian or Arabic, its keyboard is switched into the respective alphabet layout after choosing the language. You can switch between it and the Latin alphabet by pressing SYMBOL button + A / a button together.

OPENING AN INCOMING MESSAGE

When a new text message is received, it is confirmed by an acoustic signal as well as the flashing of the red indicator light on the top right hand side of the phone. The envelope symbol will appear on the display.

to read the received text message and scroll

through the message by using

From:Walker, David 100% Hi Audrey, I am sorry, but I will be late today. Do not Options

Additional functions, listed below, can be performed by activating the **Options** menu by pressing the selection key below the LCD:

Delete - deletes the current text message Reply - sends a reply to the message sender Forward - forwards the message to another recipient Call - calls back the message sender

Details

- shows detail information about message sender and time New...


- starts a new text message

Store number - saves the message sender's number in your phone book

Delete all - deletes all messages in the current folder

To read previous incoming messages or to send messages, open the **Messages** menu by pressing and select Inbox or Sent.





OTHER FUNCTIONS


SPEED DIAL BUTTONS


There are six buttons on your GDP-04i that can be used for frequently called numbers or emergency numbers.

To enter a new number, hold down the selected memory button for about two seconds until the **Phone number**: dialog appears. Enter the phone number and press **OK** selection key.

To connect a speed dial button with a contact from your phonebook, find the contact name in your phonebook and press and hold the selected speed dial button for about 2 seconds until you see the confirmation on the display.

Another 6 memories are available when you use dial button with the A / a kev.







xXC GDP-04i.ENG.MAN.Manual.10.C

If you want to enter a DTMF command only, it must be iniciated by a "P" character. Example: P*2121481#.

OPTIONS

Some special functions are selectable under the **Options** menu in the normal operating mode.

▶ Silent mode / Normal mode

This function allows switching to the silent mode where all sound alerts and rings are disabled. This allows a user to stay connected to the network while not being disturbed by incoming calls or text messages.

Switch Off

This function turns off the phone. When turned off, the phone cannot make or receive any calls or text messages.



The battery charging function is active whenever the power adaptor is connected, even when the phone is switched off. The battery charger progress indicator on the display will be active when the phone is off, if the battery is charging.



The phone can also be switched off by pressing for more than 3 seconds.

In order to switch the phone back on, press and hold until "The phone is starting..." message appears on the display.



The phone will start automatically when the power cable from the adaptor is re-connected into the phone.

▶ Travel mode Off

This feature ensures that the phone will not be switched on accidentally. Travel mode is active only when the phone is powered from the battery only.

To switch the phone on again from the travel mode, press and hold until the red light is activated and then type the word "START" on the character keyboard or connect the power adaptor again.

Cell lock

If the cell lock function is available on your network and your GSM service provider activated it on your SIM card, you can see a dicon while connected within the home location.

ADVANCED CALL FUNCTIONS



Some of the advanced call functions will not work properly unless they are supported by your GSM operator.

CALL WAITING

The call waiting function indicates an incoming call even when another call is in progress.



To use the call waiting function, please check that you have activated it in the GSM network setting – see chapter Settings.

If a new incoming call is indicated, press to answer the waiting call. Also you can select **Options** and

Switch function by using the selection key. The first call is put on hold. To switch between the calls press



CONFERENCE CALL

The conference call function is a network service that allows up to six people to take part in a conference call. To arrange a conference call:

- Establish a call to the first participant
- To add new participant into the conference call enter the phone number directly and press or select the
 contact from phonebook and press the Select selection key. You may put the first call on hold if you want by
 pressing the Options selection key and then the Hold selection key.
- When the new call has been answered, press Options and Join calls. The message Conference appears
 on the display.
- To add another participant to the conference call, repeat the previous steps. The maximum number of remote parties is 5.



- To have a private conversation with one of the participants, press the Options selection key and select Private #. Scroll to the desired participant and press the Select selection key. Once you have finished the private conversation, re-establish the conference by pressing the Options selection key and then the Join calls selection key.
- To cancel the connection with some of the participants, press the Options selection key and then select Release #. Scroll to the desired participant and press the Select
- To end the conference call, press

CALL TRANSFER

The call transfer function allows you to forward the active call to another phone number.

During the incoming call, press the **Options** selection key and then select **Hold**. This puts the calling party on hold.

Enter the phone number directly and press or select the contact from phonebook and then press the **Select** selection key. As soon as the call is answered, press the **Options** selection key and then select **Transfer**. You can hang up as soon as the connection is established.

CALL REGISTER

The phone registers missed calls , incoming calls and outgoing calls for the memory. If the memory is full, the oldest record of the same type is automatically erased.

To view the call history list, press

Additional functions are available under the **Options** menu for each stored number:

Details

- shows extended information about the call number, date, time, number of attempts)

Call Send SMS - the phone dials the selected number - sends a text message to the selected number

Send SMS Delete

- deletes the selected call record from the call history register
- Store number Delete all
- saves the selected number in your phonebook - deletes all call records from the call history register

MUTE

You can mute your microphone during a call so that the other party does not hear you while you can hear the other party.

Select **Options** during the call and select **Mute** to disconnect the microphone (both handset and hands-free). Select **Options** and select **Unmute** to re-activate the microphone.

HEADSET MODE

If a headset is used for calling instead of the handset, we recommend switching into the special headset mode that allows receiving and terminating calls without necessity to pick up the receiver.

For activating the headset mode go to the **Settings -> Service -> Code entry...** function. Enter **HEAD1** and press **OK**. For deactivating the headset mode enter **HEAD0** instead.


To receive an incoming call, press the green button or the SPACE bar in the headset mode. To terminate a call, press the red button or the SPACE bar.

PHONEBOOK

Every phonebook contact can include the following items:

- First Name and Last Name
- Mobile number
- Office number
- Home number
- Ring tone

(a specific ring tone can be selected for this contact)







Up to 32 ASCII characters can be used for a First Name or Last Name. The total length of a Name should not exceed 44 charters. Since UTF-8 coding is used for name storage, usage of NON-ASCII specific characters will shorten the maxim length of the name. Up to 32 characters (+,0,1,2,3,4,5,6,7,8,9,A,B,C,D,X,P,*,#) can be stored in each phone number memory position.

We recommend using the international format of the phone number to avoid problems with local area codes.

The **Options** menu offers these functions for each contact:

Edit - opens the edit dialog window to edit the contact details

Call - dials the selected contact or the specific number if more numbers are stored under

the contact name

Send SMS - sends a text message

Add new... - adds a new contact into the phonebook

Delete - deletes the selected contact from the phonebook (the name with all its phone num-

bers)

Delete all - deletes all contacts from the phonebook

Import from SIM allows copying all contact records from your SIM card into the phone's memory. Select **Copy** context key for confirmation.



The contact records list on the SIM card contains one phone number for each contact only. The numbers which already are in the phonebook will not be imported again to prevent possible duplicates. The advanced SIM phonebook management is available via JabloTool software running on connected PC

SETTINGS

The specific parameter setting is available under **Menu**, **Setting**.



Use to navigate in the menu and to set up the selected value of the numeric parameter. For confirmation of a setting, press **OK** or Select **Back** or to leave the parameter unchanged.

PHONE SETTINGS

Date & Time

Select Menu, then Settings, followed by Phone settings and Date & time to set the date and time.

Languages

There can be up to 20 languages supported in the GDP-04i interface (the exact number depends on the firmware version). The language is chosen automatically according to the country code of your SIM card. The phone interface can be switched to another language under this menu.

Network selection

The GDP-04i selects a suitable GSM network automatically. Manual selection can be used in some cases.

Display Contrast

The LCD Display contrast is selectable in a range from 0 to 63.

CALL SETTINGS

Call divert

If unreachable

Incoming calls can be diverted to a specified number. The following actions are available for all divert services: **Activate**, **Cancel** (deactivates the service) or **Check status** (to view the current service setting).

Call divert can be applied in specific cases:

All calls - all incoming calls will be diverted to the specified number

If busy - incoming calls will be diverted if you are on another call or you reject the call by

X

If no answer

- incoming calls will be diverted if you do not pick up the call after a pre-set period of time selected in the dialog box - from 5, 10, 15, 20, 25 to 30 seconds

incoming calls will be diverted if the phone is switched off or there is no GSM network signal

Cancel all diverts - cancels all previously selected call diverts





Active unconditional divert may be indicated in standby screen, network permitting.

Call waiting

To activate the call waiting service, select **Activate**. To deactivate, select **Cancel**. To show the current service status, select **Check status**.

Call barring

Outgoing and incoming calls can be barred if the appropriate network service is available. You can select the types of calls, which will be barred:

Outgoing calls

- all outgoing calls will be barred

International calls Internat, when abroad - all international outgoing calls will be barred - international outgoing calls will be barred while roaming is active

Incoming calls

- all incoming calls will be barred

Incoming when abroad

- incoming calls will be barred while roaming is active

Cancel all barring - cancel all types of call barring

▶ Caller ID restriction

Your phone number is usually displayed to the person you are calling.

To hide your phone number select **On** for Caller ID restriction. To allow showing of your number, select **Off.**



The restriction does not apply to SMS. Some GSM networks do not allow canceling the caller identification.

MESSAGE SETTINGS

SMS centre number Message validity Status reports - edits the number of your SMS message centre

- selects the period of time for which the network attempts to deliver your message
 - asks the network to send the delivery report about your messages

SOUND SETTINGS

Call ring SMS alert Keyboard sounds Handset volume, Handsfree volume

- sets the ring type Melody and Volume for incoming calls
- sets the Melody and Volume of new SMS alerts
- Choose **Off, Soft** or **Loud** sound

and Line volume - each audio port's volume setting is selectable from 1 to 10. Separate settings are possible for the Microphone, Speaker in call and Tones

SECURITY

PIN protection Change PIN1

Auto PIN1

- enables or disables the SIM card protection by PIN1
- changes the PIN1 password (4 to 8 digits)
- the phone can remember your PIN number. If the auto PIN function is enabled, the phone will automatically enter the PIN number of your SIM card. If the SIM card is

removed from the GDP-04i, it remains PIN protected.

Change PIN2 Fixed dialling

- changes the PIN1 password (4 to 8 digits)

Fixed dialling - activation/deactivation of the fixed dialling numbers

All PIN manipulating functions displays number of remaining attempts (not available in all modifications)

SERVICE

You can find additional information and set advanced parameters in the ${\tt Service}$ menu. Find authorized service centre at www.jablocom.com/service.php

Firmware Version

Displays information about hardware and software versions of your phone and its IMEI number. You may be asked by a service center or a hot-line service provider for this information.

Code entry

You can control some specific features by entering a service code. The structure of the code is Xn, where "X" is a function code and "n" is a value set.



Function	Code / Value
Showing a network name on the display	NO = Off
Showing a network name on the display	N1 = On
Automatic SMS erasing if memory full	E0 = Off
Automatic sivis erasing if memory full	E1 = On
Confirmation before sending a long text message (2 or more SMS)	S0 = do not ask
Committation before sending a long text message (2 of more sivis)	S1 = ask
Automatic start when AC is connected	A0 = Off
Automatic start when AC is connected	A1 = On
Keyboard timing profile	KO = without autorepeat
keyboard tilling profile	K1 = with autorepeat
Dialing tone profile	T0 = Continuous
Dialing tone profile	T1 = Morse A
Activation of SIM tool kit application	STK0 = STK disabled
Activation of Silvi tool kit application	STK1 = STK enabled

Factory Settings

You can restore the factory default settings of the phone by selecting this option. Select **O K** to confirm your choice. Select **Back** to leave the settings unchanged.

Battery Voltage

Displays the current battery voltage. You may be asked by a service center or a hot-line service provider to give them this information.

▶ Backlight (AC)

Setting of the display back light in Stand-by mode when the phone is powered from the power adaptor.

▶ Backlight (battery)

Setting of the display back light in Stand-by mode when the phone is only powered from the backup battery.

PC INTERFACE

JABLOTOOL CALL MANAGEMENT SOFTWARE

JabloTool software pack is a tool which allows you to perform efficient control and professional management of your GDP-04i Phone via PC. It mainly allows you to:

- synchronize the GDP-04i phonebook with phonebook in your PC (i.e. e-mail client phonebook)
- control all phone settings from your PC
- dial the numbers directly from your PC or manage conference calls
- easy management of your text messages
- · access call history records
- connect your PC to the Internet via GPRS
- upgrade your GDP-04i with the latest firmware version
- allows using of the GDP-04i as an e-fax terminal

CONNECTION WITH PC VIA USB

▶ Installing JabloTool Software Pack



Warning: Do not connect the GDP-04i to the USB on your computer until you have finished installing the software from the CD. Failure to do so may permanently prevent your phone from properly communicating with a PC.

You can connect the GDP-04i to a PC equipped with MS Windows XP SP3 (32-bit or 64-bit edition) or MS Windows Vista SP2 (32-bit or 64-bit edition).



Latest version of JabloTool can be downloaded from http://www.jablocom.com/download.

Some extended Microsoft software components are required for JabloTool running:

Microsoft .NET 2.0

All the above-mentioned programs are available on the JabloTool installation CD or can be downloaded for free from Microsoft web site before installation.





<u>Warning:</u> Be sure you have the administration rights to your computer before the start of the installation

Insert the CD delivered with the phone into your PC. If the installation program does not start automatically, run the "Install.exe" in the CD's root directory. As soon as the main screen appears, selects <code>Install</code> and follow the instructions on the screen. If help is needed during installation, please refer to the more detailed installation guide located on your installation CD.

The necessary USB driver for GDP-04i and the call management software JabloTool will be installed to your computer.

CONNECTING PC

You can connect the phone to your PC via the attached USB cable after successfully installing the USB driver and JabloTool software. When Windows asks for confirmation of the USB device driver validity, please press Continue Anyway – it may repeat up to three times. Windows will then automatically finalize the installation.

Phonebook synchronization

You can synchronize your GDP-04i's phonebook with the JabloTool internal phonebook or with the address book of your default e-mail client. Currently supported e-mail clients are Microsoft Outlook and Outlook Express.



If you want to dial a phone number directly from the PC phonebook, simply place the cursor on the phone number you want to dial, click the right hand mouse button and choose Call. The GDP-04i will then dial the number.

▶ Call History

You can display all received, dialed and missed calls by choosing **Calls**. If you want to sort the list by one of the fields, simply click on the column header.

Sending and receiving of SMS messages

To send an SMS directly from the PC place the cursor on the phone number you want to send it to. Click the right mouse button and choose **Send SMS**. Type the message into the message field. You can see the number of standard messages used for sending below the message. Multiple messages will be used for longer text strings.



SMS manager

You can work with all messages in SMS manager. If you want to sort the list by one of the fields, simply click on the column header. Repeated click changes the order.

Direct dialing from an e-mail client

You can direct dial a number from the address book of your e-mail client even if you do not synchronize its address book with the phone. Dialing procedures and call settings may vary according to your e-mail client and operating system. Please refer to your e-mail client documentation.

Internet connection via GPRS modem

Choose **Configure Internet connection** from the **GDP-04 configuration** menu to set up the Internet connection via GPRS. You can choose your country and provider from the list or enter the parameters according to the instructions from your provider.





These parameters may vary according to your service provider's settings. Default settings of connection parameters are APN = "Internet", Name = "", Password = "".

Press **Apply** to save your settings. Press **Internet connection** on the GDP main screen to log your PC onto the internet via GPRS.



FIRMWARE UPDATE

GDP-04i offers an opportunity to upgrade the phone firmware through the Internet from JABLOCOM update server. Availability of a new firmware may be checked by JabloTool automatically or user can perform a manual check. If there is a new firmware available, you can update your phone using the Update Tool, an integrated part of JabloTool.

Highlight the phone within the device list and click the right mouse button. Choose **Update Firmware** from the menu. We recommend synchronizing your GDP-04i's phonebook with the PC phonebook (JabloTool or e-mail client) prior performing the update.



<u>Warning:</u> Synchronize your GDP-04i's phonebook data with PC before starting of firmware update to prevent possible data loss!

UpdateTool will offer you all firmware versions available for your phone. Choose Bootloader, Software and the Languages you want to upload into your phone and select **Apply**. The phone will automatically switch to standby mode as soon as the upload is finished.

PC-FAX

You can use the GDP-04i as a PC-fax for sending/receiving your faxes from/to your PC.

To use the GDP-04i as a PC-fax, you have to install fax service (optional component of Microsoft Windows installation). This will add FAX as printing device in the list of your printers. Open properties of FAX and select GDP-04i as a device for sending/receiving faxes during installation of a fax feature of your operating system.

To activate automatic receiving of incoming faxes you have to set-up Fax Console (Start/All Programs/Accessories/Communications/Fax/Fax Console).



<u>Warning:</u> Digital fax function may not work properly unless it is fully supported by your GSM service provider.

CONNECTING AN ANALOG PHONE (GDP-04AI ONLY)

The GDP-04Ai offers you the possibility to connect a standard analog phone.

This feature allows you to operate an analog phone in a similar way as if it is connected to a standard fixed line network (PSTN), but over a GSM network.

You can dial a number from the GDP-04Ai as well as from the analog phone. They can not be used simultaneously. The call is executed through your GSM connection in both cases.

An incoming call rings on the GDP-04Ai as well as on the attached analog phone. The user can answer the call from either phone.

To switch an ongoing call from the GDP-04Ai to the attached analog phone, press the "Space" key (on the character keyboard). You will hear the ringing signal of three short beeps. You will be disconnected once the analog phone answers the call. You may hang up now.

To switch an ongoing call from the attached analog phone to the GDP-04Ai, press the FLASH on the phone, wait for the call to be answered on GDP-04Ai and then hang up.



Only one phone or master PBX line (home exchange unit) can be attached.



Warning: Never connect the GDP-04Ai into a wall socket of a fixed line network (PSTN).

TROUBLESHOOTING

JABLOCOM is improving the GDP-04i phone software as well as the JabloTool call management software continuously. If you find an incorrect phone behavior, please check if you use the latest available firmware version within the JabloTool (menu **Tools, Update Firmware**). Detail update instructions as well as the latest JabloTool version you can find on our website - www.jablocom.com/download.


Problem / Error message	Solution
No SIM card	Your SIM card is not placed in the SIM holder correctly or the phone does not support your SIM card type. Check if the SIM card is placed in the holder correctly or contact your GSM service provider.
Registration to network failed!	The network refused to register your SIM card into the network. Contact your service provider.
Function execution failed	The network did not correctly perform the USSD command you sent. Check the command syntax or contact your service provider.
USSD code refused by network	The network refused the USSD command during USSD dialog. Repeat sending the command or contact your service provider.
Unable to process	There is a conflict between your request and the current phone status, for example during phonebook import from SIM. Repeat your request.



	-
Problem / Error message	Solution
Sending failed	Your text message was not sent to the network correctly. Check the phone number and try again. If the error repeats, contact your service provider.
Analogue line error - deactivated	Possible problem on the attached analogue phone. Unplug the GDP-04i power adaptor, check your analog phone and its cable and reconnect power adaptor to the GDP-04i.
Error	Wrong input or action was performed, for example an incorrect service code or an incorrect SIM toolkit command. Confirm you are using correct code.
Incorrect entry	An incorrect PIN was entered. Enter a correct one.
System error	Internal error of the phone. Switch the phone off, disconnect the internal battery for about 10 seconds and then switch the phone on again. If the error repeats, return the phone for service.

GDP-041 RF - WIRELESS CONTROL GUIDE

SOCIAL SECURITY ALARM - PANIC BUTTON

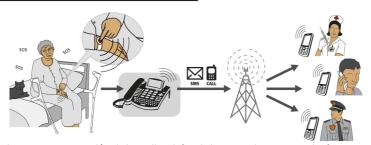

GDP-04i RF sends a text message and/or dials a call to defined phone numbers as a result of pressing a panic button enrolled it.

All settings are done in the **Menu -> Settings -> PANIC button** menu.

Choose **Remote controls** and **<enroll new...>** to enroll a new panic button. Press the button and confirm its enrollment by pressing **Save**. Enter the name under which it will be displayed and press **OK**. If you want to edit or delete a previously enrolled remote control, select it in the list and choose **Options** -> **Edit** or **Delete**.

Choose **Emergency numbers** and **add new...>** to set a new emergency number. If you want to delete a previously entered one, select it in the list and press **Delete**.

Choose **Emergency messages** -> **Edit SMS** to set an emergency message text. If you choose **Clear SMS** option or if you delete the message text completely, no SMS will be sent to emergency numbers.



Up to 10 buttons can be enrolled to the phone at the time. You can enroll Jablotron OASiS wireless accessories - RC-87 panic button, RC-88 wall button or RC-89 doorbell button – to GDP-04i RF as panic buttons.

REMOTE CONTROL



A wireless relay can be operated via SMS sent to GDP-04i RF. All settings are done in the **Menu -> Settings -> Wireless relay** menu.

To enroll a new wireless relay, switch it into the enrollment mode and choose **Enroll new relay** on the phone. The phone sends the enrollment signal immediately.

Enter the messages for operating relays 1 and 2 in the **Set SMS commands** menu. The respective command is sent to the relay immediately after an SMS with the identical text is received.

There is no restriction for commanding phone number so that you should include some security sequence into your commands and keep them secret to avoid misuse.



You can enroll Jablotron OASiS wireless relays AC-82 or UC-82 to GDP-04i RF. For more information about the accessories, including user's guides, please visit www.jablotron.com.



TECHNICAL SPECIFICATIONS

Dimensions Display Phonehook

SMS text memory

Call history Ringing melodies SMS typing Speed dialing

Operating temperature AC power adaptor Back-up battery GSM system Antenna

Data connectivity Audio parameters Hands-free calling

Language Analogue phone line Phonebook synchronization

Software

230x220x100 mm, 920 g

Illuminated graphical LCD, Resolution 132x65 dots, 82x40 mm

500 names and 1000 numbers

32 kB memory for SMS storage (124 received messages + 50 sent messages + 100 on SIM

Memory for 100 records: history of missed, outgoing and incoming calls

20 unique melodies Built-in QWERTY keypad

6 memory keys (up to 12 numbers), label for records

-10 °C to + 55 °C; 25 to 75 % humidity 100 - 240 V AC-50 to 60 Hz, 6 V/2 A DC

Li-Pol battery, 1300mAh

850/900/1800/1900 MHz quad-band system, compliant to GSM phase 2/2 + Built-in GSM antenna +2 dBm for GSM850/EGSM900/DCS1800/PSC1900

GPRS class 10: max. 85.6 kbps, CS1, CS2, CS3 and CS4

Echo cancellation. Noise reduction, HR, FR, EFR and AMR audio codec

Built-in speaker and microphone

Multilanguage support - downloadable language sets

standard analog phones (for PSTN) or a master line of PBX, Caller ID support, DTMF

MS Outlook 2000 or later, Outlook Express

Modem driver, Phone driver, JabloTool call management software

CERTIFICATION AND WARRANTY



Hereby, JABLOCOM s.r.o., declares that this GDP-04(A)i GSM Desktop Phone is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. Notified body mark for GSM module approval is CE0682. The original conformity assessment document can be found at the web site www.jablocom.com.

RF Exposure - Specific Absorption Rate (SAR):

This product is designed not to exceed the limits for exposure to radio waves recommended by international guidelines developed by the independent scientific organization ICNIRP and include safety margins designed to assure the protection of all persons, regardless of age and health. The guidelines use a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit for wireless devices is 1.6 W/kg. This product was tested and certified in accordance with the FCC regulations to verify that the product did not exceed the FCC SAR requirements. The highest SAR level measured for this product is

The GDP-04i is in compliance with the basic restrictions as specified in the European Council Recommendation [1999 519 EC] for the measured GSM850, GSM 900, GSM 1800 and GSM 1900 standards. The tests were performed according to the standard IEC 62209-2.

Regulatory information:

This phone is only intended for use in the country in which it was sold.



Note: Although this product does not contain any harmful materials we suggest that you return the product directly to the dealer or to the producer after use. Please check local regulations for disposal of electronic products.

Limited warranty:

Subject to the conditions of this Limited warranty JABLOCOM s.r.o. warrants this product to be free from defects in design, material and workmanship at the time of its original purchase by a customer and for a subsequent minimal warranty period under the national legislation in force. Should your product need warranty service, please return it to the dealer from whom it was purchased. The defects will be eliminated free of charge by repairing or, at our discretion,

Warranty conditions:

If you wish to make a claim under the warranty, please return the Product with all accessories in the original packaging to your dealer. The warranty is valid only if the original receipt issued to the original purchaser by the dealer, specifying the date of purchase and the IMEI corresponding with the Product, is presented with the Product to be repaired or replaced. Plastic parts, cables or accessories of the Product must not be visibly damaged, the Product must not show marks of the contact with liquid, the warranty seal must not be broken and the fault must be described.

This warranty does not cover any failure of the Product due to misuse, including but not limited to use in other than the normal and customary manner, in accordance with instructions for use and maintenance of the Product. Nor does this warranty cover any failure of the product due to accident, modification, adjustment, improper repair or acts of God.

This warranty does not apply to limited-life consumable components, such as batteries or accessories. It also does not apply to modules of other suppliers, such as SIM cards from the GSM provider

The warranty provided does not affect the consumer's statutory rights under applicable national legislation in force, or the consumer's rights against the dealer arising from their sales/purchase contract.

Under no circumstances shall JABLOCOM be responsible for any loss of data or income or any special, incidental, consequential or indirect damages howsoever caused

As the product is under continuous development, JABLOCOM reserves the right to make changes and improvements to any of the products described in this document without prior notice.

Operations and some features are SIM card and/or network dependent.

© Copyright 2009 by JABLOCOM s.r.o. All rights reserved.



SAFETY INSTRUCTIONS

Read these guidelines. Not following them may be dangerous and/or illegal.

You alone are responsible for how you use your phone and any consequences of its use. Do not switch the phone on wherever the use of a wireless phone is prohibited or when it may cause interference or danger.

Do not leave your phone and its accessories within the reach of small children or allow them to play with it. They could hurt themselves or others, or could accidentally damage the phone. Your phone contains small parts with sharp edges that may cause an injury or which could become detached and create a choking hazard.



\(\rightarrow\) Interference

Your phone contains a transmitter and a receiver. When it is ON, it receives and transmits RF energy. Care must be taken when using the phone in close proximity to personal medical devices, such as pacemakers and hearing aids. All wireless phones are susceptible to interference, which could affect performance. We (JABLOCOM) are not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

Your phone is designed not to exceed the limits for exposure to radio waves recommended by international guidelines. These guidelines were developed by the independent scientific organization ICNIRP and include safety margins designed to assure the protection of all persons, regardless of age and health.



This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions; (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Pacemakers

Pacemaker manufacturers recommend that a minimum separation of 15 cm be maintained between a mobile phone and a pacemaker to avoid potential interference with the pacemaker. To achieve this use the phone body in distance more than 15cm from your pacemaker.

People with hearing aids or other cochlear implants may experience interfering noises when using wireless devices or when one is nearby. The level of interference will depend on the type of hearing device and the distance from the interference source, increasing the separation between them may reduce the interference. You may also consult your hearing aid manufacturer to discuss alternatives.

Medical devices

Please consult your doctor and the device manufacturer to determine if operation of your phone may interfere with the operation of your medical device.

Hospitals

Switch off your wireless device when requested to do so in hospitals, clinics or health care facilities. These requests are designed to prevent possible interference with sensitive medical equipment.



Wireless devices can cause interference in aircraft.



Explosive environments

In locations with potentially explosive atmospheres, obey all posted signs to turn off wireless devices such as your phone or other radio equipment. Areas with potentially explosive atmospheres include fuelling areas, below decks on boats, fuel or chemical transfer or storage facilities, areas where the air contains chemicals or particles, such as grain, dust, or metal powders.



Blasting Caps and Areas

Turn off your mobile phone or wireless device when in a blasting area or in areas posted turn off "two-way radios" or "electronic devices" to avoid interfering with blasting operations. Observe restrictions, and follow all regulations and rules.

Use only the normal position. When placing or receiving a phone call, hold your phone handset to your ear, with the bottom towards your mouth or as you would any other fixed line phone.

Do not attempt to disassemble your phone or its accessories - only qualified personal may install or repair phone equipment. If your phone or its accessory has been submerged in water, punctured, or subjected to a severe fall, do not use it until you have taken it to be checked at an authorized service centre. Always treat your phone and its accessories with care and keep it in a clean and dust-free place.

Do not paint your phone or its accessories.

Do not expose your phone or its accessories to open flames or lit tobacco products.

Do not expose your phone or its accessories to liquid, moisture or high humidity.

Do not drop, throw or try to bend your phone or its accessories.

Do not use harsh chemicals, cleaning solvents, or aerosols to clean the device or its accessories.

Do not expose your phone or its accessories to extreme temperatures, minimum -10 and maximum +55 degrees Celsius.



Battery and Charger Handling & Safety

Use only JABLOCOM approved accessories and batteries. Do not connect incompatible products or accessories. Take care not to touch or allow metal objects, such as coins or key rings, to contact or short-circuit the battery terminals.

Use the battery and power adaptor only for its intended purpose. Never use any adaptor or battery that is damaged.

The phone is designed to be powered from the power adaptor. The limited capacity of the backup battery should only cover emergency calls in case of electricity failure.

Your phone may become warm during charging and during normal use.



Remember to make backup copies of all important data.



This product is only suitable for indoor usage. Your phone is not water resistant.



When connecting to any other device, read its users guide for detailed safety instructions.

When making an emergency call, ensure the phone is switched on and in service. Enter the emergency number, then press the green key. Give your location. Do not end the call until told to do so. This phone, like any wireless phone, operates using radio signals, which cannot guarantee connection in all conditions. Therefore, you must never rely solely on any wireless phone for emergency communications.







Producer:

JABLOCOM s.r.o., Czech Republic

www.jablocom.com

