



Version 1.0.2 EN

IP Camera
KK002
Quick Start Guide

Shenzhen Keekoonvision Technology Co., Ltd



Table of Contents

What' s In the Box.....	1
Get Started.....	1
Hardware Installation.....	2
For Mobile Device.....	3
Set Up Camera.....	6
View in Windows Web Browser.....	8
View in Windows CMS Software.....	11
FAQ.....	14


Notice:

Please refer the user manual in CD for detailed help.


What's In the Box

- 1.IP Camera
- 2.DC Power Adapter
- 3.Network Cable
- 4.Mounting Bracket
- 5.Quick Start Guide
- 6.CD

Get Started

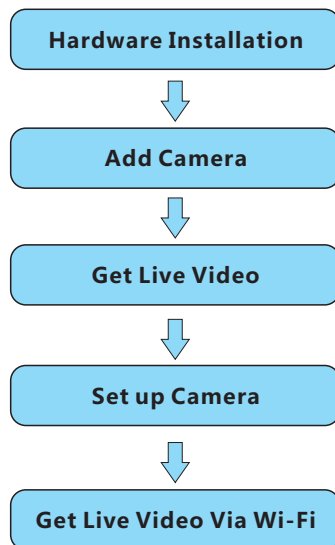

Hardware Installation

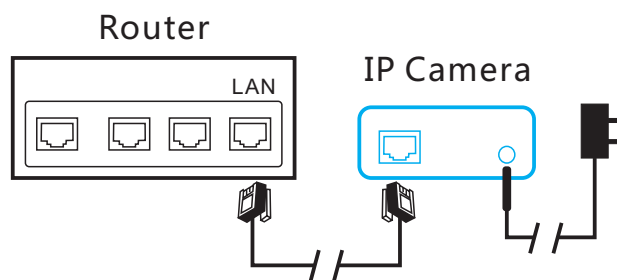

For Mobile Device

1. Download **KEEKOON** from App Store for iOS device or from Google' s Play Store for Android device. For easy installation, please scanning the QR code to download and install **KEEKOON**. If your android device could not access Google' s Play store, please download the apk file from our website directly. <http://www.keekoovision.com>



KEEKOON




KEEKOON in App Store




KEEKOON in Google Play



2. Tap on + to add your new camera. Click **Add new online cameras**, and enter camera's UID and password to add camera.

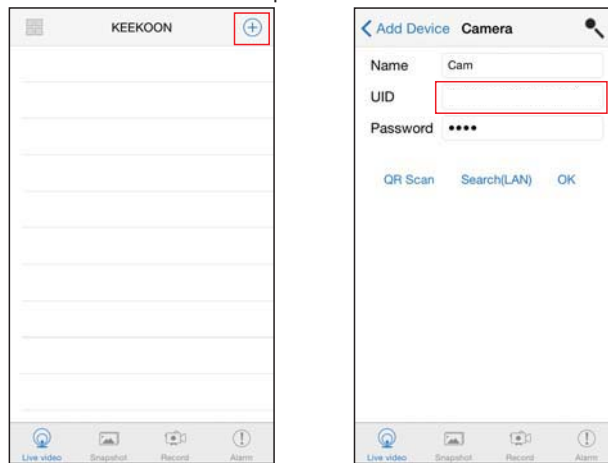



3. There are 2 ways to enter the camera's UID quickly, by scanning the QR code on the camera and search the cameras in LAN. Click **Scan** to initiate the scan and click **Search** to search the cameras in LAN.

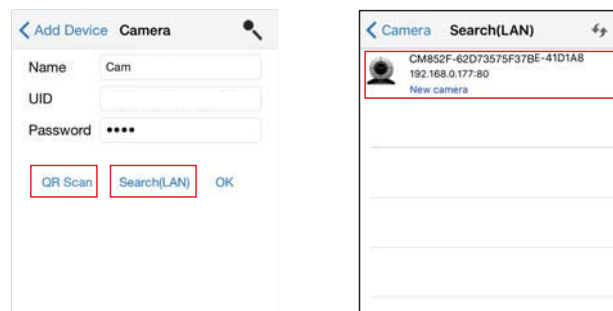



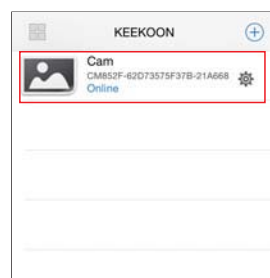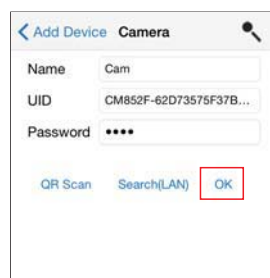




4. Enter the camera's name and P2P password. By default the P2P password is **8888**. After click **OK**, the camera will be added successfully.

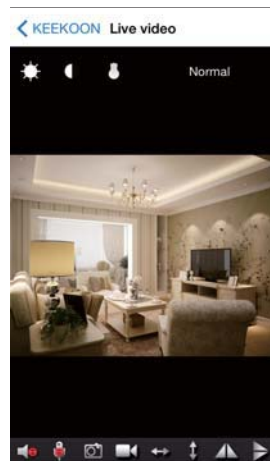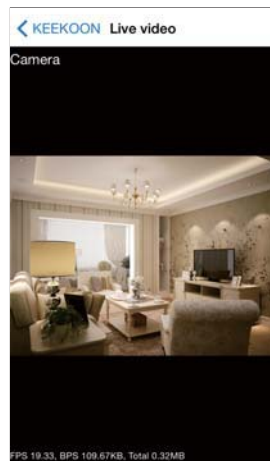

5. Select the camera you've just added to start viewing live video and tap on the black area to launch the control panel. We strongly recommend you to change the default password.




6. Instructions for the icons and buttons on live video page:

	Slither the video to pan or tilt the camera
	Allows User to listen to the camera's audio feed and talk to the camera.
	Take snapshots and record video files.
	Horizontal and vertical cruise
	Flip the image horizontally and vertically
	Adjust the brightness and contrast
	Night Vision Control




Tips :

You could turn on or off the IR LED manually by clicking this button. The IR LED's status will be lasted 30 minutes, after that the status will be restored.

If you want to speak to the camera, please press and hold the microphone button to start speaking as a interphone.





7. Instructions for other pages:

	View the snapshots taken
	View the record files in your mobile device or in the camera
	Check the alarm events



*Notice: This IP Camera is designed to only supplement existing residential and business security systems.

Set up Camera - Wi-Fi

1. Press the gear icon in the camera list to start configuring your camera.

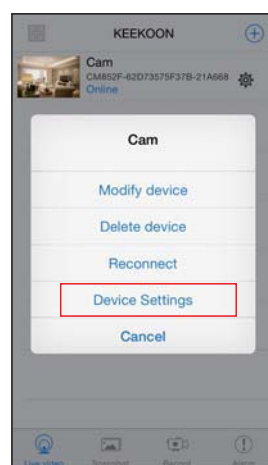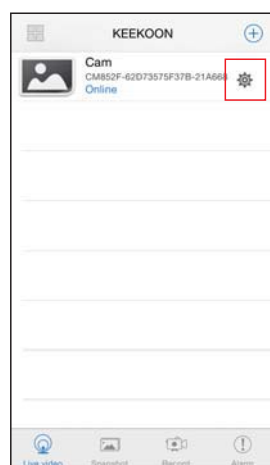


2. The camera will start scanning for Wi-Fi connections. Select your Wi-Fi network ID (SSID). Enter the password for the Wi-Fi connection.

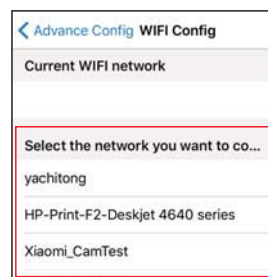



3. When the Wi-Fi is successfully configured, you can now disconnect the network cable from your camera and start using your camera as a wireless device.

*Notice: Please wait for at least 30s (maximum to 1 minute) for Wi-Fi mode to be completely functional.

4. After set up Wi-Fi, we could set up **SD card recording** mode.




5. Set up **Alarm config** to enable motion detection alarm.

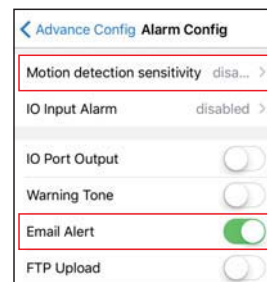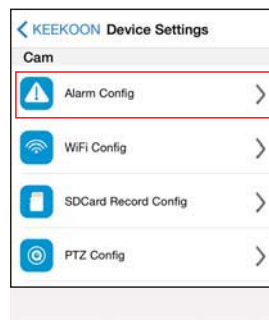

View in Windows Web Browsers

1. Run **IP Camera Search Tool** in CD's Windows folder. Click Search and double click the camera item listed in the camera list.

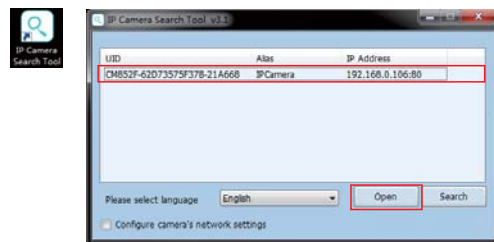


2. The default web browser will try to login the camera automatically. The default username is **admin**. There is no password by default, so leave the password field blank.
3. Download **web browser plug-in** and install it to support playing live video in Windows web browsers. Please ignore system warning, when downloading or installing the plug-in.








Tips:

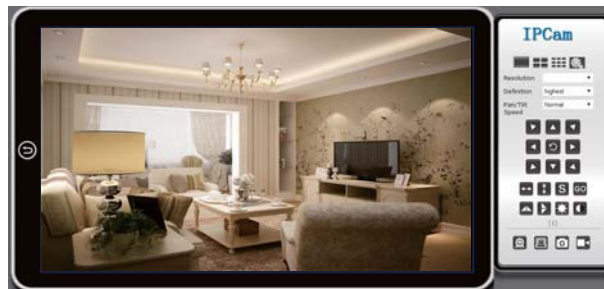












If it is a Win10 PC, please login the camera with IE or Firefox instead of Edge.

4. After installing the plug-in, choose Browser plug-ins mode to get live video.




5. Instructions of the buttons of main panel

	Return to the welcome page
	Single camera view mode. For show back to single camera mode from 4 camera view mode or 9 camera view mode.
	4 camera view mode. After set up multiple camera settings, you could view up to 4 cameras by this mode
	9 camera view mode. After set up multiple camera settings, you could view up to 9 cameras by this mode
	Click this button for camera settings
Resolution	Changed the resolution of the video, there are 3 options: 1280x720, 640x480 and 320x240.
Definition	Change the video's quality
Pan/Tilt Speed	Change the speed of the pan/tilt of the camera. There are 5 options: Fastest, Fast, Normal, Slower and Slowest. (only available for the camera with Pan/Tilt)


	<p>There are 8 direction keys and the center button is rotation center. (only available for the camera with Pan/Tilt)</p>
	<p>The horizontal cruise will pan automatically (only available for the camera with Pan/Tilt)</p>
	<p>The vertical cruise will tilt automatically (only available for the camera with Pan/Tilt)</p>
	<p>Set preset position; this camera supports 6 preset positions. (only available for the camera with Pan/Tilt)</p>
	<p>Go a specific preset position you have set (only available for the camera with Pan/Tilt)</p>
	<p>Invert the video horizontally</p>
	<p>Invert the video vertically</p>
	<p>Adjust the brightness of the video</p>
	<p>Adjust the contrast of the video</p>
	<p>Receive audio from the camera</p>
	<p>Send audio to the camera</p>
	<p>Take snapshot with the camera</p>
	<p>Record video to PC, you can change the path in the settings page</p>

View in Windows CMS Software


1. Install **Centralized monitoring software** in CD. Then launch **IPCMultiView** on your desktop. Once the software launched, it will ask you a username and password to login the software. The default username is admin, there is no default password, please leave it blank.

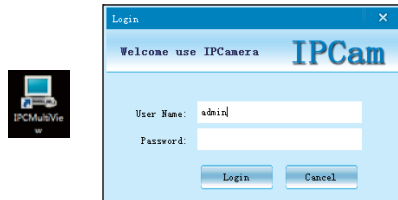


2. Once logged in the software, please click the **ip camera button** or **IPCamera Setup** to add a new camera to this software.

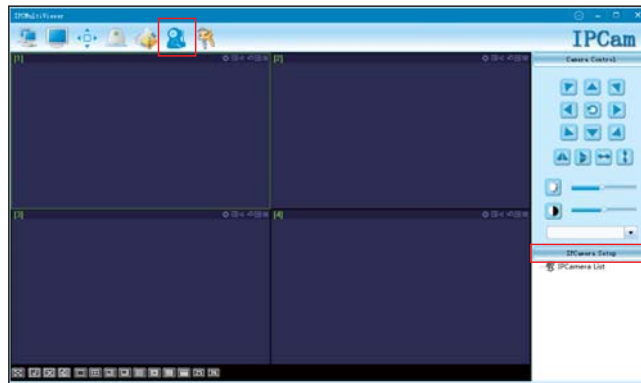


3. If you want to search the camera in LAN, please click the **magnifier** icon to search the camera in LAN. Or you could click **+** icon to add the camera manually by its P2P UID or IP address.

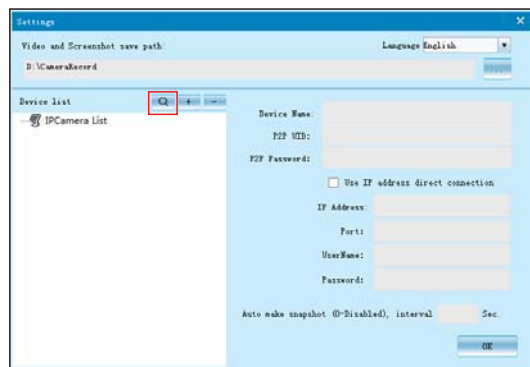


4. After searching the camera in LAN, please select the corresponding camera and click **OK**.

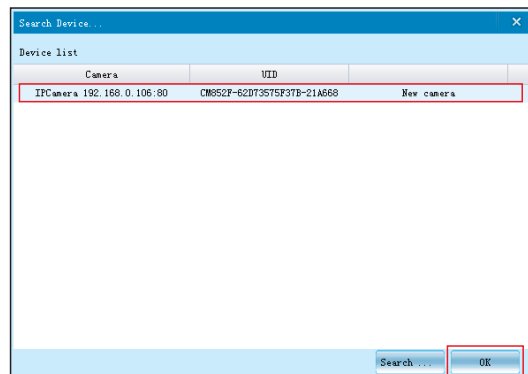

5. Select the connecting mode and enter the login information of the camera. P2P mode support view the camera from Internet, IP address mode do not need Internet support.

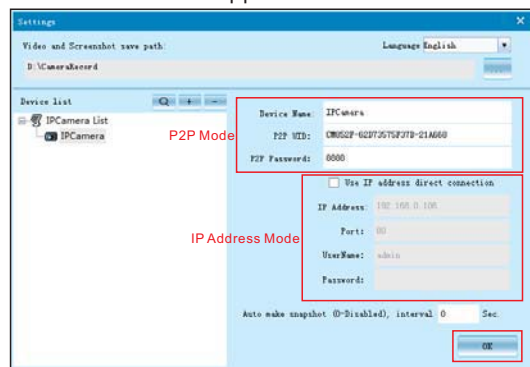

6. Then you could get live video by double clicking the camera in the list.

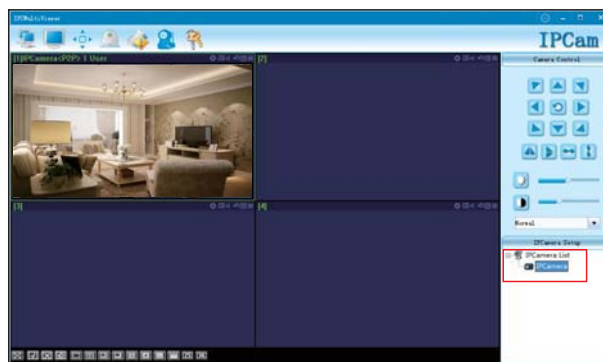

FAQ

1. Why does my computer or security software say the software is dangerous and it is a virus?

A: The software will detect device in your network, and it seems like a virus. Please ignore the warning and continue.

2. How can I reset the camera to factory settings?

A: Please press the reset button under the camera for about 5-10 seconds until the camera's indicator turned off. Please make sure the power supply is connected when you are doing it.

3. Why does the camera always ask for username and password, or it says Incorrect User?

A: The camera's default username is admin, and the default password is N/A, that means you just need leave it blank. If you forget your username or password, you can reset the camera to factory settings to get the default username and password.

4. Why can not get live video in web browser?

A: Please download and install plug-in before get live video. If still no live video, check whether the plug-in enabled in your web browser? If it is a Win10 PC, please login the camera with IE and Firefox instead of Edge.

5. Can I turned off IR LED manually?

A: Yes, you can turn it off in the setting following the instruction below. Go to "Setting" >> "Advance Config" >> "IR-LED Config", then you can adjust the sensitivity or turn off the IR light.

6. Will this camera function properly if you set it inside of a window to record outdoors?

A: Yes if left in the day position only. The night camera light will glare off the window and block vision. Also sun glare can affect camera sight.

7. Why I could not download the App from Google Play?

A: Please login our website to download and install the Android App directly. Our website is <http://www.keekoonvision.com>

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- o Reorient or relocate the receiving antenna.
- o Increase the separation between the equipment and receiver.
- o Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- o Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.