

RZT

ZERO-TURN RIDERS

- RZT 42
- RZT 50
- RZT 50VT
- RZT 54

FEATURES

..... 42" TWIN-BLADE AND 50", 54" TRIPLE-BLADE DECKS

..... WEIGHT 480 LBS. TO 557 LBS.

..... ANTI-SCALPING WHEELS

..... HYDRO-GEAR™ EZT OR ZT-2800™ TRANSMISSIONS

..... LAP BARS FEATURING SUPER-SOFT GRIPS

..... SMARTJET™ DECK WASH

..... 3-YEAR/120-HOUR LIMITED WARRANTY†

HOME OWNER
PREMIUM
OUTDOOR
EQUIPMENT



YOU CAN'T GET ANY BETTER.™




EASIER AND QUICKER.

If you want to save more time, it's time to get a Zero-Turn Rider. Choose from three models that let you mow faster on complex landscapes. For maximum power, check out the RZT 54, which features a 25 HP* Kawasaki® engine and a 54" cutting deck. Its wider cutting width and triple blades help you cut grass faster, giving you more time to relax and enjoy your lawn.

CLEANER CUT

The pivoting front axle and floating deck follow the contours of the ground for superior cutting, providing a smoother and more uniform look.

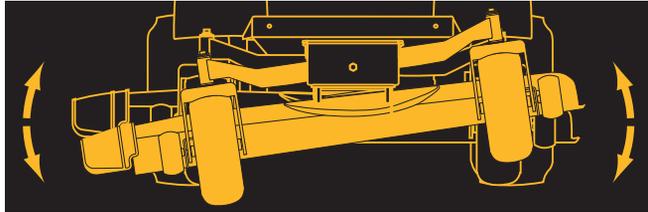

SMARTER TECHNOLOGY

The dual transmission utilizes the full potential of both the engine and transmission. With no hoses between the pump and motor, there's more power for the deck.



SMOOTHER RIDE

Heavy-duty front caster wheels provide a steady ride for maximum comfort and are easier on turf.



STRONGER ENGINES

Cub Cadet professional-grade Kawasaki® engine is built for long life, extended durability and commercial-grade performance. (RZT 50, 54) (Kohler® engine on RZT 42, Briggs & Stratton® engine on RZT 50VT)

EASIER CLEAN-UP

The bagger attachment is easy to use and keeps your yard looking great.



Optional bagger available on all models.

*as rated by engine manufacturer †See specifications for warranty information.

cubcadet.com



ENGINE	RZT 42	RZT 50	RZT 50VT	RZT 54
Engine type	20 HP* Kohler® Courage® OHV	22 HP* Cub Cadet professional-grade Kawasaki® V-Twin OHV	24 HP* Cub Cadet professional-grade Briggs & Stratton® V-Twin OHV	25 HP* Kawasaki® V-Twin OHV
Cylinders/material	1/cast-iron sleeve	2/cast-iron sleeve	2/cast-iron sleeve	2/cast-iron sleeve
Engine start	Electric			
Engine lubrication	Full-pressure with spin-on oil filter			
Engine oil capacity	1.6 qt.	2 qt.	2 qt.	2 qt.

DRIVE SYSTEM

Transmission	Dual Hydro-Gear™ EZT	Dual Hydro-Gear™ EZT	Dual Hydro-Gear™ EZT	Dual Hydro-Gear™ ZT-2800™ w/oil reservoir
--------------	----------------------	----------------------	----------------------	---

STEERING

Steering	2-way adjustable lap bars with comfort grips			
----------	--	--	--	--

CHASSIS

Frame	Fully welded steel			
Front axle	Fabricated — pivoting, greasable			
Front wheel bearings	Polycarbonate NSB-90			

ELECTRICAL SYSTEM

Alternator	15 amp. regulated			
Battery	Heavy-duty 12V sealed			
Safety systems	Operator presence			

OPERATION

PTO clutch	Electronic fingertip engagement			
Deck lift	Hand lever, multi-position			
Seat	High-back, lever adjustable			
Parking brake	Mechanical			
System monitor	Standard electronic			

ADDITIONAL SPECIFICATIONS

Forward speed	5.5 mph	6 mph	6 mph	6.5 mph
Reverse speed	3 mph			
Front tires	11" x 4" – 5"	13" x 5.0" – 6"	13" x 5.0" – 6"	13" x 5.0" – 6"
Rear tires	18" x 8.5" – 8"	18" x 9.5" – 8"	18" x 9.5" – 8"	20" x 10" – 8"
Turning radius	Zero			
Fuel tank capacity	3 gal.			
Cup holder w/utility bin	Standard			
Wheelbase	43.5"			
Overall length	67"			
Width	45"	54"	54"	57"
Estimated weight	480 lbs.	527 lbs.	527 lbs.	557 lbs.

MOWER DECK

Cutting width/blades	42" twin-blade	50" triple-blade	50" triple-blade	54" triple-blade
Cutting height	1.5" – 4" 6-position height adjustment			
Deck construction	13-gauge, floating	12-gauge, floating	12-gauge, floating	12-gauge, floating
Deck drive system	Belt driven, Kevlar®			
Anti-scalping	2 adjustable-gauge wheels, greasable	4 adjustable-gauge wheels, greasable	4 adjustable-gauge wheels, greasable	2 adjustable-gauge wheels, greasable, front roller & 3 rear stripe rollers
Deck wash	Patented SmartJet™ high-pressure deck washing system			
Accessories	Optional mulch kit/optional bagger			

WARRANTY*

	3-year/120-hr limited warranty			
--	--------------------------------	--	--	--

