

CyberOptics  
Semiconductor  
WaferSense™  
ALS150/200/300  
User's Guide



# General Information

## WaferSense ALS

Changes or modifications not expressly approved by CyberOptics Semiconductor, Inc., may void your authority to operate the WaferSense ALS.

The radio contained in the WaferSense ALS meets all the applicable FCC requirements for RF Safety. While in operation, the FCC requires users and nearby persons to maintain a minimum separation distance of 20 cm (8 inches) or farther from the WaferSense ALS.


## WaferSense Link

Changes or modifications not expressly approved by CyberOptics Semiconductor, Inc., may void your authority to operate the WaferSense Link.

The WaferSense Link has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The radio contained in the WaferSense Link meets all the applicable FCC requirements for RF Safety. While in operation, the FCC requires users and nearby persons to maintain a minimum separation distance of 20 cm (8 inches) or further from the WaferSense Link.

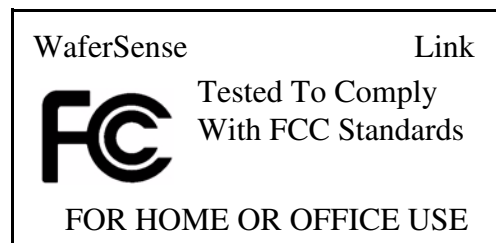

## **WaferSense Technical Support**

Technical support is available from CyberOptics Semiconductor Monday through Friday, 8:00am to 5:00pm Pacific Time.

E-mail:	CSsupport@cyberoptics.com
Phone:	(503) 495-2200 800-366-9131 (US and Canada only)
Fax:	(503) 495-2201

WaferSense and LevelView are trademarks of CyberOptics Semiconductor, Inc.

Third-party brands and names are the property of their respective owners.

*Copyright © 2003-2005, CyberOptics Semiconductor, Inc. All rights reserved.*

### **CyberOptics Semiconductor, Inc.**

13555 S.W. Millikan Way  
Beaverton, OR 97005

P/N 920-0026-03