ctions in this notice are for use by qualified service personnel only. To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions, unless you are qualified to do so

#### Note to System Installer

For this apparatus, the coaxial cable shield/screen shall be grounded as close as practical to the point of entry of the cable into the building. For products sold in the US and Canada, this reminder is provided to call the system installer's attention to Article 820-93 and Article 820-100 of the NEC (or Canadian Electrical Code Part 1), which provides uidelines for proper grounding of the coaxial cable shield.



This symbol is intended to alert you that uninsulated voltage contact with any inside part of this product.

Ce symbole a pour but d'alerter toute personne qu'un contact avec une pièce interne de ce produit, sous tension et non isolée, pourrait être suffisant pour provoquer un choc électrique. Il est donc dangereux d'être en contact avec toute CAUTION: To reduce the risk of electric shock, do no remove cover (or back). No user-serviceable part inside. Refer servicing to qualified service personne

CAUTION

RISK OF ELECTRIC SHOCK DO NOT OPEN

TO PREVENT FIRE OR ELECTRIC SHOCK DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE.



This symbol is intended to alert you of the presence of important operating and maintenance (servicing instructions in the literature accompanying this produc

Ce symbole a pour but de vous avertir qu'une documentation importante sur le fonctionnement et l'entretien accompagne ce produit.

- 1) Read these instructions.
- 2) Keep these instructions.
- 3) Heed all warnings.
- 4) Follow all instructions
- 5) Do not use this apparatus near water
- 6) Clean only with dry cloth.
- 7) Do not block any ventilation openings, Install in accordance th the manufacturer's instructions.
- 8) Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- 9) Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- 10) Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- 11) Only use attachments/accessories specified by the
- 12) Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
- 13) Unplug this apparatus during lightning storms or when unused for long periods of time
- 14) Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as a power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

#### Power Source Warning

A label on this product indicates the correct power source for this product. Operate this product only from an electrical outlet with the voltage and frequency indicated on the product label. If you are uncertain of the type of power supply to your home or business, consult your service provider

The AC inlet on the unit must remain accessible and operable at all times.

#### **Ground the Product**

WARNING: Avoid electric shock and fire hazard! If this product connects to coaxial cable wiring, be sure the cable system is grounded (earthed). Grounding provides some protection against tage surges and built-up static charges.

WARNING: Avoid electric shock and fire hazard! Do not locate an outside antenna system in the vicinity of overhea power lines or power circuits. Touching power lines or circuits

This product may contain a tuner capable of receiving off-the-air

#### **Protect the Product from Lightning**

In addition to disconnecting the AC power from the wall outlet, disconnect

#### Verify the Power Source from the On/Off **Power Light**

When the on/off power light is not illuminated, the apparatus may still be connected to the power source. The light may go out when the apparatus is turned off, regardless of whether it is still plugged into an

#### Eliminate AC Power/Mains Overloads

WARNING: Avoid electric shock and fire hazard! Do not overload AC power/mains, outlets, extension cords, or integral convenience receptacles. For products that require battery power or other power sources to operate them, refer to the operating instructions for those products.

#### Handling Disposable Batteries

This product may contain disposable batteries. Heed the following warning and follow the Battery Safety and Battery Disposal instructions below.

WARNING: There is danger of explosion if the battery is mishandled or incorrectly replaced. Replace only with the same type of battery. Do not disassemble it or attempt to recharge it side the system. Do not crush, puncture, dispose of in fire short the external contacts, or expose to water or other liquids Dispose of the battery in accordance with local regulations and ructions from your service provider

- Insert batteries correctly. There may be a risk of explosion if the batteries are incorrectly inserted.
- Do not attempt to recharge 'disposable' or 'non-reusable' batteries. Please follow instructions provided for charging 'rechargeable'
- Replace batteries with the same or equivalent type that we recommend. Do not expose batteries to excessive heat (such as sunlight or fire).
- Do not expose batteries to temperatures above 100°C (212°F).

#### **Battery Disposal**

- The batteries may contain substances that could be harmful to the
- Recycle or dispose of batteries in accordance with the battery manufacturer's instructions and local/national disposal and recycling





🔀 🖾 😘 廢電池請回收

The batteries may contain perchlorate, a known hazardous substance. so special handling and disposal of this product might be necessary. For more information about perchlorate and best management

#### **Provide Ventilation and Select a Location**

- Remove all packaging material before applying power to the product. Do not place this apparatus on a bed, sofa, rug, or similar surface.
- unless the installation provides proper ventilation.
- Do not place this apparatus on an unstable surface Do not install this apparatus in an enclosure, such as a bookcase or rack,
- Do not place entertainment devices (such as VCRs or DVDs), James books, vases with liquids, or other objects on top of this product.
- · Do not block ventilation openings.

#### **Operating Environment**

This product is designed for operation indoors with a temperature range from 32° to 104° F (0° to 40°C). Each product should have adequate spacing on all sides so that the cooling air vents on the chassis are not blocked.(Protect from Exposure to Moisture and Foreign Objects)

## **Protect from Exposure to Moisture and Foreign**

WARNING: Avoid electric shock and fire hazard! Do not expose this product to dripping or splashing liquids, rain, or moisture. Objects filled with liquids, such as vases, should not be placed on

WARNING: Avoid electric shock and fire hazard! Unplug this product before cleaning. Do not use a liquid cleaner or a aerosol cleaner. Do not use a magnetic/static cleaning device (dust



### Service Warnings

WARNING: Avoid electric shock! Do not open the cove of this product. Opening or removing the cover may expose you ngerous voltages. If you open the cover, your warranty will be void. This product contains no user-serviceable parts.

#### **Check Product Safety**

Upon completion of any service or repairs to this product, the service technician must perform safety checks to determine that this product is in

#### **Protect the Product When Moving It**

Always disconnect the power source when moving the apparatus or connecting or disconnecting cables.

20110316 Cable Safety

#### Industry Canada statement:

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Ce dispositif est conforme à la norme CNR-210 d'Industrie Canada applicable aux appareils radio exempts de licence. Son fonctionnement est sujet aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

#### Radiation Exposure Statement:

This equipment complies with IC/FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

#### Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps



11 111 11

Quick Reference Guide

# Cisco HD Digital Transport Adapter (DTA)



Note: This illustration may vary from the actual product

### **Open Source License Statement**

Cisco HD Digital Transport Adapter (DTA) contain(s), in part, certain free and/or open source software ("Open Source") under separate license terms. Examples of such licenses may include all versions of the GNU General Public License (GPL), GNU Lesser General Public License (LGPL), BSD license, MIT license, Mozilla Public License, Eclipse Public License, Apache license, and others. To find specific information regarding the Open Source in your product, including copies of the applicable license documentation and related information, please go to: (i) for North America m/web/consumer/support/open\_source.html, or (ii) for outside North America http://www.cisco.com open\_source.html#~international. Once at the site, search for the product listing and click on the related items identified. If you have any questions or problems accessing any of the links, please contact: spvtg-external-

#### **United States FCC Compliance**

This device has been tested and found to comply with the limits for a Class 3 digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against such interference in a sidential installation. This equipment generates, uses, and can radiate radio frequency energy. If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or vision reception, which can be determined by turning the equipment OFF and ON, the user is encouraged to try to correct the interference by one or more of the following measures

- · Reorient or relocate the receiving antenna.
- · Increase the separation between the equipment and receiver.
- · Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the service provider or an experienced radio/television technician

Any changes or modifications not expressly approved by Cisco Systems Inc., could void the user's authority to operate the equipment.

The information shown in the FCC Declaration of Conformity paragraph below is a requirement of the FCC and is intended to supply you with information regarding the FCC approval of this device. The phone numbers listed are for FCC-related questions only and not intended for questions regarding the connection or operation for this device. Please contact your service provider for any questions you may have regarding the operation or installation of this device.

### **FC** Declaration of Conformity

This device complies with Part 15 of ECC Rules. Operation is subject to the following two conditions: 1) the device may not cause harmful interference, and 2) the device must accept any interference received. including interference that may cause undesired operation.

Cisco HD Digital Transport Adapter (DTA)

Models: 170HD and 171HD Manufactured by: Cisco Systems, Inc. San Jose, CA 95134 USA

### **Canada EMI Regulation**

This Class B digital apparatus complies with Canadian ICES-003. Cet appareil numérique de la class B est conforme à la norme 20081121 FCC Standard

#### **ENERGY STAR® Notice**



Printed in China

This Cisco product has earned the ENERGY STAR.

Products that earn the ENERGY STAR reduce greenhouse gas emissions by meeting strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and the U.S. Department of Energy. ENERGY STAR is a registered mark owned by the U.S. government

#### **AVC VIDEO LICENSE**

With respect to each AVC/H.264 product, we are obligated to provide the following notice:

THIS PRODUCT IS LICENSED LINDER THE AVC PATENT PORTEOLIO LICENSE THIS PRODUCT IS LICENSED UNDER THE AVC PATENT PORTHOLIC DICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC VIDEO") AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEGIA LLC SEE

Accordingly, please be advised that service providers, content providers, and broadcasters may be required to obtain a senarate use license from MPEG LA prior to any use of AVC/H.264 encoders and/or decoders.

#### **ROVI CORPORATION COPYRIGHT** NOTICE

This product incorporates copyright protection technology that is protected by U.S. patents and other intellectual property rights of Rovi Corporation Use of this copyright protection technology must be authorized by Rovi Corporation, and is intended for home and other limited viewing uses only unless otherwise authorized by Rovi Corporation. Reverse engineering and

Cisco Systems. Inc. assumes no responsibility for errors or omissions that may appear in this guide. We reserve the right to change this guide at any time without notice

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

ENERGY STAR and the ENERGY STAR mark are registered trademarks of the U.S. govern

Hall The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Rovi is a trademark of Rovi Corporation. Product and service availability are subject to change without notice

© 2011-2014 Cisco and/or its affiliates. All rights reserved.

Last Undated: April 2014

Part Number 78-100314-01A0

#### Welcome

The Cisco® HD Digital Transport Adapter (DTA) works with traditional analog TVs and digital High Definition TVs. Decryption technology on the DTA lets both analog and digital TV owners view a variety of standard and high definition channels, including subscribed premium channels where offered. See your service provider for details. Use the instructions in this guide to install the DTA.

The consumer support website provides news and information about this product. For more information, please refer to: http://www.cisco.com/web/consumer/support/index.html

#### Safety First

Before using this DTA, read the IMPORTANT SAFETY INSTRUCTIONS section of this quide.

#### **Avoid Screen Burn-In**

Images such as letterbox bars or side bars, bright closed-captioning backgrounds, station logos, or any other stationary images may cause the TV screen to age unevenly and cause damage to your TV. Refer to the user guide that came with your TV for more information about screen burn-in.

### Performance Tips

If the DTA does not perform as expected, the following tips may help.

#### No picture

- · Verify that the power to your TV is turned on.
- If the DTA is plugged into a wall switch, verify the switch is in the ON position (Avoid plugging into an outlet that is controlled by a wall switch.)
- · Verify that all cables are properly connected.
- The current channel may not be available in your service package. Try selecting another channel to see if a picture appears.


#### o color

- · Verify the current TV program is broadcast in color.
- · Adjust the TV color controls.

#### No sound

- · Verify the volume is turned up.
- $\boldsymbol{\cdot}$  Verify the mute function is not on.

#### **Front Panel**



1 Power LED Illuminates green when the DTA is powered up.
Illuminates red when the DTA is in standby mode.

Note: This illustration may vary from the actual product.

#### **Safety and Performance Tip**

Keep the top of the DTA free of all objects and electronic devices, including your TV.

#### **Back Panel**

3 IR In



1 Cable In Connects to a coaxial cable that delivers the signal from your service provider

2 TV Out Connects to a coaxial cable that sends signals to your TV

Connects to an optional IR Extender if provided with the DTA by your service provider

4 Slide Switch Can be set to either channel 3 or channel 4

5 HDMI Connect an HDTV HDMI™ (High-Definition Multimedia Interface) cable from the HDTV to the HDMI port. HDMI

supports both digital audio and video

6 DC Power Input Connects to the external power supply for the DTA

Note: This illustration may vary from the actual product.


POWER SUPPLY WARNING: Only the supply that came with your system may be safely used to power the DTA.

#### **Installing the DTA**

WARNING: Electric shock hazard! Unplug all electronic devices before connecting or disconnecting any device cables to the DTA.


#### TVs with an HDMI Connector

- 1. Connect the DTA to the coaxial cable coming from the wall.
- 2. Connect an HDMI cable from the DTA to your TV.

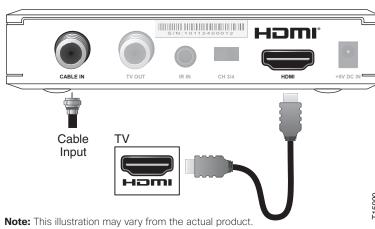

#### **Other TVs**

- 1. Connect the DTA to the coaxial cable coming from the wall.
- 2. Connect a coaxial cable from the DTA to your TV.
- 3. Slide the switch to channel 3 or channel 4 based on the channel your service provider uses.

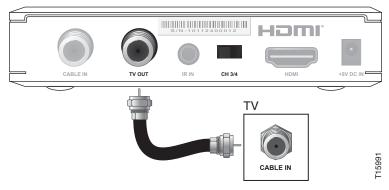

#### All TVs


After connecting your TV to the DTA:

- 1. Plug the power cord from the external power supply into the  $\ensuremath{\mathsf{DTA}}$ .
- 2. If you received an IR Extender from your service provider, read and follow the installation instructions in *Connecting an Optional IR Extender*.
- 3. Plug the DTA's external power supply and the TV into an AC power source.
- 4. The DTA will power on once plugged in (indicated by a green light on its front panel). Follow the on-screen steps or instructions provided by your Service Provider for initial activation.


## Mounting the DTA to a TV with Optional Hook-and-Loop Squares

 Remove one of the two optional hook-and-loop mounting squares from the carton in which your DTA unit was shipped.

**Note:** Mounting the DTA to your television may be easier if the loop tape remains attached to the hook fastener.




- 2. Peel the paper backing from the loop tape on the mounting square you selected.
- Press and hold the mounting square against the bottom of the DTA until the square forms a secure bond.
- 4. Repeat steps 2 3 for the other mounting square.
- 5. Peel the paper backing from the hook fastener on each of the mounting squares.
- Press and hold the mounting squares to the top or back of your television until the squares form a secure bond.



#### **Connecting an Optional IR Extender**

The IR Extender, if packaged with your DTA, allows you to install your DTA in an unobtrusive location, such as a cabinet, and control your DTA with a remote control.

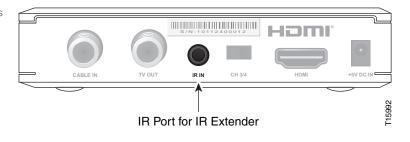

- 1. Plug the connector into the IR port on the back of the DTA.
- 2. Peel the paper backing from the adhesive pad on the bottom of the receiver. Then, mount the IR Extender receiver in an inconspicuous place, but make certain that nothing blocks the sensor on the front of the receiver. You must be able to point the remote control at this sensor.

To control the DTA, press the keys on the remote control while aiming the remote control at the sensor on the receiver.

**Note:** If you encounter problems, make sure that all connections are secure and that nothing blocks the path between the receiver and your remote control. For further assistance, contact your service provider.

