

User Manual

PRODUCT NAME : Wireless Adapter Card

MODEL NAME : WL1NB6(TWBI-H002D)

The information contained herein is the exclusive property of LG Innotek and shall not be distributed, reproduced or disclosed in whole or no in part without prior written permission of LG Innotek.

Table of Contents

No.	Description	Page
1	Features	2
2	Module Photo	2
3	Block Diagram	3
4	Storage Conditions	4
5	Operating Conditions	4
6	Interface Specification	5
7	Pin Description	6
8	Outline Drawing	7
9	Packing Information	8


1. Features

TWBI-H002D is the small size and low power module for Wireless Audio.

TWBI-H002D is based on Syncomm IA9Q.

- 5.2/5.8GHz GFSK Modulation
- Size : 35mm x 35mm x 5.03 mm
- Internal PCB Printed Antenna
- I2S digital audio interface
- I2C control with external device
- Low audio delay time < 20ms
- Application : Wireless Speaker, Woofer, TV Theater

2. Module Photo

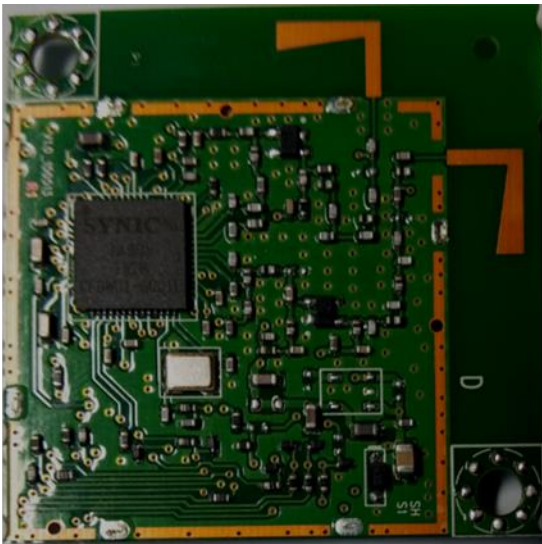


< TOP View >



< Bottom View >

3. Block Diagram

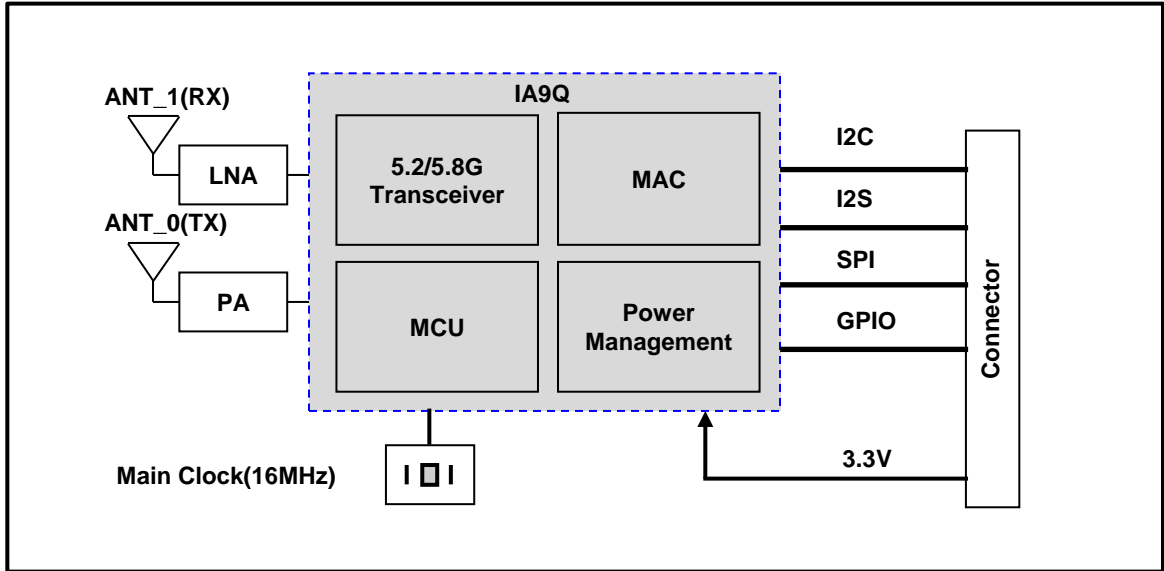

4. Storage Conditions

Parameter	Min	Max	Unit
Storage Temperature	-10	+80	°C
Storage Humidity (@ 40°C)	-	90	%

Caution : The specifications above the Table define levels at which permanent damage to the device can occur. Function operation is not guaranteed under these conditions. Operating at absolute maximum conditions for extend periods can adversely affect the long-term reliability of the device.

- Other conditions

- 1) Do not use or store modules in the corrosive atmosphere, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are contained.

Also, avoid exposure to moisture.


- 2) Store the modules where the temperature and relative humidity do not exceed 5 to 40°C and 20 to 60%.

5. Operating Conditions

Parameter	Min	Typ	Max	Unit
Ambient Temperature	0	-	+60	°C
Operating Humidity (40°C)	-	-	85	%
Supply Voltage	3.15	3.3	3.45	Vdc

6. Interface Specification

1) I2S Timing

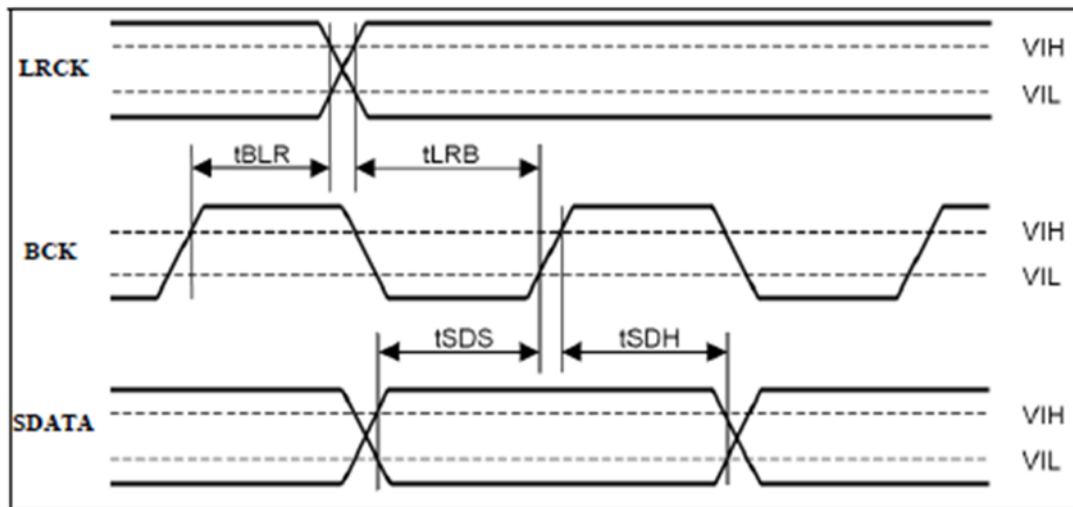


Symbol	Parameter	Min	Typ	Max	Unit
t_{BLR}	BCK rising to LRCK edge	60			ns
t_{LRB}	LRCK edge to BCK rise	60			ns
t_{SDS}	SDATA setup time	60			ns
t_{SDH}	SDATA hold time	60			ns


7. Pin Description

Pin No.	Pin Name	I/O	Pin Description	Pin No.	Pin Name	I/O	Pin Description
1	VCCIO	PWR	VCC supply	14	SPI_CLK	I/O	Clock pin of SPI interface
2	GND	GND	Ground	15	SPI_CS	I/O	Chip select pin of SPI interface
3	GND	GND	Ground	16	SPI_WP	I/O	Write protect pin of SPI interface, low active
4	BLUE_LED	I/O	GPIO	17	RESET	I	Reset pin, low active
5	RED_LED	I/O	GPIO	18	P_SENSE	I/O	GPIO
6	GND	GND	Ground	19	P_CTL	I/O	GPIO
7	NC	I/O	Not connect	20	PWM_RST	I/O	GPIO
8	I2S_DATA	I/O	Data pin of I2S signal	21	AMP_PDN	I/O	GPIO
9	GND	GND	Ground	22	AMP_SD	I/O	GPIO
10	I2C_CLK	I/O	Clock pin of I2C control signal	23	PARING_SW	I/O	GPIO
11	I2C_DATA	I/O	Data pin of I2C control signal	24	I2S_BCK	I/O	BCK pin of I2S signal
12	SPI_DI	I/O	Data input pin of SPI interface	25	GND	GND	Ground
13	SPI_DO	I/O	Data out pin of SPI interface	26	I2S_LRCK	I/O	LRCK pin of I2S

< TOP View >



< Bottom View >

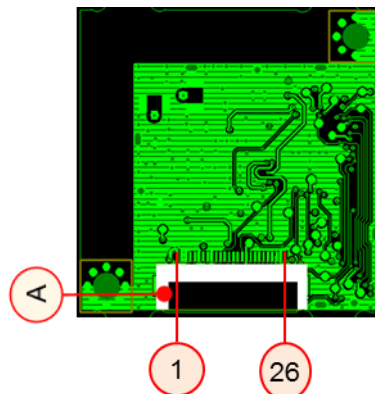


Note.

- 1) Recommend a Module install sequence for prevent operation failure
- Supply 3.3V power

(A)

- 2) Connector: 26Pin SMD Connector

9. Packing Information

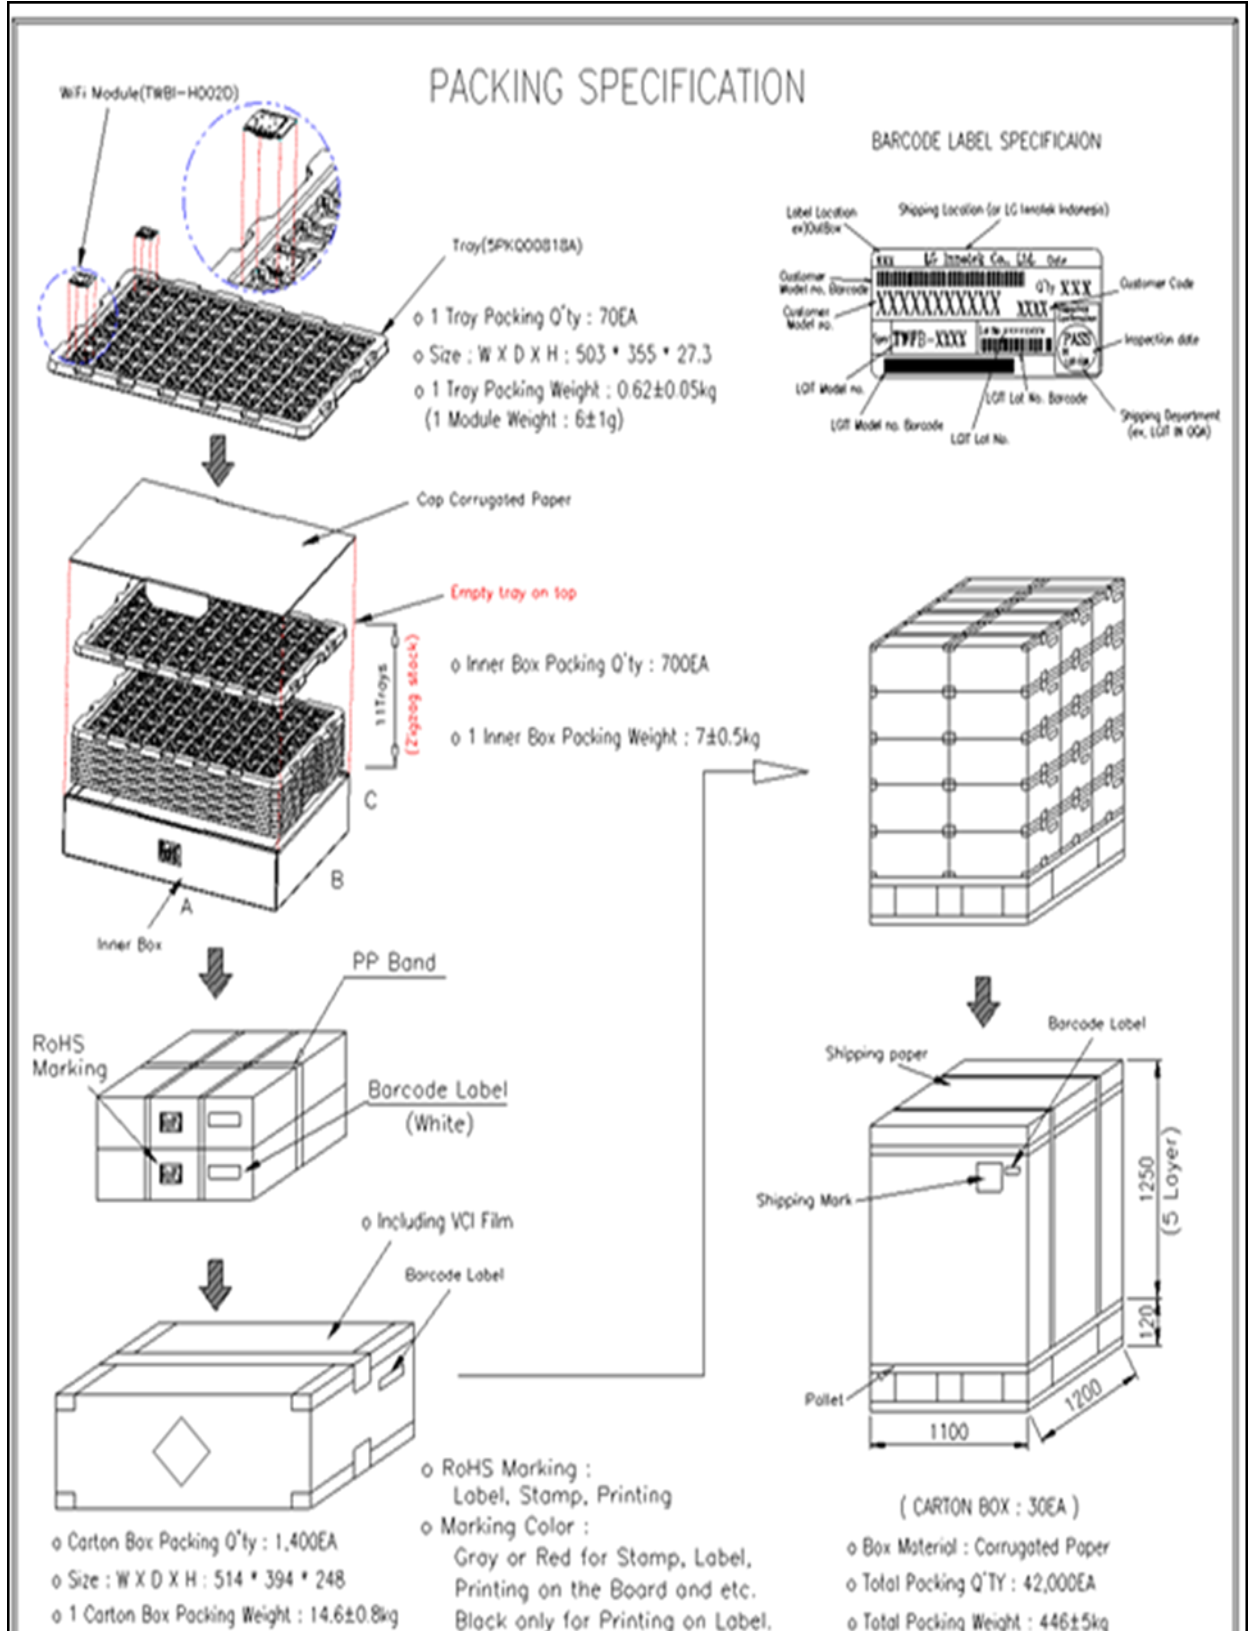

FCC Part 15.19 Statements:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Part 15.105 statement (Class A or Class B 중 선택)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Part 15.21 statement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

RF Exposure Statement

The antenna(s) must be installed such that a minimum separation distance of at least 20 cm is maintained between the radiator (antenna) and all persons at all times. This device must not be co-located or operating in conjunction with any other antenna or transmitter.

End Product Labeling

The module is labeled with its own FCC ID and IC Certification Number. If the FCC ID and IC Certification Number are not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. In that case, the final end product must be labeled in a visible area with the following:

“Contains FCC ID: BEJ9QK-DMWL1NB6

“Contains IC: 2703H-DMWL1NB6

RSS-GEN, Sec. 7.1.2 – (transmitters)

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

RF Exposure

The antenna (or antennas) must be installed so as to maintain at all times a distance minimum of at least 20 cm between the radiation source (antenna) and any individual. This device may not be installed or used in conjunction with any other antenna or transmitter.

l'exposition aux RF

L'antenne (ou les antennes) doit être installée de façon à maintenir à tout instant une distance minimum de au moins 20 cm entre la source de radiation (l'antenne) et toute personne physique.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment. Attention:

Les changements ou modifications de cet appareil non expressément approuvé par le fabricant peuvent annuler votre droit à utiliser cet équipement.

Étiquetage du produit final (IC)

Le module BT111 est étiqueté avec sa propre identification FCC et son propre numéro de certification IC. Si l'identification FCC et le numéro de certification IC ne sont pas visibles lorsque le module est installé à l'intérieur d'un autre dispositif, la partie externe du dispositif dans lequel le module est installé devra également présenter une étiquette faisant référence au module inclus. Dans ce cas, le produit final devra être étiqueté sur une zone visible avec les informations suivantes :

« Contient module émetteur identification FCC ID : BEJ9QK-DMWL1NB6

« Contient module émetteur IC : 2703H-DMWL1NB6

RSS-GEN, Sec. 7.1.3

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module or change RF related parameters in the user manual of the end product.

OEM Responsibilities to comply with FCC and Industry Canada Regulations

The module has been certified for integration into products only by OEM integrators under the following condition:

- The transmitter module must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC multi-transmitter product procedures.

As long as the two condition above is met, further transmitter testing will not be required.

However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

IMPORTANT NOTE: In the event that these conditions can't be met (for certain configurations or co-location with another transmitter), then the FCC and Industry Canada authorizations are no longer considered valid and the FCC ID and IC Certification Number can't be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC and Industry Canada authorization.

Responsabilités des OEM quant à la conformité avec les réglementations de FCC et d'

Industrie Canada

Les modules ont été certifiés pour entrer dans la fabrication de produits exclusivement réalisés par des intégrateurs dans les conditions suivantes :

- Le module transmetteur ne doit pas être installé ou utilisé en concomitance avec une autre antenne ou un autre transmetteur.

Tant que ces deux conditions sont réunies, il n'est pas nécessaire de procéder à des tests supplémentaires sur le transmetteur. Cependant, l'intégrateur est responsable des tests effectués sur le produit final afin de se mettre en conformité avec d'éventuelles exigences complémentaires lorsque le module est installé (exemple : émissions provenant d'appareils numériques, exigences vis-à-vis de périphériques informatiques, etc.)

REMARQUE IMPORTANTE : En cas d'inobservance de ces conditions (en ce qui concerne certaines configurations ou l'emplacement du dispositif à proximité d'un autre émetteur), les autorisations de FCC et d'Industrie Canada ne seront plus considérées valables et l'identification de FCC et le numéro de certification d'IC ne pourront pas être utilisés sur le produit final. Dans ces cas, l'intégrateur OEM sera chargé d'évaluer à nouveau le produit final (y compris l'émetteur) et d'obtenir une autorisation indépendante de FCC et d'Industrie Canada.

- Dans le guide d'utilisation du produit final, l'intégrateur OEM doit s'abstenir de fournir des informations à l'utilisateur final portant sur les procédures à suivre pour installer ou retirer ce module RF ou pour changer les paramètres RF.