

APPENDIX H
: USER'S MANUAL

HP LD4200 LCD Monitor

User Guide



© 2009 Hewlett-Packard Development Company, L.P.

Microsoft, Windows, and Windows Vista are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.

All other product names mentioned herein may be trademarks of their respective companies.

Hewlett-Packard Company shall not be liable for technical or editorial errors or omissions contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material. The information in this document is provided "as is" without warranty of any kind, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, and is subject to change without notice. The warranties for Hewlett-Packard products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty.

This document contains proprietary information that is protected by copyright. No part of this document may be photocopied, reproduced, or translated to another language without the prior written consent of Hewlett-Packard Company.

First Edition (February 2009)

Document Part Number: 516388-001

About This Guide

This guide provides information on setting up the monitor, installing drivers, using the on-screen display menu, troubleshooting and technical specifications.

-
- ⚠ **WARNING!** Text set off in this manner indicates that failure to follow directions could result in bodily harm or loss of life.
 - ⚠ **CAUTION:** Text set off in this manner indicates that failure to follow directions could result in damage to equipment or loss of information.
 - 📄 **NOTE:** Text set off in this manner provides important supplemental information.
-

Table of contents

1 Product Features

HP LD4200 Model	1
-----------------------	---

2 Safety and Maintenance Guidelines

Important Safety Information	2
Maintenance Guidelines	3
Cleaning the Monitor	3
Shipping the Monitor	3

3 Setting Up the Monitor

Installing the Stand (Select Models)	4
Connecting the Speakers (Select Models)	5
Rotating to the Portrait Position (Select Models)	7
Using the Remote Control	8
Inserting the Batteries	8
Identifying Remote Control Buttons	9
Identifying Rear Components	10
Connecting to External Devices	11
Connecting to the Computer	11
Connecting Daisy Chain Monitors	13
VESA Mounting Support	13
Connecting Video Input	14
Connecting Component Input (480p/720p/1080p/1080i/480i)	15
Connecting HDMI Input (480p/720p/1080i/1080p)	16
Watching AV Outputs	17

4 Operating the Monitor

Software and Utilities	18
The Information File	18
The Image Color Matching File	18
Installing the .INF and .ICM Files	19
Installing from the CD	19
Downloading from the Worldwide Web	19
Screen Adjustment Options	20
Using the Auto-Adjustment Function	21
Using the On-Screen Display Menu	22
Using the Remote Control to Adjust the OSD	22
OSD Menu Selections	23

Selecting An Aspect Ratio Mode	26
Adjusting the Timer Function	27
Clock	27
On/Off Timer	27
Sleep Time	27
Auto Sleep	27
Selecting Options	28
Using the Key Lock	28
Using the ISM Method Option	28
Using the Tile Mode	28

Appendix A Troubleshooting

Solving Common Problems	31
Using the Worldwide Web	33
Preparing to Call Technical Support	33

Appendix B Technical Specifications

HP LD4200 LCD Monitor	34
Recognizing Preset Display Resolutions	36
HP LD4200 Preset Display Modes	36
DTV Mode	36
Power Indicator	37

Appendix C Controlling the Multiple Product

Connecting the Cable	38
RS-232C Configurations	38
Communication Parameter	39
Command Reference List	39
Transmission / Receiving Protocol	40
01. Power (Command : a)	41
02. Input Select (Command : b) (Main Picture Input)	42
03. Aspect Ratio (Command : c) (Main picture format)	42
04. Screen Mute (Command : d)	43
05. Volume Mute (Command : e)	43
06. Volume Control (Command : f)	44
07. Contrast (Command : g)	44
08. Brightness (Command : h)	45
09. Color (Command : i) (Video only)	45
10. Tint (Command : j) (Video only)	46
11. Sharpness (Command : k) (Video only)	46
12. OSD Select (Command : l)	46
13. Remote Lock /Key Lock (Command : m)	47
14. Balance (Command : t)	47
15. Color Temperature (Command : u)v	48
16. Abnomal state (Command : z)	48
17. ISM mode (Command: j p)	49
18. Auto Configure (Command: j u)	49
19. Key (Command : m c)	49
20. Tile Mode (Command : d d)	50

21. Tile H Position (Command : d e)	50
22. Tile V Position (Command : d f)	51
23. Tile H Size (Command : d g)	51
24. Tile V Size (Command : d h)	51
25. Tile ID Set (Command : d i)	51
26. Natural Mode (In Tilemode) (Command : d j)	52
27. Elapsed time return (Command : d l)	52
28. Temperature value (Command : d n)	52
29. Lamp fault Check (Command : d p)	53
30. Auto volume (Command : d u)	53
31. Speaker (Command : d v)	54
32. Time (Command : f a)	54
33. On Timer (On/Off Timer) On, Off (Command : F b)	55
34. Off Timer (On/Off Timer) On, Off (Command : f c)	55
35. On Timer (On/Off Timer) Time (Command : f d)	56
36. Off Timer (On/Off Timer) Time (Command : f e)	57
37. Sleep Time (Command : f f)	57
38. Auto Sleep (Command : f g)	58
39. Power On Delay (Command : f h)	58
40. Language (Command : f i)	59
41. DPM Select (Command : f j)	59
42. Reset (Command : f k)	59
43. S/W Version (Command : f z)	60
44. Input Select (Command : x b)	60
IR Codes	61
Remote Control IR Code	61
Output Wave	61
Configuration of Frame	61
Lead Code	62
Repeat Code	62
Bit Description	62
Frame Interval: Tf	62
IR Codes Table	62

Appendix D Agency Regulatory Notices

Federal Communications Commission Notice	64
Modifications	64
Cables	64
Declaration of Conformity for Products Marked with the FCC Logo (United States Only)	64
Canadian Notice	65
Avis Canadien	65
Power Cord Set Requirements	65
Product Environmental Notices	66
Materials Disposal	66
Chemical Substances	66
Disposal of Waste Equipment by Users in Private Household in the European Union	66
Restriction of Hazardous Substances (RoHS)	66

1 Product Features

HP LD4200 Model

The HP LD4200 LCD digital signage monitor has a wide aspect active matrix thin-film transistor (TFT) panel. The monitor features:

- 106.7 cm (42-inch) widescreen diagonal viewable area display with 1920 x 1080 native resolution
- Wide viewing angle up to 178° horizontal and 178° vertical
- Landscape or portrait wall mounting position
- Remote control with AAA type batteries
- Video signal inputs to support HDMI and VGA analog with VGA cable provided
- Video inputs support HDMI, composite, S-video and RS232 signal inputs
- Picture mode, tile mode, color temperature, aspect ratio, audio modes, auto volume, on/off timer, key lock, ISM method and auto config user controls
- PC sound jack, audio ports and speaker ports with audio cable provided
- Screen adjustment buttons on the back side of the monitor panel
- On-screen display (OSD) menu in several languages for ease of setup and screen optimization
- Plug and play capability if supported by the system
- Security cable provision on rear panel to lock down the monitor and help prevent theft
- Support VESA compliant mounting interface with 600 x 400 hole pattern
- Optional stand with cable management feature to position monitor on a desktop or table
- Optional mounting speakers
- Optional Thin Client mounting adapter plate
- Software and documentation CD provided

2 Safety and Maintenance Guidelines

Important Safety Information

A power cord is included with the monitor. If another cord is used, use only a power source and connection appropriate for this monitor. For information on the correct power cord set to use with the monitor, refer to the [Power Cord Set Requirements on page 65](#) in Appendix C.

⚠ **WARNING!** To reduce the risk of electric shock or damage to the equipment:

- Do not disable the power cord grounding feature. The grounding plug is an important safety feature.
- Plug the power cord in a grounded (earthed) outlet that is easily accessible at all times.
- Disconnect power from the product by unplugging the power cord from the electrical outlet.

For your safety, do not place anything on power cords or cables. Arrange them so that no one may accidentally step on or trip over them. Do not pull on a cord or cable. When unplugging from the electrical outlet, grasp the cord by the plug.

To reduce the risk of serious injury, read the *Safety and Comfort Guide*. It describes proper workstation, setup, posture, and health and work habits for computer users, and provides important electrical and mechanical safety information. This guide is located on the Web at <http://www.hp.com/ergo> and/or on the documentation CD, if one is included with the monitor.

⚠ **CAUTION:** For the protection of the monitor, as well as the computer, connect all power cords for the computer and its peripheral devices (such as a monitor, printer, scanner) to some form of surge protection device such as a power strip or Uninterruptible Power Supply (UPS). Not all power strips provide surge protection; the power strips must be specifically labeled as having this ability. Use a power strip whose manufacturer offers a Damage Replacement Policy so you can replace the equipment, if surge protection fails.

Use the appropriate and correctly sized furniture designed to properly support your HP LCD monitor.

⚠ **WARNING!** LCD monitors that are inappropriately situated on dressers, bookcases, shelves, desks, speakers, chests, or carts may fall over and cause personal injury.

Care should be taken to route all cords and cables connected to the LCD monitor so that they can not be pulled, grabbed, or tripped over.

Maintenance Guidelines

To enhance the performance and extend the life of the monitor:

- Do not open the monitor cabinet or attempt to service this product yourself. Adjust only those controls that are covered in the operating instructions. If the monitor is not operating properly or has been dropped or damaged, contact an authorized HP dealer, reseller, or service provider.
- Use only a power source and connection appropriate for this monitor, as indicated on the label/back plate of the monitor.
- Be sure the total ampere rating of the products connected to the outlet does not exceed the current rating of the electrical outlet, and the total ampere rating of the products connected to the cord does not exceed the rating of the cord. Look on the power label to determine the ampere rating (AMPS or A) for each device.
- Install the monitor near an outlet that you can easily reach. Disconnect the monitor by grasping the plug firmly and pulling it from the outlet. Never disconnect the monitor by pulling the cord.
- Turn the monitor off when not in use. You can substantially increase the life expectancy of the monitor by using a screen saver program and turning off the monitor when not in use.
- Slots and openings in the cabinet are provided for ventilation. These openings must not be blocked or covered. Never push objects of any kind into cabinet slots or other openings.
- Do not drop the monitor or place it on an unstable surface.
- Do not allow anything to rest on the power cord. Do not walk on the cord.
- Keep the monitor in a well-ventilated area, away from excessive light, heat or moisture.
- When removing the monitor base, you must lay the monitor face down on a soft area to prevent it from getting scratched, defaced, or broken.

Cleaning the Monitor

1. Turn off the monitor and the computer.
2. Unplug the monitor from the wall outlet.
3. Clean the monitor plastics with a clean cloth dampened with water.
4. Clean the monitor screen with an antistatic screen cleaner.

△ **CAUTION:** Do not use benzene, thinner, ammonia, or any other volatile substances to clean the monitor or the screen. These chemicals may damage the cabinet finish as well as the screen.

Shipping the Monitor

Keep the original packing box in a storage area. You may need it later if you move or ship the monitor.


3 Setting Up the Monitor

To set up the monitor, ensure that the power is turned off to the monitor, computer system, and other attached devices, then follow the instructions below.

Installing the Stand (Select Models)


1. Remove the six M4 x 12mm screws (1), monitor stand (2) and cable management clip (3) from the box.

Figure 3-1 Stand Accessory Contents

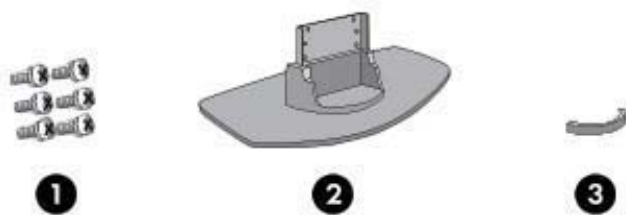


2. Place a soft cloth on the table and place the product with the screen facing downward. Connect the stand as shown in the following illustration.

Figure 3-2 Sliding the Stand Onto the Monitor

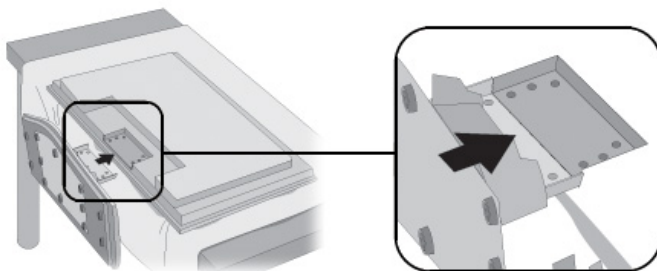

3. Use the screws to secure the stand to the rear side of the product.


Figure 3-3 Securing the Stand to the Monitor

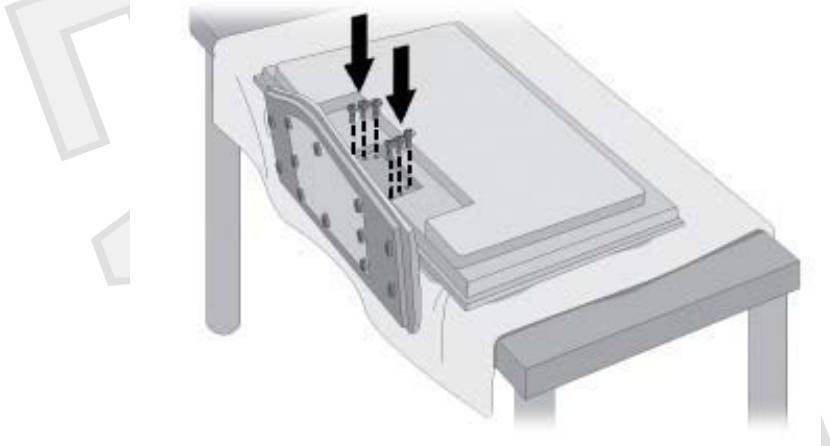

Connecting the Speakers (Select Models)


1. Mount the speakers onto the product.

Figure 3-4 Mounting the Speakers

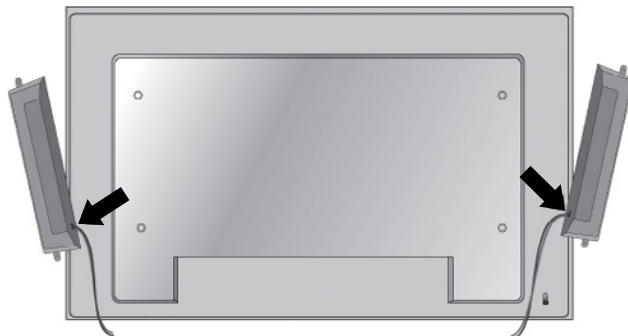

2. Use the four Taptite D3 x 12mm screws to secure the speakers to the monitor.

Figure 3-5 Securing the Speakers to the Monitor

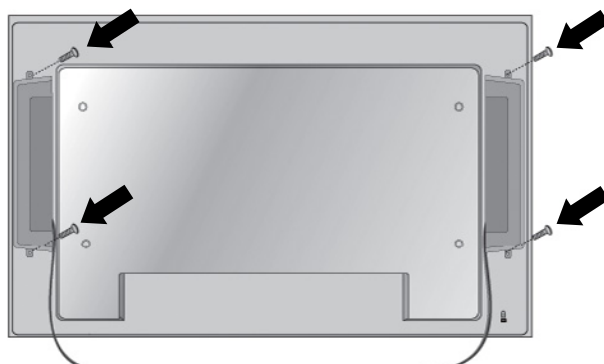

3. After installing the speakers, use the cable holders and cable ties (available on select models) to organize the speaker cables.

Figure 3-6 Using the Cable Holders (Feature Available on Select Models)



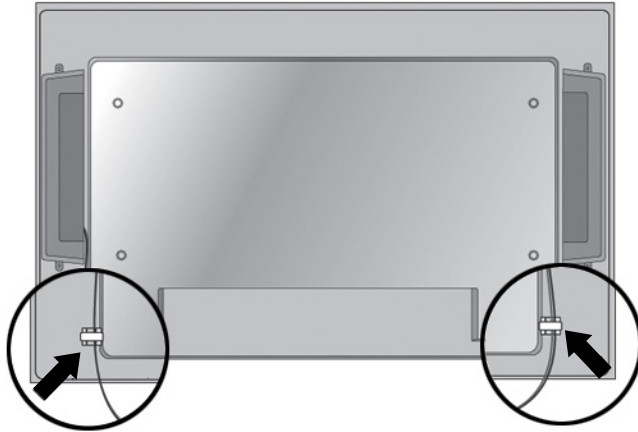


Figure 3-7 Using the Cable Ties (Feature Available on Select Models)

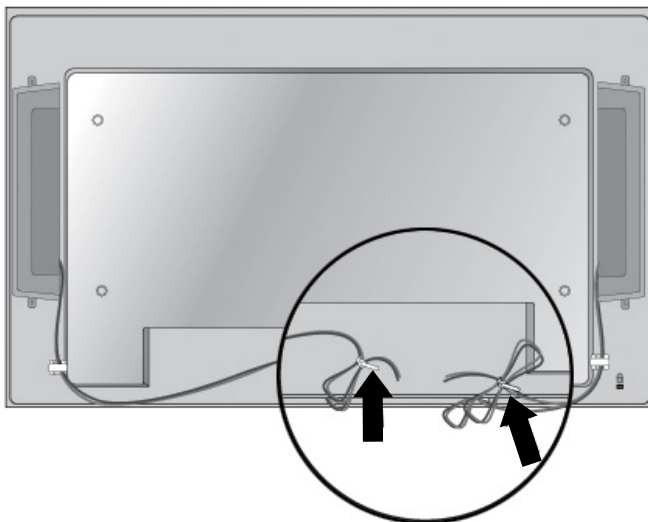

4. After installing the speakers, connect the input terminal with a proper color match.

Figure 3-8 Connecting to the Input Terminal

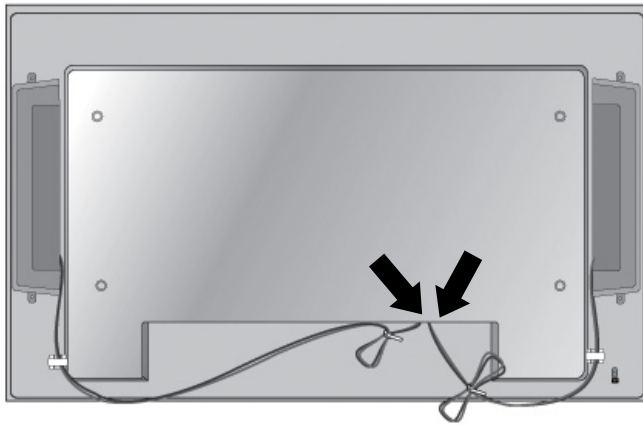

Rotating to the Portrait Position (Select Models)

When installing the monitor in the portrait position, rotate it clockwise based on its front. The monitor can be rotated in only one direction.


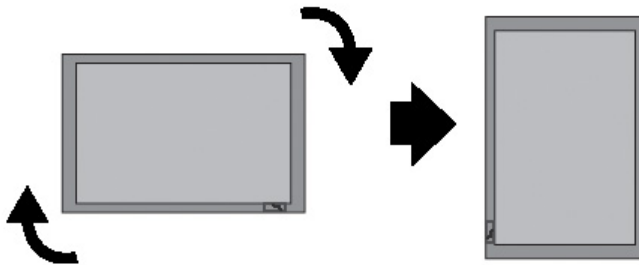
 **NOTE:** The monitor cannot be rotated if it is installed on the stand.

Figure 3-9 Installing Portrait




Using the Remote Control

Inserting the Batteries

1. Slide off the battery cover.
2. Insert the batteries with correct polarity (+/-).
3. Close the battery cover.


 **NOTE:** Dispose of used batteries in the recycle bin to prevent environmental pollution.

Figure 3-10 Inserting Batteries

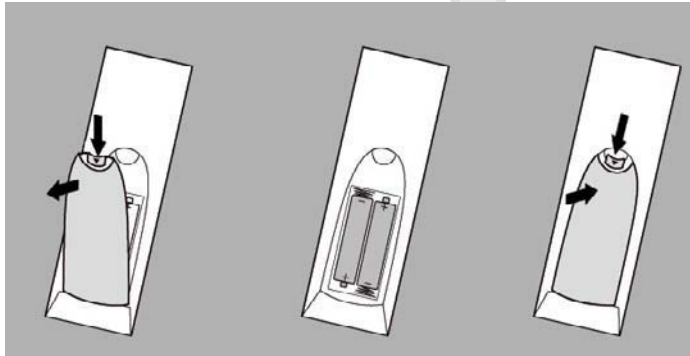

Identifying Remote Control Buttons

Figure 3-11 Remote Control Buttons

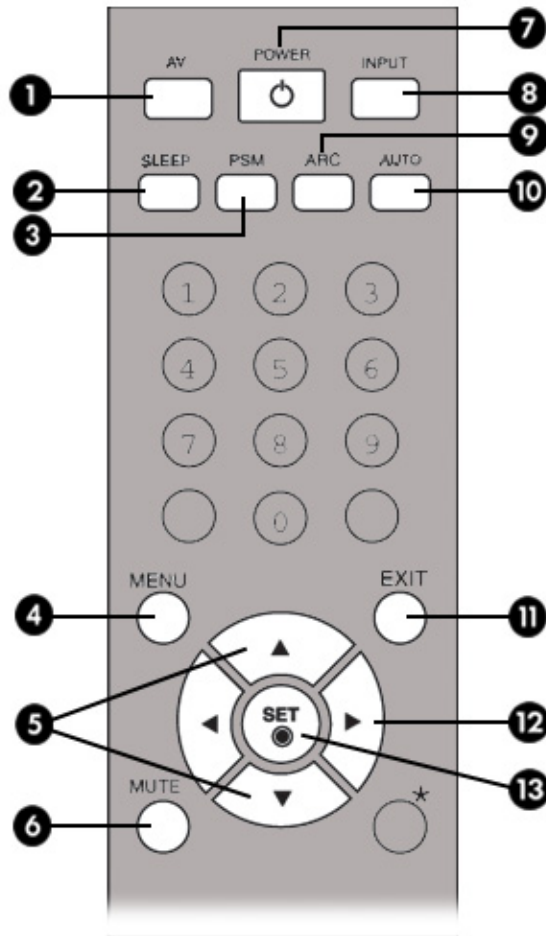


Component	Function
1 AV	Toggles through video: AV > Component1 > Component2 > RGB PC > HDMI/DVI
2 Sleep	When watching AV , RGB PC , HDMI/DVI , Component1 , Component2 , the product will be automatically turned off after a certain period of time. Press the button repetitively to select an appropriate time duration.
3 PSM	Toggles through present video settings.
4 Menu	Opens the menu selection.
5 Up and Down	Provides up and down direction adjustment.
6 Mute	Turns off sound.
7 Power	Turns the monitor on and off.
8 Input Select	Selects the video signal input. If you press the button once, the input signal window will open. Select the signal input type you want using the up or down button.
9 ARC	Aspect Ratio Correction. Toggles through aspect ratio options.
10 Auto	Automatic adjustment function (operational for the analog signal only).

Component	Function
11 Exit	Exits the menu.
12 Volume	Adjusts the sound up and down.
13 Set (Check)	Press to select a menu item or save changes.

Identifying Rear Components

Figure 3-12 Rear Components (The product image in the user guide could be different from the actual image)

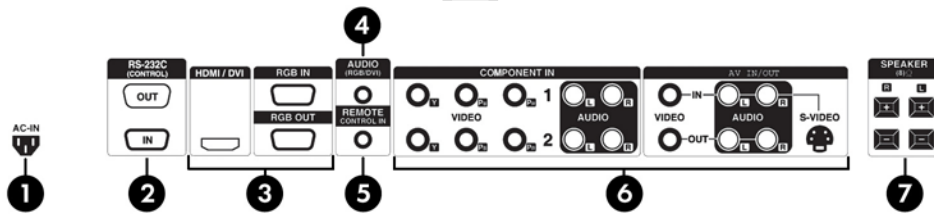

Component	Function
1 Power connector	Connects the AC power cord to the monitor
2 RS-232C serial ports	Connects to RS-232 devices
3 RGB PC, HDMI/DVI Ports	HDMI supports High Definition input and HDCP (High-bandwidth Digital Content Protection). Some devices require HDCP in order to display HD signals
4 PC Sound Jack	Connects the audio cable to the line-out jack of the PC sound card
5 Wired Remote Control Port	Connects a wired remote control to the monitor
6 AV Ports	Connects the video and audio equipment to the monitor
7 Speaker Ports	Connects the speakers to the monitor

NOTE: The line-out terminal is used to connect to the speaker, including a built-in amplifier (AMP). Be sure the connecting terminal of the PC sound card is checked before connecting. If the Audio Out of the PC sound card has only Speaker Out, reduce the PC volume. If the Audio Out of the PC sound card supports both Speaker Out and Line Out, convert to Line Out using the card jumper of the program. Refer to the manual that comes with the sound card for additional instructions.

Connecting to External Devices

Connecting to the Computer

1. Be sure the monitor, computer and all attached devices are turned off.
2. Connect the signal input cable:
 - a. For analog operation, connect the VGA (D-sub) signal cable to the RGB IN (1) connector on the rear of the monitor and the other end to the VGA connector (2) on the computer.


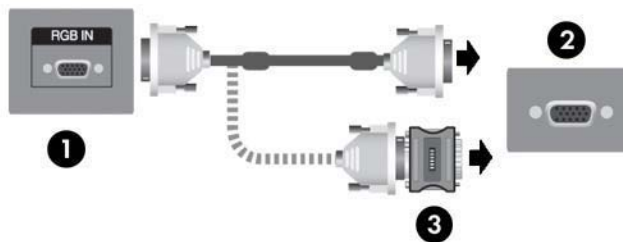
 **NOTE:** If connecting to a Mac computer, use the standard Macintosh adapter (3).

Figure 3-13 Connecting the VGA Signal Cable



- b. For digital operation, connect the HDMI to DVI signal cable (not included) to the HDMI/DVI (1) connector on the rear of the monitor and the other end to the DVI connector (2) on the computer.


 **NOTE:** Use shielded signal interface cables with ferrite cores to maintain standard compliance for this product.

Figure 3-14 Connecting the HDMI to DVI Signal Cable



3. Connect the audio cable (provided) to the Audio (RGB/DVI) (1) connector on the rear of the monitor and the other end to the line out jack (2) on the computer.

Figure 3-15 Connecting the Audio Cable



4. Connect the AC power cord to the power connector (1) on the rear of the monitor and the other end to an electrical outlet (2).


⚠ **WARNING!** To reduce the risk of electric shock or damage to the equipment:

- Do not disable the power cord grounding feature. The grounding plug is an important safety feature.
- Plug the power cord in a grounded (earthed) outlet that is easily accessible at all times.
- Disconnect power from the product by unplugging the power cord from the electrical outlet.

For your safety, do not place anything on power cords or cables. Arrange them so that no one may accidentally step on or trip over them. Do not pull on a cord or cable. When unplugging from the electrical outlet, grasp the cord by the plug.


To reduce the risk of serious injury, read the *Safety and Comfort Guide*. It describes proper workstation, setup, posture, and health and work habits for computer users, and provides important electrical and mechanical safety information. This guide is located on the Web at <http://www.hp.com/ergo> and/or on the documentation CD, if one is included with the monitor.

Figure 3-16 Connecting the Power Cord

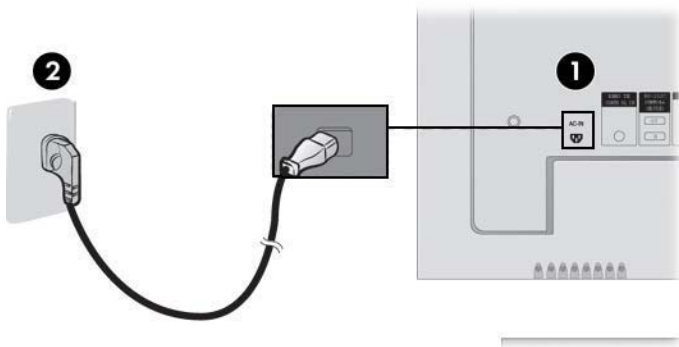

5. Turn on power to the monitor by pressing the front panel power button.

Figure 3-17 Front Panel Power Button

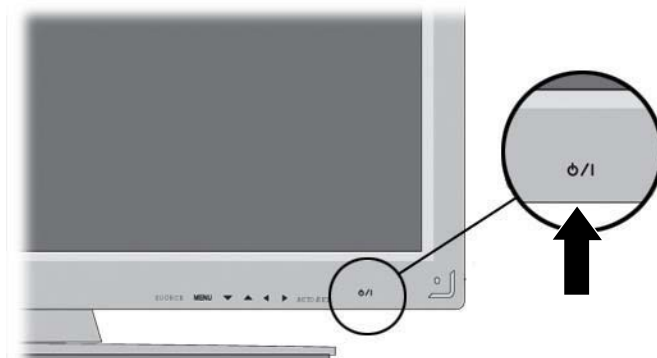



6. Turn on the computer.
7. Select an input signal.

Press the INPUT button on the remote control to select the input signal. Press the SET button to save your change.

Or, press the SOURCE button on the back side of the monitor panel. Press the AUTO/SET button to save your change.

- a. When connecting with a VGA signal input cable, select the **RGB PC** from the Input menu.
- b. When connecting with a HDMI to DVI signal input cable, select **HDMI/DVI** from the Input menu.

 **NOTE:** If connecting two monitors, connect the signal cables (HDMI to DVI and VGA) to each computer. Press the INPUT button on the remote control to select the computer use.


 **CAUTION:** Burn-in damage may occur on monitors that display the same static image on the screen for a prolonged period of time (12 consecutive hours of non-use). To avoid burn-in image damage on the monitor screen, you should always activate a screen saver application or turn off the monitor when it is not in use for a prolonged period of time or cycle between 5 minutes of static information and 10 seconds of a moving image. Image retention is a condition that may occur on all LCD screens. Screen burn-in is not covered under the HP warranty.

Connecting Daisy Chain Monitors

Use this function when displaying analog RGB inputs of a computer to the other product.

To use different products connected to each other, connect one end of the signal input cable (15-pin D-Sub VGA signal cable) to the RGB Out connector of product 1 and connect the other end of the RGB In connector of other products.

Figure 3-18 Connecting Several Monitors to the Computer

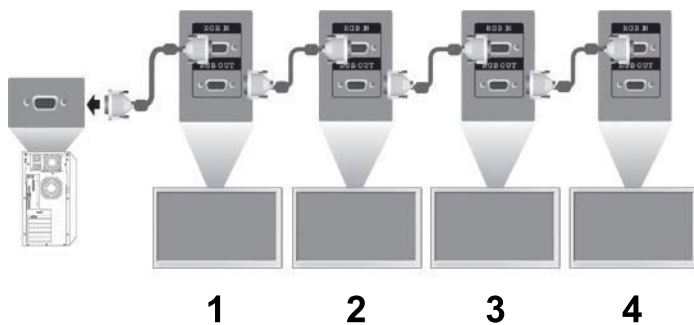


VESA Mounting Support

This product supports a VESA FDMI compliant mounting interface. On the rear of the monitor are four VESA mounting holes that allow you to install a mounting device to the monitor. The mounting devices are purchased separately and not available from HP. Refer to the instructions included with the mount for additional information.

A security cable provision is available on the rear of the monitor to help prevent theft. The cable and lock are available separate and can be purchased from HP.


Figure 3-19 VESA Mounting Holes

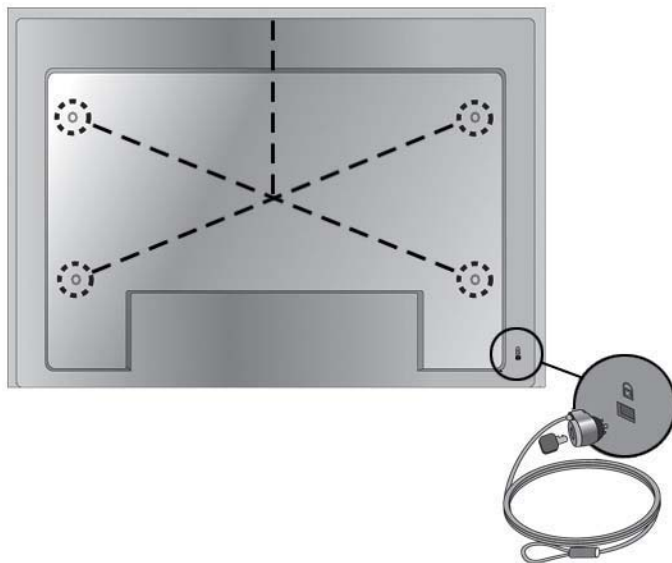

Connecting Video Input

1. Connect the video cable (not included) as shown in the following illustration, and then connect the power cable.
 - a. When connecting with a BNC cable (1), connect the input terminal to the monitor and VCR/DVD receiver.
 - b. When connecting with an S-Video cable (2), connect the S-Video input terminal to the monitor and VCR/DVD receiver to watch high image quality movies.

Figure 3-20 Connecting with the BNC and Audio Cables to VCR/DVD Receiver

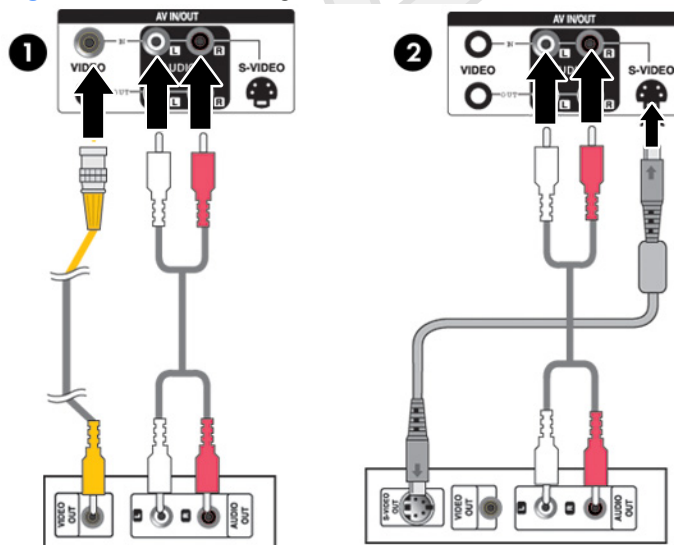


2. Select an input signal.

Press the INPUT button on the remote control to select the input signal. Press the SET button to save your change.

Or, press the SOURCE button on the back side of the monitor panel. Press the AUTO/SET button to save your change.


- a. When connecting with a BNC cable, select **AV** from the Input menu.
- b. When connecting with an S-Video cable, select **AV** from the Input menu.


 **NOTE:** When the BNC cable is connected simultaneously with S-Video cable, the S-Video input has a priority.

Connecting Component Input (480p/720p/1080p/1080i/480i)

1. Connect the video/audio cable (not included) as shown in the following illustration, and then connect the power cord. Connect the Component1 (1) or Component2 (2) input terminal to the monitor and HDTV receiver.

Figure 3-21 Connecting the BNC and Audio Cables to HDTV Receiver

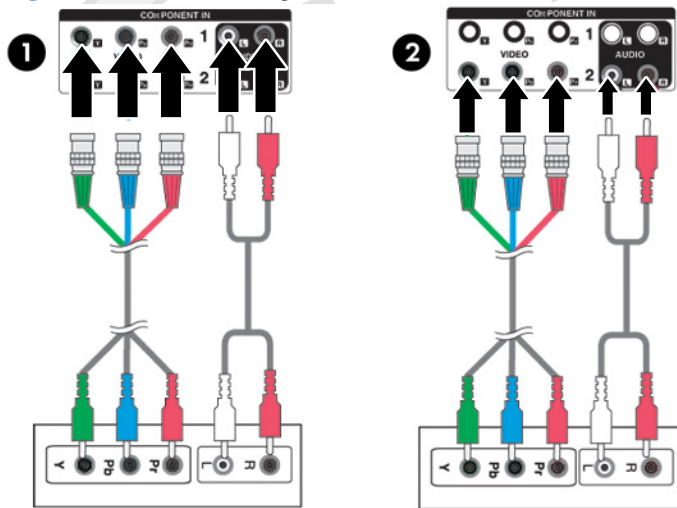

 **NOTE:** Some devices may require HDCP in order to display HD signals. Component does not support HDCP.

2. Select an input signal.

Press the INPUT button on the remote control to select the input signal. Press the SET button to save your change.

Or, press the SOURCE button on the back side of the monitor panel. Press the AUTO/SET button to save your change.


- a. Select **Component1** from the Input menu.
- b. Select **Component2** from the Input menu.

Connecting HDMI Input (480p/720p/1080i/1080p)

HDMI supports High Definition Input and HDCP (High-bandwidth Digital Content Protection). Some devices require HDCP in order to display HD signals.

1. Connect the video/audio cable (not included) as shown in the following illustration, and then connect the power cord.
 - (1) Connect an HDMI to DVI signal cable and RCA-PC audio cable to the monitor and VCR/DVD/ Set-top box
 - (2) Connecting an HDMI signal cable to the monitor and DVR/DVD/Set-top box

Figure 3-22 Connecting HDMI Input to VCR/DVD/Set-Top Box

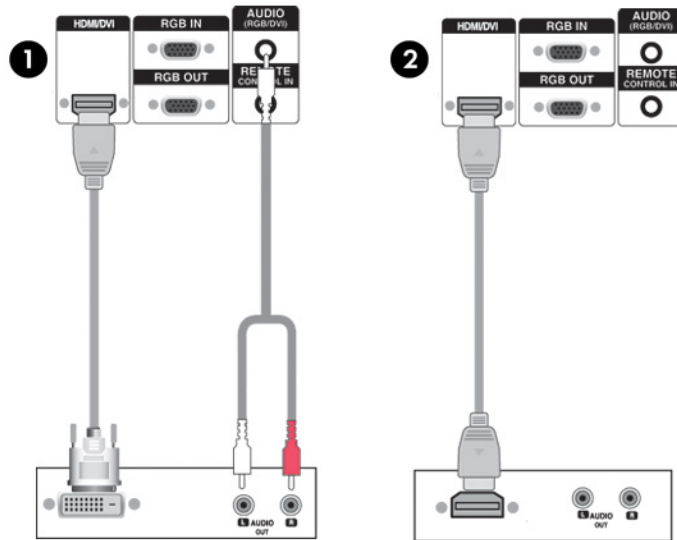

2. Select an input signal.

Press the INPUT button on the remote control to select the input signal. Press the SET button to save your change.


Or, press the SOURCE button on the back side of the monitor panel. Press the AUTO/SET button to save your change.

When connecting with an HDMI to DVI signal cable or HDMI signal input cable, select **HDMI/DVI** from the Input menu.

Watching AV Outputs

When using AV input, you can connect the AV Out to other monitors. Connect the BNC cable (1) and audio cable (2) to the video/TV (3) and to the monitor (4).

Figure 3-23 Connecting AV Out

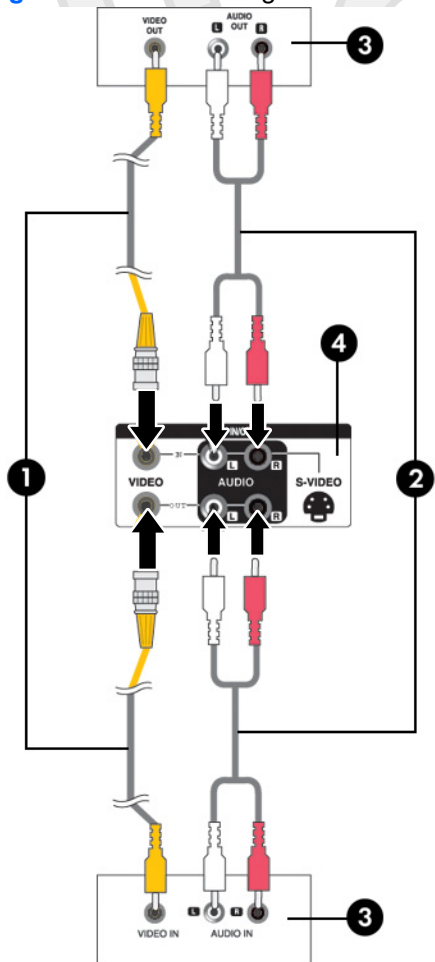

4 Operating the Monitor

Software and Utilities

The CD that comes with the monitor contains files that you can install on the computer to enhance the performance of the monitor.

- HP monitor driver software, which automatically detects the computer's Microsoft Operating System and installs the corresponding .INF (Information) and .ICM (Image Color Matching) driver files that are used to configure the HP monitor
- Auto-adjustment pattern utility to optimize the display

PDF Complete is supplied on this CD and can be installed from the menu.

 **NOTE:** If the monitor does not include a CD, the .INF and .ICM files can be downloaded from the HP monitors support Web site. See [Downloading from the Worldwide Web on page 19](#) in this chapter.

The Information File

The setup information, or .INF file, defines monitor resources used by Microsoft Windows operating systems to ensure monitor compatibility with the computer's graphics adapter.

The Image Color Matching File

The image color matching, or .ICM file, is a color data file that is used in conjunction with graphics applications to provide consistent color matching from monitor screen to printer, or from scanner to the monitor screen. The .ICM file is only activated from within the graphics applications that support this feature.

Installing the .INF and .ICM Files

After you determine that you need to update, you can install the .INF and .ICM files from the CD or download them.

Installing from the CD

To install the .INF and .ICM files on the computer from the CD:

1. Insert the CD in the computer CD-ROM drive. The CD menu is displayed.
2. View the **Monitor Driver Software Readme** file.
3. Select **Install Monitor Driver Software**.
4. Follow the on-screen instructions.
5. Ensure that the proper resolution and refresh rates appear in the Windows Display control panel.

 **NOTE:** You may need to install the digitally signed monitor .INF and .ICM files manually from the CD in the event of an installation error. Refer to the Monitor Driver Software Readme file on the CD.


Downloading from the Worldwide Web

To download the latest version of .INF and .ICM files from the HP monitors support Web site:

1. Refer to <http://www.hp.com/support> and select the country region.
2. Follow the links for the monitor to the support page and download page.
3. Ensure the system meets the requirements.
4. Download the software by following the instructions.

Screen Adjustment Options

Figure 4-1 Front Panel Controls

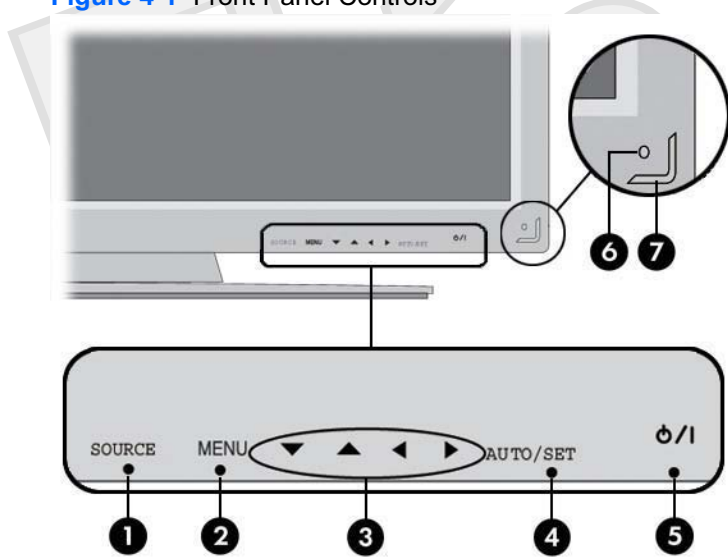

Component	Function
1 Source	<p>Toggles between video inputs:</p> <ul style="list-style-type: none"> • AV - Composite Video, S-Video • Component1 - HDTV, DVD • Component2 - HDTV, DVD • RGB PC - VGA or 15-pin D-Sub analog signal • HDMI/DVI - Digital signal
2 Menu	Opens or closes the OSD (On-screen Display) menu screen.
3 OSD Select/Adjust buttons	<p>Selects an OSD menu icon or adjusts the settings in the OSD screen.</p> <ul style="list-style-type: none"> ▼ ▲ Adjusts up and down ◀ ▶ Adjusts the volume
4 Auto/Set	When OSD window is closed, activates the auto adjustment feature to optimize the screen image. When OSD window is open, press to select a menu item or save changes.
5 Power	Press to turn on the power. Press again to turn it off.
6 IR Receiver	Receives signals from the remote control.
7 Power Indicator	Lights up blue when the display operates normally (on mode). If the display is in sleep (Energy Saving) mode, the indicator color changes to amber.

Using the Auto-Adjustment Function

You can optimize the screen performance for the VGA (analog) input by using the Auto/Set button on the monitor (AUTO button on the remote control) and the auto-adjustment pattern software utility on the CD provided.

Do not use this procedure if the monitor is using an HDMI to DVI input. If the monitor is using a VGA (analog) input, this procedure can correct the following image quality conditions:






- Fuzzy or unclear focus
- Ghosting, streaking or shadowing effects
- Faint vertical bars
- Thin, horizontal scrolling lines
- An off-center picture

To use the auto-adjustment feature:

1. Allow the monitor to warm up for 20 minutes before adjusting.
2. Press the [Auto/Set](#) button on the back side of the monitor panel.
If the result is not satisfactory, continue with the procedure.
3. Insert the CD in the disc drive. The CD menu is displayed.
4. Select **Open Auto-Adjustment Software**. The setup test pattern is displayed.
5. Press the [Auto/Set](#) button on the back side of the monitor panel to produce a stable, centered image.
6. Press the [ESC](#) key or any other key on the keyboard to exit the test pattern.

Using the On-Screen Display Menu


The monitor settings can be adjusted from the On-Screen Display (OSD) menu.

Icon	Main Menu	Function Description
	Picture	Adjusts screen brightness, contrast and color
	Audio	Adjusts the audio options
	Time	Adjusts the timer options
	Option	Adjusts the screen status according to the circumstances
	Information	Adjusts Set ID and check serial number and software version

Using the Remote Control to Adjust the OSD

Use the OSD to adjust the screen image based on your viewing preferences. To access the OSD, do the following:


1. If the monitor is not already on, press the power button to turn on the monitor.

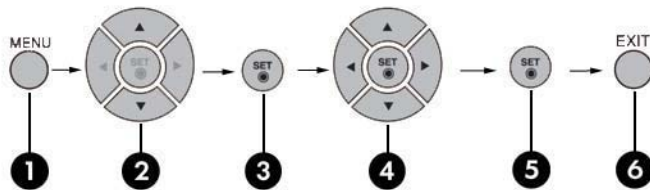



2. Press the MENU button (1) on the remote control.
3. To access a control, use the ▼ ▲ buttons (2).
4. When the icon you want becomes highlighted, press the SET button (3).
5. Use the ▼ ▲ ◀ ▶ buttons (4) to adjust the item to the desired level.
6. Accept the changes by pressing the SET (5) button.
7. Exit the OSD menu by pressing the EXIT button (6).



OSD Menu Selections

The following table lists the On-Screen Display (OSD) menu selections and their functional descriptions.

Icon	Main Menu	Submenu	Description
	Picture	Picture Mode	<p>Selects your screen presets. Toggle between:</p> <ul style="list-style-type: none"> • Vivid - select to display with a sharp image. • Standard - the most general and natural screen display status. • Cinema - lowers brightness by one level. • Sport - displays with a soft image. • Game - to enjoy dynamic image when playing a game. • User 1, 2 - allows the user defined settings: <ul style="list-style-type: none"> ◦ Backlight: controls the brightness of the screen, adjust the brightness of the LCD panel. ◦ Contrast: adjusts the difference between the light and dark levels. ◦ Color: adjusts the color to desired level. ◦ Sharpness: adjusts the clearness of the screen. ◦ Tint: adjusts the tint to a desired level. ◦ Expert: compensates for each image mode, or adjust image values according to a particular image (applies only to User 2 menu.) <p>NOTE: If the Picture Mode setting in the Picture menu is set to Vivid, Standard, Cinema, Sport or Game, the subsequent menus will be automatically set</p>
		Color Temperature	<p>Selects color settings:</p> <ul style="list-style-type: none"> • Cool - slightly bluish white. • Medium - slightly purplish white. • Warm - slightly reddish white. • User - select this option to use the user-defined settings and set your own colors levels: <ul style="list-style-type: none"> ◦ Red ◦ Green ◦ Blue

Icon	Main Menu	Submenu	Description
		Advanced	<p>Selects the following screen color adjustment settings:</p> <ul style="list-style-type: none"> • Gamma - set your own gamma value. On the monitor, high gamma values display whitish images and low gamma values display high contrast images. • Film Mode - function works in the following mode: AV, Component 480i. When you watch a movie, this function adjusts the set to the best picture appearance. • Black Level - function works in the following mode: AV (NTSC), HDMI/DVI adjusts the contrast and the brightness of the screen using the black level of the screen. • NR - removing the noise up to the point where it does not damage the original picture.
		Aspect Ratio	<p>Selects the image size of the screen to:</p> <ul style="list-style-type: none"> • 16:9 - widescreen mode. • Just Scan - allows you to enjoy the transmitted data fully without any images cut off. (This menu is activated only in 720p, 1080p and 1080i in Component mode.) • Original - the aspect ratio is not adjusted from the original. It is set by the program being watched. • 4:3 - the picture format is 4:3 aspect ratio. • 1:1 - the aspect ratio is not adjusted from the original. Used in PC mode. (Only HDMI/DVI PC, RGB PC) • 14:9 - programs are viewed normally in 14:9 with black bars added to the top and bottom. The 4:3 programs are magnified on the top/bottom and left/right sides. • Zoom1,2 - 4:3 programs are magnified until they fill the 16:9 screen. The top and bottom will be cut off.
		Picture Reset	<p>Returns the Picture Mode, Color Temperature, and Advance menu settings to the default factory settings.</p>
		Screen	<p>Adjusts the screen video to:</p> <ul style="list-style-type: none"> • Auto config (RGB PC Input only): This button is for the automatic adjustment of the screen position, clock and phase. This function is available for analog signals only. • Manual Config: If the picture isn't clear after auto adjustment and characters are still trembling, adjust the picture phase manually using the following functions: <ul style="list-style-type: none"> ◦ Clock - minimizes any vertical bars or strips visible on the screen background. The horizontal screen size will also change. This function is available for analog signals only. The clock function is not available in Component, HDMI/DVI/AV. ◦ Phase - adjusts the focus of the display. This item allows you to move any horizontal noise and clear or sharpen the image of characters. This function is available for analog signals only. The phase function is not available in Component, HDMI/DVI/AV.

Icon	Main Menu	Submenu	Description
			<ul style="list-style-type: none"> ◦ H-Position - moves the screen position horizontally. ◦ V-Position - moves the screen position vertically. ◦ H-Size - adjusts the horizontal size of the screen. ◦ V-Size - adjusts the vertical size of the screen.
			XGA Mode (RGB-PC only) - provides improved or better picture quality, select the same mode corresponding to computer resolution.
			Reset: returns Manual Config to the default factory settings.
	Audio	Sound Mode	<p>Automatically selects the best sound tone quality depending on the video type that you're currently watching:</p> <ul style="list-style-type: none"> • Clear Voice - differentiates the human sound from others and helps users listen to human voices better. • Standard - most commanding and natural audio. • Music - select the option to enjoy the original sound when listening to the music. • Cinema - select this option to enjoy sublime sound. • Sport - select this option to watch sports broadcasting. • Game - select this option to enjoy dynamic sound when playing a game. • User - select this option to use the user-defined audio settings. <p>NOTE: When connected to a computer and the Sound Mode setting, the audio menu is Clear Voice, Standard Music, Cinema or Sport. The available menus are Balance, Auto Volume, Speaker.</p>
		Auto Volume	Adjusts uneven sound volumes across all channels or signals automatically to the most appropriate level. To use this feature select On.
		Balance	Use this function to balance sound from the left and right speakers.
		Speaker	Adjusts internal speaker status. If you want to use an external hi-fi stereo system, turn off the internal speakers of the set.
	Time	Clock	Resets the clock if the current time is incorrect.
		On/Off Timer	The time off automatically switches the set to standby at the pre-set time.
		Sleep Time	Automatically turns off power when the time set by a user is passed.
		Auto Sleep	If active and there is no input signal, the set switches to off mode automatically after 10 minutes.
		Power On Delay	When connecting multiple monitors and turning the power on, the monitors are turned on individually to prevent overload.

Icon	Main Menu	Submenu	Description
	Option	Language	Selects the language in which the OSD menu is displayed.
		Key Lock	Sets up the monitor so that it can only be used with the remote control. This feature can prevent unauthorized viewing.
		ISM Method	Avoids allowing a fixed or burn-in image to remain on the screen for a long period of time.
		Power Indicator	Sets the power indicator on the front of the monitor to On or Off.
		Logo Light	Sets the Logo light on the front of the monitor to On or Off.
		DPM (Display Power Management) Select	Turns the power saving mode on or off.
		Tile Mode	Enlarges the screen and is also used with several products to view the screen. To use this function, it: <ul style="list-style-type: none"> • must be displayed with several other products. • must be in a function that can be connected to RS232C or RGB Out.
	Information	Set ID	Assigns a unique Set ID number (name assignment) to each product when several products are connected for display. Specify the number (1 ~ 99) using the up and down buttons and exit. Use the assigned Set ID to individually control each product using the Product Control Program.
		Serial No	Displays the serial numbers of the product.
		SW Version	Displays the software version.

Selecting An Aspect Ratio Mode

The aspect ratio modes available for your selection depends on the current input source. Use the following table to determine which mode is available for your monitor.

ARC \ Mode	AV	Component	HDMI/DVI		RGB
			DTV	PC	PC
16:9	X	X	X	X	X
Just Scan		X	X		
Original	X				
4:3	X	X	X	X	X
1:1				X	X
14:9	X				
Zoom1	X				
Zoom2	X				

Adjusting the Timer Function

Use the remote control to set the following timer options.

Clock

The Clock menu allows you to reset the clock manually if the current time is incorrect. To reset the clock:

1. Press the MENU button and then use ▼▲ buttons to select the **Time** menu.
2. Press the ► button and then use ▼▲ buttons to select the Clock menu.
3. Press the ► button and then use ▼▲ buttons to set the hour (00~23).
4. Press the ► button and then use ▼▲ buttons to set the minutes (00~59).

On/Off Timer

The on/off timer menu lets you set the monitor to automatically switch to standby at a pre-set time:

1. Press the MENU button and then use ▼▲ buttons to select the Time menu.
2. Press the ► button and then use ▼▲ buttons to select On/Off Timer.
3. Press the ► button and then use ▼▲ buttons to set the hour (00~23).
4. Press the ► button and then use ▼▲ buttons to set the minutes (00~59).
5. Press the ► button and then use ▼▲ buttons to select On or Off.

Sleep Time

The sleep time menu lets you set the monitor power to automatically turn off when the time set by a user is passed.

1. Press the MENU button and then use ▼▲ buttons to select the Sleep Time menu.
2. Press the ► button and then use ▼▲ buttons to set the hour (00~23).
3. Press the ► button and then use ▼▲ buttons to set the minutes (00~59).

Auto Sleep

To set the monitor to switch to the off mode automatically after 10 minutes if Auto Sleep is active and there is no input signal:

1. Press the MENU button and then use ▼▲ buttons to select the Auto Sleep menu.
2. Press the ► button and then use ▼▲ buttons to select On or Off.

 **NOTE:** In the event of a power interruption (disconnection or power failure), the Sleep Time clock must be reset.

NOTE: Once the On or Off time is set, these functions operate daily at the preset time. Off time function overrides On time function if they are set to the same time. When On time is operated, input screen is turned on as it was turned off.

Selecting Options

Using the Key Lock

The monitor can be set up so you can only use the remote control. To lock or unlock the OSD screen adjustment:

1. Open the OSD menu and select Option.
2. Select Key Lock from the menu list.
3. To lock the OSD screen adjustment, set the Key Lock tab to the ON position.
4. To unlock the OSD screen adjustment, press the MENU button on the remote control and set the Key Lock tab to the Off position.

Using the ISM Method Option

A frozen or still picture from a PC/Video game that is displayed on the screen for a prolonged period of time could result in a ghost image remaining even when you change the image. To avoid a fixed or burn-in image to remain on the screen for a long period of time:


1. Open the OSD menu and select Option.
2. Select ISM Method from the menu list.
3. Select one of the following menu options:
 - Normal - leave on normal if you don't foresee image burn-in being a problem.
 - White wash - white wash fills the screen with solid white. This helps removes permanent images burned into the screen. A permanent image may be impossible to clear entirely with white wash.
 - Orbiter - may help prevent ghost images. However, it is best not to allow any fixed image to remain on the screen. To avoid a permanent image on the screen, the screen will move every 2 minutes.
 - Inversion - this function inverts the panel color of the screen. The panel color is automatically inverted every 30 minutes.
 - Dot Wash - this function moves the black dots of the screen. The black dots are automatically moved every 5 second.

Using the Tile Mode

Tile Mode is used to enlarge the screen and also used with several products to view the screen. This function must be displayed with various other products and connected to RS-232C or RGB Out.

Tile mode allows you to:

- Choose tile alignment and set the ID of the current product to set location
- Set column by row ($r = 1, 2, 3, 4, 5$; $c = 1, 2, 3, 4, 5$) up to 5 x 5
- Configure an integration screen as well as configure one by one display

 **NOTE:** Adjustments made to the settings will be saved only after pressing the SET button on the remote control.

A Troubleshooting

Solving Common Problems

The following table lists possible problems, the possible cause of each problem, and the recommended solutions.

Problem	Possible Cause	Solution
No image is displayed.	Power cord not connected.	Be sure the power cord is properly connected to the outlet. <ul style="list-style-type: none">• Verify that the outlet has power to it.• Check that the fuse or breaker has not tripped or burned out. See if the power switch is turned on. May need service.
Power is on, power indicator is blue, but the screen appears extremely dark.	Screen needs adjustments	Adjust brightness and contrast again. Backlight may need repair.
Power indicator is amber.	Monitor in power saving mode.	Move the mouse or press any key on the keyboard. Turn off equipment and then back on.
Out of Range message appears.	Input signal is out of frequency range.	The signal from the PC (video card) is out of the vertical or horizontal frequency range of the monitor. Adjust the frequency range by referring to the specifications in this manual (maximum resolution: RGB - 1920 x 1080 @ 60Hz; HDMI - 1920 x 1080 @ 60Hz. NOTE: Vertical Frequency - to enable the user to watch the monitor display, screen image should be changed tens of times every second like a fluorescent lamp. The vertical frequency or refresh rate is the times of image display per second. The unit is measured in Hz. Horizontal Frequency - the horizontal interval is the time to display one vertical line. When 1 is divided by the horizontal interval, the number of horizontal lines displayed every second can be tabulated as the horizontal frequency. The unit is measured in kHz.

Problem	Possible Cause	Solution
Check signal cable message appears.	Signal cable is not connected.	<p>The signal cable between the PC and monitor is not connected.</p> <p>Check the signal cable.</p> <p>Press the INPUT button on the remote control to check the input signal.</p>
"Unknown Product" message appears when the monitor is connected.	Monitor driver is not installed.	<p>Install the monitor driver, which is provided with the monitor or download from the HP Web site (http://www.hp.com).</p> <p>See if the plug & play function is supported by referring to the video card's user manual.</p>
"Key Lock On" message appears when pressing the Menu button.	Key Lock function is turned on.	<p>The control locking function prevents unintentional OSD setting change due to careless usage. To unlock the controls, simultaneously press the Menu button and ► button for several seconds. (You cannot set this function using the remote control buttons. You can set this function in the monitor only.)</p>
The screen looks abnormal; screen position is wrong.	Screen is out of adjustment.	<p>D-sub analog signal - press the AUTO button on the remote control to automatically select the optimal screen status that fits into the current mode. If the adjustment is not satisfactory, use the Position OSD menu.</p> <p>Check that the video card resolution and frequency are supported by the monitor. If the frequency is out of range, set to the recommended resolution in the Control Panel > Display > Setting menu of the operating system.</p>
Lines appear on the background screen.	Screen is out of adjustment.	<p>D-sub analog signal - press the AUTO button on the remote control to automatically select the optimal screen status that fits into the current mode. If the adjustment is not satisfactory, use the Clock OSD menu.</p>
Horizontal noise appears or the characters look blurred.	Screen is out of adjustment.	<p>D-sub analog signal - press the AUTO button on the remote control to automatically select the optimal screen status that fits into the current mode. If the adjustment is not satisfactory, use the Phase OSD menu.</p>
The screen displays abnormally.	Using an incorrect Input signal.	<p>The proper input signal is not connected to the signal port. Connect the signal cable that matches with the source input signal.</p>
An after image appears when the monitor is turned off.	Using a fixed image too long.	<p>If you used a fixed image for a long time, the pixels may be damaged. Use a screen-saver function.</p>

Problem	Possible Cause	Solution
No sound.	Audio cable not connected.	Check that the audio cable is properly connected. Adjust the volume. Check if the sound is set properly.
Sound is too dull.	Equalizer is not balanced.	Select the appropriate equalize sound.
Sound is too low.	Sound needs adjusting.	Adjust the volume by pressing the volume buttons on the remote control.
Screen has poor color resolution (16 colors).	Color is not set correctly.	Set the number of colors to more than 24 bits (true color). Select Control Panel > Display > Settings > Color table menu in the operating system.
Screen color is unstable or monocolored.	Signal cable or video card connection is loose.	Check the connection status of the signal cable or reinsert the PC video card.
Black spots appear on the screen.	Characteristics of the LCD panel.	Several pixels (red, green, white or black color) may appear on the screen, which can be attributable to the unique characteristics of the LCD panel. It is not a malfunction of the LCD.
The power suddenly turned off.	Sleep timer setting turned on or power interrupted.	Check that the sleep timer is set. Check the power control settings. If power is turned off after the message, "CAUTION! FAN ERROR!" appears, the fan is out of order. Contact your local service center.

Using the Worldwide Web


For the online access to technical support information, self-solve tools, online assistance, community forums of IT experts, broad multivendor knowledge base, monitoring and diagnostic tools, go to <http://www.hp.com/support>

Preparing to Call Technical Support

If you can not solve a problem using the troubleshooting tips in this section, you may need to call technical support. Contact your regional HP authorized service provider. Have the following information available when you call:

- Monitor model number
- Serial number for the monitor
- Purchase date on invoice
- Conditions under which the problem occurred
- Error messages received
- Hardware configuration
- Hardware and software you are using

B Technical Specifications

 **NOTE:** All performance specifications are provided by the component manufacturers. Performance specifications represent the highest specification of all HP's component manufacturers' typical level specifications for performance and actual performance may vary either higher or lower.

HP LD4200 LCD Monitor

Table B-1 HP LD4200 Specifications

Display	106.73 cm	42 inches
Type	TFT LCD	
Viewable Image Size	106.73 cm diagonal	42-inch diagonal
Pixel Pitch	0.681 mm x 0.681 mm	
Maximum Weight		
Without Stand & Speaker	21.2 kg	46.7 lbs.
With Speaker	21.9 kg	48.3 lbs.
With Stand	24.5 kg	54.0 lbs.
With Stand & Speaker	25.3 kg	55.7 lbs.
Dimensions (Without Stand & Speaker)		
Height	58.76 cm	23.1 inches
Depth	11.39 cm	4.5 inches
Width	99.56 cm	39.2 inches
Dimensions (With Speaker)		
Height	58.76 cm	23.1 inches
Depth	12.57 cm	4.9 inches
Width	99.56 cm	39.2 inches
Dimensions (With Stand)		
Height	67.6 cm	26.6 inches
Depth	29.3 cm	11.5 inches
Width	99.56 cm	39.2 inches
Dimensions (With Stand & Speaker)		

Table B-1 HP LD4200 Specifications (continued)

Height	67.6 cm	26.6 inches
Depth	29.3 cm	11.5 inches
Width	99.56 cm	39.2 inches
Power		
Rated Voltage	AC 100-240V ~50/60Hz 2.2 A	
Power Consumption		
On Mode	220W Typical	
Sleep Mode	≤ 1W (RGB) / 4W (HDMI/DVI)	
Off Mode	≤ 1W	
Maximum Resolution		
RGB	1920 x 1080 @ 60Hz	
HDMI/DVI	1920 x 1080 @ 60Hz (if supported by OS or video card type)	
Recommended Resolution		
RGB	1920 x 1080 @ 60Hz	
HDMI/DVI	1920 x 1080 @ 60Hz (if supported by OS or video card type)	
Horizontal Frequency		
RGB	30 - 83kHz	
HDMI/DVI	30 - 83kHz	
Vertical Frequency		
RGB	56 - 76Hz	
HDMI/DVI	56 - 60Hz	
Synchronization Type	Composite/Separate/Digital	
Input Connector	15-pin D-Sub type, HDMI (digital), S-Video, Composite Video, Component, RS-232C	
Environmental Conditions		
Operating Temperature	0 ~ 35° C, Humidity 10% ~ 80%	
Storage Temperature	-20 ~ 60° C, Humidity 5% ~ 90%	
Audio (Select Models)		
RMS Audio Output	10W + 10W (R+L)	
Input Sensitivity	0.7 rms	
Speaker Impedance	8 Ohms	

Recognizing Preset Display Resolutions

The display resolutions listed below are the most commonly used modes and are set as factory defaults. This monitor automatically recognizes these preset modes and they will appear properly sized and centered on the screen.


HP LD4200 Preset Display Modes

Table B-2 HP LD4200 Factory Preset Display Modes

Preset	Pixel Format	Horz Freq (kHz)	Vert Freq (Hz)
1	640 x 350	31.469	70.8
2	720 x 400	31.468	70.8
*3	640 x 480	31.469	59.94
4	640 x 480	37.5	75
*5	800 x 600	37.879	60.317
6	800 x 600	46.875	75
7	832 x 624	49.725	74.55
*8	1024 x 768	48.363	60
9	1024 x 768	60.123	75.029
*10	1280 x 720	44.772	59.855
*11	1280 x 768	47.7	60
*12	1360 x 768	47.72	54.799
*13	1366 x 768	47.4	60
*14	1280 x 1024	63.981	60.02
15	1280 x 1024	79.98	75.02
*16	1680 x 1050	65.290	60
*17	1920 x 1080	67.5	60
1 ~17 RGB Mode			
* HDMI/DVI Mode			

DTV Mode

	Component	HDMI/DVI (DTV)
480i	o	x
480p	o	o
720p	o	o
1080i	o	o
1080p	o	o

 **NOTE:** DTV/PC selection on RGB and HDMI/DVI inputs is available for PC resolutions 640 x 480/60Hz, 1280 x 720/60Hz, 1920 x 1080/60Hz and DTV resolutions: 480p, 720p, 1080p.

Power Indicator


Mode	Indicator Light
On Mode	Blue
Sleep Mode	Amber
Off Mode	

C Controlling the Multiple Product

Use this method to connect several monitors to a single computer. You can control several monitors at a time by connecting them to a single computer.

Connecting the Cable

Connect the RS-232C cable as shown in the following illustration. The RS-232C protocol is used for communication between the computer and the monitor. You can turn the monitor on/off, select an input source or adjust the OSD menu from the computer.

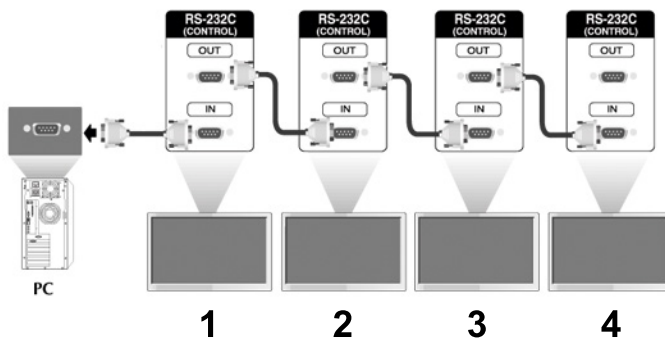

RS-232C Configurations

7-Wire Configurations (Standard RS-232C cable)				3-Wire Configurations (Not Standard)			
PC		Monitor		PC		Monitor	
RXD	2	3	TXD	RXD	2	3	TXD
TXD	3	2	RXD	TXD	3	2	RXD
GND	5	5	GND	GND	5	5	GND
DTR	4	6	DSR	DTR	4	6	DSR
DSR	6	4	DTR	DSR	6	4	DTR
RTS	7	8	CTS	RTS	7	8	CTS
CTS	8	7	RTS	CTS	8	7	RTS
D-Sub		D-Sub 9		D-Sub		D-Sub 9	
(Female)		(Female)		(Female)		(Female)	

Communication Parameter

- Baud Rate: 9600baudRate (UART)
- Data Length: 8bits
- Parity Bit: None
- Stop Bit: 1bit
- Flow Control: None
- Communication Code: ASCII code
- Use a crossed (reverse) cable

Command Reference List

	COMMAND1	COMMAND2	DATA1	DATA2	DATA3
01. Power	k	a	00H -01H		
02. Input Select	k	b	02H -09H		
03. Aspect Ratio	k	c	01H -09H		
04. Screen Mute	k	d	00H -01H		
05. Volume Mute	k	e	00H -01H		
06. Volume Control	k	f	00H -64H		
07. Contrast	k	g	00H -64H		
08. Brightness	k	h	00H -64H		
09. Color	k	i	00H -64H		
10. Tint	k	j	00H -64H		
11. Sharpness	k	k	00H -64H		
12. OSD Select	k	l	00H -01H		
13. Remote Lock/ key Lock	k	m	00H -01H		
14. Balance	k	t	00H -64H		
15. Color Temperature	k	u	00H -03H		
16. Abnormal state	k	z	FFH		
17. ISM mode	j	p	00H -10H		
18. Auto configuratio	j	u	01H		
19. Key	m	c	Key Code		
20. Tile Mode	d	d	00H -55H		
21. Tile H Position	d	e	00H -64H		
22. Tile V Position	d	f	00H -64H		
23. Tile H Size	d	g	00H -64H		

	COMMAND1	COMMAND2	DATA1	DATA2	DATA3
24. Tile V Size	d	h	00H -64H		
25. Tile ID Set	d	i	00H -19H		
26. Natural Mode (In Tilemode)	d	j	00H -01H		
27. Elapsed time return	d	l	FFH		
28. Temperature value	d	n	FFH		
29. Lamp fault check	d	p	FFH		
30. Auto Volume	d	u	00H -01H		
31. Speaker	d	v	00H -01H		
32. Time	f	a	00H -06H	00H - 17H	0 - 3BH
33. On Timer (On/Off Timer) On, Off	f	b	00H, FFH		
34. Off Timer (On/Off Timer) On, Off	f	c	00H, FFH		
35. On Timer (On/Off Timer) Time	f	d	00H -07H	00H - 17H	00 - 3BH
36. Off Timer (On/Off Timer) Time	f	e	00H -07H	00H - 17H	00 - 3BH
37. Sleep Time	f	f	00H -08H		
38. Auto Sleep	f	g	00H -01H		
39. Power On Delay	f	h	00H -64H		
40. Language	f	i	00H -09H		
41. DPM Select	f	j	00H -01H		
42. Reset	f	k	00H -02H		
43. S/W Version	f	z	FFH		
44. Input Select	x	b	20H -A0H		

Transmission / Receiving Protocol

Transmission

[Command1][Command2][][Set ID][][Data][Cr]

*[Command 1]: First command. (k)

*[Command 2]: Second command.(a ~ u)

*[Set ID]: Set up the Set ID number of product.

range : 01H~63H. by setting '00H', server can control all products.

* In case of operating with more than 2 sets using set ID as '0' at the same time, it should not be checked the ack message.

Because all sets will send the ack message, so it's impossible the check the whole ack messages.

*[DATA]: To transmit command data.

Transmit 'FF' data to read status of command.

*[Cr]: Carriage Return

ASCII code '0x0D'

*[]: ASCII code Space (0x20)'

OK Acknowledgement

```
[Command2][ ][Set ID][ ][OK][Data][x]
```

*The Product transmits ACK (acknowledgement) based on this format when receiving normal data. At this time, if the data is data read mode, it indicates present status data.

If the data is data write mode, it returns the data of the PC computer.

Error Acknowledgement

```
[Command2][ ][Set ID][ ][NG][Data][x]
```

*If there is error, it returns NG

01. Power (Command : a)

To control Power On/Off of the Set.

Transmission

```
[k][a][ ][Set ID][ ][Data][Cr]
```

Data 0 : Power Off 1 : Power On

Acknowledgement

```
[a][ ][Set ID][ ][OK][Data][x]
```

To show the status of Power On/Off.

Transmission

```
[k][a][ ][Set ID][ ][FF][Cr]
```

Acknowledgement

```
[a][ ][Set ID][ ][OK][Data][x]
```

Data 0 : Power Off 1 : Power On

02. Input Select (Command : b) (Main Picture Input)

To select input source for the Set.

You can also select an input source using the INPUT button on the remote control.

Transmission

```
[k][b][ ][Set ID][ ][Data][Cr]
```

Data 2: AV

4 : Component 1

5 : Component 2

7 : RGB (PC)

8 : HDMI (DTV)

9 : HDMI (PC)

Acknowledgement

```
[b][ ][Set ID][ ][OK][Data][x]
```

Data 2 : AV

4 : Component 1

5 : Component 2

7 : RGB (PC)

8 : HDMI (DTV)

9 : HDMI (PC)

03. Aspect Ratio (Command : c) (Main picture format)

To adjust the screen format.

You can also adjust the screen format using the ARC (Aspect Ratio Control) button on remote control or in the Screen menu.

Transmission

```
[k][c][ ][Set ID][ ][Data][Cr]
```

Data 1 : Normal Screen (4:3)

2 : Wide Screen (16 :9)

- 4 : Zoom1 (AV)
- 5 : Zoom2 (AV)
- 6 : Original (AV)
- 7 : 14:9 (AV)
- 9 : Just Scan(HD DTV), 1:1 (RGB PC, HDMI/DVI PC)

Acknowledgement

```
[c][ ][Set ID][ ][OK][Data][x]
```

04. Screen Mute (Command : d)

To select screen mute on/off.

Transmission

```
[k][d][ ][Set ID][ ][Data][Cr]
```

Data 0 : Screen mute off (Picture on)

1 : Screen mute on (Picture off)

Acknowledgement

```
[d][ ][Set ID][ ][OK][Data][x]
```

05. Volume Mute (Command : e)

To control On/Off of the Volume Mute.

Transmission

```
[k][e][ ][Set ID][ ][Data][Cr]
```

Data 0 : Volume Mute On (Volume Off)

1 : Volume Mute Off (Volume On)

Acknowledgement

```
[e][ ][Set ID][ ][OK][Data][x]
```

Data 0 : Volume Mute On (Volume Off)

1 : Volume Mute Off (Volume On)

06. Volume Control (Command : f)

To adjust Volume.

Transmission

```
[k][f][ ][Set ID][ ][Data][Cr]
```

Data Min : 00H ~ Max : 64H

(Hexadecimal code)

Acknowledgement

```
[f][ ][Set ID][ ][OK][Data][x]
```

Data Min : 00H ~ Max : 64H

Refer to "Real data mapping" in this appendix.

07. Contrast (Command : g)

To adjust screen contrast. You can also adjust the contrast in the Picture menu.

Transmission

```
[k][g][ ][Set ID][ ][Data][Cr]
```

Data Min : 00H ~ Max : 64H

Refer to "Real data mapping" as shown below.

Acknowledgement

```
[g][ ][Set ID][ ][OK][Data][x]
```

* Real data mapping

0 : Step 0

:

A : Step 10

:

F : Step 15

10 : Step 16

:

64 : Step 100

08. Brightness (Command : h)

To adjust screen brightness. You can also adjust the brightness in the Picture menu.

Transmission

```
[k][h][ ][Set ID][ ][Data][Cr]
```

Data Min : 00H ~ Max : 64H

Refer to "Real data mapping" as shown below.

Acknowledgement

```
[h][ ][Set ID][ ][OK][Data][x]
```

* Real data mapping

0 : Step

:

A : Step 10

:

F : Step 15

10 : Step 16

:

64 : Step 100

09. Color (Command : i) (Video only)

To adjust the screen color. You can also adjust the color in the Picture menu.

Transmission

```
[k][i][ ][Set ID][ ][Data][Cr]
```

Data Min : 00H ~ Max : 64H (Hexadecimal code)

Refer to "Real data mapping" in the previous section of this appendix.

Acknowledgement

```
[i][ ][Set ID][ ][OK][Data][x]
```

Data Min : 00H ~ Max : 64H

10. Tint (Command : j) (Video only)

To adjust the screen tint. You can also adjust the tint in the Picture menu.

Transmission

```
[k][ ][Set ID][ ][Data][Cr]
```

Data Red: 00H ~ Green: 64H (Hexadecimal code)

Refer to "Real data mapping" in the previous section of this appendix.

Acknowledgement

```
[j][ ][Set ID][ ][OK][Data][x]
```

Data Red: 00H ~ Green: 64H

* Tint Real data mapping

0 : Step -50

:

64 : Step 50

11. Sharpness (Command : k) (Video only)

To adjust the screen Sharpness. You can also adjust the sharpness in the Picture menu.

Transmission

```
[k][k][ ][Set ID][ ][Data][Cr]
```

Data Min : 00H ~ Max : 64H

(Hexadecimal code)

Refer to "Real data mapping" in the previous section of this appendix.

Acknowledgement

```
[k][ ][Set ID][ ][OK][Data][x]
```

Data Min : 00H ~ Max : 64H

12. OSD Select (Command : l)

To control OSD on/off to the set.

Transmission

[k][][Set ID][][Data][Cr]

Data 0 : OSD Off 1 : OSD On

Acknowledgement

[][Set ID][][OK][Data][x]

Data 0 : OSD Off 1 : OSD On

13. Remote Lock /Key Lock (Command : m)

To control Remote Lock on/off to the set.

This function, when controlling RS-232C, locks the remote control and the local keys.

Transmission

[k][m][][Set ID][][Data][Cr]

Data 0 : Off 1 : On

Acknowledgement

[m][][Set ID][][OK][Data][x]

Data 0 : Off 1 : On

14. Balance (Command : t)

To adjust the sound balance.

Transmission

[k][t][][Set ID][][Data][Cr]

Data Min : 00H ~ Max : 64H

(Hexadecimal code)

Refer to "Real data mapping" in the previous section of the appendix

Acknowledgement

[t][][Set ID][][OK][Data][x]

Data Min : 00H ~ Max : 64H

Balance : L50 ~ R50

15. Color Temperature (Command : u)v

To adjust the screen color temperature.

Transmission

```
[k][u][ ][Set ID][ ][Data][Cr]
```

Data 0 : Medium

1 : Cool

2 : Warm

3 : User

Acknowledgement

```
[u][ ][Set ID][ ][OK][Data][x]
```

Data 0 : Medium

1 : Cool

2 : Warm

3 : User

16. Abnormal state (Command : z)

Abnormal State : Used to Read the power off status when Stand-by mode.

Transmission

```
[k][z][ ][Set ID][ ][Data][Cr]
```

Data FF : Read

0 : Normal (Power on and signal exist)

1 : No signal (Power on)

2 : Turn the monitor off by remote control

3 : Turn the monitor off by sleep time function

4 : Turn the monitor off by RS-232C function

8 : Turn the monitor off by off time function

9 : Turn the monitor off by auto off function

Acknowledgement

[z][][Set ID][][OK][Data][x]

17. ISM mode (Command: j p)

Used to select the afterimage preventing function.

Transmission

[j][p][][Set ID][][Data][Cr]

Data 1H : Inversion

2H : Orbiter

4H : White Wash

8H : Normal

10H : Dot Wash

Acknowledgement

[p][][Set ID][][OK][Data][x]

18. Auto Configure (Command: j u)

To adjust picture position and minimize image shaking automatically. It works only in RGB(PC) mode.

Transmission

[j][u][][Set ID][][Data][Cr]

Data 1 : To set

Acknowledgement

[u][][Set ID][][OK][Data][x]

19. Key (Command : m c)

To send IR remote key code.

Transmission

[m][c][][Set ID][][Data][Cr]

Data Key code : Refer to page A18.

Acknowledgement

[c][Set ID][OK][Data][x]

20. Tile Mode (Command : d d)

Change a Tile Mode.

Transmission

[d][d][Set ID][Data][x]

Data	Description
00	Tile mode is off.
12	1 x 2 mode(column x row)
13	1 x 3 mode
14	1 x 4 mode
...	...
55	5 x 5 mode

*The data can not be set to 0X or X0 except 00

Acknowledgement

[d][00][OK/NG][Data][x]

21. Tile H Position (Command : d e)

To set the Horizontal position.

Transmission

[d][e][Set ID][Data][x]

Data Min : 00H ~ Max : 64H

Acknowledgement

[e][Set ID][OK/NG][Data][x]

22. Tile V Position (Command : d f)

To set the Vertical position.

Transmission

[d][f][Set ID][Data][x]

Data Min : 00H ~ Max : 64H

Acknowledgement

[f][Set ID][OK/NG][Data][x]

23. Tile H Size (Command : d g)

To set the Horizontal size.

Transmission

[d][g][Set ID][Data][x]

Data Min : 00H ~ Max : 64H

Acknowledgement

[g][Set ID][OK/NG][Data][x]

24. Tile V Size (Command : d h)

To set the Vertical size.

Transmission

[d][h][Set ID][Data][x]

Data Min : 00H ~ Max : 64H

Acknowledgement

[h][Set ID][OK/NG][Data][x]

25. Tile ID Set (Command : d i)

To assign the Tile ID for Tiling function.

Transmission

[d][i][Set ID][Data][x]

Data Min : 00H ~ Max : 19H

(Hexadecimal code)

Acknowledgement

[i][Set ID][OK/NG][Data][x]

26. Natural Mode (In Tilemode) (Command : d j)

The image is omitted by the distance between the screens to be naturally shown.

Transmission

[d][j][Set ID][Data][x]

Data 0 : Natural Off

1 : Natural On

ff : Read Status

Acknowledgement

[j][Set ID][OK/NG][Data][x]

27. Elapsed time return (Command : d l)

To read the elapsed time.

Transmission

[d][l][Set ID][Data][x]

* The data is always FF(in Hex).

Acknowledgement

[l][Set ID][OK/NG][Data][x]

* The data means used hours. (Hexadecimal code)

28. Temperature value (Command : d n)

To read the inside temperature value.

Transmission

[d][n][Set ID][Data][x]

* The data is always FF(in Hex).

Acknowledgement

[n][Set ID][OK/NG][Data][x]

* The data is 1 byte long in Hexadecimal.

29. Lamp fault Check (Command : d p)

To check lamp fault.

Transmission

[d][p][Set ID][Data][x]

* The data is always FF(in Hex).

Acknowledgement

[p][Set ID][OK/NG][Data][x]

Data 0 : Lamp Fault

1 : Lamp OK

30. Auto volume (Command : d u)

Automatically adjust the volume level.

Transmission

[d][u][Set ID][Data][x]

Data 0 : Off

1 : On

Acknowledgement

[u][Set ID][OK/NG][Data][x]

31. Speaker (Command : d v)

Turn the speaker on or off.

Transmission

[d][v][Set ID][Data][x]

Data 0 : Off

1 : On

Acknowledgement

[v][Set ID][OK/NG][Data][x]

32. Time (Command : f a)

Set the current time.

Transmission

[f][a][Set ID][Data1][Data2][Data3][Cr]

[Data1]

0 : Monday

1 : Tuesday

2 : Wednesday

3 : Thursday

4 : Friday

5 : Saturday

6 : Sunday

[Data2]

0H~17H (Hours)

[Data3]

00H~3BH (Minutes)

Acknowledgement

[a][Set ID][OK/NG][Data1][Data2][Data3][x]

*When reading data, FFH is inputted for [Data1], [Data2] and [Data3]. In other cases, all are treated as NG.

33. On Timer (On/Off Timer) On, Off (Command : F b)

Set days for On Timer.

Transmission

[f][b][Set ID][Data1][Data2][Cr]

[Data1]

0 (Write), FFH(Read)

[Data2]

00H~FFH

bit0 : Monday On Timer On(1), Off(0)

bit1 : Tuesday On Timer On(1), Off(0)

bit2 : Wednesday On Timer On(1), Off(0)

bit3 : Thursday On Timer On(1), Off(0)

bit4 : Friday On Timer On(1), Off(0)

bit5 : Saturday On Timer On(1), Off(0)

bit6 : Sunday On Timer On(1), Off(0)

bit7 : Everyday On Timer On(1), Off(0)

Acknowledgement

[b][Set ID][OK/NG][Data1][Data2][x]

34. Off Timer (On/Off Timer) On, Off (Command : f c)

Set days for Off Timer.

Transmission

[f][c][Set ID][Data1][Data2][Cr]

[Data1]

0 (Write), FFH(Read)

[Data2]

00H~FFH

bit0 : Monday Off Timer On(1), Off(0)
bit1 : Tuesday Off Timer On(1), Off(0)
bit2 : Wednesday Off Timer On(1), Off(0)
bit3 : Thursday Off Timer On(1), Off(0)
bit4 : Friday Off Timer On(1), Off(0)
bit5 : Saturday Off Timer On(1), Off(0)
bit6 : Sunday Off Timer On(1), Off(0)
bit7 : Everyday Off Timer On(1), Off(0)

Acknowledgement

```
[c][Set ID][OK/NG][Data1][Data2][x]
```

35. On Timer (On/Off Timer) Time (Command : f d)

Set On Timer.

Transmission

```
[f][d][Set ID][Data1][Data2][Data3][Cr]
```

[Data1]

0 : Monday
1 : Tuesday
2 : Wednesday
3 : Thursday
4 : Friday
5 : Saturday
6 : Sunday
7 : Everyday

[Data2]

00H~17H (Hours)

[Data3]

00H~3BH (Minutes)

Acknowledgement

```
[d][Set ID][OK/NG][Data1][Data2][Data3][x]
```

Acknowledgement

[b][][Set ID][][OK][Data][x]

Data 20H : AV

40H : Component 1

41H : Component 2

60H : RGB (PC)

90H : HDMI/DVI (DTV)

A0H : HDMI/DVI (PC)


IR Codes

Use this method to connect your wired remote control port on the monitor.

Remote Control IR Code


Output Wave

- Single pulse, modulated with 37.9KHz signal at 455kHz
- Carrier Frequency
 - $FCAR = 1/Tc = fosc/12$
 - Duty Ratio = $T1/Tc = 1/3$

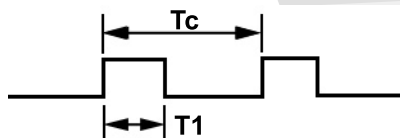


Configuration of Frame


- First Frame




- Repeat Frame



Lead Code




Repeat Code

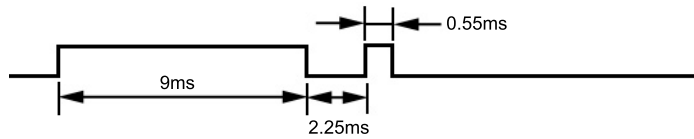


Bit Description

- Bit "0"
- Bit "1"



Frame Interval: Tf

The waveform is transmitted as long as a key is depressed.



IR Codes Table

Code(Hexa)	Function	Note
00	▲	R/C Button
01	▼	R/C Button
02	VOL(▶)	R/C Button
03	VOL(◀)	R/C Button
08	POWER ON/OFF	R/C Button (Power On/Off)
C4	POWER ON	Discrete IR Code (Only Power On)
C5	POWER OFF	Discrete IR Code (Only Power On)
09	MUTE	R/C Button
98	AV	R/C Button
0B	INPUT	R/C Button
0E	SLEEP	R/C Button

Code(Hexa)	Function	Note
43	MENU	R/C Button
5B	EXIT	R/C Button
6E	PSM	R/C Button
44	SET	R/C Button
10	Number Key 0	R/C Button
11	Number Key 1	R/C Button
12	Number Key 2	R/C Button
13	Number Key 3	R/C Button
14	Number Key 4	R/C Button
15	Number Key 5	R/C Button
16	Number Key 6	R/C Button
17	Number Key 7	R/C Button
18	Number Key 8	R/C Button
19	Number Key 9	R/C Button
5A	AV	Discrete IR Code(Input AV Selection)
BF	COMPONENT1	Discrete IR Code(Input COMPONENT1 Selection)
D4	COMPONENT2	Discrete IR Code(Input COMPONENT2 Selection)
D5	RGB PC	Discrete IR Code(Input RGB PC Selection)
C6	HDMI/DVI	Discrete IR Code(Input HDMI/DVI Selection)
79	ARC	R/C Button
76	ARC (4:3)	Discrete IR Code(Only 4:3 mode)
77	ARC (16:9)	Discrete IR Code(Only 16:9 mode)
AF	ARC (ZOOM)	Discrete IR Code(Only ZOOM1, ZOOM2 mode)
99	AUTO CONFIC	Discrete IR Code

D Agency Regulatory Notices

Federal Communications Commission Notice

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio or television technician for help.

Modifications

The FCC requires the user to be notified that any changes or modifications made to this device that are not expressly approved by Hewlett Packard Company may void the user's authority to operate the equipment.

Cables

Connections to this device must be made with shielded cables with metallic RF/EMI connector hoods to maintain compliance with FCC Rules and Regulations.

Declaration of Conformity for Products Marked with the FCC Logo (United States Only)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

For questions regarding the product, contact:

Hewlett Packard Company

P. O. Box 692000, Mail Stop 530113

Houston, Texas 77269-2000

Or, call 1-800-HP-INVENT (1-800 474-6836)

For questions regarding this FCC declaration, contact:

Hewlett Packard Company

P. O. Box 692000, Mail Stop 510101

Houston, Texas 77269-2000

Or, call (281) 514-3333

To identify this product, refer to the Part, Series, or Model number found on the product.

Canadian Notice

This Class B digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations.

Avis Canadien

Cet appareil numérique de la classe B respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

Power Cord Set Requirements

The monitor power supply is provided with Automatic Line Switching (ALS). This feature allows the monitor to operate on input voltages between 100–120V or 200–240V.

The power cord set (flexible cord or wall plug) received with the monitor meets the requirements for use in the country where you purchased the equipment.

If you need to obtain a power cord for a different country, you should purchase a power cord that is approved for use in that country.

The power cord must be rated for the product and for the voltage and current marked on the product's electrical ratings label. The voltage and current rating of the cord should be greater than the voltage and current rating marked on the product. In addition, the cross-sectional area of the wire must be a minimum of 0.75 mm² or 18 AWG, and the length of the cord must be between 6 feet (1.8 m) and 12 feet (3.6 m). If you have questions about the type of power cord to use, contact an authorized HP service provider.

A power cord should be routed so that it is not likely to be walked on or pinched by items placed upon it or against it. Particular attention should be paid to the plug, electrical outlet, and the point where the cord exits from the product.

Product Environmental Notices

Materials Disposal

This HP product contains mercury in the fluorescent lamp in the display LCD that might require special handling at end-of-life.

Disposal of this material can be regulated because of environmental considerations. For disposal or recycling information, contact the local authorities or the Electronic Industries Alliance (EIA) <http://www.eiae.org>.

Chemical Substances

HP is committed to providing our customers with information about the chemical substances in our products as needed to comply with legal requirements such as REACH (Regulation EC No 1907/2006 of the European Parliament and Council). A chemical information report for this product can be found at <http://www.hp.com/go/reach>.

Disposal of Waste Equipment by Users in Private Household in the European Union



This symbol on the product or on its packaging indicates that this product must not be disposed of with your household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling or waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact the local city office, the household waste disposal service or the shop where you purchased the product.

Restriction of Hazardous Substances (RoHS)

A Japanese regulatory requirement, defined by specification JIS C 0950, 2005, mandates that manufacturers provide Material Content Declarations for certain categories of electronic products offered for sale after July 1, 2006. To view the JIS C 0950 material declaration for this product, visit <http://www.hp.com/go/jisc0950>.

2005年、日本における製品含有表示方法、JISC0950が公示されました。製造事業者は、2006年7月1日以降に販売される電気・電子機器の特定化学物質の含有につきまして情報提供を義務付けられました。製品の部材表示につきましては、<http://www.hp.com/go/jisc0950>を参照してください。

有毒有害物质/元素的名称及含量表

根据中国
《电子信息产品污染控制管理办法》

液晶显示器

部件名称	有毒有害物质和元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
液晶显示器显示面板	X	X	○	○	○	○
机箱/其它	X	○	○	○	○	○

CRT 显示器

部件名称	有毒有害物质和元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
阴极射线管	X	○	○	○	○	○
机箱/其它	X	○	○	○	○	○

O: 表示该有毒或有害物质在该部件所有均质材料中的含量均在 SJ/T11363-2006 标准规定的限量要求以下。

X: 表示该有毒或有害物质至少在该部件所用的某一均质材料中的含量超出 SJ/T11363-2006 标准规定的限量要求。

表中标有“X”的所有部件都符合欧盟 RoHS 法规 — “欧洲议会和欧盟理事会 2003 年 1 月 27 日关于电子电器设备中限制使用某些有害物质的 2002/95/EC 号指令”。

注: 环保使用期限的参考标识取决于产品正常工作的温度和湿度等条件。

■■■ Regulatory Information cont.

:: FCC Compliance Statement

This equipment has been tested and found to comply within the limits of a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception (which can be determined by turning the equipment on and off), the user is encouraged to try to correct the interference by using one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's (or your) authority to operate the equipment. Only peripherals (digital input/output devices, terminals, printers, etc.) certified to comply with the Class B limits may be attached to this monitor. Operation with non-certified peripherals is likely to result in interference to radio and TV reception. Only shielded signal cables may be used with this System.

NOTICE

The regulations are applied only to the products with the ID LABEL indicating specific requirements.

:: Canadian DOC Notice

This Class B digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations. Cet appareil numérique de la classe B

respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

NOTICE

The regulations are applied only to the products with the ID LABEL indicating specific requirements.

:: CE Conformity Notice (for Europe)

Products with the "CE" Marking comply with the EMC Directive(89/336/EEC) and LOW VOLTAGE Directive (73/23/EEC) issued by the Commission of the European Community.

Compliance with these directives implies conformity to the following European Norms :

- EN 55022 ; Radio Frequency Interference
- EN 55024 ; Electromagnetic Immunity
- EN 61000-3-2 ; Power Line Harmonics
- EN 61000-3-3 ; Voltage Fluctuations
- EN 60950-1 ; Product Safety

NOTICE

The regulations are applied only to the products with the ID LABEL indicating specific requirements.

:: Low Radiation Compliance (MPR II)

This monitor meets one of the strictest guidelines available today for low radiation emissions, offering the user extra shielding and an antistatic screen coating. These guidelines, set forth by a government agency in Sweden, limit the amount of emission allowed in the Extremely Low Frequency (ELF) and Very Low Frequency (VLF) electromagnetic range.

:: TCO'99 (TCO'99 applied model only)



Congratulations!

You have just purchased a TCO'99 approved and labelled product! Your choice has provided you with a product developed for professional use. Your purchase has also contributed to reducing the burden on the environment and also to the further development of environmentally adapted electronics products.

■■■ Regulatory Information cont.

Why do we have environmentally labelled computers?

In many countries, environmental labelling has become an established method for encouraging the adaptation of goods and services to the environment. With the growing manufacture and usage of electronic equipment throughout the world, there is a recognized concern for the materials and substances used by electronic products with regards to their eventual recycling and disposal. By proper selection of these materials and substances, the impact on the environment can be minimized.

There are also other characteristics of a computer, such as energy consumption levels, that are important from the viewpoints of both the work (internal) and natural (external) environments. Electronic equipment in offices is often left running continuously, resulting in unnecessary consumption of large amounts of energy and additional power generation. From the standpoint of carbon dioxide emissions alone, it is vital to save energy.

What does labelling involve?

The product meets the requirements for the TCO'99 scheme which provides for international and environmental labelling of personal computers and/or displays.

The labelling scheme was developed as a joint effort by the TCO (The Swedish Confederation of Professional Employees), Svenska Naturskyddsforeningen (The Swedish Society for Nature Conservation) and Statens Energimyndighet (The Swedish National Energy Administration).

Approval requirements cover a wide range of issues: ecology, ergonomics, emission of electrical and magnetical fields, energy consumption and electrical safety.

Ecological criteria impose restrictions on the presence and use of heavy metals, brominated and chlorinated flame retardants, and other substances. The product must be prepared for recycling and the manufacturing site(s) shall be certified according to ISO14001 or EMAS registered.

Energy requirements include a demand that the system unit and/or display, after a certain period of inactivity, shall reduce its power consumption to a lower level in one or more stages. The length of time to reactivate the system unit shall be reasonable for the user.

Labelled products must meet strict environmental demands, for example, in respect of the reduction of electrical and magnetical fields as well as work load and

visual ergonomics.

Below you will find a brief summary of the ecological requirements met by this product. The complete ecological criteria document can be found at TCO Development's website <http://www.tcodevelopment.com> or may be ordered from:

TCO Development

SE-114 94 STOCKHOLM, Sweden

Fax: +46 8 782 92 07

Email : development@tco.se

Information regarding TCO'99 approved and labelled products may also be obtained at <http://www.tcodevelopment.com>

Ecological requirements

Flame retardants

Flame retardants may be present in printed wiring board laminates, cables, and housings. Their purpose is to prevent, or at least to delay the spread of fire. Up to 30% by weight of the plastic in a computer casing can consist of flame retardant substances. Many flame retardants contain bromine or chlorine, and these flame retardants are chemically related to PCBs (polychlorinated biphenyls). Both the flame retardants containing bromine or chlorine and the PCBs are suspected of giving rise to health effects, including reproductive damage in fish-eating birds and mammals, due to the bio-accumulative* processes when not disposed of in accordance with strict standards for disposal.

TCO'99 requires that plastic components weighing more than 25 grams shall not contain flame retardants with organically bound bromine or chlorine. Flame retardants are allowed in the printed wiring board laminates due to the lack of commercially available alternatives.

Cadmium**

Cadmium is present in rechargeable batteries and in the colour-generating layers of certain computer displays. TCO'99 requires that batteries, the colour-generating layers of display screens, and the electrical or electronics components shall not contain any cadmium.

Mercury**

Mercury is sometimes found in batteries, relays and switches. TCO'99 requires that batteries shall not contain any mercury. It also demands that mercury is not present in any of the electrical or electronics components associated with the labelled unit. There is however one

■■■ Regulatory Information cont.

exception. Mercury is, for the time being, permitted in the back light system of flat panel monitors as there today is no commercially available alternative. TCO aims on removing this exception when a mercury free alternative is available.

Lead**

Lead can be found in picture tubes, display screens, solders and capacitors. TCO'99 permits the use of lead due to the lack of commercially available alternatives, but in future requirements TCO Development aims at restricting the use of lead.

* **Bio-accumulative is defined as substances which accumulate in living organisms.**

** **Lead, Cadmium and Mercury are heavy metals which are bio-accumulative.**

:: TCO'03 (TCO'03 applied model only)



Congratulations!

The display you have just purchased carries the TCO'03 Displays label.

This means that your display is designed, manufactured and tested according to some of the strictest quality and environmental requirements in the world. This makes for a high performance product, designed with the user in focus that also minimizes the impact on our natural environment. Some of the features of the TCO'03 Display requirements:

Ergonomics

- Good visual ergonomics and image quality in order to improve the working environment for the user and to reduce sight and strain problems. Important parameters are luminance, contrast, resolution, reflectance, colour rendition and image stability.

Energy

- Energy-saving mode after a certain time – beneficial both for the user and the environment
- Electrical safety

Emissions

- Electromagnetic fields

- Noise emissions

Ecology

- The product must be prepared for recycling and the manufacturer must have a certified environmental management system such as EMAS or ISO 14 001
- Restrictions on
 - chlorinated and brominated flame retardants and polymers
 - heavy metals such as cadmium, mercury and lead.

The requirements included in this label have been developed by TCO Development in co-operation with scientists, experts, users as well as manufacturers all over the world. Since the end of the 1980s TCO has been involved in influencing the development of IT equipment in a more user-friendly direction. Our labelling system started with displays in 1992 and is now requested by users and IT-manufacturers all over the world.

For more information, please visit
www.tcodevelopment.com

English

Information for Environmental Preservation

LGE. announced the 'LG Declaration for a Cleaner Environment' in 1994, and this ideal has served as a guiding managerial principle ever since. The Declaration is a foundation that has allowed us to undertake environmentally friendly activities in careful consideration of economic, environmental, and social aspects.

We promote activities for environmental preservation, and we specifically develop our products to embrace the concept of environment-friendly.

We minimize the hazardous materials contained in our products. For example, there is no cadmium to be found in our monitors.

Information for recycling

This monitor may contain parts which could be hazardous to the environment. It is important that this monitor be recycled after use.

LGE. handles all waste monitors through an environmentally acceptable recycling method. There are several take-back and recycling systems currently in

■■■ Regulatory Information cont.

operation worldwide. Many parts will be reused and recycled, while harmful substances and heavy metals are treated by an environmentally friendly method.

If you want to find out more information about our recycling program, please contact your local LG vendor or a corporate representative of LG.

We set our vision and policies on a cleaner world by selecting the issue of the global environment as a task for corporate improvement. Please visit our website for more information about our 'green' policies.

<http://www.lge.com/about/environment/html/Recycling.jsp>

■■■ Deutsch

Informationen zur Erhaltung der Umwelt

Im Jahr 1994 verkündete LGE die 'LG Declaration for a Cleaner Environment' (LG Erklärung für eine sauberere Umwelt). Seitdem dient dieses Ideal als führendes Prinzip des Unternehmens. Diese Erklärung war die Basis für die Durchführung von

umweltfreundlichen Aktivitäten, wobei wirtschaftliche, umweltbezogene und soziale Aspekte in die Überlegungen mit einbezogen wurden.

Wir fördern Aktivitäten zum Schutz der Umwelt und die Entwicklung unserer Produkte ist darauf ausgerichtet, unserem Konzept bezüglich Umweltfreundlichkeit gerecht zu werden.

Wir sind darauf bedacht, den Anteil der in unseren Produkten enthaltenen schädlichen Materialien zu minimieren. So ist in unseren Monitoren beispielsweise kein Kadmium zu finden.

Informationen zum Thema Recycling

Dieser Monitor enthält Teile, die umweltschädlich sein können. Es ist unbedingt erforderlich, dass der Monitor recycelt wird, nachdem er außer Dienst gestellt wurde.

Bei LGE werden alle ausrangierten Monitore in einem unter umweltbezogenen Aspekten geeigneten Verfahren recycelt. Augenblicklich sind weltweit mehrere Rücknahme- und Recyclingsysteme im Einsatz. Viele Teile werden wieder verwendet und recycelt. Schädliche Substanzen und Schwermetalle werden durch umweltverträgliche Verfahren behandelt.

Falls Sie mehr über unser Recyclingprogramm erfahren möchten, wenden Sie sich bitte an Ihren lokalen LG-Händler oder einen Unternehmensvertreter von LG.

Wir richten unsere Firmenpolitik auf eine sauberere Umwelt hin aus, indem wir umweltspezifische Aspekte als wichtigen Punkt in die Weiterentwicklung unseres Unternehmens einfließen lassen. Zusätzliche

Informationen über unsere 'grüne' Firmenpolitik erhalten Sie auf unserer Website.

<http://www.lge.com/about/environment/html/Recycling.jsp>

■■■ Français

Information sur la protection de l'environnement

LGE a publié sa 'Déclaration en faveur d'un environnement plus propre' en 1994 et celle-ci est restée, depuis lors, un principe directeur de notre entreprise. Cette déclaration a servi de base à notre réflexion et nous a permis de prendre en compte à la fois les aspects économiques et sociaux de nos activités, tout en respectant l'environnement.

Nous encourageons les activités en faveur de la préservation de l'environnement et c'est dans cet esprit que nous développons nos produits : nous réduisons au minimum les matières dangereuses qui entrent dans leur composition et l'on ne trouve pas de cadmium, par exemple, dans nos moniteurs.

Information sur le recyclage

Ce moniteur peut contenir des composants qui présentent un risque pour l'environnement. Il est donc important que celui-ci soit recyclé après usage.

LGE traite les moniteurs en fin de cycle conformément à une méthode de recyclage respectueuse de l'environnement. Nous reprenons nos produits et les recyclons dans plusieurs sites répartis dans le monde entier. De nombreux composants sont réutilisés et recyclés, et les matières dangereuses, ainsi que les métaux lourds, sont traités selon un procédé écologique.

Si vous souhaitez plus de renseignements sur notre programme de recyclage, veuillez contacter votre revendeur LG ou un l'un de nos représentants.

Nous voulons agir pour un monde plus propre et croyons au rôle de notre entreprise dans l'amélioration de l'environnement. Pour plus de renseignements sur notre politique "verte", rendez visite à notre site :

<http://www.lge.com/about/environment/html/Recycling.jsp>

■■■ Regulatory Information cont.

Italiano

Informazioni per la tutela dell'ambiente

La LGE. ha annunciato nel 1994 la cosiddetta 'LG Declaration for a Cleaner Environment' (Dichiarazione di LG a favore di un ambiente più pulito), un ideale che da allora funge da principio ispiratore della gestione aziendale. La dichiarazione rappresenta il fondamento che consente di intraprendere attività a favore dell'ambiente tenendo conto degli aspetti economici, ambientali e sociali. Noi della LG, promuoviamo attività a favore della tutela dell'ambiente sviluppando appositamente i nostri prodotti per cogliere il concetto del rispetto dell'ambiente riducendo i materiali dannosi presenti nei nostri prodotti. Ad esempio nei nostri monitor non è presente il cadmio.

Informazioni per il riciclaggio

Il monitor può presentare componenti che potrebbero risultare eventualmente dannosi per l'ambiente. È importante che il monitor sia riciclato al termine del suo utilizzo.

La LGE. gestisce tutti i monitor di rifiuto con un metodo di riciclaggio soddisfacente dal punto di vista ambientale. In tutto il mondo sono attualmente in funzione numerosi sistemi di riciclaggio e recupero. I diversi componenti sono riutilizzati e riciclati, mentre le sostanze dannose e i metalli pesanti vengono trattati con un metodo rispettoso dell'ambiente.

Se si desiderano maggiori informazioni in merito al programma di riciclaggio, è consigliabile rivolgersi al proprio rivenditore LG o ad un rappresentante aziendale della LG.

Noi della LG impostiamo la nostra visione e le nostre politiche a favore di un mondo più pulito ponendo la questione dell'ambiente dal punto di vista globale come una mansione rivolta al miglioramento della nostra azienda. Vi invitiamo a visitare il nostro sito internet per ulteriori informazioni sulla nostra politica "verde".
<http://www.lge.com/about/environment/html/Recycling.jsp>

Espanol

Información para la conservación medioambiental

LGE. presentó la 'Declaración para un entorno más limpio de LG' en 1994 y este ideal ha servido para guiar nuestros principios empresariales desde entonces. La Declaración es la base que nos ha permitido llevar a cabo tareas que

respetan el medio ambiente siempre teniendo en cuenta aspectos sociales, económicos y medioambientales.

Promocionamos actividades orientadas a la conservación del medio ambiente y desarrollamos nuestros productos específicamente para que se ajusten a la filosofía que protege el entorno.

Reducimos al máximo el uso de materiales de riesgo en nuestros productos. Un ejemplo de ello es la ausencia total de cadmio en nuestros monitores.

Información para el reciclaje

Este monitor puede contener piezas que entrañen riesgos medioambientales. Es importante reciclar este monitor después de su utilización.

LGE. trata todos los monitores usados siguiendo un método de reciclaje que no daña al entorno. Contamos con diversos sistemas de recuperación y reciclaje que funcionan a nivel mundial en la actualidad. Es posible reciclar y reutilizar muchas de las piezas, mientras que las sustancias dañinas y los metales pesados se tratan siguiendo un método que no perjudique al medio ambiente. Si desea obtener más información acerca del programa de reciclaje, póngase en contacto con su proveedor local de LG o con un representante empresarial de nuestra marca.

Basamos nuestra visión y nuestras políticas en un mundo más limpio y para ellos optamos por un entorno global como tarea principal de nuestra evolución como empresa. Visite nuestra página Web para obtener más información sobre nuestras políticas ecológicas.

<http://www.lge.com/about/environment/html/Recycling.jsp>

Português

Informações relacionadas à preservação ambiental

A LGE. anunciou a 'LG Declaration for a Cleaner Environment' (Declaração da LG para um ambiente mais limpo) em 1994 e esse ideal tem servido desde então como um princípio administrativo de orientação. A Declaração é a base que nos tem permitido realizar atividades favoráveis ao ambiente com consideração atenta aos aspectos econômicos, ambientais e sociais.

Promovemos atividades de preservação ambiental e desenvolvemos nossos produtos para englobar

■■■ Regulatory Information cont.

especificamente o conceito de favorável ao ambiente. Reduzimos os materiais perigosos contidos em nossos produtos. Por exemplo, não há cádmio em nossos monitores.

Informações relacionadas à reciclagem

Este monitor pode conter peças que podem representar riscos ao ambiente. É importante que ele seja reciclado após o uso.

A LGE, cuida de todos os monitores descartados através de um método de reciclagem agradável ao ambiente. Há vários sistemas de devolução e reciclagem atualmente em operação no mundo. Muitas peças serão reutilizadas e recicladas e as substâncias nocivas e os metais pesados passarão por tratamento através de um método favorável ao ambiente.

Para obter mais informações sobre nosso programa de reciclagem, entre em contato com seu fornecedor LG local ou com um representante corporativo da LG.

Definimos nossa visão e nossas políticas relacionadas a um mundo mais limpo selecionando a questão do ambiente global como uma tarefa de aprimoramento corporativo. Visite nosso site para obter mais informações sobre nossas políticas de meio ambiente.

<http://www.lge.com/about/environment/html/Recycling.jsp>

Nederlands

Informatie met betrekking tot het behoud van het milieu

LGE. publiceerde in 1994 de 'LG Declaration for a Cleaner Environment' (de LG-verklaring met betrekking tot een schoner milieu). Deze verklaring en het ideaal van een schoner milieu fungeren sindsdien als een bestuurlijke leidraad voor onze onderneming. Op basis van deze verklaring ontplooiën wij milieuvriendelijke activiteiten, waarbij er zowel met sociale en economische aspecten, als met milieuaspecten zorgvuldig rekening wordt gehouden.

Wij ondersteunen activiteiten die zijn gericht op het behoud van het milieu en wij houden bij het ontwikkelen onze producten specifiek rekening met de milieuvriendelijkheid van onze producten.

Wij minimaliseren het gebruik van schadelijke stoffen in onze producten. Er wordt bijvoorbeeld geen cadmium verwerkt in onze monitoren.

Informatie met betrekking tot recycling

Deze monitor bevat materialen die schadelijk zouden kunnen zijn voor het milieu. Het is belangrijk dat deze monitor aan het einde van zijn levensduur wordt gerecycled.

LGE. verwerkt alle afvalmonitoren via een milieuvriendelijke recyclingmethode. Hiervoor worden er momenteel wereldwijd verscheidene inname- en recyclingsystemen gehanteerd. Een groot aantal onderdelen wordt opnieuw gebruikt en gerecycled, waarbij schadelijke stoffen en zware metalen volgens een milieuvriendelijke methode worden verwerkt.

Voor meer informatie over ons recyclingprogramma kunt u contact opnemen met uw plaatselijke LG-vertegenwoordiger of een LG-vestiging.

Onze visie en ons beleid met betrekking tot een schonere wereld vloeien voort uit het feit dat wij het milieu hebben aangemerkt als een onderwerp dat speciale aandacht verdient binnen onze onderneming. Bezoek onze website voor meer informatie over ons 'groene' beleid.

<http://www.lge.com/about/environment/html/Recycling.jsp>

Russian

Информация по охране окружающей среды

В 1994 году корпорация LGE опубликовала 'Декларацию LG по охране окружающей среды', которая с тех пор служит основным принципом управления. На основе этой декларации мы смогли предпринять действия, обеспечивающие безопасность окружающей среды, уделяя при этом должное внимание экономическим, экологическим и социальным аспектам.

Мы стимулируем деятельность по охране окружающей среды, уделяя особое внимание разработке нашей продукции в соответствии с концепцией экологической безопасности.

Мы сводим к минимуму содержание опасных веществ в нашей продукции. Например, в наших мониторах вы не найдете кадмия.

Информация по утилизации отходов

Этот монитор может содержать компоненты, которые могут нанести ущерб окружающей среде.

■■■ Regulatory Information cont.

Необходимо утилизировать монитор после использования.

Корпорация LGE перерабатывает все бракованные мониторы с помощью экологически приемлемого метода утилизации отходов. По всему миру действуют системы утилизации отходов и возврата использованной продукции. Многие компоненты будут вторично использованы и утилизированы, в то время как вредные вещества и тяжелые металлы будут обработаны с помощью экологически приемлемого метода.

За более подробной информацией по нашей программе утилизации отходов обращайтесь к местному поставщику или представителю корпорации LG.

Мы ориентируемся на обеспечение экологической безопасности, ставя себе целью глобальную защиту окружающей среды. Дополнительную информацию о нашей политике по охране окружающей среды вы можете найти на нашем сайте:
<http://www.lge.com/about/environment/html/Recycling.jsp>

한국어

환경 보존 정보

LG 전자는 1994년 'LG 환경 선언문'을 발표한 후 현재까지 이를 기업 경영의 이념으로 삼아왔습니다. 이 선언문을 바탕으로 LG 전자는 모든 경영 활동에서 경제성뿐만 아니라 환경성 및 사회성을 주요 의사 결정의 기준으로 삼음으로써 지속적으로 환경 친화적인 경영을 전개하고 있습니다.

본사는 보다 활발한 환경 보존 활동과 더불어 환경 친화적 제품 개발에 주력해 왔습니다.

또한 제품에 포함되는 환경 위해 요소를 최소화하는 데에도 노력을 기울이지 않고 있습니다. LG 전자 모니터의 경우 카드를 전혀 사용하지 않는 것에서도 이러한 노력을 알 수 있습니다.

재활용 정보

본 모니터에는 환경에 위해를 주는 부품이 포함되어 있을 수도 있습니다. 따라서 사용이 끝난 모니터는 재활용하는 것이 좋습니다.

폐모니터는 모두 환경 친화적 방식으로 처리됩니다. 현재 세계적으로 운영되고 있는 회수 및 재활용 시스템에는

여러 가지가 있습니다. 대부분의 부품의 경우 재사용 또는 재활용되지만 환경 위해 물질과 중금속은 환경 친화적 방법으로 처리됩니다.

본사의 재활용 프로그램에 대한 자세한 정보는 각 지역의 LG 공급업체나 LG 기업 대표부에 문의하시기 바랍니다.

LG 전자는 기업 개선 정책의 하나로 지구 환경 문제를 채택함으로써 보다 나은 환경을 만들어 나가기 위한 비전과 정책을 수립했습니다. 본사의 친환경 정책에 대한 자세한 정보를 보시려면 아래의 웹 사이트를 방문하십시오.

http://www.lge.co.kr/ckr/about/environment/purity_02.jsp

∴EPA (EPA applied model only)

ENERGY STAR is a set of power-saving guidelines issued by the U.S. Environmental Protection Agency(EPA).




As an ENERGY STAR Partner LGE U. S. A.,Inc. has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

∴NOM MARK (Mexico only)



■■■ Regulatory Information cont.

:: WEEE (for Europe)



■ ■ English

Disposal of your old appliance

1. When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2002/96/EC.
2. All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
3. The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.
4. For more detailed information about disposal of your old appliance, please contact your city office, waste disposal service or the shop where you purchased the product.

■ ■ French

Élimination de votre ancien appareil

1. Ce symbole, représentant une poubelle sur roulettes barrée d'une croix, signifie que le produit est couvert par la directive européenne 2002/96/EC.
2. Les éléments électriques et électroniques doivent être jetés séparément, dans les vide-ordures prévus à cet effet par votre municipalité.
3. Une élimination conforme aux instructions aidera à réduire les conséquences négatives et risques éventuels pour l'environnement et la santé humaine.
4. Pour plus d'information concernant l'élimination de votre ancien appareil, veuillez contacter votre mairie, le service des ordures ménagères ou encore la magasin où vous avez acheté ce produit.

■ ■ Italian

Smaltimento delle apparecchiature obsolete

1. Quando su un prodotto è riportato il simbolo di

un bidone della spazzatura barrato da una croce significa che il prodotto è coperto dalla direttiva europea 2002/96/EC.

2. Tutti i prodotti elettrici ed elettronici dovrebbero essere smaltiti separatamente rispetto alla raccolta differenziata municipale, mediante impianti di raccolta specifici designati dal governo o dalle autorità locali.
3. Il corretto smaltimento delle apparecchiature obsolete contribuisce a prevenire possibili conseguenze negative sulla salute umana e sull'ambiente.
4. Per informazioni più dettagliate sullo smaltimento delle apparecchiature obsolete, contattare il comune, il servizio di smaltimento rifiuti o il negozio in cui è stato acquistato il prodotto.

■ ■ Swedish

Kassering av din gamla apparat

1. När den här symbolen med en överkryssad soptunna på hjul sitter på en produkt innebär det att den regleras av European Directive 2002/96/EC.
2. Alla elektriska och elektroniska produkter bör kasseras via andra vägar än de som finns för hushållsavfall, helst via för ändamålet avsedda uppsamlingsanläggningar som myndigheterna utser.
3. Om du kasserar din gamla apparat på rätt sätt så bidrar du till att förhindra negativa konsekvenser för miljön och människors hälsa.
4. Mer detaljerad information om kassering av din gamla apparat kan fås av kommunen, renhållningsverket eller den butik där du köpte produkten.

■ ■ Dutch

Uw oude toestel wegdoen

1. Als het symbool met de doorgekruiste verrijdbare afvalbak op een product staat, betekent dit dat het product valt onder de Europese Richtlijn 2002/96/EC.
2. Elektrische en elektronische producten mogen niet worden meegegeven met het huishoudelijk afval, maar moeten worden ingeleverd bij speciale inzamelingspunten die door de lokale of landelijke overheid zijn aangewezen.
3. De correcte verwijdering van uw oude toestel helpt negatieve gevolgen voor het milieu en de menselijke gezondheid voorkomen.

Regulatory Information cont.

4. Wilt u meer informatie over de verwijdering van uw oude toestel? Neem dan contact op met uw gemeente, de afvalophaaldienst of de winkel waar u het product hebt gekocht.

Finnish

Vanhojen laitteiden hävittäminen

1. Tämä merkki tuotteessa tarkoittaa, että tuote kuuluu sähkö- ja elektroniikkalaiteromusta annetun EU-direktiivin 2002/96/EY soveltamisalaan.
2. Kaikki elektroniset laitteet ovat ongelmajätettä, joten ne on toimitettava paikalliseen keräyspisteeseen.
3. Vanhan laitteen asianmukainen hävittäminen ehkäisee mahdollisia ympäristöön ja terveyteen kohdistuvia haittavaikutuksia.
4. Lisätietoa vanhan laitteen hävittämisestä saat ottamalla yhteyden paikallisiin viranomaisiin, kierrätyskeskukseen tai myymälään, josta ostit laitteen.

German

Entsorgung von Altgeräten

1. Wenn dieses Symbol eines durchgestrichenen Abfalleimers auf einem Produkt angebracht ist, unterliegt dieses Produkt der europäischen Richtlinie 2002/96/EC.
2. Alle Elektro- und Elektronik-Altgeräte müssen getrennt vom Hausmüll über dafür staatlich vorgesehene Stellen entsorgt werden.
3. Mit der ordnungsgemäßen Entsorgung des alten Geräts vermeiden Sie Umweltschäden und eine Gefährdung der persönlichen Gesundheit.
4. Weitere Informationen zur Entsorgung des alten Geräts erhalten Sie bei der Stadtverwaltung, beim Entsorgungsamt oder in dem Geschäft, wo Sie das Produkt erworben haben.

Danish

Sådan smider du dit gamle apparat ud

1. Når der er et tegn med et kryds over en skraldespand, betyder det, at produktet er omfattet af EU-direktiv 2002/96/EC.
2. Alle elektriske og elektroniske produkter skal smides ud et andet sted end gennem den kommunale affaldsordning ved hjælp af specielle indsamlingsfaciliteter, der er organiseret af staten

eller de lokale myndigheder.

3. Korrekt bortskaffelse af dit gamle apparat er med til at forhindre mulige skadevirkninger på miljøet og menneskelig sundhed.
4. Mere detaljerede oplysninger om bortskaffelse af dit gamle apparat kan fås ved at kontakte dit lokale kommunekontor, renovationselskab eller den butik, hvor du købte produktet.

Greek

Απόρριψη της παλιάς σας συσκευής

1. Όταν ένα προϊόν διαθέτει το σύμβολο ενός διαγραμμένου κάλαθου απορριμμάτων, τότε το προϊόν καλύπτεται από την Ευρωπαϊκή Οδηγία 2002/96/EOK.
2. Η απόρριψη όλων των ηλεκτρικών και ηλεκτρονικών προϊόντων πρέπει να γίνεται χωριστά από τα γενικά οικιακά απορρίμματα μέσω καθορισμένων εγκαταστάσεων συλλογής απορριμμάτων, οι οποίες έχουν δημιουργηθεί είτε από την κυβέρνηση ή από τις τοπικές αρχές.
3. Η σωστή απόρριψη της παλιάς σας συσκευής θα βοηθήσει στην αποτροπή πιθανών αρνητικών συνεπειών ως προς το περιβάλλον και την υγεία του ανθρώπου.
4. Για πιο λεπτομερείς πληροφορίες σχετικά με την απόρριψη της παλιάς σας συσκευής, επικοινωνήστε με το αρμόδιο τοπικό γραφείο, υπηρεσία διάθεσης οικιακών απορριμμάτων ή το μαγαζί από το οποίο αγοράσατε το προϊόν.

Spanish

Cómo deshacerse de aparatos eléctricos y electrónicos viejos

1. Si en un producto aparece el símbolo de un contenedor de basura tachado, significa que éste se acoge a la Directiva 2002/96/CE.
2. Todos los aparatos eléctricos o electrónicos se deben desechar de forma distinta del servicio municipal de recogida de basura, a través de puntos de recogida designados por el gobierno o las autoridades locales.
3. La correcta recogida y tratamiento de los dispositivos inservibles contribuye a evitar riesgos potenciales para el medio ambiente y la salud pública.
4. Para obtener más información sobre cómo deshacerse de sus aparatos eléctricos y electrónicos viejos, póngase en contacto con su ayuntamiento, el servicio de recogida de basuras o el establecimiento donde adquirió el producto.

Regulatory Information cont.

Portuguese

Eliminação do seu antigo aparelho

1. Quando este símbolo de latão cruzado estiver afixado a um produto, significa que o produto é abrangido pela Directiva Europeia 2002/96/EC.
2. Todos os produtos eléctricos e electrónicos devem ser eliminados separadamente do lixo doméstico através de pontos de recolha designados, facilitados pelo governo ou autoridades locais.
3. A eliminação correcta do seu aparelho antigo ajuda a evitar potenciais consequências negativas para o ambiente e para a saúde humana.
4. Para obter informações mais detalhadas acerca da eliminação do seu aparelho antigo, contacte as autoridades locais, um serviço de eliminação de resíduos ou a loja onde comprou o produto.

Slovak

Likvidácia váš ho starého prístroja

1. Keď sa na produkte nachádza tento symbol prečiarknutej smetnej nádoby s kolieskami, znamená to, že daný produkt vyhovuje európskej Smernici č. 2002/96/EC.
2. Všetky elektrické a elektronické produkty by mali byť zlikvidované oddelene od komunálneho odpadu prostredníctvom na to určených zberných zariadení, ktoré boli ustanovené vládou alebo orgánmi miestnej správy.
3. Správnu likvidáciu starých zariadení pomôžete predchádzať potenciálnym negatívnym následkom pre prostredie a ľudské zdravie.
4. Podrobnejšie informácie o likvidácii starých zariadení nájdete na miestnom úrade, v službe na likvidáciu odpadu alebo u predajcu, kde ste tento produkt zakúpili.

Czech

Likvidace starých spotřebičů

1. Pokud je u výrobku uveden symbol pořízdného kontejneru v přeškrtnutém poli, znamená to, že na výrobek se vztahuje směrnice Evropské unie číslo 2002/96/EC.
2. Všechny elektrické a elektronické výrobky by měly být likvidovány odděleně od běžného komunálního odpadu prostřednictvím sběrných zařízení zřízených za tímto účelem vládou nebo místní samosprávou.
3. Správný způsob likvidace starého elektrického spotřebiče pomáhá zamezit možným negativním dopadům na životní prostředí a zdraví.
4. Bližší informace o likvidaci starého spotřebiče získáte u místní samosprávy, ve sběrném zařízení nebo v obchodě, ve kterém jste výrobek zakoupili.

Croatian

Uklanjanje starog aparata

1. Ako se na proizvodu nalazi simbol prekrizhene kante za smeće, to znači da je proizvod pokriven europskom direk-

tivom 2002/96/EC.

2. Električni i elektronski proizvodi ne smiju se odlagati zajedno s komunalnim otpadom, već u posebna odlagališta koja je odredila vlada ili lokalne vlasti.
3. Pravilno odlaganje starog proizvoda sprečiti će potencijalne negativne posljedice po okoliš i zdravlje ljudi.
4. Podrobnije informacije o odlaganju starog proizvoda potražite u gradskom uredu, službi za odlaganje otpada ili u trgovini u kojoj ste kupili proizvod.

Hungarian

Régi eszközök ártalmatlanítása

1. A termékhez csatolt áthúzott, kereskes szeméttároló jel jelöli, hogy a termék a 2002/96/EC EU-direktíva hatálya alá esik.
2. Minden elektromos és elektronikai terméket a lakossági hulladéktól elkülönítve kell begyűjteni, a kormány vagy az önkormányzatok által kijelölt begyűjtő eszközök használatával.
3. Régi eszközeinek megfelelő ártalmatlanítása segíthet megelőzni az esetleges egészségre vagy környezetre ártalmas hatásokat.
4. Ha több információra van szüksége régi eszközeinek ártalmatlanításával kapcsolatban, tanulmányozza a vonatkozó környezetvédelmi szabályokat, vagy lépjen kapcsolatba az üzlettel, ahol a terméket vásárolta.

Polish

Utylizacja starych urządzeń

1. Kiedy do produktu dołączony jest niniejszy przekreślony symbol kołowego pojemnika na śmieci, oznacza to, że produkt jest objęty dyrektywą 2002/96/EC.
2. Wszystkie elektryczne i elektroniczne produkty powinny być utylizowane niezależnie od odpadów miejskich, z wykorzystaniem przeznaczonych do tego miejsc składowania wskazanych przez rząd lub miejscowe władze.
3. Właściwy sposób utylizacji starego urządzenia pomoże zapobiec potencjalnie negatywnemu wpływowi na zdrowie i środowisko.
4. Aby uzyskać więcej informacji o sposobach utylizacji starych urządzeń, należy skontaktować się z władzami lokalnymi, przedsiębiorstwem zajmującym się utylizacją odpadów lub sklepem, w którym produkt został kupiony.

Regulatory Information cont.

Estonian

Kasutuskõlbmatu seadme käitlemise kord

1. Kui seade on märgistatud selle elektri- ja elektroonikaseadmete lahuskogumist märgistava tähisega (ratastega prügikonteineri kujutis, millele on rist peale tõmmatud), tuleb toodet käidelda vastavalt Eurodirektiivile 2002/96/EÜ.
2. Elektri- ja elektroonikaseadmeid ei tohi visata tavalise prügi hulka. Nad kuuluvad lahuskogumisele selleks määratud kogumispunktides.
3. Kasutuskõlbmatu tervikseadme käitlemine tavaprügist lahus on korraldatud selleks, et vältida negatiivseid tagajärgi, mida põhjustaksid seadme osade purunemisel vabaneda võivad ohtlikud jäätmeloodusele või inimorganismile.
4. Täpsemat informatsiooni selle kohta, kuhu ja millal saab ära anda oma kasutamiskõlbmatu elektri- ja elektroonikaseadme, küsige kohalikul omavalitsuselt, prügifirmalt või kaupluselt, kust seadme ostsite.

Latvian

Vecās elektroierīces nodošana

1. Ja uz produkta ir simbols ar pārsvītrotu atkritumu tvertni, tas nozīmē, ka produkts ir iekļauts Eiropas direktīvā 2002/96/EC.
2. Visi elektriskie un elektroniskie produkti ir jāutilizē, nododot pašvaldības īpaši noteiktās pieņemšanas vietās. Tos nedrīkst izmest parastās municipalitātes atkritumu urnās.
3. Ievērojot prasības veco elektroierīču utilizēšanā, jūs pasargāsiet apkārtējo vidi un cilvēku veselību no iespējami nelabvēlīgajām sekām, kādas varētu rasties, ierīcēm sadaloties nepiemērotā vietā.
4. Lai gūtu plašāku informāciju par veco ierīču utilizēšanas iespējām, sazinieties ar pilsētas pašvaldību, atkritumu savākšanas saimniecību vai veikalu, kurā ierīci iegādājāties.

Lithuanian

Senos įrangos atliekų tvarkymas

1. Užbrauktas konteinerio simbolis priverčia atkreipti dėmesį, kad įrangą saugo Europos direktyva 2002/96/EC.
2. Visos elektros ir elektroninės įrangos atliekos turi būti renkamos atskirai ir neišmetamos į atliekų konteinerį kartu su kitomis komunalinėmis atliekomis, taikant specialią atliekų surinkimo sistemą, patvirtintą vyriausybės ar vietos valdžios.
3. Teisingas senos įrangos atliekų tvarkymas, padės išvengti neigiamų pasekmių aplinkai ir žmonių sveikatai.
4. Dėl išsamesnės informacijos apie senos įrangos tvarkymą, prašome kreiptis į miesto valdžią, atliekų perdirbimo tarnybą arba parduotuvę, kurioje pirkote įrangą.